

SHARP®**SERVICE MANUAL**

SE00AK45CHA00

Issued: 20th Jan. 2004

PAL B/G, I / SECAM L/L', B/G, D/K SYSTEM COLOUR TELEVISION

**CHASSIS AK-45**

In the interests of user safety (required by safety regulations in some countries) the set should be re-stored to its original condition and only parts identical to those specified should be used.

CONTENTS

TABLE OF CONTENTS	3
INTRODUCTION	6
CIRCUIT DESCRIPTIONS	6
INTEGRATED CIRCUIT DESCRIPTIONS	10
SERVICE MODE ADJUSTMENTS	23
BLOCK DIAGRAM	61
CIRCUIT DIAGRAMS	62
HOW TO UPDATE THE TECHNICAL INFORMATION	73

SHARP CORPORATION

This document has been published to
be used for after sales service only.

SERVICE MANUAL UPDATE LOG SHEET

[illegible]

Use this page to keep any special servicing information as Technical Report (Bulletin), Technical Information, etc.
If only part number changes are required, just change part number directly the part number in the Parts Listing Section.
If you need more information, please refer to the Technical Report (Bulletin).

TABLE OF CONTENTS

1.INTRODUCTION	6
2.TUNER	6
3.IF PART (TDA9885/86)	6
4.VIDEO SWITCH TEA6415	7
5.MULTI STANDARD SOUND PROCESSOR	7
6.SOUND OUTPUT STAGE WITH TDA7269A	7
7.VERTICAL OUTPUT STAGE WITH STV9379FA	7
8.VIDEO OUTPUT AMPLIFIER TDA6108	7
9.POWER SUPPLY (SMPS)	8
10.MICROCONTROLLER SDA55XX	8
10.1.General Features	8
10.2.External Crystal and Programmable Clock Speed	8
10.3.Microcontroller Features	8
10.4.Memory	8
10.5.Display Features	8
10.6.Acquisition Features	9
10.7.Ports	9
11.CLASS AB STEREO HEADPHONE DRIVER TDA1308	9
12.SAW FILTERS	9
13.IC DESCRIPTIONS	10
13.1.LM317T	10
13.1.1.Description	10
13.1.2.Features	10
13.2.TDA1308T	10
13.2.1.General Description	10
13.2.2.Features	10
13.2.3.Pinning	11
13.3.MSP34X0G (MSP3410G)	11
13.3.1.Description	11
13.3.2.Features	12
13.3.3.Pin connections	12
13.4.VDP313xY	13
13.4.1.Introduction	13
13.4.2.Features	14
13.4.3.Pin Connections and short descriptions	14
13.5.TEA6415C	15
13.5.1.General Description	15
13.5.2.Features	15
13.5.3.Pinning	16
13.6.STV9379FA	16
13.6.1.Description	16
13.6.2.Features	16
13.6.3.Pinning	16
13.7.TDA7269A	17
13.7.1.Description	17
13.7.2.Features	17
13.8.LM7800 (LM7805/LM7808)	17
13.8.1.Description	17
13.8.2.Features	17
13.9.AT24C08	17
13.9.1.Description	17
13.9.2.Features	17
13.9.3.Pin Configurations	18

13.10.SDA5555	18
13.10.1.General definition	18
13.10.2.Features	18
13.11.MC44608	19
13.11.1.Description	19
13.11.2.General Features	20
13.11.3.Pin Connections	20
13.12.TCET1102G	21
13.12.1.Description	21
13.12.2.Applications	21
13.12.3.Features	21
13.13.TDA9885T	21
13.13.1.General Description	21
13.13.2.Features	21
13.13.3.Pinning.....	22
13.14.PI5V330	22
13.14.1.General Description	22
14.AK45 CHASSIS PRODUCTION SERVICE MODE ADJUSTMENTS	23
14.1.SERVICE MENU	23
14.2.ADJUST MENU	23
14.3.OPTIONS MENU.....	35
Option 0. Video Processor Crystal Indication	35
Option 1. (0x01) Video Processor Decoder Mode Register.....	35
Option 2. (0x18) Video Processor Blanking Control.....	35
Option 3. (0x19) Video Processor Cathode Drive Level	36
Option 4.	36
Option 5. CTI Available, Mono AVL.....	36
Option 6.	36
Option 7. OPTIONHOTELACTIVE, PLL_VST, PIP Zoom Mode, PIP Position	36
Option 8. IF Frequency.....	37
Option 9. Standard Available.....	37
Option 10. Scart, Combfilter, Teletext, Language	38
Option 11. PLL Tuner Control 1 Byte.....	38
Option 12. PLL Tuner Control 2 Low Byte	38
Option 13. PLL Tuner Control 2 Mid Byte	39
Option 14. PLL Tuner Control 2 High Byte	39
Option 15. PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte	39
Option 16. PLL Tuner VHF LOW – VHF HIGH Crossover High Byte	39
Option 17. PLL Tuner VHF HIGH – UHF Crossover Low Byte	39
Option 18. PLL Tuner VHF HIGH – UHF Crossover High Byte.....	39
Option 19. PIP PLL Tuner Control 1 Byte.....	40
Option 20. PIP PLL Tuner Control 2 Low Byte	40
Option 21. PIP PLL Tuner Control 2 Mid Byte	40
Option 22. PIP PLL Tuner Control 2 High Byte.....	40
Option 23. PIP PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte	40
Option 24. PIP PLL Tuner VHF LOW – VHF HIGH Crossover High Byte.....	40
Option 25. PIP PLL Tuner VHF HIGH – UHF Crossover Low Byte.....	41
Option 26. PIP PLL Tuner VHF HIGH – UHF Crossover High Byte.....	41
Option 27. Language Available 1	41
Option 28. Language Available 2	41
Option 29. Language Available 3 and Zoom Mode Available	41
Option 30. Country	42
Option 31. Prescaler MSP FM (AVL=OFF).....	42
Option 32. Prescaler MSP NICAM (AVL=OFF)	42
Option 33. Prescaler MSP SCART (AVL=OFF)	43
Option 34. Prescaler MSP I2S (AVL=OFF).....	43
Option 35. Not used.....	43
Option 36. Not used.....	43
Option 37. Reserved for USA	43
Option 38. TV Teletext Mode Selection, Child Lock, Equalizer Country.....	43

Option 39. Personal Preference Equalizer Band 1	44
Option 40. Personal Preference Equalizer Band 2	44
Option 41. Personal Preference Equalizer Band 3	44
Option 42. Personal Preference Equalizer Band 4	44
Option 43. Personal Preference Equalizer Band 5	44
Option 44. Sound Effect (Standard; Music; Speech; Jazz; Pp)	44
Option 45. Volume Offset Left	44
Option 46. Volume Offset Right	44
Option 47. Volume Offset Center	45
Option 48. Volume Offset Rear	45
Option 49. Surround Delay	45
Option 50. FM Prescaler	45
Option 51. NICAM Prescaler	45
Option 52. Scart Input Prescaler	45
Option 53. I2S Prescaler	45
Option 54. Scart Output Prescaler	45
Option 55. Speaker Setup	46
Option 56. Audio Options Available Or Not	46
Option 57. Stereo Threshold	46
Option 58. MSP Audio Flags	47
Option 59. NICAM Threshold	47
Option 60. Power Delay Time	47
14.4.OPTION TABLE RECOMMENDED VALUES	50
14.5.SCREEN ADJUSTMENT (FBT SCREEN)	52
14.6.GEOMETRY ADJUSTMENT	53
4:3 FORMATS	53
16:9 FORMATS	54
15.BLOCK DIAGRAM	61
16.CIRCUIT DIAGRAMS	62
17. HOW TO UPDATE THE TECHNICAL INFORMATION	73
17.1. HOW TO UPDATE THE TECHNICAL INFORMATION APPEARED ON THIS SERVICE MANUAL (AND RELATIVES)	73
17.2. NVM / EEPROM RECORDER	73
17.3. CHASSIS LABEL INFORMATION	73
17.4. CODE BAR LABEL INFORMATION	74

1.INTRODUCTION

11AK45 is a 50Hz colour television capable of driving 24" + CRT sizes (beginning from 24" 16:9 up to 33").

The chassis is capable of operation in PAL, SECAM, NTSC (playback) colour standards and multiple transmission standards as B/G, D/K, I/I', and L/L'.

Sound system output is supplying 2x10W (10%THD) for left and right outputs of 8ohm speakers.

TV supports FASTTEXT. It is possible to decode transmissions including high graphical data.

The chassis is equipped with three full EuroScarts; only one of them supports RGB input, one headphone output, one FAV input, one SVHS input (via SCART)

2.TUNER

The hardware and software of the TV is suitable for tuners, supplied by different companies, which are selected from the Service Menu. These tuners can be combined VHF, UHF tuners suitable for CCIR systems B/G, H, L, L', I and I'. The tuning is available through the digitally controlled I²C bus (PLL). Below you will find info on one of the Tuners in use.

General description of UV1316:

The UV1316 tuner belongs to the UV 1300 family of tuners, which are designed to meet a wide range of applications. It is a combined VHF, UHF tuner suitable for CCIR systems B/G, H, L, L', I and I'. The low IF output impedance has been designed for direct drive of a wide variety of SAW filters with sufficient suppression of triple transient.

Features of UV1316:

1. Member of the UV1300 family small sized UHF/VHF tuners
2. Systems CCIR: B/G, H, L, L', I and I'; OIRT: D/K
3. Digitally controlled (PLL) tuning via I²C-bus
4. Off-air channels, S-cable channels and Hyperband
5. World standardized mechanical dimensions and world standard pinning
6. Compact size
7. Complies to "CENELEC EN55020" and "EN55013"

Pinning:

1. Gain control voltage (AGC) : 4.0V, Max: 4.5V
2. Tuning voltage
3. I²C-bus address select : Max: 5.5V
4. I²C-bus serial clock : Min:-0.3V, Max: 5.5V
5. I²C-bus serial data : Min:-0.3V, Max: 5.5V
6. Not connected
7. PLL supply voltage : 5.0V, Min: 4.75V, Max: 5.5V
8. ADC input
9. Tuner supply voltage : 33V, Min: 30V, Max: 35V
10. Symmetrical IF output 1
11. Symmetrical IF output 2

3.IF PART (TDA9885/86)


The TDA9885 is an alignment-free single standard (without positive modulation) vision and sound IF signal PLL.

The TDA9886 is an alignment-free multistandard (PAL, SECAM and NTSC) vision and sound IF signal PLL. Both devices can be used for TV, VTR, PC and set-top box applications.

The following figure shows the simplified block diagram of the integrated circuit.

The integrated circuit comprises the following functional blocks:

VIF amplifier, Tuner and VIF-AGC, VIF-AGC detector, Frequency Phase-Locked Loop (FPLL) detector, VCO and divider, Digital acquisition help and AFC, Video demodulator and amplifier, Sound carrier trap, SIF amplifier, SIF-AGC detector, Single reference QSS mixer, AM demodulator, FM demodulator and acquisition help, Audio amplifier and mute time constant, I²C-bus transceivers and MAD (module address), Internal voltage stabilizer.

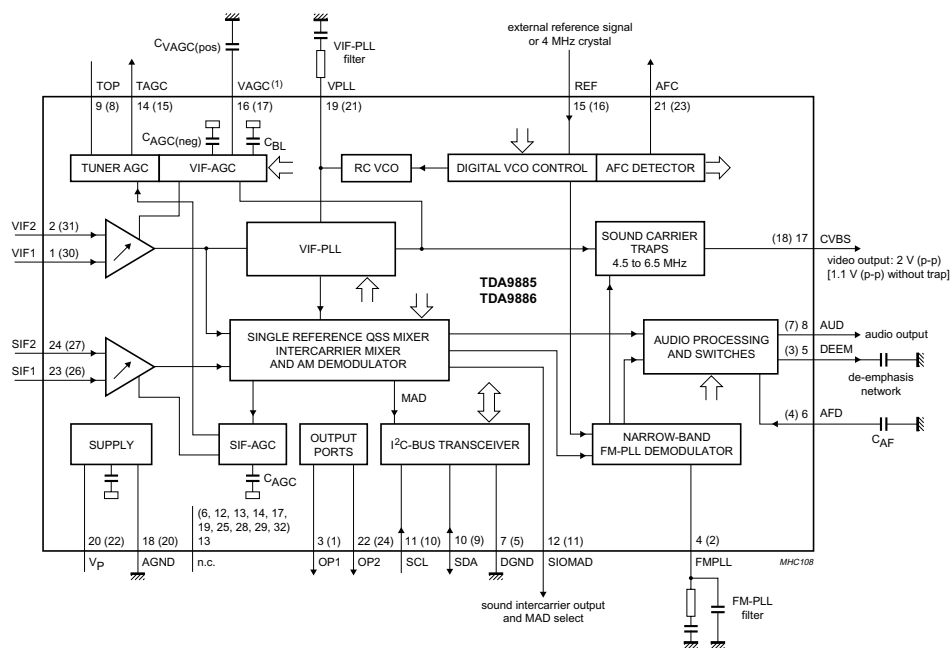

4.VIDEO SWITCH TEA6415

In case of three or more external sources are used, the video switch IC TEA6415 is used. The main function of this device is to switch 8 video-input sources on the 6 outputs.

Each output can be switched on only one of each input. On each input an alignment of the lowest level of the signal is made (bottom of sync. top for CVBS or black level for RGB signals).

Each nominal gain between any input and output is 6.5dB. For D2MAC or Chroma signal the alignment is switched off by forcing, with an external resistor bridge, 5VDC on the input. Each input can be used as a normal input or as a MAC or Chroma input (with external Resistor Bridge). All the switching possibilities are changed through the BUS. Driving 75ohm load needs an external resistor. It is possible to have the same input connected to several outputs.

5.MULTI STANDARD SOUND PROCESSOR

The MSP 34x10G family of single-chip Multi-standard Sound Processors covers the sound processing of all analog TV-Standards worldwide, as well as the NICAM digital sound standards. The full TV sound processing, starting with analog sound IF signal-in, down to processed analog AF-out, is performed on a single chip.

The DBX noise reduction, or alternatively, MICRONAS Noise Reduction (MNR) is performed alignment free.

6.SOUND OUTPUT STAGE WITH TDA7269A

The TDA7269A is class AB dual Audio power amplifier assembled in the Multi-watt package, specially designed for high quality sound application as Hi-Fi music centers and stereo TV sets.

7.VERTICAL OUTPUT STAGE WITH STV9379FA

The IC STV9379FA is the vertical deflection booster circuit. Two supply voltages, +14V and -14V are needed to scan the inputs VERT+ and VERT-, respectively. And a third supply voltage, +60V for the flyback limiting is needed. The vertical deflection coil is connected in series between the output and feedback to the input.

8.VIDEO OUTPUT AMPLIFIER TDA6108

The TDA6108Q includes three video output amplifiers is intended to drive the three cathodes of a colour picture tube.

9. POWER SUPPLY (SMPS)

The DC voltages required at various parts of the chassis are provided by an SMPS transformer controlled by the IC MC44608, which is designed for driving, controlling and protecting switching transistor of SMPS. The transformer generates 145V for Horizontal output stage, +/-14V for audio amplifier, 5V and 3.3V stand by voltage and 8V, 12V and 5V supplies for other different parts of the chassis. An optocoupler is used to control the regulation of line voltage and stand-by power consumption. There is a regulation circuit in secondary side. This circuit produces a control voltage according to the changes in 145V DC voltage, via an optocoupler (TCET1102G) to pin3 of the IC.

During the switch on period of the transistor, energy is stored in the transformer. During the switch off period energy is fed to the load via secondary winding. By varying switch-on time of the power transistor, it controls each portion of energy transferred to the secondary side such that the output voltage level remains nearly independent of load variations.

10. MICROCONTROLLER SDA55XX

10.1. General Features

- Feature selection via special function register
- Simultaneous reception of TTX, VPS, PDC, and WSS (line 23)
- Supply Voltage 2.5 and 3.3 V
- ROM version package PSDIP52-2, PMQFP64-1
- Romless version package PMQFP100-2, PLCC84-2

10.2. External Crystal and Programmable Clock Speed

- Single external 6MHz crystal, all necessary clocks are generated internally
- CPU clock speed selectable via special function registers.
- Normal Mode 33.33 MHz CPU clock, Power Save mode 8.33 MHz

10.3. Microcontroller Features

- 8bit 8051 instruction set compatible CPU.
- 33.33-MHz internal clock (max.)
- 0.360 ms (min.) instruction cycle
- Two 16-bit timers
- Watchdog timer
- Capture compare timer for infrared remote control decoding
- Pulse width modulation unit (2 channels 14 bit, 6 channels 8 bit)
- ADC (4 channels, 8 bit)
- UART (rx, tx)

10.4. Memory

- Non-multiplexed 8-bit data and 16 ... 20-bit address bus (ROMless Version)
- Memory banking up to 1Mbyte (Romless version)
- Up to 128 Kilobyte on Chip Program ROM
- Eight 16-bit data pointer registers (DPTR)
- 256-bytes on-chip Processor Internal RAM (IRAM)
- 128bytes extended stack memory.
- Display RAM and TXT/VPS/PDC/WSS-Acquisition-Buffer directly accessible via MOVX
- UP to 16KByte on Chip Extended RAM (XRAM) consisting of;
 - 1 Kilobyte on-chip ACQ-buffer-RAM (access via MOVX)
 - 1 Kilobyte on-chip extended-RAM (XRAM, access via MOVX) for user software
 - 3 Kilobyte Display Memory

10.5. Display Features

- ROM Character Set Supports all East and West European Languages in single device
- Mosaic Graphic Character Set
- Parallel Display Attributes
- Single/Double Width/Height of Characters
- Variable Flash Rate
- Programmable Screen Size (25 Rows x 33...64 Columns)
- Flexible Character Matrixes (HxV) 12 x 9...16
- Up to 256 Dynamical Redefinable Characters in standard mode; 1024 Dynamical Redefinable Characters in Enhanced Mode
- CLUT with up to 4096 colour combinations

- Up to 16 Colours per DRCS Character
- One out of Eight Colours for Foreground and Background Colours for 1-bit DRCS and ROM Characters
- Shadowing
- Contrast Reduction
- Pixel by Pixel Shiftable Cursor With up to 4 Different Colours
- Support of Progressive Scan and 100 Hz.
- 3 X 4Bits RGB-DACs On-Chip
- Free Programmable Pixel Clock from 10 MHz to 32MHz
- Pixel Clock Independent from CPU Clock
- Multinorm H/V-Display Synchronization in Master or Slave Mode

10.6.Acquisition Features

- Multi-standard Digital Data Slicer
- Parallel Multi-norm Slicing (TTX, VPS, WSS, CC, G+)
- Four Different Framing Codes Available
- Data Caption only limited by available Memory
- Programmable VBI-buffer
- Full Channel Data Slicing Supported
- Fully Digital Signal Processing
- Noise Measurement and Controlled Noise Compensation
- Attenuation Measurement and Compensation
- Group Delay Measurement and Compensation
- Exact Decoding of Echo Disturbed Signals

10.7.Ports

- One 8-bit I/O-port with open drain output and optional I²C Bus emulation support (Port0)
- Two 8-bit multifunction I/O-ports (Port1, Port3)
- One 4-bit port working as digital or analogue inputs for the ADC (Port2)
- One 2-bit I/O port with secondary function (P4.2, 4.3, 4.7)
- One 4-bit I/O-port with secondary function (P4.0, 4.1, 4.4) (Not available in P-SDIP 52)

11.CLASS AB STEREO HEADPHONE DRIVER TDA1308

The TDA1308 is an integrated class AB stereo headphone driver contained in a DIP8 plastic package. The device is fabricated in a 1 mm CMOS process and has been primarily developed for portable digital audio applications.

12.SAW FILTERS

K3953M:

Standard

B/G, D/K, I, L/L'

Features

TV IF filter with Nyquist slopes at 33,90 MHz and 38,90 MHz

Constant group delay

Suitable for GENELEC EN 55020

Terminals

Tinned CuFe alloy

Pin configuration

1 Input

2 Input - ground

3 Chip carrier - ground

4 Output

5 Output

K3958M:

Standard

B/G, D/K, I, L/L'

Features

TV IF filter with Nyquist slopes at 33.90 MHz and 38.90 MHz

Constant group delay

Terminal and Pin configuration are the same with K3953M

K9356M:

Standard

B/G, D/K, I, L

Features

TV IF audio filter with pass band for sound carriers at 32,40 MHz (D/K, L), 32,90 MHz (I) and 33,40 MHz (B/G)

Terminal and Pin configuration are the same with K3953M

K9656M:

Standard

B/G, D/K, I, L/L'

Features

TV IF audio filter with two channels

Channel 1 (L') with one pass band for sound carriers at 40,40 MHz (L') and 39,75 MHz (L'- NICAM)

Channel 2 (B/G, D/K, L, I) with one pass band for sound carriers between 32,35 MHz and 33,40 MHz

Terminal and Pin configuration are the same with K3953M

13.IC DESCRIPTIONS

LM317T

MSP3410G

TEA6415

TDA7269A

24C08

MC44608

TDA9885T

TDA1308T

VDP3130Y

STV9379FA

LM7805/LM7808

SDA55XX

TCET1102G

13.1.LM317T

13.1.1.Description

The LM317T is an adjustable 3 terminal positive voltage regulator capable of supplying in excess of 1.5 amps over an output range of 1.25 to 37 volts. This voltage regulator is exceptionally easy to use and requires only two external resistors to set the output voltage. Further, it employs internal current limiting, thermal shutdown and safe area compensation, making it essentially blow-out proof. The LM317 serves a wide variety of applications including local, on card regulation. This device can also be used to make a programmable output regulator, or by connecting a fixed resistor between the adjustment and output, the LM317 can be used as a precision current regulator.

13.1.2.Features

- Output Current in Excess of 1.5 A
- Output Adjustable between 1.2 V and 37 V
- Internal Thermal Overload Protection
- Internal Short Circuit Current Limiting Constant with Temperature
- Output Transistor Safe-Area Compensation
- Floating Operation for High Voltage Applications
- Available in Surface Mount D²PAK, and Standard 3-Lead Transistor Package
- Eliminates Stocking many Fixed Voltages

13.2.TDA1308T

13.2.1.General Description

The TDA1308 is an integrated class AB stereo headphone driver contained in an SO8 or a DIP8 plastic package. The device is fabricated in a 1 mm CMOS process and has been primarily developed for portable digital audio applications. It gets its input from two analog audio outputs (DACA_L and DACA_R) of MSP 34x0G. The gain of the output is adjustable by the feedback resistor between the inputs and outputs.

13.2.2.Features

- Wide temperature range
- No switch ON/OFF clicks
- Excellent power supply ripple rejection

- Low power consumption
- Short-circuit resistant
- High performance
- high signal-to-noise ratio
- High slew rate
- Low distortion
- Large output voltage swing.


13.2.3.Pinning

SYMBOL	PIN	DESCRIPTION
OUTA	1	Output A
INA(neg)	2	Inverting input A
INA(pos)	3	Non-inverting input A
V _{SS}	4	Negative supply
INB(pos)	5	Non-inverting input B
INB(neg)	6	Inverting input B
OUTB	7	Output B
V _{DD}	8	Positive supply

13.3.MSP34X0G (MSP3410G)

13.3.1.Description

The MSP 34x0G family of single-chip Multi standard Sound Processors covers the sound processing of all analog TV-Standards worldwide, as well as the NICAM digital sound standards. The full TV sound processing, starting with analog sound IF signal-in, down to processed analog AF-out, is performed on a single chip. Figure shows a simplified functional block diagram of the MSP 34x0G.

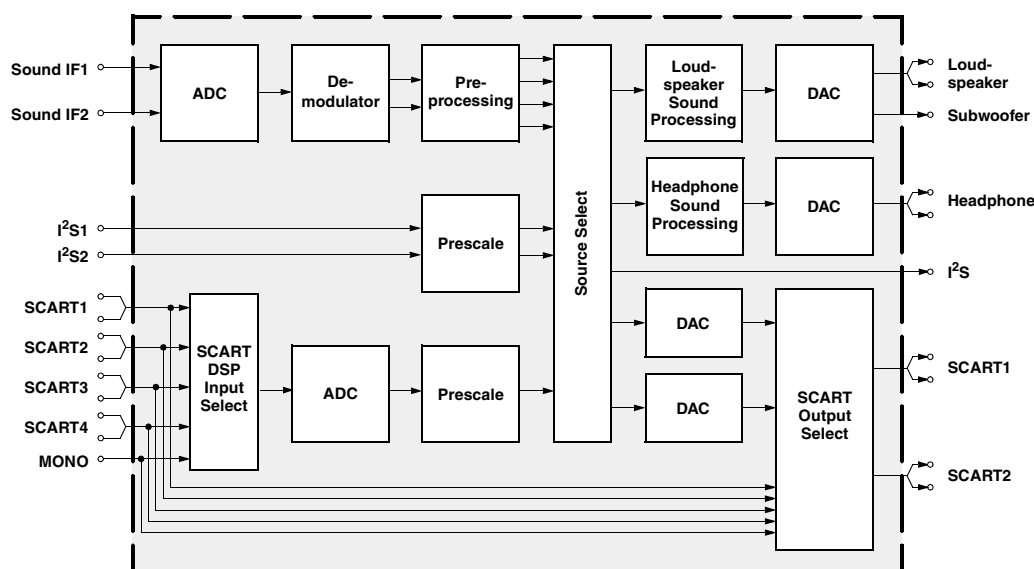

This new generation of TV sound processing ICs now includes versions for processing the multi channel television sound (MTS) signal conforming to the standard recommended by the Broadcast Television Systems Committee (BTSC). The DBX noise reduction, or alternatively, MICRONAS Noise Reduction (MNR) is performed alignment free. Other processed standards are the Japanese FM-FM multiplex standard (EIA-J) and the FM Stereo Radio standard. Current ICs have to perform adjustment procedures in order to achieve good stereo separation for BTSC and EIA-J. The MSP 34x0G has optimum stereo performance without any adjustments.

All MSP 34x0G versions are pin and software downward compatible to the MSP34x0D. The MSP34x0G further simplifies controlling software. Standard selection requires a single I²C transmission only.

The MSP 34x0G has built-in automatic functions: The IC is able to detect the actual sound standard automatically (Automatic Standard Detection). Furthermore, pilot levels and identification signals can be evaluated internally with subsequent switching between mono/stereo/bilingual; no I²C interaction is necessary (Automatic Sound Selection).

13.3.2.Features

Standard Selection with single I²C transmission
Automatic Standard Detection of terrestrial TV standards
Automatic Sound Selection (mono/stereo/bilingual), new registers MODUS, STATUS
Two selectable sound IF (SIF) inputs
Automatic Carrier Mute function
Interrupt output programmable (indicating status change)
Loudspeaker / Headphone channel with volume, balance, bass, treble, loudness
AVC: Automatic Volume Correction
Subwoofer output with programmable low-pass and complementary high-pass filter
5-band graphic equalizer for loudspeaker channel
Spatial effect for loudspeaker channel
Four Stereo SCART (line) inputs, one Mono input; two Stereo SCART outputs
Complete SCART in/out switching matrix
Two I²S inputs; one I²S output
Dolby Pro Logic with DPL 351xA coprocessor
All analog FM-Stereo A2 and satellite standards; AM-SECAM L standard
Simultaneous demodulation of (very) high-deviation FM-Mono and NICAM
Adaptive deemphasis for satellite (Wegener-Panda, acc. to ASTRA specification)
ASTRA Digital Radio (ADR) together with DRP 3510A
All NICAM standards
Korean FM-Stereo A2 standard

13.3.3.Pin connections

NC = not connected; leave vacant
LV = if not used, leave vacant
X = obligatory; connect as described in circuit diagram
DVSS: if not used, connect to DVSS
AHVSS: connect to AHVSS

Pin No.					Pin Name	Type	Connection (if not used)	Short Description
PLCC 68-pin	PSDIP 64-pin	PSDIP 52-pin	PQFP 80-pin	PLQFP 64-pin				
1	16	14	9	8	ADR_WS	OUT	LV	ADR word strobe
2	-	-	-	-	NC		LV	Not connected
3	15	13	8	7	ADR_DA	OUT	LV	ADR Data Output
4	14	12	7	6	I2S_DA_IN1	IN	LV	I ² S1 data input
5	13	11	6	5	I2S_DA_OUT	OUT	LV	I ² S data output
6	12	10	5	4	I2S_WS	IN/OUT	LV	I ² S word strobe
7	11	9	4	3	I2S_CL	IN/OUT	LV	I ² S clock
8	10	8	3	2	I2C_DA	IN/OUT	X	I ² C data
9	9	7	2	1	I2C_CL	IN/OUT	X	I ² C data
10	8	-	1	64	NC		LV	Not connected
11	7	6	80	63	STANDBYQ	IN	X	Stand-by (low-active)
12	6	5	79	62	ADR_SEL	IN	X	I ² C bus address select
13	5	4	78	61	D_CTR_I/O_0	IN/OUT	LV	D_CTR_I/O_0
14	4	3	77	60	D_CTR_I/O_1	IN/OUT	LV	D_CTR_I/O_1
15	3	-	76	59	NC		LV	Not connected
16	2	-	75	58	NC		LV	Not connected
17	-	-	-	-	NC		LV	Not connected
18	1	2	74	57	AUD_CL_OUT	OUT	LV	Audio clock output (18.432 MHz)
19	64	1	73	56	TP		LV	Test pin
20	63	52	72	55	XTAL_OUT	OUT	X	Crystal oscillator
21	62	51	71	54	XTAL_IN	IN	X	Crystal oscillator
22	61	50	70	53	TESTEN	IN	X	Test pin
23	60	49	69	52	ANA_IN2+	IN	AVSS via 56 pF/LV	IF Input 2 (can be left vacant, only if IF input 1 is also not in use)
24	59	48	68	51	ANA_IN-	IN	AVSS via 56 pF/LV	IF common (can be left vacant, only if IF input 1 is also not in use)
25	58	47	67	50	ANA_IN1+	IN	LV	IF input 2
26	57	46	66	49	AVSUP		X	Analog power supply 5v
-	-	-	65	-	AVSUP		X	Analog power supply 5v

-	-	-	64	-	NC		LV	Not connected
-	-	-	63	-	NC		LV	Not connected
27	56	45	62	48	AVSS		X	Analog ground
-	-	-	61	-	AVSS		X	Analog ground
28	55	44	60	47	MONO_IN	IN	LV	Mono input
-	-	-	59	-	NC		LV	Not connected
29	54	43	58	46	VREFTOP		X	Reference voltage IF A/D converter
30	53	42	57	45	SC1_IN_R	IN	LV	SCART 1 input, right
31	52	41	56	44	SC1_IN_L	IN	LV	SCART 1 input, left
32	51	-	55	43	ASG1		AHVSS	Analog Shield Ground 1
33	50	40	54	42	SC2_IN_R	IN	LV	SCART 2 input, right
34	49	39	53	41	SC2_IN_L	IN	LV	SCART 2 input, left
35	48	-	52	40	ASG2		AHVSS	Analog Shield Ground 2
36	47	38	51	39	SC3_IN_R	IN	LV	SCART 3 input, right
37	46	37	50	38	SC3_IN_L	IN	LV	SCART 3 input, left
38	45	-	49	37	ASG4		AHVSS	Analog Shield Ground 4
39	44	-	48	36	SC4_IN_R	IN	LV	SCART 4 input, right
40	43	-	47	35	SC4_IN_L	IN	LV	SCART 4 input, left
41	-	-	46	-	NC		LV or AHVSS	Not connected
42	42	36	45	34	AGNDC		X	Analog reference voltage
43	41	35	44	33	AHVSS		X	Analog ground
-	-	-	43	-	AHVSS		X	Analog ground
-	-	-	42	-	NC		LV	Not connected
-	-	-	41	-	NC		LV	Not connected
44	40	34	40	32	CAPL_M		X	Volume capacitor MAIN
45	39	33	39	31	AHVSUP		X	Analog power supply 8V
46	38	32	38	30	CAPL_A		X	Volume capacitor AUX
47	37	31	37	29	SC1_OUT_L	OUT	LV	SCART output 1, left
48	36	30	36	28	SC1_OUT_R	OUT	LV	SCART output 1, right
49	35	29	35	27	VREF1		X	Reference ground 1
50	34	28	34	26	SC2_OUT_L	OUT	LV	SCART output 2, left
51	33	27	33	25	SC2_OUT_R	OUT	LV	SCART output 2, right
52	-	-	32	-	NC		LV	Not connected
53	32	-	31	24	NC		LV	Not connected
54	31	26	30	23	DACM_SUB	OUT	LV	Subwoofer output
55	30	-	29	22	NC		LV	Not connected
56	29	25	28	21	DACM_L	OUT	LV	Loudspeaker out, left
57	28	24	27	20	DACM_R	OUT	LV	Loudspeaker out, right
58	27	23	26	19	VREF2		X	Reference ground 2
59	26	22	25	18	DACA_L	OUT	LV	Headphone out, left
60	25	21	24	17	DACA_R	OUT	LV	Headphone out, right
-	-	-	23	-	NC		LV	Not connected
-	-	-	22	-	NC		LV	Not connected
61	24	20	21	16	RESETQ	IN	X	Power-on-reset
62	23	-	20	15	NC		LV	Not connected
63	22	-	19	14	NC		LV	Not connected
64	21	19	18	13	NC		LV	Not connected
65	20	18	17	12	I2S_DA_IN2	IN	LV	I ² S2-data input
66	19	17	16	11	DVSS		X	Digital ground
-	-	-	15	-	DVSS		X	Digital ground
-	-	-	14	-	DVSS		X	Digital ground
67	18	16	13	10	DVSUP		X	Digital power supply 5V
-	-	-	12	-	DVSUP		X	Digital power supply 5V
-	-	-	11	-	DVSUP		X	Digital power supply 5V
68	17	15	10	9	ADR_CL	OUT	LV	ADR clock

13.4.VDP313xY

13.4.1.Introduction

The VDP 313xY is a video IC family of high-quality single-chip video processors. Modular design and a sub-micron technology allow the economic integration of features in all classes of TV sets. The VDP 313xY family is based on the VDP 31xxB including YCRCB inputs for DVD component signals.

The VDP 313xY includes complete video, display and deflection processing. All processing is done digitally, the video front-end and video backend are interfacing to the analog world. Most functions of the VDP can be controlled by software via I²C-Bus interface

13.4.2.Features**Video Decoding and Processing**

- four CVBS, one S-VHS input, one YC R C B component input
- integrated high-quality A/D converters and associated clamp and AGC circuits
- adaptive 2H comb filter Y/C separator
- multistandard colour decoder PAL/NTSC/SECAM including all substandards
- multistandard sync decoder
- automatic standard recognition
- black-line detector
- linear horizontal scaling (0.25...4), as well as non-linear horizontal scaling “Panoramavision”
- black-level expander
- dynamic peaking
- soft limiter (gamma correction)
- colour transient improvement

RGB Processing and Deflection

- programmable RGB matrix
- two analog RGB / Fastblank inputs
- half-contrast switch
- picture frame generator
- scan velocity modulation output
- high-performance H/V deflection
- separate ADC for tube measurements
- EHT compensation
- angle and bow correction
- one 20.25 MHz crystal, few external components
- I²C-Bus Interface
- 64-pin PSDIP package

13.4.3.Pin Connections and short descriptions

NC = not connected

X = obligatory; connect as described in circuit diagram

OUT = Output

LV = if not used, leave vacant

IN = Input

SUPPLY = Supply Pin

Pin no PSDIP 64-pin	Pin name	Type	Connection (if not used)	Short description
1	TEST	IN	GNDD	Test Input
2	RESQ	IN	X	Reset Input
3	SCL	IN/OUT	X	I ² C Bus Clock
4	SDA	IN/OUT	X	I ² C Bus Data
5	GNDD	SUPPLY	X	Digital Ground
6	HCS	IN	LV	Half Contrast Switch Input
7	FSY	OUT	LV	Front Sync Output
8	CSY	OUT	LV	Composite Sync Output
9	VS	OUT	LV	Vertical Sync Output (=VS Bit of MSY for TPU)
10	INTLC	OUT	LV	Interface Control Output
11	VPROT	IN	GNDD	Vertical Protection Input
12	SAFETY	IN	GNDD	Safety Input
13	HFLB	IN	HOUT	Horizontal Flyback Input
14	GNDD	SUPPLY	X	Digital Ground
15	VSUPD	SUPPLY	X	Digital Supply Voltage (3.3V)
16	GNDD	SUPPLY	X	Digital Ground
17	VSUPD	SUPPLY	LV	Digital Supply Voltage (3.3V)
18	P0	IN/OUT	LV	Port 1, Bit 0
19	P1	IN/OUT	LV	Port 1, Bit 1
20	P2	IN/OUT	GNDD	Port 1, Bit 2
21	P3	IN/OUT	GNDD	Port 1, Bit 3
22	P4	IN/OUT	GNDD	Port 1, Bit 4
23	P5	IN/OUT	GNDD	Port 1, Bit 5
24	P6	IN/OUT	GNDD	Port 1, Bit 6

25	GNDD	SUPPLY	X	Digital Ground
26	RSW2	OUT	GNDAB	Range Switch 2 for Measurement ADC
27	RSW1	OUT	GNDAB	Range Switch 1 for Measurement ADC
28	SENSE	IN	GNDAB	Sense ADC Input
29	GNDM	SUPPLY	X	Ground, MADC Input
30	VERTQ	OUT	LV	Inverted Vertical Sawtooth Output
31	VERT	OUT	LV	Vertical Sawtooth Output
32	E/w	OUT	LV	Vertical Parabola Output
33	XREF	IN	X	Reference Input for RGB DACs
34	SVMOUT	OUT	VSUPAB	Analog Scan Velocity Modulation Output
35	GNDAB	SUPPLY	X	Analog Ground Backend
36	VSUPAB	SUPPLY	X	Analog Supply Voltage (5.0V) Backend
37	ROUT	OUT	VSUPAB	Analog Red Output
38	GOUT	OUT	VSUPAB	Analog Green Output
39	BOUT	OUT	VSUPAB	Analog Blue Output
40	VRD	IN	X	DAC Reference
41	RIN	IN	GNDAB	Analog Red Input
42	GIN	IN	GNDAB	Analog Green Input
43	BIN	IN	GNDAB	Analog Blue Input
44	FBLIN	IN	GNDAB	Fast Blank Input
45	RIN2	IN	GNDAB	Analog Red Input2
46	GIN2	IN	GNDAB	Analog Green Input2
47	BIN2	IN	GNDAB	Analog Blue Input2
48	FBLIN2	IN	GNDAB	Fast Blank Input2
49	CLK20	OUT	LV	20.25 MHz System Clock Output
50	HOUT	OUT	X	Horizontal Drive Output
51	XTAL 1	IN	X	Analog Crystal Input
52	XTAL 2	OUT	X	Analog Crystal Output
53	CIN 2/CRIN		LV	Analog Chroma 2/Component C _R Input
54	CBIN	IN	LV	Component C _B Input
55	GNDAF	SUPPLY	X	Analog Ground Front-end
56	SGND	IN	GNDAF	Signal Ground for Analog Input
57	VRT	IN	X	Reference Voltage Top, Video ADC
58	VSUPAF	SUPPLY	X	Analog Supply Voltage (5.0V) Front-end
59	VOUT	OUT	LV	Analog Video Output
60	CIN1	IN	VRT	Analog Chroma 1 Input
61	VIN1	IN	VRT	Analog Video 1 Input
62	VIN2	IN	VRT	Analog Video 2 Input
63	VIN3	IN	VRT	Analog Video 3 Input
64	VIN4	IN	VRT	Analog Video 4 Input

13.5.TEA6415C

13.5.1.General Description

The main function of the IC is to switch 8 video input sources on 6 outputs. Each output can be switched on only one of each input. On each input an alignment of the lowest level of the signal is made (bottom of synch. top for CVBS or black level for RGB signals). Each nominal gain between any input and output is 6.5dB. For D2MAC or Chroma signal the alignment is switched off by forcing, with an external resistor bridge, 5 V_{DC} on the input. Each input can be used as a normal input or as a MAC or Chroma input (with external resistor bridge). All the switching possibilities are changed through the BUS. Driving 75Ω load needs an external transistor. It is possible to have the same input connected to several outputs. The starting configuration upon power on (power supply: 0 to 10V) is undetermined. In this case, 6 words of 16 bits are necessary to determine one configuration. In other case, 1 word of 16 bits is necessary to determine one configuration.

13.5.2.Features

- 20MHz Bandwidth
- Cascadable with another TEA6415C (Internal address can be changed by pin 7 voltage)
- 8 Inputs (CVBS, RGB, MAC, CHROMA,...)
- 6 Outputs
- Possibility of MAC or chroma signal for each input by switching-off the clamp with an external resistor bridge
- Bus controlled

- 6.5dB gain between any input and output
- 55dB crosstalk at 5mHz
- Fully ESD protected

13.5.3.Pinning

1. Input: Max: 2Vpp, Input Current: 1mA, Max: 3mA
2. Data: Low level: -0.3V Max: 1.5V,
High level: 3.0V Max: Vcc+0.5V
3. Input: Max: 2Vpp, Input Current: 1mA, Max: 3mA
4. Clock: Low level: -0.3V Max: 1.5V,
High level: 3.0V Max: Vcc+0.5V
5. Input: Max : 2Vpp, Input Current: 1mA, Max: 3mA
6. Input: Max: 2Vpp, Input Current: 1mA, Max: 3mA
7. Prog
8. Input: Max : 2Vpp, Input Current: 1mA, Max: 3mA
9. Vcc: 12V
10. Input: Max : 2Vpp, Input Current: 1mA, Max: 3mA
11. Input: Max : 2Vpp, Input Current: 1mA, Max: 3mA
12. Ground
13. Output: 5.5Vpp, Min: 4.5Vpp
14. Output: 5.5Vpp, Min: 4.5Vpp
15. Output: 5.5Vpp, Min: 4.5Vpp
16. Output: 5.5Vpp, Min: 4.5Vpp
17. Output: 5.5Vpp, Min: 4.5Vpp
18. Output: 5.5Vpp, Min: 4.5Vpp
19. Ground
20. Input: Max: 2Vpp, Input Current: 1mA, Max: 3mA

13.6.STV9379FA

13.6.1.Description

Designed for monitors and high performance TVs, the STV9379FA vertical deflection booster can handle flyback voltage up to 90V. Further to this, it is possible to have a flyback voltage, which is more than the double of the supply (Pin 2). This allows to decrease the power consumption, or to decrease the flyback time for a given supply voltage. The STV9379FA operates with supplies up to 42V and provides up to 2.6APP output current to drive the yoke. The STV9379FA is offered in HEPTAWATT package.

13.6.2.Features

Power Amplifier
Thermal Protection
Output Current Up To 2.6APP
Flyback Voltage Up To 90V (on Pin 5)
Suitable For DC Coupling Application
External Flyback Supply

13.6.3.Pinning

Pin1 : Output Stage Supply
Pin2 : Output
Pin3 : GND or Negative Supply
Pin4 : Flyback Supply
Pin5 : Supply Voltage
Pin6 : Inverting Input
Pin7 : Non-inverting Input

13.7.TDA7269A

13.7.1.Description

The TDA7269A is class AB dual Audio power amplifier assembled in the Multiwatt package, specially designed for high quality sound application as Hi-Fi music centers and stereo TV sets.

13.7.2.Features

Wide Supply Voltage Range Up To $\pm 20V$
 Split Supply
 High Output Power
 $14 + 14W$ @THD =10%, $R_L = 8\Omega$, $V_S = +16V$
 No Pop at Turn-On/Off
 Mute (Pop Free)
 Stand-By Feature (Low I_q)
 Short Circuit Protection To Gnd
 Thermal Overload Protection

13.8.LM7800 (LM7805/LM7808)

13.8.1.Description

The L7800 series of three-terminal positive regulators is available in TO-220 TO-220FP TO-3 and D 2 PAK packages and several fixed output voltages, making it useful in a wide range of applications. These regulators can provide local on-card regulation, eliminating the distribution problems associated with single point regulation. Each type employs internal current limiting, thermal shutdown and safe area protection, making it essentially indestructible. If adequate heat sinking is provided, they can deliver over 1A output current. Although designed primarily as fixed voltage regulators, these devices can be used with external components to obtain adjustable voltages and currents.

13.8.2.Features

Output Current Up To 1.5 A
 Output Voltages of 5; 5.2; 6; 8; 8.5; 9; 12; 15; 18; 24V
 Thermal Over load protection
 Short Circuit Protection
 Output Transition SOA Protection

13.9.AT24C08

13.9.1.Description

The AT24C01A/02/04/08/16 provides 1024/2048/4096/8192/16384 bits of serial electrically erasable and programmable read-only memory (EEPROM) organized as 128/256/512/1024/2048 words of 8 bits each. The device is optimized for use in many industrial and commercial applications where low-power and low-voltage operation are essential. The AT24C01A/02/04/08/16 is available in space-saving 8-pin PDIP, (AT24C01A/02/04/08/16), 8-lead TSSOP (AT24C01A/02/04/08/16) and 8-lead JEDEC SOIC (AT24C01A/02/04/08/16) packages and is accessed via a 2-wire serial interface. In addition, the entire family is available in 5.0V (4.5V to 5.5V), 2.7V (2.7V to 5.5V), 2.5V (2.5V to 5.5V) and 1.8V (1.8V to 5.5V) versions.

13.9.2.Features

- Low-voltage and Standard-voltage Operation
 - 5.0 (V CC = 4.5V to 5.5V)
 - 2.7 (V CC = 2.7V to 5.5V)
 - 2.5 (V CC = 2.5V to 5.5V)
 - 1.8 (V CC = 1.8V to 5.5V)
- Internally Organized 128 x 8 (1K), 256 x 8 (2K), 512 x 8 (4K), 1024 x 8 (8K) or 2048 x 8 (16K)
- 2-wire Serial Interface
- Schmitt Trigger, Filtered Inputs for Noise Suppression
- Bi-directional Data Transfer Protocol
- 100 kHz (1.8V, 2.5V, 2.7V) and 400 kHz (5V) Compatibility
- Write Protect Pin for Hardware Data Protection

- 8-byte Page (1K, 2K), 16-byte Page (4K, 8K, 16K) Write Modes
- Partial Page Writes are Allowed
- Self-timed Write Cycle (10 ms max)
- High-reliability
 - Endurance: 1 Million Write Cycles
 - Data Retention: 100 Years
- Automotive Grade and Extended Temperature Devices Available
- 8-lead JEDEC SOIC, 8-pin PDIP and 8-lead TSSOP Packages

13.9.3.Pin Configurations

Pin name	Function
A0-A2	Address Inputs
SDA	Serial Data
SCL	Serial Clock Input
WP	Write Protect
NC	No Connect

13.10.SDA5555

13.10.1.General definition

The SDA55XX is a single chip teletext decoder for decoding World System Teletext data as well as Video Programming System (VPS), Program Delivery Control (PDC), and Wide Screen Signalling (WSS) data used for PAL plus transmissions (Line 23). The device also supports Closed caption acquisition and decoding. The device provides an integrated general-purpose, fully 8051-compatible Microcontroller with television specific hardware features. Microcontroller has been enhanced to provide powerful features such as memory banking, data pointers, and additional interrupts etc. The on-chip display unit for displaying Level 1.5 teletext data can also be used for customer defined on screen displays. Internal XRAM consists of up to 16 Kbytes. Device has an internal ROM of up to 128 KBytes. ROMless versions can access up to 1 MByte of external RAM and ROM. The SDA 55XX supports a wide range of standards including PAL, NTSC and contains a digital slicer for VPS, WSS, PDC, TTX and Closed Caption, an accelerating acquisition hardware module, a display generator for Level 1.5 TTX data and powerful On screen Display capabilities based on parallel attributes, and Pixel oriented characters (DRCS).

13.10.2.Features

General

- Feature selection via special function register
- Simultaneous reception of TTX, VPS, PDC, and WSS (line 23)
- Supply Voltage 2.5 and 3.3 V
- ROM version package PSDIP52-2, PMQFP64-1
- Romless version package PMQFP100-2, PLCC84-2

External Crystal and Programmable Clock Speed

- Single external 6MHz crystal, all necessary clocks are generated internally
- CPU clock speed selectable via special function registers.
- Normal Mode 33.33 MHz CPU clock, Power Save mode 8.33 MHz

Microcontroller Features

- 8bit 8051 instruction set compatible CPU.
- 33.33-MHz internal clock (max.)
- 0.360ms (min.) instruction cycle
- Two 16-bit timers
- Watchdog timer
- Capture compare timer for infrared remote control decoding
- Pulse width modulation unit (2 channels 14 bit, 6 channels 8 bit)
- ADC (4 channels, 8 bit)
- UART

Memory

- Non-multiplexed 8-bit data and 16 ... 20-bit address bus (ROMless Version)
- Memory banking up to 1Mbyte (ROMless version)
- Up to 128 Kilobyte on Chip Program ROM
- Eight 16-bit data pointer registers (DPTR)
- 256-bytes on-chip Processor Internal RAM (IRAM)
- 128bytes extended stack memory.
- Display RAM and TXT/VPS/PDC/WSS-Acquisition-Buffer directly accessible via MOVX
- UP to 16KByte on Chip Extended RAM (XRAM) consisting of;
 - 1 Kilobyte on-chip ACQ-buffer-RAM (access via MOVX)
 - 1 Kilobyte on-chip extended-RAM (XRAM, access via MOVX) for user software
 - 3 Kilobyte Display Memory

Display Features

- ROM Character Set Supports all East and West European Languages in single device
- Mosaic Graphic Character Set
- Parallel Display Attributes
- Single/Double Width/Height of Characters
- Variable Flash Rate
- Programmable Screen Size (25 Rows x 33...64 Columns)
- Flexible Character Matrixes (HxV) 12 x 9...16
- Up to 256 Dynamical Redefinable Characters in standard mode; 1024 Dynamical Redefinable Characters in Enhanced Mode
- CLUT with up to 4096 colour combinations
- Up to 16 Colours per DRCS Character
- One out of Eight Colours for Foreground and Background Colours for 1-bit DRCS and ROM Characters
- Shadowing
- Contrast Reduction
- Pixel by Pixel Shiftable Cursor With up to 4 Different Colours
- Support of Progressive Scan and 100 Hz.
- 3 X 4Bits RGB-DACs On-Chip
- Free Programmable Pixel Clock from 10 MHz to 32MHz
- Pixel Clock Independent from CPU Clock
- Multinorm H/V-Display Synchronization in Master or Slave Mode

Acquisition Features

- Multistandard Digital Data Slicer
- Parallel Multi-norm Slicing (TTX, VPS, WSS, CC, G+)
- Four Different Framing Codes Available
- Data Caption only Limited by available Memory
- Programmable VBI-buffer
- Full Channel Data Slicing Supported
- Fully Digital Signal Processing
- Noise Measurement and Controlled Noise Compensation
- Attenuation Measurement and Compensation
- Group Delay Measurement and Compensation
- Exact Decoding of Echo Disturbed Signals

Ports

- One 8-bit I/O-port with open drain output and optional I²C Bus emulation support (Port 0)
- Two 8-bit multifunction I/O-ports (Port 1, Port 3)
- One 4-bit port working as digital or analog inputs for the ADC (Port 2)
- One 2-bit I/O port with secondary functions (P4.2, 4.3, 4.7)
- One 4-bit I/O-port with secondary function (P4.0, 4.1, 4.4) (Not available in P-SDIP 52)

13.11.MC44608**13.11.1.Description**

The MC44608 is a high performance voltage mode controller designed for off-line converters. This high voltage circuit that integrates the start-up current source and the oscillator capacitor, requires few

external components while offering a high flexibility and reliability. The device also features a very high efficiency stand-by management consisting of an effective Pulsed Mode operation. This technique enables the reduction of the stand-by power consumption to approximately 1W while delivering 300mW in a 150W SMPS.

- Integrated Start-Up Current Source
- Lossless Off-Line Start-Up
- Direct Off-Line Operation
- Fast Start-Up

13.11.2.General Features

- Flexibility
- Duty Cycle Control
- Under voltage Lockout with Hysteresis
- On Chip Oscillator Switching Frequency 40, or 75kHz
- Secondary Control with Few External Components


Protections

- Maximum Duty Cycle Limitation
- Cycle by Cycle Current Limitation
- Demagnetization (Zero Current Detection) Protection
- “Over VCC Protection” Against Open Loop
- Programmable Low Inertia Over Voltage Protection Against Open Loop
- Internal Thermal Protection

GreenLine™ Controller

- Pulsed Mode Techniques for a Very High Efficiency Low Power Mode
- Lossless Start-up
- Low dV/dT for Low EMI Radiations

13.11.3.Pin Connections



AWL = Manufacturing Code
YYWW = Date Code

13.11.4.Pin Function description

Pin	Name	Description
1	Demag	The Demag pin offers 3 different functions: Zero voltage crossing detection (50mV), 24mA current detection and 120mA current detection. The 24mA level is used to detect the secondary reconfiguration status and the 120mA level to detect an Over Voltage status called Quick OVP.
2	ISENSE	The Current Sense pin senses the voltage developed on the series resistor inserted in the source of the power MOSFET. When I sense reaches 1V, the Driver output (pin 5) is disabled. This is known as the Over Current Protection function. A 200mA current source is flowing out of the pin 3 during the start-up phase and during the switching phase in case of the Pulsed Mode of operation. A resistor can be inserted between the sense resistor and the pin 3; thus a programmable peak current detection can be performed during the SMPS stand-by mode.
3	Control Input	A feedback current from the secondary side of the SMPS via the opto-coupler is injected into this pin. A resistor can be connected between this pin and GND to allow the programming of the Burst duty cycle during the Stand-by mode.
4	Ground	This pin is the ground of the primary side of the SMPS.
5	Driver	The current and slew rate capability of this pin are suited to drive Power MOSFETs.
6	VCC	This pin is the positive supply of the IC. The driver output gets disabled when the voltage becomes higher than 15V and the operating range is between 6.6V and 13V. An intermediate voltage level of 10V creates a disabling condition called Latched Off phase.
7		This pin is to provide isolation between the Vi pin 8 and the VCC pin 6.
8	Vi	This pin can be directly connected to a 500V voltage source for start-up function of the IC. During the Start-up phase a 9 mA current source is internally delivered to the VCC pin 6 allowing a rapid charge of the VCC capacitor. As soon as the IC starts-up, this current source is disabled.

13.12.TCET1102G

13.12.1.Description

The TCET110/ TCET2100/ TCET4100 consists of a phototransistor optically coupled to a gallium arsenide infrared-emitting diode in a 4-lead up to 16-lead plastic dual inline package. The elements are mounted on one lead frame using a **coplanar technique**, providing a fixed distance between input and output for highest safety requirements.

13.12.2.Applications

Circuits for safe protective separation against electrical shock according to safety class II (reinforced isolation):

For appl. class I – IV at mains voltage ≤ 300 V

For appl. class I – III at mains voltage ≤ 600 V

According to VDE 0884, table 2, suitable for: **Switch-mode power supplies, line receiver, computer peripheral interface, and microprocessor system interface.**

13.12.3.Features

VDE 0884 related features:

Rated impulse voltage (transient overvoltage) $V_{IOTM} = 8$ kV peak

Isolation test voltage (partial discharge test voltage) $V_{pd} = 1.6$ kV

Rated isolation voltage (RMS includes DC) $V_{IOWM} = 600$ V RMS (848 V peak)

Rated recurring peak voltage (repetitive) $V_{IORM} = 600$ V RMS

General features:

CTR offered in 9 groups

Isolation materials according to UL94-VO

Pollution degree 2 (DIN/VDE 0110 / resp. IEC 664)

Climatic classification 55/100/21 (IEC 68 part 1)

Special construction: Therefore, extra low coupling capacity of typical 0.2pF, high **Common Mode Rejection**

Low temperature coefficient of CTR

G = Leadform 10.16 mm; provides creepage distance > 8 mm, for TCET2100/ TCET4100 optional; suffix letter 'G' is not marked on the optocoupler

Coupling System U

13.13.TDA9885T

13.13.1.General Description

The TDA9885 is an alignment-free single standard (without positive modulation) vision and sound IF signal PLL.

13.13.2.Features

5 V supply voltage

Gain controlled wide-band Vision Intermediate Frequency (VIF) amplifier (AC-coupled)

Multistandard true synchronous demodulation with active carrier regeneration (very linear demodulation, good intermodulation figures, reduced harmonics, excellent pulse response)

Gated phase detector for L/L accent standard

Fully integrated VIF Voltage Controlled Oscillator (VCO), alignment-free; frequencies switchable for all negative and positive modulated standards via I²C-bus

Digital acquisition help, VIF frequencies of 33.4, 33.9, 38.0, 38.9, 45.75 and 58.75 MHz

4 MHz reference frequency input [signal from Phase-Locked Loop (PLL) tuning system] or operating as crystal oscillator

VIF Automatic Gain Control (AGC) detector for gain control, operating as peak sync detector for negative modulated signals and as a peak white detector for positive modulated signals

Precise fully digital Automatic Frequency Control (AFC) detector with 4-bit digital-to-analog converter; AFC bits via I²C -bus readable

TakeOver Point (TOP) adjustable via I²C-bus or alternatively with potentiometer

Fully integrated sound carrier trap for 4.5, 5.5, 6.0 and 6.5 MHz, controlled by FM-PLL oscillator

Sound IF (SIF) input for single reference Quasi Split Sound (QSS) mode (PLL controlled)

SIF AGC for gain controlled SIF amplifier; single reference QSS mixer able to operate in high performance single reference QSS mode and in intercarrier mode, switchable via I²C-bus

AM demodulator without extra reference circuit

Alignment-free selective FM-PLL demodulator with high linearity and low noise

I²C-bus control for all functions

I²C-bus transceiver with pin programmable Module Address (MAD).

13.13.3.Pinning

SYMBOL	PIN	DESCRIPTION
VIF1	1	VIF differential input 1
VIF2	2	VIF differential input 2
OP1	3	output 1 (open-collector)
FMPLL	4	FM-PLL for loop filter
DEEM	5	de-emphasis output for capacitor
AFD	6	AF decoupling input for capacitor
DGND	7	digital ground
AUD	8	audio output
TOP	9	tuner AGC TakeOver Point (TOP)
SDA	10	I ² C-bus data input/output
SCL	11	I ² C-bus clock input
SIOMA	12	sound intercarrier output and MAD select
n.c.	13	not connected
TAGC	14	tuner AGC output
REF	15	4 MHz crystal or reference input
VAGC	16	VIF-AGC for capacitor; note 1
CVBS	17	video output
AGND	18	analog ground
VPLL	19	VIF-PLL for loop filter
V _P	20	supply voltage (+5 V)
AFC	21	AFC output
OP2	22	output 2 (open-collector)
SIF1	23	SIF differential input 1
SIF2	24	SIF differential input 2

13.14.PI5V330


13.14.1.General Description

The PI5V330 is well suited for video applications when switching composite or RGB analog.

14.AK45 CHASSIS PRODUCTION SERVICE MODE ADJUSTMENTS

14.1.SERVICE MENU


All system, geometry and white balance alignments are performed in production service mode. Before starting the production mode alignments, make sure that all manual adjustments are done correctly. To start production mode alignments enter the MAIN MENU and then press the digits 4, 7, 2 and 5 respectively or press **MUTE** and **INFO** buttons at the same time. The following first menu appears on the screen.

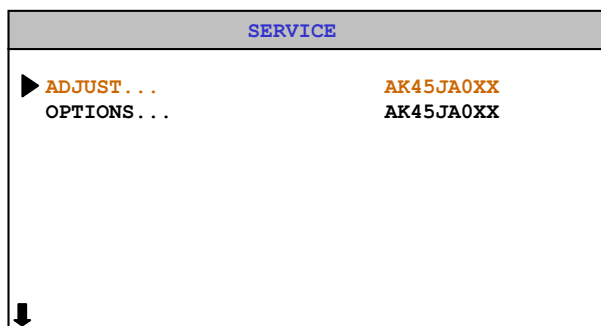

You can select Adjust or Options items by pressing Up/Down buttons. Selected parameter will be highlighted. In order to enter the selected parameter, press Left or Right button. To exit the service menu press MENU button. Entire service menu parameters of AK45 CHASSIS are listed below.

14.2.ADJUST MENU

Select the parameter by pressing up/down buttons. Adjust the parameter by pressing Left/Right buttons. In ADJUST menu, changed values are stored automatically.

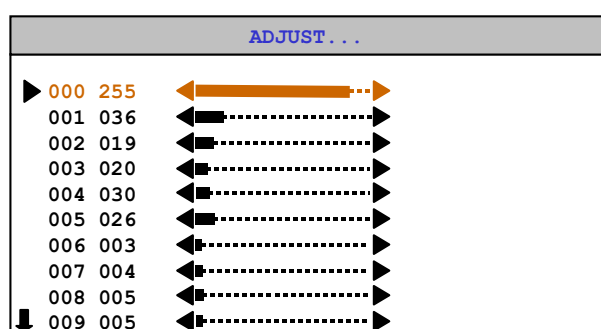

White Point Red, White Point Green, White Point Blue:

Not used.

AGC

Apply PAL BG signal, VHF-3 Channel-12 and 60dBμV signal level. Adjust AGC (Automatic Gain Control) item by pressing Left/Right buttons till the voltage at AGC point (pin1 of the tuner) becomes 3.0 volts.

If PLL negative

Not used.

If PLL positive

Not used.

Y-Delay

Enter a PAL B/G colour and black-white bar test pattern via RF. Adjust Y-Delay for PAL till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

Y-Delay SECAM

Enter a SECAM B/G colour and black-white bar test pattern via RF. Adjust Y-Delay SECAM till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

Y-Delay NTSC

Enter an NTSC colour and black-white bar test pattern via RF. Adjust Y-Delay NTSC till the colour transients on the colour bar of the pattern become as sharper and colours between transients do not mix with each other as possible.

Y-Delay other

Not used.

Vertical Position Offset

This value is fixed (127)

Vertical Position Offset

This value is fixed (127)

Horizontal Position Offset

This value is fixed (127)

Horizontal Position Offset

This value is fixed (127)

Vertical Blank Start

This register will be used only at 4:3 tubes for 16:9 mode adjustment. It adjusts the vertical blank start position.

Vertical Blank Stop

This register will be used only at 4:3 tubes for 16:9 mode adjustment. It adjusts the vertical blank stop position.

Angle

Change Angle by pressing Left/Right buttons till the vertical lines of the crosshatch pattern become completely perpendicular to horizontal lines without any angle of vertical deviation. Check and readjust ANGLE item if the adjustment becomes improper after some other geometric adjustments are done.

Bow

Change Bow by pressing Left/Right buttons till the vertical lines especially ones close to the left and right sides will of equal and symmetrical bending, i.e. they together will neither be towards left side nor right side. Check and readjust BOW item if the adjustment becomes improper after some other geometric adjustments are done.

4:3 Horizontal Blank Start

This register will be used only at 16:9 tube for 4:3 mode adjustment. It adjusts the horizontal blank start position.

4:3 Horizontal Blank Stop

This register will be used only at 16:9 tube for 4:3 mode adjustment. It adjusts the horizontal blank stop position.

EHTV Compensation

It's used to adjust the EHT compensation vertical gain coefficient.

EHTTM Compensation

It's used to adjust the EHT compensation time constant.

EHTEW Compensation

It's used to adjust the EHT compensation east/west gain coefficient.

WDR

The amplitude of R of RGB output can be adjusted with the drive parameter WDR.

WDG

The amplitude of G of RGB output can be adjusted with the drive parameter WDG.

WDB

The amplitude of B of RGB output can be adjusted with the drive parameter WDB.

CR

The DC offset values of R of RGB output can be adjusted with the cutoff parameter CR.

CG

The DC offset values of G of RGB output can be adjusted with the cutoff parameter CG.

CB

The DC offset values of B of RGB output can be adjusted with the cutoff parameter CB.

COR coring level

The amplitude of the correction signal is adjustable. Small noise amplitudes in the correction signal are suppressed by an adjustable coring circuit.

REGULAR VERT_POS (Regular mode Vertical Position)

Enter a PAL B/G circle test pattern via RF. Change Vertical Position till the test pattern is vertically centered. Horizontal line at the center pattern is in equal distance both to upper and lower side of the picture tube. Check and readjust Vertical Position item if the adjustment becomes improper after some other geometric adjustments are done.

It's used to adjust the vertical position of regular mode.

REGULAR VERT_AMPL (Regular mode Vertical Amplitude)

It's used to adjust the vertical amplitude of regular mode.

REGULAR VERT_SCOR (Regular mode Vertical S-Correction)

It's used to adjust the vertical s-correction of regular mode.

REGULAR VERT_SSYM(Regular mode Vertical S Symmetry)

It's used to adjust the vertical s-symmetry of regular mode.

REGULAR TRAPEZE (Regular mode Trapeze)

Change Trapezium by pressing Left/Right buttons till vertical lines, especially lines at the sides of the picture frame became parallel to the both sides of picture tube as close as possible. Check and readjust TRPEZ item if the adjustment becomes improper after some other geometric adjustments are done.

It's used to adjust the trapeze of regular mode.

REGULAR CUSHION (Regular mode Cushion)

It's used to adjust the cushion of regular mode.

REGULAR HOR_COR_SYM (Regular mode Horizontal Corner Symmetry)

It's used to adjust the horizontal corners symmetry of regular mode.

REGULAR HOR_CORNER (Regular mode Horizontal Corner)

It's used to adjust the horizontal corners of regular mode.

REGULAR HORZ_POS (Regular mode Horizontal Position)

Enter a PAL B/G circle test pattern via RF. Change Horizontal Position until the picture is horizontally centered. Check and readjust Horizontal Position item if the adjustment becomes improper after some other geometric adjustments are done.

It's used to adjust the horizontal position of regular mode.

REGULAR HORZ_AMPL (Regular mode Horizontal Amplitude)

It's used to adjust the horizontal amplitude of regular mode.

PANORAMIC VERT_POS (Panoramic mode Vertical Position)

It's used to adjust the vertical position of panoramic mode.

PANORAMIC VERT_AMPL (Panoramic mode Vertical Amplitude)

It's used to adjust the vertical amplitude of panoramic mode.

PANORAMIC VERT_SCOR (Panoramic mode Vertical S-Correction)

It's used to adjust the vertical s-correction of panoramic mode.

PANORAMIC VERT_SSYM (Panoramic mode Vertical S-Symmetry)

It's used to adjust the vertical s-symmetry of panoramic mode.

PANORAMIC TRAPEZE (Panoramic mode Trapeze)

It's used to adjust the trapeze of panoramic mode.

PANORAMIC CUSHION (Panoramic mode Cushion)

It's used to adjust the cushion of panoramic mode.

PANORAMIC HOR_COR_SYM (Panoramic mode Horizontal corner symmetry)

It's used to adjust the horizontal corners symmetry of panoramic mode.

PANORAMIC HOR_CORNER (Panoramic mode Horizontal corner)

It's used to adjust the horizontal corners of panoramic mode.

PANORAMIC HORZ_POS (Panoramic mode Horizontal position)

It's used to adjust the horizontal position of panoramic mode.

PANORAMIC HORZ_AMPL (Panoramic mode Horizontal amplitude)

It's used to adjust the horizontal amplitude of panoramic mode.

14:9 ZOOM VERT_POS (14:9 Zoom mode Vertical Position)

It's used to adjust the vertical position of 14:9 zoom mode.

14:9 ZOOM VERT_AMPL (14:9 Zoom mode Vertical Amplitude)

It's used to adjust the vertical amplitude of 14:9 zoom mode.

14:9 ZOOM VERT_SCOR (14:9 Zoom mode Vertical S-Correction)

It's used to adjust the vertical s-correction of 14:9 zoom mode.

14:9 ZOOM VERT_SSYM (14:9 Zoom mode Vertical S-Symmetry)

It's used to adjust the vertical s-symmetry of 14:9 zoom mode.

14:9 ZOOM TRAPEZE (14:9 Zoom mode Trapeze)

It's used to adjust the trapeze of 14:9 zoom mode.

14:9 ZOOM CUSHION (14:9 Zoom mode Cushion)

It's used to adjust the cushion of 14:9 zoom mode.

14:9 ZOOM HOR_COR_SYM (14:9 Zoom mode Corner Symmetry)

It's used to adjust the horizontal corners symmetry of 14:9 zoom mode.

14:9 ZOOM HOR_CORNER (14:9 Zoom mode Horizontal Corner)

It's used to adjust the horizontal corners of 14:9 zoom mode.

14:9 ZOOM HORZ_POS (14:9 Zoom mode Horizontal Position)

It's used to adjust the horizontal position of 14:9 zoom mode.

14:9 ZOOM HORZ_AMPL (14:9 Zoom mode Horizontal Amplitude)

It's used to adjust the horizontal amplitude of 14:9 zoom mode.

16:9 ZOOM VERT_POS (16:9 Zoom mode Vertical Position)

It's used to adjust the vertical position of 16:9 zoom mode.

16:9 ZOOM VERT_AMPL (16:9 Zoom mode Vertical Amplitude)

It's used to adjust the vertical amplitude of 16:9 zoom mode.

16:9 ZOOM VERT_SCOR (16:9 Zoom mode Vertical S-Correction)

It's used to adjust the vertical s-correction of 16:9 zoom mode.

16:9 ZOOM VERT_SSYM (16:9 Zoom mode Vertical S-Symmetry)

It's used to adjust the vertical s-symmetry of 16:9 zoom mode.

16:9 ZOOM TRAPEZE (16:9 Zoom mode Trapeze)

It's used to adjust the trapeze of 16:9 zoom mode.

16:9 ZOOM CUSHION (16:9 Zoom mode Cushion)

It's used to adjust the cushion of 16:9 zoom mode.

16:9 ZOOM HOR_COR_SYM (16:9 Zoom mode Horizontal corner symmetry)

It's used to adjust the horizontal corners symmetry of 16:9 zoom mode.

16:9 ZOOM HOR_CORNER (16:9 Zoom mode Horizontal corner)

It's used to adjust the horizontal corners of 16:9 zoom mode.

16:9 ZOOM HORZ_POS (16:9 Zoom mode Horizontal position)

It's used to adjust the horizontal position of 16:9 zoom mode.

16:9 ZOOM HORZ_AMPL (16:9 Zoom mode Horizontal amplitude)

It's used to adjust the horizontal amplitude of 16:9 zoom mode.

16:9 ZOOM SUBTITLE VERT_POS (16:9 Zoom Subtitle mode Vertical position)

It's used to adjust the vertical position of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE VERT_AMPL (16:9 Zoom Subtitle mode Vertical amplitude)

It's used to adjust the vertical amplitude of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE VERT_SCOR (16:9 Zoom Subtitle mode Vertical S-Correction)

It's used to adjust the vertical s-correction of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE VERT_SSYM (16:9 Zoom Subtitle mode Vertical S-Symmetry)

It's used to adjust the vertical s-symmetry of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE TRAPEZE (16:9 Zoom Subtitle mode Trapeze)

It's used to adjust the trapeze of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE CUSHION (16:9 Zoom Subtitle mode Cushion)

It's used to adjust the cushion of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE HOR_COR_SYM (16:9 Zoom Subtitle mode Horizontal Corner Symmetry)

It's used to adjust the horizontal corners symmetry of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE HOR_CORNER (16:9 Zoom Subtitle mode Horizontal corner)

It's used to adjust the horizontal corners of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE HORZ_POS (16:9 Zoom Subtitle mode Horizontal position)

It's used to adjust the horizontal position of 16:9 zoom subtitle mode.

16:9 ZOOM SUBTITLE HORZ_AMPL (16:9 Zoom Subtitle mode Horizontal amplitude)

It's used to adjust the horizontal amplitude of 16:9 zoom subtitle mode.

OSD Position

It's used to adjust the horizontal position of the OSD.

BCLTHR

Beam current threshold

BCLG

Beam current loop gain

ROTATION (TILT)

This adjustment only works when the TV has rotation option. Change TILT by pressing Left/Right buttons to rotate the complete raster clock-wise and counter clock-wise depending on the CRT. Check and readjust TRPEZ item if the adjustment becomes improper after some other geometric adjustments are done.

LSLSA, LSLSB, LSL2, LSLTA, LSLTB (Luma soft limiter)

LSLSA: Luma soft limiter slope A (fixed)

LSLSB: Luma soft limiter slope B (fixed)

LSL2: Luma soft limiter absolute limit (fixed)

LSLTA: Luma soft limiter segment A tilt point (fixed)

LSLTB: Luma soft limiter segment A tilt point (fixed)

REFERENCE WDR RED (NORMAL)

The amplitude of R of RGB output can be adjusted with the drive parameter WDR for the colour temperature of normal mode.

REFERENCE WDR GREEN (NORMAL)

The amplitude of G of RGB output can be adjusted with the drive parameter WDR for the colour temperature of normal mode.

REFERENCE WDR BLUE (NORMAL)

The amplitude of B of RGB output can be adjusted with the drive parameter WDR for the colour temperature of normal mode.

REFERENCE CUTOFF RED

It's fixed.

REFERENCE CUTOFF GREEN

It's fixed.

REFERENCE CUTOFF BLUE

It's fixed.

IBRM

Internal Brightness, the brightness for measurement can be set to measure at higher cutoff current. The measurement brightness is independent of the drive values. It's used to adjust the maximum brightness level.

WDRV

White drive measurement control. It is used to adjust the maximum contrast level.

ACC_SAT (COLOUR OFFSET)

It's used to adjust the max. colour level.

G2 CUTOFF REFERENCE

It's fixed.

G2 WDR REFERENCE

It's fixed.

POFS2 (RGB HORIZONTAL SHIFT)

It's used to adjust the horizontal position of RGB signal.

REFERENCE WDR RED COOL

The amplitude of R of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

REFERENCE WDR GREEN COOL

The amplitude of G of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

REFERENCE WDR BLUE COOL

The amplitude of B of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

REFERENCE WDR RED WARM

The amplitude of R of RGB output can be adjusted with the drive parameter WDR for the colour temp of warm mode.

REFERENCE WDR GREEN WARM

The amplitude of G of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

REFERENCE WDR BLUE WARM

The amplitude of B of RGB output can be adjusted with the drive parameter WDR for the colour temp of cool mode.

STANDARD MODE BRIGHTNESS

It's used to adjust the brightness value of standard mode.

STANDARD MODE COLOUR

It's used to adjust the colour value of standard mode.

STANDARD MODE CONTRAST

It's used to adjust the contrast value of standard mode.

FULL VERT_POS (16:9 MODE)

It's used to adjust the vertical position of 16:9 mode (full mode).

FULL VERT_AMPL

It's used to adjust the vertical amplitude of 16:9 mode (full mode).

FULL VERT_SCOR

It's used to adjust the vertical s-correction of 16:9 mode (full mode).

FULL VERT_SSYM

It's used to adjust the vertical s-symmetry of 16:9 mode (full mode).

FULL TRAPEZE

It's used to adjust the trapeze of 16:9 mode (full mode).

FULL CUSHION

It's used to adjust the cushion of 16:9 mode (full mode).

FULL HOR_COR_SYM

It's used to adjust the horizontal corners symmetry of 16:9 mode (full mode).

FULL HOR_CORNER

It's used to adjust the horizontal corners of 16:9 mode (full mode).

FULL HORZ_POS

It's used to adjust the horizontal position of 16:9 mode (full mode).

FULL HORZ_AMPL

It's used to adjust the horizontal amplitude of 16:9 mode (full mode).

BRIGHT MODE BRIGHTNESS

It's used to adjust the brightness value of bright mode.

BRIGHT MODE COLOUR

It's used to adjust the colour value of bright mode.

BRIGHT MODE CONTRAST

It's used to adjust the contrast value of bright mode.

SOFT MODE BRIGHTNESS

It's used to adjust the brightness value of soft mode.

SOFT MODE COLOUR

It's used to adjust the colour value of soft mode.

SOFT MODE CONTRAST

It's used to adjust the contrast value of soft mode.

PERSONAL MODE FACTORY SETTING BRIGHTNESS

It's fixed.

PERSONAL MODE FACTORY SETTING COLOUR

It's fixed.

PERSONAL MODE FACTORY SETTING CONTRAST

It's fixed.

SCINC FOR PANORAMIC MODE

scaler1 coefficient, this scaler is compressing the signal.

SCINC1 FOR PANORAMIC MODE

scaler2 coefficient, this scaler is expanding the signal.

VOLUME AFTER APS

It's used to adjust the volume level after APS.

VERTICAL SCROLL

It's used to adjust the step width for scroll function.

14:9 HORIZONTAL START

It's used to adjust the horizontal blank start position for 14:9 mode.

14:9 HORIZONTAL STOP

It's used to adjust the horizontal blank stop position for 14:9 mode.

4:3 RGB HORIZONTAL AMPLITUDE

It's used to adjust the horizontal amplitude in 4:3 mode for RGB signals.

4:3 RGB CUSHION

It's used to adjust the cushion in 4:3 mode for RGB signals.

14:9 RGB HORIZONTAL AMPLITUDE

It's used to adjust the horizontal amplitude in 14:9 mode for RGB signals.

14:9 RGB CUSHION

It's used to adjust the cushion in 14:9 mode for RGB signals.

PANORAMIC RGB HORIZONTAL AMPLITUDE

It's used to adjust the horizontal amplitude in panoramic mode for RGB signals.

16:9 RGB HORIZONTAL AMPLITUDE

It's used to adjust the horizontal amplitude in 16:9 mode for RGB signals.

16:9 SUBTITLE RGB HORIZONTAL AMPLITUDE

It's used to adjust the horizontal amplitude in 16:9 subtitle mode for RGB signals.

FULL RGB HORIZONTAL AMPLITUDE

It's used to adjust the horizontal amplitude in full mode for RGB signals.

TELETEXT HORZ_POS

It's used to adjust the horizontal position of teletext signal.

SHARP 11AK45 TVs ADJUST VALUES				
ADJUST NO	EXPLANATION	SETTING VALUES		
		THOMSON 28" 16:9 SF TV W66EJU023X215	THOMSON 28" 4:3 SF A66EHJ13X01	THOMSON 32" 16:9 SF W7EGV023X215
ADJUST 0	Not used	255	255	255
ADJUST 1	Not used	36	36	36
ADJUST 2	Not used	19	19	19
ADJUST 3	AGC (Automatic Gain Control)	It will be adjusted to below 1V of max. AGC for each TV		
ADJUST 4	Not used	30	30	30
ADJUST 5	Not used	26	26	26
ADJUST 6	Y-Delay	2	2	2
ADJUST 7	Y-Delay SECAM	3	3	3
ADJUST 8	Y-Delay NTSC	5	5	5
ADJUST 9	Y-Delay OTHER	5	5	5
ADJUST 10	Vertical Position Offset	127	127	127
ADJUST 11	Vertical Amplitude Offset	127	127	127
ADJUST 12	Horizontal Position Offset	127	127	127
ADJUST 13	Horizontal Amplitude Offset	127	127	127
ADJUST 14	Vertical Blank Start (It will be used only at 4.3 tube for 16:9 mode adjustment)	No use	150	119
ADJUST 15	Vertical Blank Stop (It will be used only at 4.3 tube for 16:9 mode adjustment)	No use	12	34
ADJUST 16	Angle	129	124	139
ADJUST 17	Bow	131	127	127
ADJUST 18	Horz. Blank Start (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	19	No use	19
ADJUST 19	Horz. Blank Stop (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	201	No use	201
ADJUST 20	EHTV compensation	66	55	66
ADJUST 21	EHTM compensation	2	2	5
ADJUST 22	EHTW compensation	160	219	160
ADJUST 23	WDR	VDP ADJUSTS ITSELF		
ADJUST 24	WDG	VDP ADJUSTS ITSELF		
ADJUST 25	WDB	VDP ADJUSTS ITSELF		
ADJUST 26	CR	VDP ADJUSTS ITSELF		
ADJUST 27	CG	VDP ADJUSTS ITSELF		
ADJUST 28	CB	VDP ADJUSTS ITSELF		
ADJUST 29	COR coring level	15		
ADJUST 30	NORMAL VERT_POS	127	128	127
ADJUST 31	NORMAL VERT_AMPL	53	81	53
ADJUST 32	NORMAL VERT_SCOR	129	132	133
ADJUST 33	NORMAL VERT_SSYM	136	136	131
ADJUST 34	NORMAL TRAPEZE	129	129	131
ADJUST 35	NORMAL CUSHION	149	155	141
ADJUST 36	NORMAL HOR_COR_SYM	128	123	118
ADJUST 37	NORMAL HOR_CORNER	113	107	137
ADJUST 38	NORMAL HORZ_POS	50	54	45
ADJUST 39	NORMAL HORZ_AMPL	98	16	107
ADJUST 40	PANORAMIC VERT_POS	127		127
ADJUST 41	PANORAMIC VERT_AMPL	52		48
ADJUST 42	PANORAMIC VERT_SCOR	134		133
ADJUST 43	PANORAMIC VERT_SSYM	139		131
ADJUST 44	PANORAMIC TRAPEZE	129		131
ADJUST 45	PANORAMIC CUSHION	150		146
ADJUST 46	PANORAMIC HOR_COR_SYM	134		121
ADJUST 47	PANORAMIC HOR_CORNER	113		134
ADJUST 48	PANORAMIC HORZ_POS	48		48
ADJUST 49	PANORAMIC HORZ_AMPL	36		44
ADJUST 50	ZOOM 14:9 VERT_POS	128		125
ADJUST 51	ZOOM 14:9 VERT_AMPL	41		42
ADJUST 52	ZOOM 14:9 VERT_SCOR	134		133
ADJUST 53	ZOOM 14:9 VERT_SSYM	140		131
ADJUST 54	ZOOM 14:9 TRAPEZE	128		131
ADJUST 55	ZOOM 14:9 CUSHION	156		148
ADJUST 56	ZOOM 14:9 HOR_COR_SYM	145		123
ADJUST 57	ZOOM 14:9 HOR_CORNER	113		135
ADJUST 58	ZOOM 14:9 HORZ_POS	49		47

SHARP 11AK45 TVs ADJUST VALUES				
ADJUST NO	EXPLANATION	SETTING VALUES		
		THOMSON 28" 16:9 SF TV W66EJU023X215	THOMSON 28" 4:3 SF A66EHJ13X01	THOMSON 32" 16:9 SF W7EGV023X215
ADJUST 59	ZOOM 14:9 HORZ_AMPL	59		63
ADJUST 60	CINEMA VERT_POS	128		127
ADJUST 61	CINEMA VERT_AMPL	28		32
ADJUST 62	CINEMA VERT_SCOR	129		126
ADJUST 63	CINEMA VERT_SSYM	146		131
ADJUST 64	CINEMA TRAPEZE	128		130
ADJUST 65	CINEMA CUSHION	164		154
ADJUST 66	CINEMA HOR_COR_SYM	135		128
ADJUST 67	CINEMA HOR_CORNER	117		131
ADJUST 68	CINEMA HORZ_POS	48		48
ADJUST 69	CINEMA HORZ_AMPL	36		44
ADJUST 70	16:9 ZOOM SUBTITLE VERT_POS	147		145
ADJUST 71	16:9 ZOOM SUBTITLE VERT_AMPL	33		39
ADJUST 72	16:9 ZOOM SUBTITLE VERT_SCOR	123		133
ADJUST 73	16:9 ZOOM SUBTITLE VERT_SSYM	156		129
ADJUST 74	16:9 ZOOM SUBTITLE TRAPEZE	121		122
ADJUST 75	16:9 ZOOM SUBTITLE CUSHION	162		152
ADJUST 76	16:9 ZOOM SUBTITLE HOR_COR_SYM	125		128
ADJUST 77	16:9 ZOOM SUBTITLE HOR_CORNER	114		125
ADJUST 78	16:9 ZOOM SUBTITLE HORZ_POS	48		44
ADJUST 79	16:9 ZOOM SUBTITLE HORZ_AMPL	36		43
ADJUST 80	OSD Position	205	217	205
ADJUST 81	BCLTHR beam current threshold	30	39	74
ADJUST 82	BCLG beam current loop gain	6	7	7
ADJUST 83	ROTATION (TILT)	2	2	2
ADJUST 84	LSLSA luma soft limiter	2	2	2
ADJUST 85	LSLSB	0	0	0
ADJUST 86	LSL2	255	255	255
ADJUST 87	LSLTA	0	0	0
ADJUST 88	LSLTB	1	1	0
ADJUST 89	REFERENCE WDR RED (NORMAL)	X	X	X
ADJUST 90	REFERENCE WDR GREEN (NORMAL)	X	X	X
ADJUST 91	REFERENCE WDR BLUE (NORMAL)	X	X	X
ADJUST 92	REFERENCE CUTOFF RED	55	65	55
ADJUST 93	REFERENCE CUTOFF GREEN	69	68	69
ADJUST 94	REFERENCE CUTOFF BLUE	69	77	69
ADJUST 95	IBRM	215	200	215
ADJUST 96	WDRV	68	75	68
ADJUST 97	ACC_SAT (COLOR OFFSET)	130	154	130
ADJUST 98	G2 CUTOFF REFERENCE	220	200	220
ADJUST 99	G2 WDR REFERENCE	90	90	90
ADJUST 100	ADJUST POFs2 (RGB HORIZONTAL SHIFT)	60	50	60
ADJUST 101	REFERENCE WDR RED COOL	X	X	X
ADJUST 102	REFERENCE WDR GREEN COOL	X	X	X
ADJUST 103	REFERENCE WDR BLUE COOL	X	X	X
ADJUST 104	REFERENCE WDR RED WARM	X	X	X
ADJUST 105	REFERENCE WDR GREEN WARM	X	X	X
ADJUST 106	REFERENCE WDR BLUE WARM	X	X	X
ADJUST 107	STANDARD MODE BRIGHTNESS	32	32	32
ADJUST 108	STANDARD MODE COLOR	47	47	47
ADJUST 109	STANDARD MODE CONTRAST	32	32	32
ADJUST 110	FULL VERT_POS	128	126	126
ADJUST 111	FULL VERT_AMPL	51	94	53
ADJUST 112	FULL VERT_SCOR	132	132	133
ADJUST 113	FULL VERT_SSYM	139	131	131
ADJUST 114	FULL TRAPEZE	128	129	129
ADJUST 115	FULL CUSHION	151	143	144
ADJUST 116	FULL HOR_COR_SYM	134	129	128
ADJUST 117	FULL HOR_CORNER	49	114	135
ADJUST 118	FULL HORZ_POS	35	54	46
ADJUST 119	FULL HORZ_AMPL	30	16	46
ADJUST 120	BRIGHT MODE BRIGHTNESS	43	43	43
ADJUST 121	BRIGHT MODE COLOR	50	50	50
ADJUST 122	BRIGHT MODE CONTRAST	32	32	32
ADJUST 123	SOFT MODE BRIGHTNESS	43	43	43
ADJUST 124	SOFT MODE COLOR	58	58	58
ADJUST 125	SOFT MODE CONTRAST	20	20	20

SHARP 11AK45 TVs ADJUST VALUES				
ADJUST NO	EXPLANATION	SETTING VALUES		
		THOMSON 28" 16:9 SF TV W66EJU023X215	THOMSON 28" 4:3 SF A66EHJ13X01	THOMSON 32" 16:9 SF W7EGV023X215
ADJUST 126	PERSONAL MODE FACTORY SETTING BRIGHTNESS	32	32	32
ADJUST 127	PERSONAL MODE FACTORY SETTING COLOR	47	47	47
ADJUST 128	PERSONAL MODE FACTORY SETTING CONTRAST	32	32	32
ADJUST 129	SCINC FOR PANORAMIC MODE	56	56	56
ADJUST 130	SCINC1 FOR PANORAMIC MODE	125	125	125
ADJUST 131	VOLUME AFTER APS	5		
ADJUST 132	VERTICAL SCROLL	11	11	11
ADJUST 133	14:9 HORIZONTAL START (It will be used only at 4.3 tube for 16:9 mode adjustment)	19	No use	19
ADJUST 134	14:9 HORIZONTAL STOP (It will be used only at 4.3 tube for 16:9 mode adjustment)	201	No use	201
ADJUST 135	NORMAL RGB HORIZONTAL AMPLITUDE	99	19	98
ADJUST 136	NORMAL RGB CUSHION	151	159	142
ADJUST 137	14:9 RGB HORIZONTAL AMPLITUDE	70	No use	71
ADJUST 138	14:9 RGB CUSHION	156	No use	149
ADJUST 139	PANORAMIC RGB HORIZONTAL AMPLITUDE	40	No use	49
ADJUST 140	CINEMA RGB HORIZONTAL AMPLITUDE	40	No use	48
ADJUST 141	ZOOM 16:9 SUBTITLE RGB HORIZONTAL AMPLITUDE	40	No use	48
ADJUST 142	FULL RGB HORIZONTAL AMPLITUDE	40	18	48
ADJUST 143	TELETEXT HORZ_POS	95	104	98
ADJUST 144	RGB BRIGHTNESS OFFSET	0	80	0
ADJUST 145	RGB CONTRAST OFFSET	0	75	0
ADJUST 146	TELETEXT BRIGHTNESS	100	150	100
ADJUST 147	TELETEXT CONTRAST	120	135	120
ADJUST 148	SVG1	3	3	3
ADJUST 149	SVD1	7	7	7
ADJUST 150	SVLIM	127	127	127
ADJUST 151	SVDEL	4	4	4
ADJUST 152	SVCOR	0	0	0
ADJUST 153	RASTER Horz. Blank Start (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	117	No use	115
ADJUST 154	RASTER Horz. Blank Stop (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	178	No use	176
ADJUST 155	RASTER RGB Horz. Blank Start (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	116	No use	116
ADJUST 156	RASTER RGB Horz. Blank Stop (It will be used only at 16:9 tube for 4:3 and 14:9 mode adjustments)	177	No use	176
ADJUST 157	PIP BRIGHTNESS	5	5	5
ADJUST 158	PIP CONTRAST	15	15	15

X: WILL BE ADJUSTED AUTOMATICALLY ACCORDING TO THE SHARP SPECIFICATION.
COLOR TEMPERATURE SHOULD BE (SHARP SPECIFICATION);

	WESTERN EUROPE	EASTERN EUROPE	UK
FOR NORMAL (x, y)	(290, 300)	(304, 306)	(290, 284)
FOR COOL (x, y)	(274, 273)	(288, 269)	(274, 257)
FOR WARM (x, y)	(310, 294)	(324, 300)	(310, 278)

14.3.OPTIONS MENU

Select the parameter by pressing up/down buttons. Adjust the parameter by pressing Left/Right buttons. . In OPTIONS menu, some of the changed parameters are not stored automatically. To store the adjusted parameters, you should turn off and on TV.

OPTIONS...		
▶	000 02	00000010
	001 00	00000000
	002 22	00100010
	003 08	00001000
	004 00	00000000
	005 10	00010000
	006 00	00000000
	007 56	01010110
	008 39	00111001
↓	009 0F	00001111

Option 0. Video Processor Crystal Indication

B7: x = x
 B6: x = x
 B5: x = x
 B4: x = x
 B3: x = x
 B2: x = x
 B1: Xa = note1 (Crystal indication)
 B0: Xb = note1 (Crystal indication)

note 1:

Xa,Xb

0,1 : Pal M, Pal N, NTSC M

Pin 34 : 3.58 (1, 2 or 3 crystals)
 Pin 35 : No crystal

1,0 : Pal BG, Pal DK, Pal I/I+, Secam BG, Secam DK, Secam L/L', Secam K1

Pin 34 : No crystal
 Pin 35 : 4.43 (1 crystal)

1,1 : Pal BG, Pal DK, Pal I/I+, Secam BG, Secam DK, Secam L/L', Secam K1, Pal M, Pal N, Ntsc M

Pin 34 : 3.58 (1, 2 or 3 crystals)
 Pin 35 : 4.43 (1 crystal)

Option 1. (0x01) Video Processor Decoder Mode Register

B7: x = x
 B6: x = x
 B5: x = x
 B4: x = x
 B3: x = x
 B2: x = x
 B1: x = x
 B0: x = x

Option 2. (0x18) Video Processor Blanking Control

B7: SWF = 1 (Subwoofer item at menu)
 B6: Vsd = 0 (Vertical scan disable)
 B5: x = x

B4: x = x
 B3: x = x
 B2: x = x
 B1: LUMA = 1 Luma Soft Limiter Enabled
 B0: BB = 1 Blue Background Option

Option 3. (0x19) Video Processor Cathode Drive Level

B7: x = x
 B6: x = x
 B5: x = x
 B4: x = x
 B3: x = x
 B2: x = x
 B1: x = x
 B0: country = note 0

Note 0: choice for others country option

1 : BG
 0 : DK

Option 4.

B7: x = x
 B6: x = x
 B5: x = x
 B4: x = x
 B3: x = x
 B2: x = x
 B1: x = x
 B0: x = x

Option 5. CTI Available, Mono AVL

B7: x = x
 B6: x = x
 B5: x = x
 B4: x = x
 B3: x = x
 B2: x = x
 B1: x = x
 B0: x = x

Option 6.

B7: = TEXT LANGUAGE 3
 B6: = TEXT LANGUAGE 2
 B5: = TEXT LANGUAGE 1
 B4: x = x
 B3: x = x
 B2: x = x
 B1: x = x
 B0: x = x

Option 7. OPTIONHOTELACTIVE, PLL_VST, PIP Zoom Mode, PIP Position

B7: x = x
 B6: x = x
 B5: F = note 1
 B4: x = x
 B3: x = x
 B2: PZM= x
 B1: AV2 = 1 AV2 Output enabled
 B0: x = x

Note 1:

F :Frequency Mode

1: = Frequency Menu Item available

0: = Frequency Menu Item not available

Option 8. IF Frequency

B7: x = x

B6: x = x

B5: Ifl = 0 note 3

B4: IfD = 0 note 4

B3: IfM = note 5

B2: Aps = note 6

B1: Hp = note 7

B0: Hue = note 8

Note 3:

IfI

1 = IF I 39.5 MHz Great Britain I , Only UHF Tuner

0 = IF I 38.9 MHz Ireland I+, Standard Tuner

Note 4:

IfD

1 = IF DK 38.0 MHz

0 = IF DK 38.9 MHz

Note 5:

IfM

1 = IF M,N 45.75 MHz S&N American Models , Tuner UV1336 (Only Pal M/N, Ntsc M)

0 = IF M,N 38.9 MHz Euro M,N Models , Standard Tuner

Note 6:

Aps (Only for PLL)

0 = A.P.S. done

1 = A.P.S. set

Note 7:

Hp : Headphone available

0 = No headphone

1 = Headphone available

Note 8:

Hue : Hue Available

0 = No Hue

1 = Hue available

Option 9. Standard Available

B7: NM = note 1

B6: PN = note 1

B5: PM = note 1

B4: K1 = note 1

B3: L = note 1

B2: I = note 1

B1: DK = note 1

B0: BG = note 1

Note 1:

0 = Standard not supported

1 = Standard available

Option 10. Scart, Combfilter, Teletext, Language

B7: x = x
B6: RGB = note 2
B5: FAV =
B4: AV2S =
B3: FSVHS = note 3
B2: BAV = note 4
B1: Sc2 = note 5
B0: BSVHS = note 6

Note 2 :

RGB = RGB Menu Item active/inactive

0 = RGB Menu Item inactive
1 = RGB Menu Item active

Note 3:

0 = Front S-VHS not supported
1 = Front S-VHS available

Note 4:

0 = Back AV (AV-3) not supported
1 = Back AV (AV-3) available

Note 5:

0 = Scart 2 not supported
1 = Scart 2 available

Note 6:

0 = Back SVHS not supported
1 = Back SVHS available

Option 11. PLL Tuner Control 1 Byte

PLL tuner control 1 byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	1	0	0	0	1	1	1	0
Philips	UV1316MK2	1	0	0	0	1	1	1	0
Alps	TELE9X062A	1	0	0	0	1	1	1	0
Samsung	TEXX2949PG28A	1	0	0	0	1	1	1	0
Siel	PT060	1	0	0	0	1	1	1	0
Temic	5001PH5-3X0003	1	0	0	0	1	1	1	0
Thomson	CTT5020	1	0	0	0	1	1	1	0

Option 12. PLL Tuner Control 2 Low Byte

PLL tuner control 2 low byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	0	0	0	1
Philips	UV1316MK2	1	0	1	0	0	0	0	1
Alps	TELE9X062A	0	0	0	0	0	0	0	1
Samsung	TEXX2949PG28A	0	0	0	0	0	0	0	1
Siel	PT060	0	1	1	0	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	1	0
Thomson	CTT5020	0	0	0	0	0	0	1	1

Option 13. PLL Tuner Control 2 Mid Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	0	0	1	0
Philips	UV1316MK2	1	0	0	1	0	0	1	0
Alps	TELE9X062A	0	0	0	0	0	0	1	0
Samsung	TEXX2949PG28A	0	0	0	0	0	0	1	0
Siel	PT060	1	1	0	1	0	0	0	0
Temtec	5001PH5-3X0003	0	0	0	0	0	1	0	0
Thomson	CTT5020	0	0	0	0	0	1	1	0

Option 14. PLL Tuner Control 2 High Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316T MK3	0	0	0	0	0	1	0	0
Philips	UV1316MK2	0	0	1	1	0	1	0	0
Alps	TELE9X062A	0	0	0	0	1	0	0	0
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0
Siel	PT060	0	0	1	1	0	0	0	0
Temtec	5001PH5-3X0003	0	0	0	0	0	0	0	1
Thomson	CTT5020	1	0	0	0	0	1	0	1

Option 15. PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316T MK3	0	0	1	0	0	0	0	0	
Philips	UV1316MK2	0	0	0	0	1	0	1	0	(0A hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0	
Siel	PT060	0	0	0	0	1	0	1	0	
Temtec	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	1	0	1	0	1	0	1	0	(AA hex)

Option 16. PLL Tuner VHF LOW – VHF HIGH Crossover High Byte

PLL tuner VHF LOW - VHF HIGH crossover high byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316T MK3	0	0	0	0	1	1	0	0	
Philips	UV1316MK2	0	0	0	0	1	1	0	0	(0C hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	0	1	1	0	1	
Siel	PT060	0	0	0	0	1	1	0	1	
Temtec	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	0	0	0	0	1	0	0	1	(09 hex)

Option 17. PLL Tuner VHF HIGH – UHF Crossover Low Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316T MK3	0	0	0	0	0	0	1	0	
Philips	UV1316MK2	1	1	1	0	0	0	1	0	(E2 hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	1	0	1	0	0	0	1	0	
Siel	PT060	1	0	1	0	0	1	0	0	
Temtec	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	1	0	1	0	0	0	1	0	(A2 hex)

Option 18. PLL Tuner VHF HIGH – UHF Crossover High Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316T MK3	0	0	0	1	1	1	1	0	
Philips	UV1316MK2	0	0	0	1	1	1	1	0	(1D hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	1	1	1	1	0	
Siel	PT060	0	0	0	1	1	1	1	0	

Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0
Thomson	CTT5020	0	0	0	1	1	0	1	1

(1B hex)

Option 19. PIP PLL Tuner Control 1 Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316MK2	1	0	0	0	1	1	1	0
Alps	TELE9X062A	1	0	0	0	1	1	1	0
Samsung	TEXX2949PG28A	1	0	0	0	1	1	1	0
Siel	PT060	1	0	0	0	1	1	1	0
Temic	5001PH5-3X0003	1	0	0	0	1	1	1	0
Thomson	CTT5020	1	0	0	0	1	1	1	0

Option 20. PIP PLL Tuner Control 2 Low Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316MK2	1	0	1	0	0	0	0	1
Alps	TELE9X062A	0	0	0	0	0	0	0	1
Samsung	TEXX2949PG28A	0	0	0	0	0	0	0	1
Siel	PT060	0	1	1	0	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	1	0
Thomson	CTT5020	0	0	0	0	0	0	1	1

Option 21. PIP PLL Tuner Control 2 Mid Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316MK2	1	0	0	1	0	0	1	0
Alps	TELE9X062A	0	0	0	0	0	0	1	0
Samsung	TEXX2949PG28A	0	0	0	0	0	0	1	0
Siel	PT060	1	1	0	1	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	1	0	0
Thomson	CTT5020	0	0	0	0	0	1	1	0

Option 22. PIP PLL Tuner Control 2 High Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316MK2	0	0	1	1	0	1	0	0
Alps	TELE9X062A	0	0	0	0	1	0	0	0
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0
Siel	PT060	0	0	1	1	0	0	0	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	1
Thomson	CTT5020	1	0	0	0	0	1	0	1

Option 23. PIP PLL Tuner VHF LOW – VHF HIGH Crossover Low Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316MK2	0	0	0	0	1	0	1	0
Alps	TELE9X062A	0	0	0	0	0	0	0	0
Samsung	TEXX2949PG28A	0	0	0	0	1	0	0	0
Siel	PT060	0	0	0	0	1	0	1	0
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0
Thomson	CTT5020	1	0	1	0	1	0	1	0

(0A hex)

(AA hex)

Option 24. PIP PLL Tuner VHF LOW – VHF HIGH Crossover High Byte

		b7	b6	b5	b4	b3	b2	b1	b0
Philips	UV1316MK2	0	0	0	0	1	1	0	0
Alps	TELE9X062A	0	0	0	0	0	0	0	0
Samsung	TEXX2949PG28A	0	0	0	0	1	1	0	1
Siel	PT060	0	0	0	0	1	1	0	1
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0
Thomson	CTT5020	0	0	0	0	1	0	0	1

(0C hex)

(09 hex)

Option 25. PIP PLL Tuner VHF HIGH – UHF Crossover Low Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	1	1	1	0	0	0	1	0	(E2 hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	1	0	1	0	0	0	1	0	
Siel	PT060	1	0	1	0	0	1	0	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	1	0	1	0	0	0	1	0	(A2 hex)

Option 26. PIP PLL Tuner VHF HIGH – UHF Crossover High Byte

		b7	b6	b5	b4	b3	b2	b1	b0	
Philips	UV1316MK2	0	0	0	1	1	1	1	0	(1D hex)
Alps	TELE9X062A	0	0	0	0	0	0	0	0	
Samsung	TEXX2949PG28A	0	0	0	1	1	1	1	0	
Siel	PT060	0	0	0	1	1	1	1	0	
Temic	5001PH5-3X0003	0	0	0	0	0	0	0	0	
Thomson	CTT5020	0	0	0	1	1	0	1	1	(1B hex)

Option 27. Language Available 1

B7: L7 = DANISH
 B6: L6 = SWEDISH
 B5: L5 = ITALIAN
 B4: L4 = PORTUGUESE
 B3: L3 = SPANISH
 B2: L2 = FRENCH
 B1: L1 = GERMAN
 B0: L0 = ENGLISH

1: Language available

0: Language not available

Option 28. Language Available 2

B7: L15 = CROATIC
 B6: L14 = POLISH
 B5: L13 = SLOVAK
 B4: L12 = CZECH
 B3: L11 = HUNGARY
 B2: L10 = GREEK
 B1: L9 = TURKEY
 B0: L8 = NORWEGIAN

1: Language available

0: Language not available

Option 29. Language Available 3 and Zoom Mode Available

B7: ZSP = 16:9 ZOOM SUBTITLE MODE
 B6: ZSB = 16:9 ZOOM MODE
 B5: ZCN = 14:9 ZOOM MODE
 B4: PNM = 1 (Panoramic zoom mode)
 B3: Tub = note 2
 B2: Z.Def = note 3
 B1: PMK = note 1
 B0:

1: Available

0: Not available

Note 1 :

PMK : Picture mode key

0 : Not available picture mode key from RC

1 : available picture mode key from RC

Note 2:

Tub : Tube size

0 = 16:9 Tube size
1 = 4:3 Tube size

Note 3:

Z.Def : Zoom Default Mode

0 = 16:9 mode default
1 = 4:3 mode default

Option 30. Country

B7: C4 = note 1
B6: C3 = note 1
B5: C2 = note 1
B4: C1 = note 1
B3: C0 = note 1
B2: x = x
B1: x = x
B0: x = x

Note 1:

C5,C4,C3,C2,C1,C0 = Country

0, 0, 0,0,0	=	OTHER,	Not allowed
0, 0, 0,0,1	=	D,	Germany
0, 0, 0,1,0	=	A,	
0, 0, 0,1,1	=	CH,	
0, 0, 1,0,0	=	I,	
0, 0, 1,0,1	=	F,	
0, 0, 1,1,0	=	RSM,	
0, 0, 1,1,1	=	B,	
0, 1, 0,0,0	=	DK,	
0, 1, 0,0,1	=	S,	
0, 1, 0,1,0	=	N,	
0, 1,0,1,1	=	FIN,	
0, 1,1,0,0	=	GB,	
0, 1,1,0,1	=	IRL,	
0, 1,1,1,0	=	IS,	
0, 1,1,1,1	=	NL,	
1, 0,0,0,0	=	E,	
1, 0,0,0,1	=	P,	
1, 0,0,1,0	=	PL,	
1, 0,0,1,1	=	CZ,	
1, 0,1,0,0	=	H,	
1, 0,1,0,1	=	HR,	
1, 0,1,1,0	=	GR,	
1, 0,1,1,1	=	TR	

Option 31. Prescaler MSP FM (AVL=OFF)

	b7 b6 b5 b4 b3 b2 b1 b0
Prescaler MSP FM (AVL = OFF)	0 0 0 0 1 0 0 0

	b7 b6 b5 b4 b3 b2 b1 b0
Prescaler MSP FM (AVL = OFF)	0 0 0 0 1 0 0 0 (if virtual Dolby option is available)

Option 32. Prescaler MSP NICAM (AVL=OFF)

	b7 b6 b5 b4 b3 b2 b1 b0
Prescaler MSP NICAM (AVL = OFF)	0 0 0 1 1 1 1 1

b7 b6 b5 b4 b3 b2 b1 b0

Prescaler MSP NICAM (AVL = OFF) 0 0 0 1 1 1 1 1 (if virtual Dolby option is available)

Option 33. Prescaler MSP SCART (AVL=OFF)

b7 b6 b5 b4 b3 b2 b1 b0

Prescaler MSP SCART (AVL = OFF) 0 0 0 0 1 1 0 0

b7 b6 b5 b4 b3 b2 b1 b0

Prescaler MSP SCART (AVL = OFF) 0 0 0 1 1 0 0 1 (if virtual Dolby option is available)

Option 34. Prescaler MSP I2S (AVL=OFF)

b7 b6 b5 b4 b3 b2 b1 b0

Prescaler MSP I2S (AVL = OFF) not defined yet
(if virtual Dolby option is available)

Option 35. Not used

B7: x = note 7
B6: x = note 6
B5: x = note 5
B4: x = note 4
B3: AV2S = Scart2 SVHS
B2: Macro = Macrovision
B1: DP = Dolby Prologic
B0: VD = Virtual Dolby

Option 36. Not used

B7: x = note 7
B6: TAT = 1 Tilt and trapeze enabled
B5: SWF = 1 Subwoofer enabled
B4: VLO = 1 Variable line out
B3: VBUS = 1 Vestelbus enabled
B2: x = x
B1: DVD = 1 DVD enabled
B0: DVB = 1 DVB enabled

Option 37. Reserved for USA

Option 38. TV Teletext Mode Selection, Child Lock, Equalizer Country

B7: VCR = note 7
B6: C = note 6
B5: LM = note 5
B4: EQ = note 4
B3: x = x
B2: CL = note 2
B1: T1 = note 1
B0: T0 = note 1

Note 1:

Teletext selection
T1, T0:
0,0 = No TV Text
0,1 = Simple TV Text (One page)
1,1 = Fasttext/Toptext TV Text (Eight pages)

Note 2:

CL = Child Lock
0 = Off
1 = On (Active)

Note 3:

RGB = RGB Menu Item active/inactive
0 = RGB Menu Item inactive
1 = RGB Menu Item active

Note 4:

EQ = Equalizer available
0 = Equalizer not available
1 = Equalizer available

Note 5:

LM = List Mode available
0 = List Mode not available
1 = List Mode available

Note 6:

C = Country Line available / Aps available or not
0 = Country Line not available / Aps not available
1 = Country Line available / Aps available

Note 7:

VCR = VCR Menu Item available / not available
0 = VCR Menu Item not available
1 = VCR Menu Item available

Option 39. Personal Preference Equalizer Band 1

	b7	b6	b5	b4	b3	b2	b1	b0
EQUALIZER BAND 1	0	0	0	0	0	1	1	0

Option 40. Personal Preference Equalizer Band 2

	b7	b6	b5	b4	b3	b2	b1	b0
EQUALIZER BAND 2	0	0	0	0	0	1	1	0

Option 41. Personal Preference Equalizer Band 3

	b7	b6	b5	b4	b3	b2	b1	b0
EQUALIZER BAND 3	0	0	0	0	0	1	1	0

Option 42. Personal Preference Equalizer Band 4

	b7	b6	b5	b4	b3	b2	b1	b0
EQUALIZER BAND 4	0	0	0	0	0	1	1	0

Option 43. Personal Preference Equalizer Band 5

	b7	b6	b5	b4	b3	b2	b1	b0
EQUALIZER BAND 5	0	0	0	0	0	1	1	0

Option 44. Sound Effect (Standard; Music; Speech; Jazz; Pp)

	b7	b6	b5	b4	b3	b2	b1	b0
SOUND EFFECT	0	0	0	0	0	1	1	0

Option 45. Volume Offset Left

	b7	b6	b5	b4	b3	b2	b1	b0
VOLUME OFFSET LEFT	0	0	0	0	0	1	1	0

Option 46. Volume Offset Right

	b7	b6	b5	b4	b3	b2	b1	b0
VOLUME OFFSET RIGHT	0	0	0	0	0	1	1	0

Option 47. Volume Offset Center

	b7	b6	b5	b4	b3	b2	b1	b0
VOLUME OFFSET CENTER	0	0	0	0	0	1	1	0

Option 48. Volume Offset Rear

	b7	b6	b5	b4	b3	b2	b1	b0
VOLUME OFFSET REAR	0	0	0	0	0	1	1	0

Option 49. Surround Delay

	b7	b6	b5	b4	b3	b2	b1	b0
SURROUND DELAY	0	0	0	0	0	0	0	1

Option 50. FM Prescaler

	b7	b6	b5	b4	b3	b2	b1	b0
FM PRESCALER for Stereo	0	0	0	0	1	1	0	0

	b7	b6	b5	b4	b3	b2	b1	b0
FM PRESCALER for Dolby	0	0	0	0	1	0	0	1

Note: if virtual Dolby is available, this option is not used.

Option 51. NICAM Prescaler

	b7	b6	b5	b4	b3	b2	b1	b0
NICAM Prescaler for Stereo	0	0	1	0	1	1	0	1

	b7	b6	b5	b4	b3	b2	b1	b0
3D Panorama	0	0	0	0	1	0	1	1

	b7	b6	b5	b4	b3	b2	b1	b0
NICAM Prescaler for Dolby	0	0	0	0	1	1	1	0

Note: if virtual Dolby is available, this option is not used.

Option 52. Scart Input Prescaler

	b7	b6	b5	b4	b3	b2	b1	b0
Scart Input Prescaler for Stereo	0	0	0	0	1	0	0	0

	b7	b6	b5	b4	b3	b2	b1	b0
Scart Input Prescaler for Dolby	0	0	0	0	1	1	1	1

	b7	b6	b5	b4	b3	b2	b1	b0
Prescaler MSP Scart (AVL = OFF)	0	0	0	1	1	0	0	1

 (if virtual Dolby option is available)

Note: if virtual Dolby is available, this option is not used.

Option 53. I2S Prescaler

	b7	b6	b5	b4	b3	b2	b1	b0
I2S Prescaler for Stereo	0	0	0	0	0	1	1	0

	b7	b6	b5	b4	b3	b2	b1	b0
I2S Prescaler for Dolby	0	0	0	0	0	1	1	0

Note: if virtual Dolby is available, this option is not used.

Option 54. Scart Output Prescaler

	b7	b6	b5	b4	b3	b2	b1	b0
Scart Output Prescaler	0	1	1	1	1	1	1	1

Option 55. Speaker Setup

	b7	b6	b5	b4	b3	b2	b1	b0
Speaker Setup (L/R, L/C/R, L/R/S, L/C/R/S)	0	0	0	0	0	0	0	0

Option 56. Audio Options Available Or Not

Attention: All bits on the Option 56 must be the "0" for MONO TV SETS

B7: Nicam	=	note 7
B6: ASD	=	note 6
B5: VRS	=	note 5
B4: CRM	=	note 4
B3: ...	=	x
B2: LBE	=	note 2
B1: Spa	=	note 1
B0: Avl	=	note 0

Note 7:

Nicam	=	Nicam available
0	=	Nicam not available
1	=	Nicam available

Note 6:

ASD	=	Auto Sound Detection available/not available
0	=	Auto Sound Detection not available
1	=	Auto Sound Detection available

Note 5:

VRS	=	Virtual Surround
0	=	VRS not available
1	=	VRS available

Note 4:

CRM	=	CARRIER MUTE OFF/ON
0	=	Sound carrier mute is ON in the Stereo Sound IC
1	=	Sound carrier mute is OFF in the Stereo Sound IC (i.e. option available)

Note 2:

LBE	=	LBE (Dynamic Bass)
0	=	LBE not available
1	=	LBE available

Note 1:

Spa	=	Spatial Effect available
0	=	Spatial Effect not available
1	=	Spatial Effect available

Note 0:

Avl	=	Automatic volume level available on the Menu
0	=	Automatic volume level not available
1	=	Automatic volume level available

Option 57. Stereo Threshold

B7: b7	=	note 1	Remark:
B6: b6	=	note 1	
B5: b5	=	note 1	-Threshold for all FM A2 signals to switch from MONO to STEREO.
B4: b4	=	note 1	-For first check after programme change half value is changed (0Ch) 19h/2
B3: b3	=	note 1	-For switching from STEREO back to MONO: 19h/4 *3
B2: b2	=	note 1	
B1: b1	=	note 1	
B0: b0	=	note 1	

Note 1:

b7 b6 b5 b4 b3 b2 b1 b0
MSP Stereo/Mono Threshold 0 0 0 1 1 0 0 1

Option 58. MSP Audio Flags

B7: b7 = x
B6: b6 = x
B5: b5 = x
B4: Trs = note 1
B3: Trb = note 1
B2: Bbe = note 1
B1: Spa = note 1
B0: Avl = note 1

Note 1:

Defines whether the feature is toggled ON or OFF in the menu and stored.

0 : OFF
1 : ON

Option 59. NICAM Threshold

b7 b6 b5 b4 b3 b2 b1 b0
MSP NICAM Threshold 0 1 1 0 0 1 0 0

Option 60. Power Delay Time

B7: NZ = x
B6: HM = x
B5: L5 = note 3
B4: L4 = note 3
B3: L3 = note 3
B2: L2 = note 3
B1: L1 = note 3
B0: L0 = note 3

Note 3:

L7 L6 L5 L4 L3 L2 L1 L0
Default Value: x x 1 1 0 0 0 0
1000 MSEC = 1SN

Number	L7L6L5L4L3L2L1L0	Delay	Number	L7L6L5L4L3L2L1L0	Delay
0	00000000	= 4 Sec	32	00100000	= 12 Sec
1	00000001	= 4,25 Sec	33	00100001	= 12,25 Sec
2	00000010	= 4,5 Sec	34	00100010	= 12,5 Sec
3	00000011	= 4,75 Sec	35	00100011	= 12,75 Sec
4	00000100	= 5 Sec	36	00100100	= 13 Sec
5	00000101	= 5,25 Sec	37	00100101	= 13,25 Sec
6	00000110	= 5,5 Sec	38	00100110	= 13,5 Sec
7	00000111	= 5,75 Sec	39	00100111	= 13,75 Sec
8	00001000	= 6 Sec	40	00101000	= 14 Sec
9	00001001	= 6,25 Sec	41	00101001	= 14,25 Sec
10	00001010	= 6,5 Sec	42	00101010	= 14,5 Sec
11	00001011	= 6,75 Sec	43	00101011	= 14,75 Sec
12	00001100	= 7 Sec	44	00101100	= 15 Sec
13	00001101	= 7,25 Sec	45	00101101	= 15,25 Sec
14	00001110	= 7,5 Sec	46	00101110	= 15,5 Sec
15	00001111	= 7,75 Sec	47	00101111	= 15,75 Sec
16	00010000	= 8 Sec	48	00110000	= 16 Sec
17	00010001	= 8,25 Sec	49	00110001	= 16,25 Sec
18	00010010	= 8,5 Sec	50	00110010	= 16,5 Sec
19	00010011	= 8,75 Sec	51	00110011	= 16,75 Sec

20	00010100	=	9	Sec
21	00010101	=	9,25	Sec
22	00010110	=	9,5	Sec
23	00010111	=	9,75	Sec
24	00011000	=	10	Sec
25	00011001	=	10,25	Sec
26	00011010	=	10,5	Sec
27	00011011	=	10,75	Sec
28	00011100	=	12	Sec
29	00011101	=	12,25	Sec
30	00011110	=	12,5	Sec
31	00011111	=	12,75	Sec

52	00110100	=	17	Sec
53	00110101	=	17,25	Sec
54	00110110	=	17,5	Sec
55	00110111	=	17,75	Sec
56	00111000	=	18	Sec
57	00111001	=	18,25	Sec
58	00111010	=	18,5	Sec
59	00111011	=	18,75	Sec
60	00111100	=	19	Sec
61	00111101	=	19,25	Sec
62	00111110	=	19,5	Sec
63	00111111	=	19,75	Sec

Decimal - Binary Conversion Table

	76543210	Bit Position		76543210
0	00000000		32	00100000
1	00000001		33	00100001
2	00000010		34	00100010
3	00000011		35	00100011
4	00000100		36	00100100
5	00000101		37	00100101
6	00000110		38	00100110
7	00000111		39	00100111
8	00001000		40	00101000
9	00001001		41	00101001
10	00001010		42	00101010
11	00001011		43	00101011
12	00001100		44	00101100
13	00001101		45	00101101
14	00001110		46	00101110
15	00001111		47	00101111
16	00010000		48	00110000
17	00010001		49	00110001
18	00010010		50	00110010
19	00010011		51	00110011
20	00010100		52	00110100
21	00010101		53	00110101
22	00010110		54	00110110
23	00010111		55	00110111
24	00011000		56	00111000
25	00011001		57	00111001
26	00011010		58	00111010
27	00011011		59	00111011
28	00011100		60	00111100
29	00011101		61	00111101
30	00011110		62	00111110
31	00011111		63	00111111


14.4.OPTION TABLE RECOMMENDED VALUES

X listed in the option can be 0 or 1


OPTION	28" 4:3 MULTI	28" 16:9 MULTI	28" 16:9 PAL I
000	X2 XXXXXX10	X2 XXXXXX10	X2 XXXXXX10
001	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
002	23 001XXX11	23 001XXX11	23 001XXX11
003	XX XXXXXXXX0	XX XXXXXXXX0	XX XXXXXXXX0
004	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
005	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
006	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
007	XX XX0XXX1X	XX XX0XXX1X	XX XX0XXX1X
008	A1 11000001	01 00000001	01 00000001
009	0B 00001111	0B 00001111	04 00001111
010	X2 XXXXX011	X7 XXXXX111	X7 XXXXX111
011	8E 10001110	8E 10001110	8E 10001110
012	03 00000011	03 00000011	03 00000011
013	06 00000110	06 00000110	06 00000110
014	15 10000101	15 10000101	15 10000101
015	AA 10101010	AA 10101010	AA 10101010
016	09 00001001	09 00001001	09 00001001
017	A2 10100010	A2 10100010	A2 10100010
018	1B 00011011	1B 00011011	1B 00011011
019	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
020	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
021	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
022	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
023	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
024	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
025	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
026	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
027	FF 11111111	FF 11111111	FF 11111111
028	FF 11111111	FF 11111111	FF 11111111
029	FF 11111111	EF 11101111	EF 11101111
030	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
031	0F 00001111	0F 00001111	0F 00001111
032	23 00100011	23 00100011	23 00100011
033	0E 00001110	0E 00001110	0E 00001110
034	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
035	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
036	X4 XXXXX1XX	X4 XXXXX1XX	X4 XXXXX1XX
037	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
038	AF 11001111	AF 11001111	AF 11001111
039	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
040	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
041	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
042	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
043	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
044	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
045	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
046	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
047	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
048	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
049	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
050	XX XXXXXXXX	XX XXXXXXXX	XX XXXXXXXX
051	41 01000001	41 01000001	41 01000001
052	1B 00011011	1B 00011011	1B 00011011
053	06 00000110	06 00000110	06 00000110

054	75	01110101	75	01110101	75	01110101
055	00	00000000	00	00000000	00	00000000
056	DE	11011110	DE	11011110	DE	11011110
057	19	00011001	19	00011001	19	00011001
058	00	00000000	00	00000000	00	00000000
059	64	01100100	64	01100100	64	01100100
060	10	00010000	10	00010000	10	00010000

14.5.SCREEN ADJUSTMENT (FBT SCREEN)

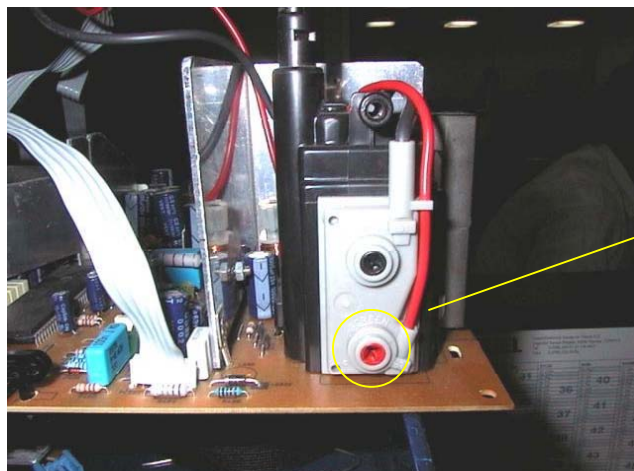

SCREEN
ADJUST
POT



From the option list change option 2 bit 6 from 0 to 1 for disabling vertical scan. Adjust horizontal line via screen adjust pot. as thin as possible. Then press 0 to leave service menu.


14.6.GEOMETRY ADJUSTMENT

4:3 FORMATS

4:3 MODE




16:9 MODE

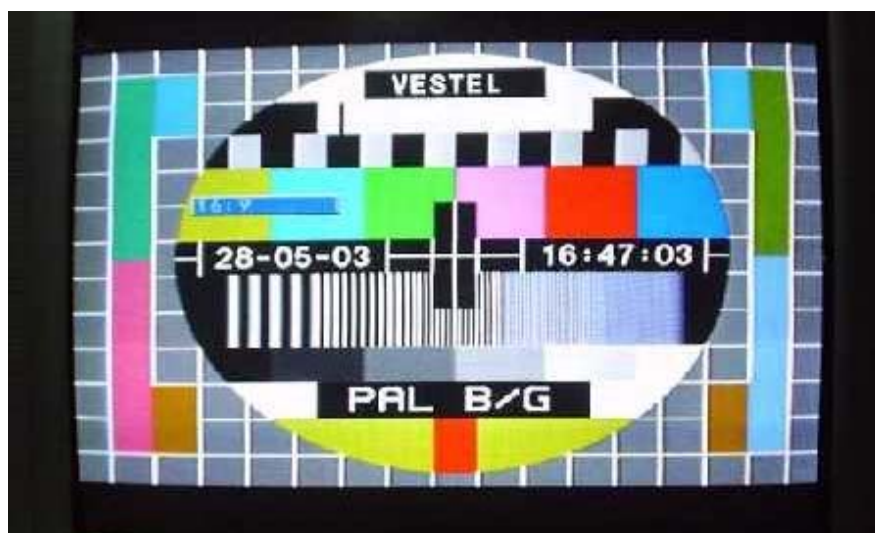


16:9 FORMATS


AUTO MODE

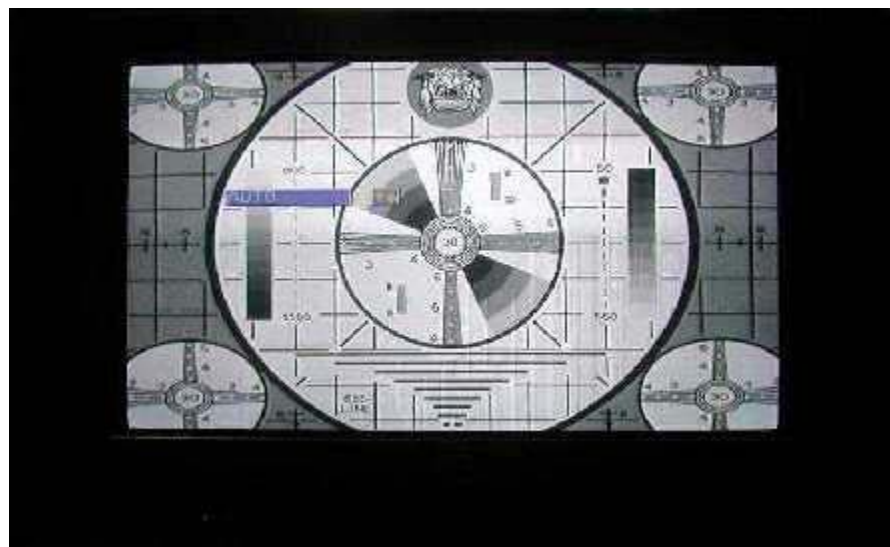


REGULAR MODE

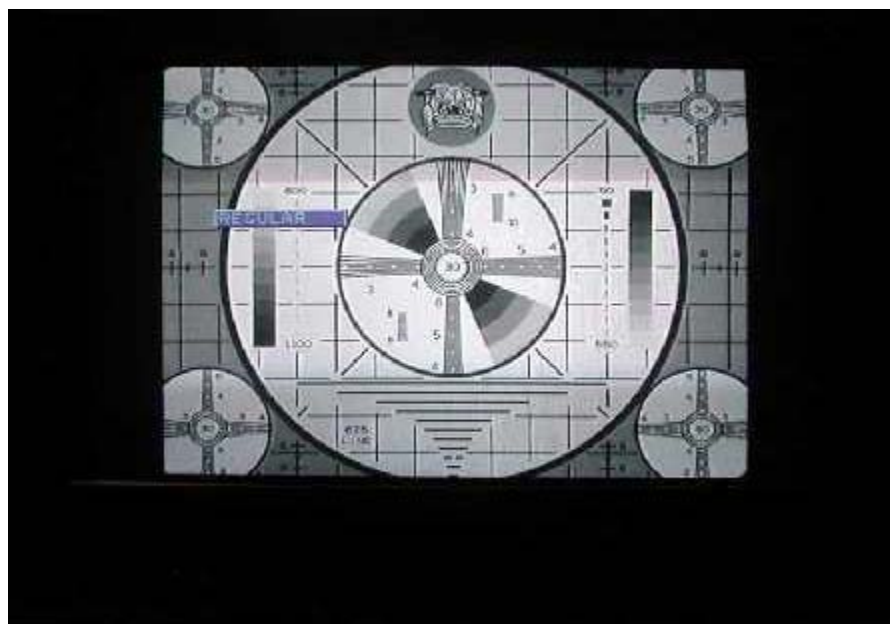


ZOOM 14:9 MODE

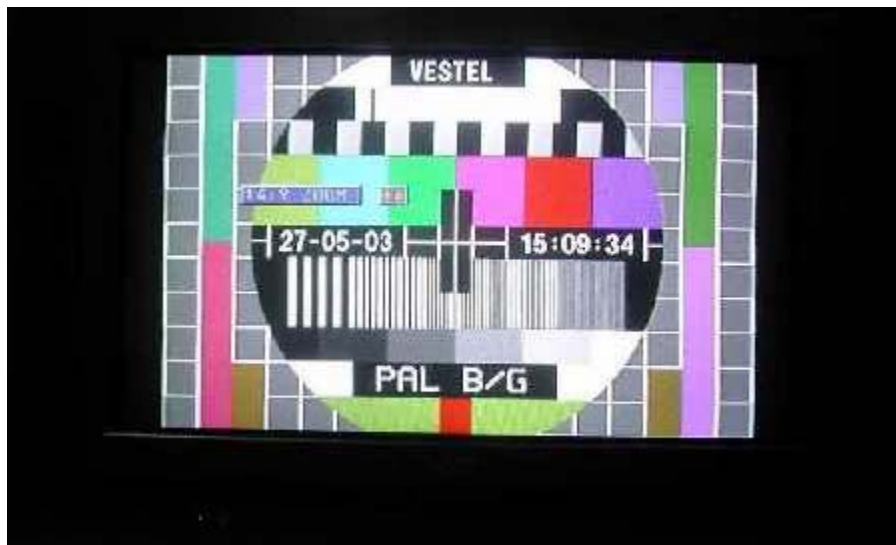


ZOOM 16:9 MODE

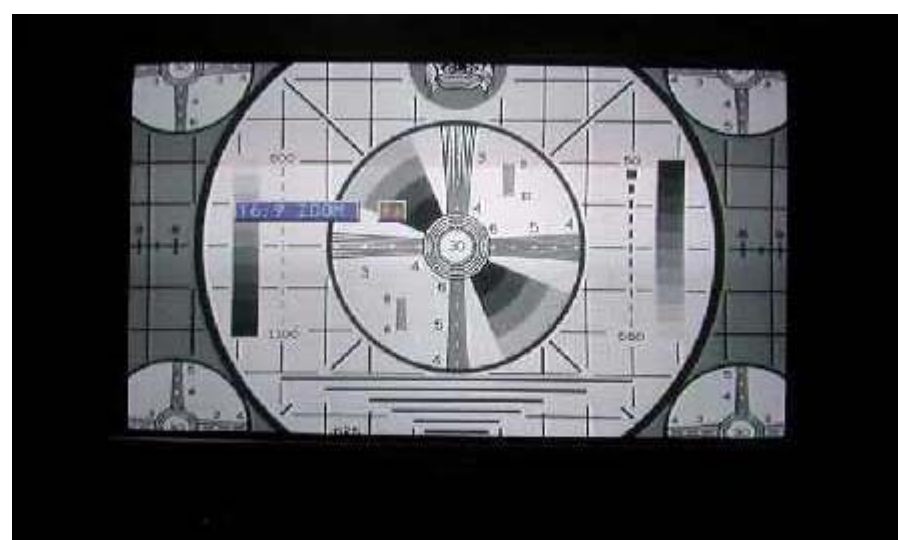


SUBTITLE ZOOM MODE

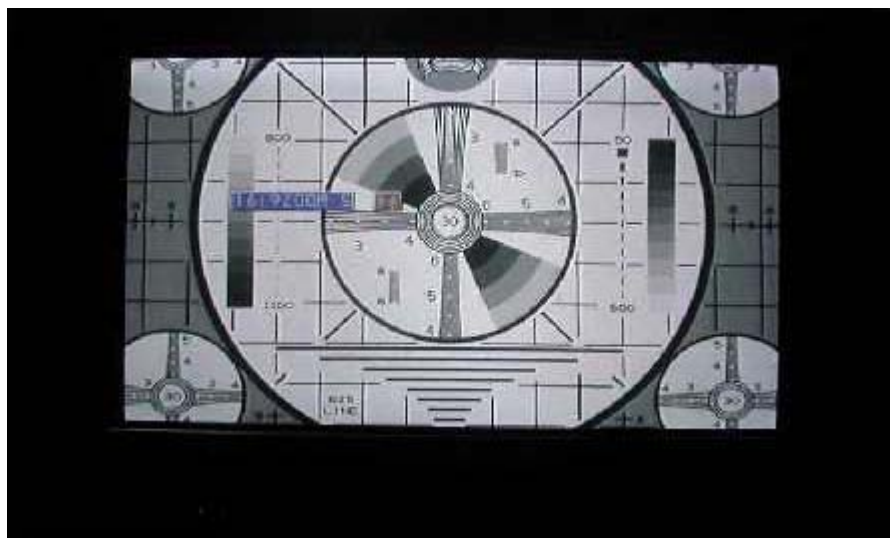

FULL MODE

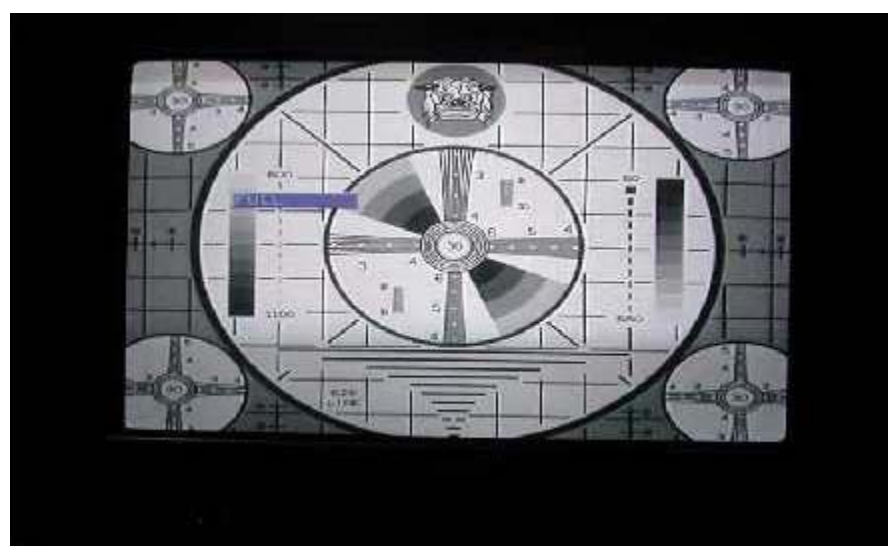


PANORAMIC MODE

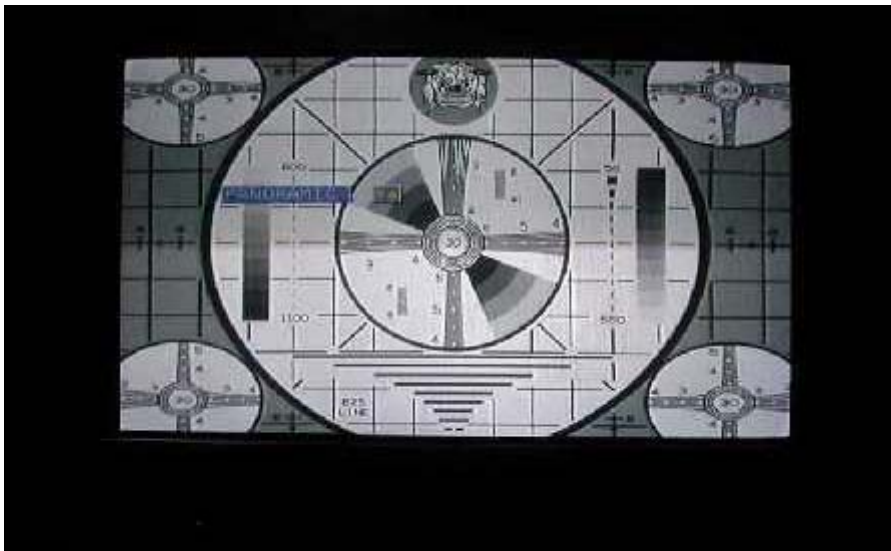


15. BLOCK DIAGRAM

General Block Diagram of chassis 11AK45

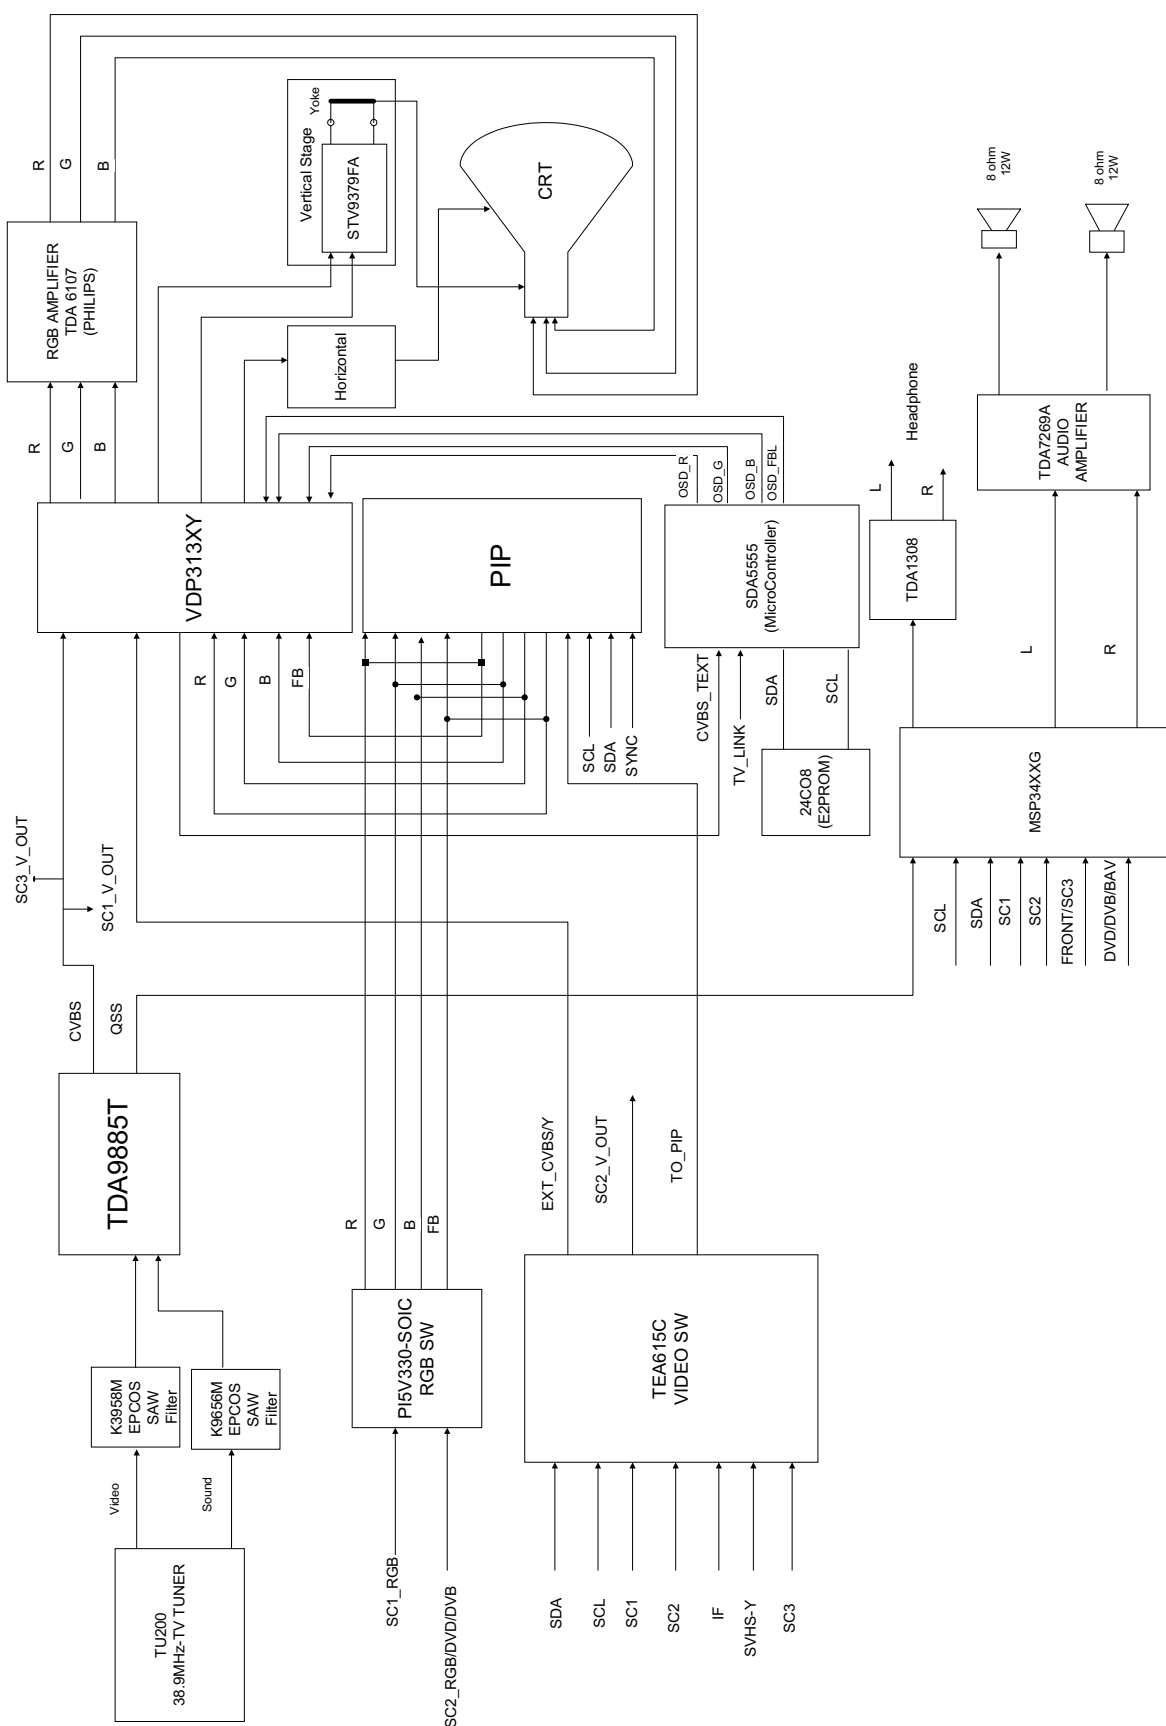


16. CIRCUIT DIAGRAMS

16.1 Schematic Diagram of Video-IF Circuit

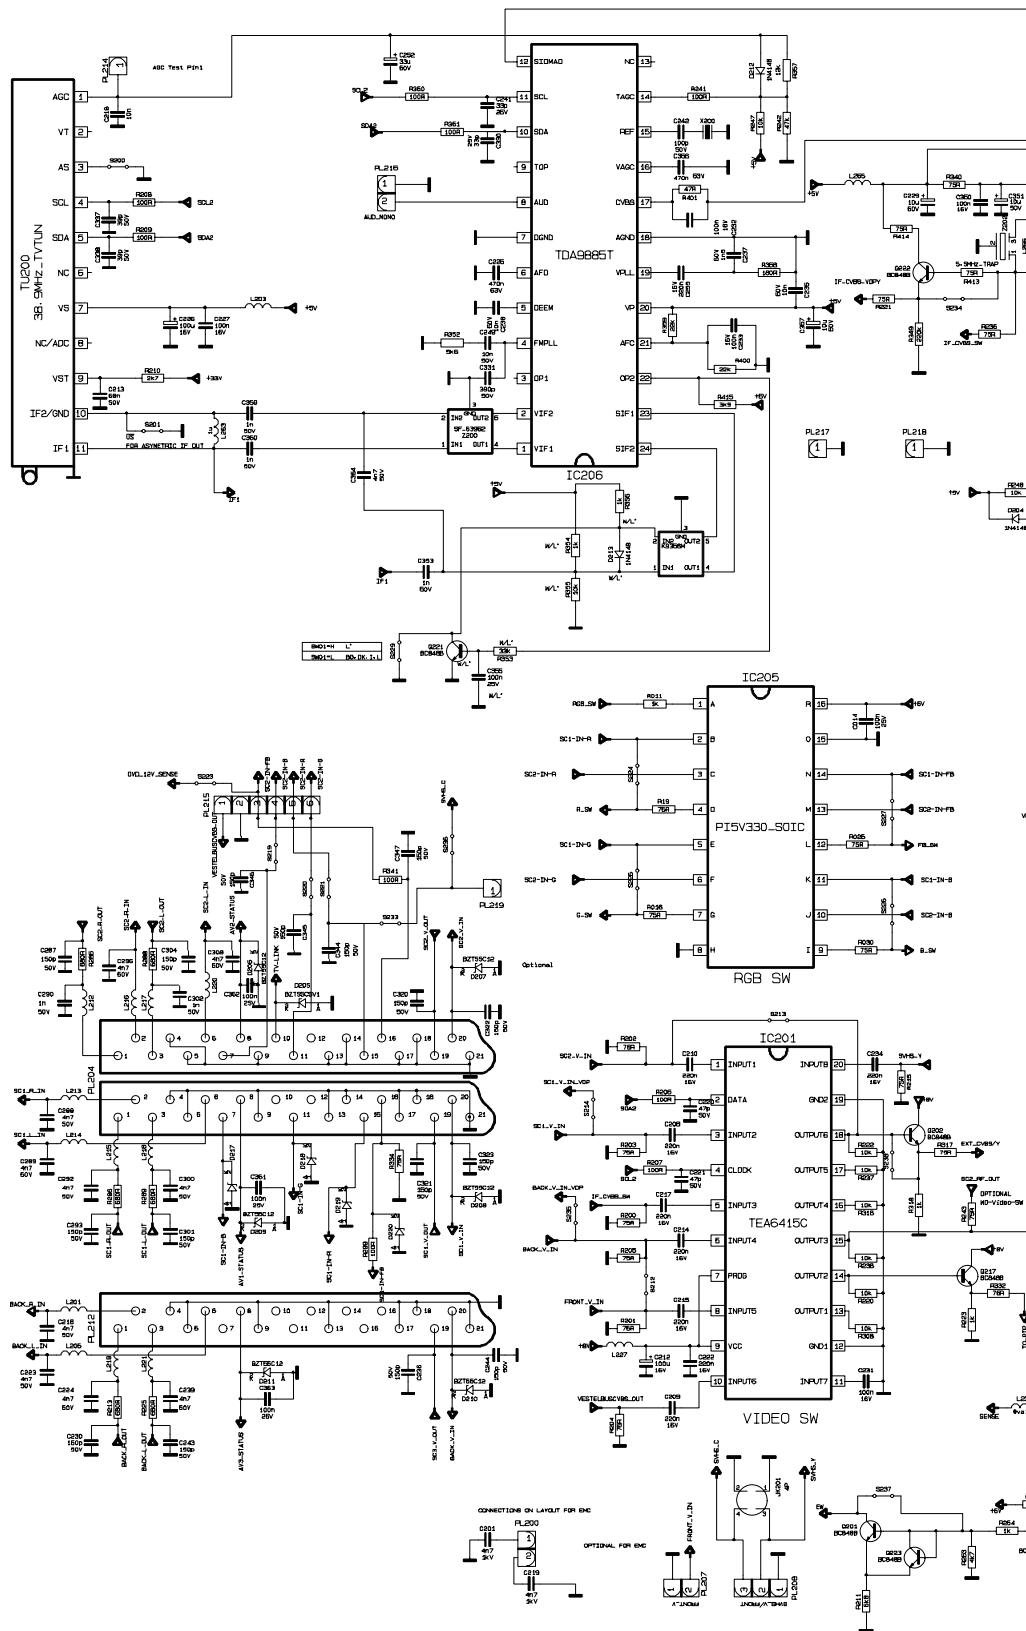


16.1 Schematic Diagram of Video-IF Circuit

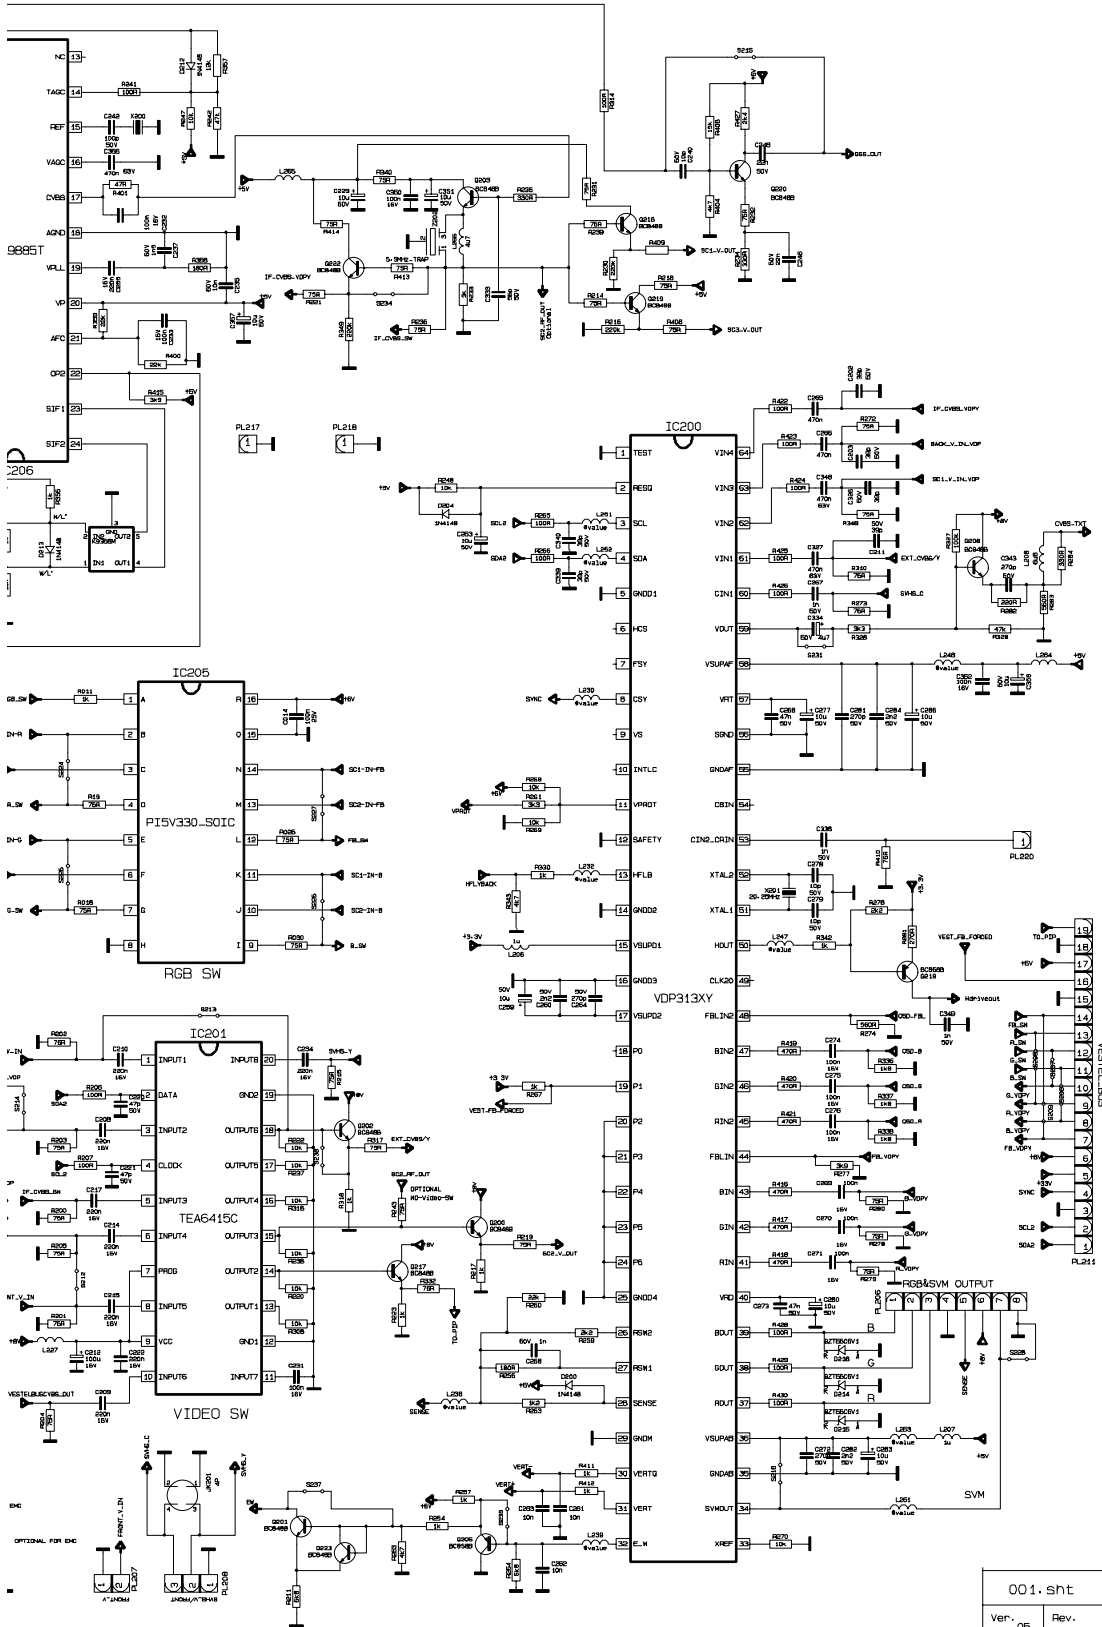


001.sht	11AK45B5 VIDEO-IF
Ver. 05	Rev.
DATE 24.03.2023	Author Video-IF Group
	Sheet 01 of 01

16.2 Schematic Diagram of μ -Controller Circuit

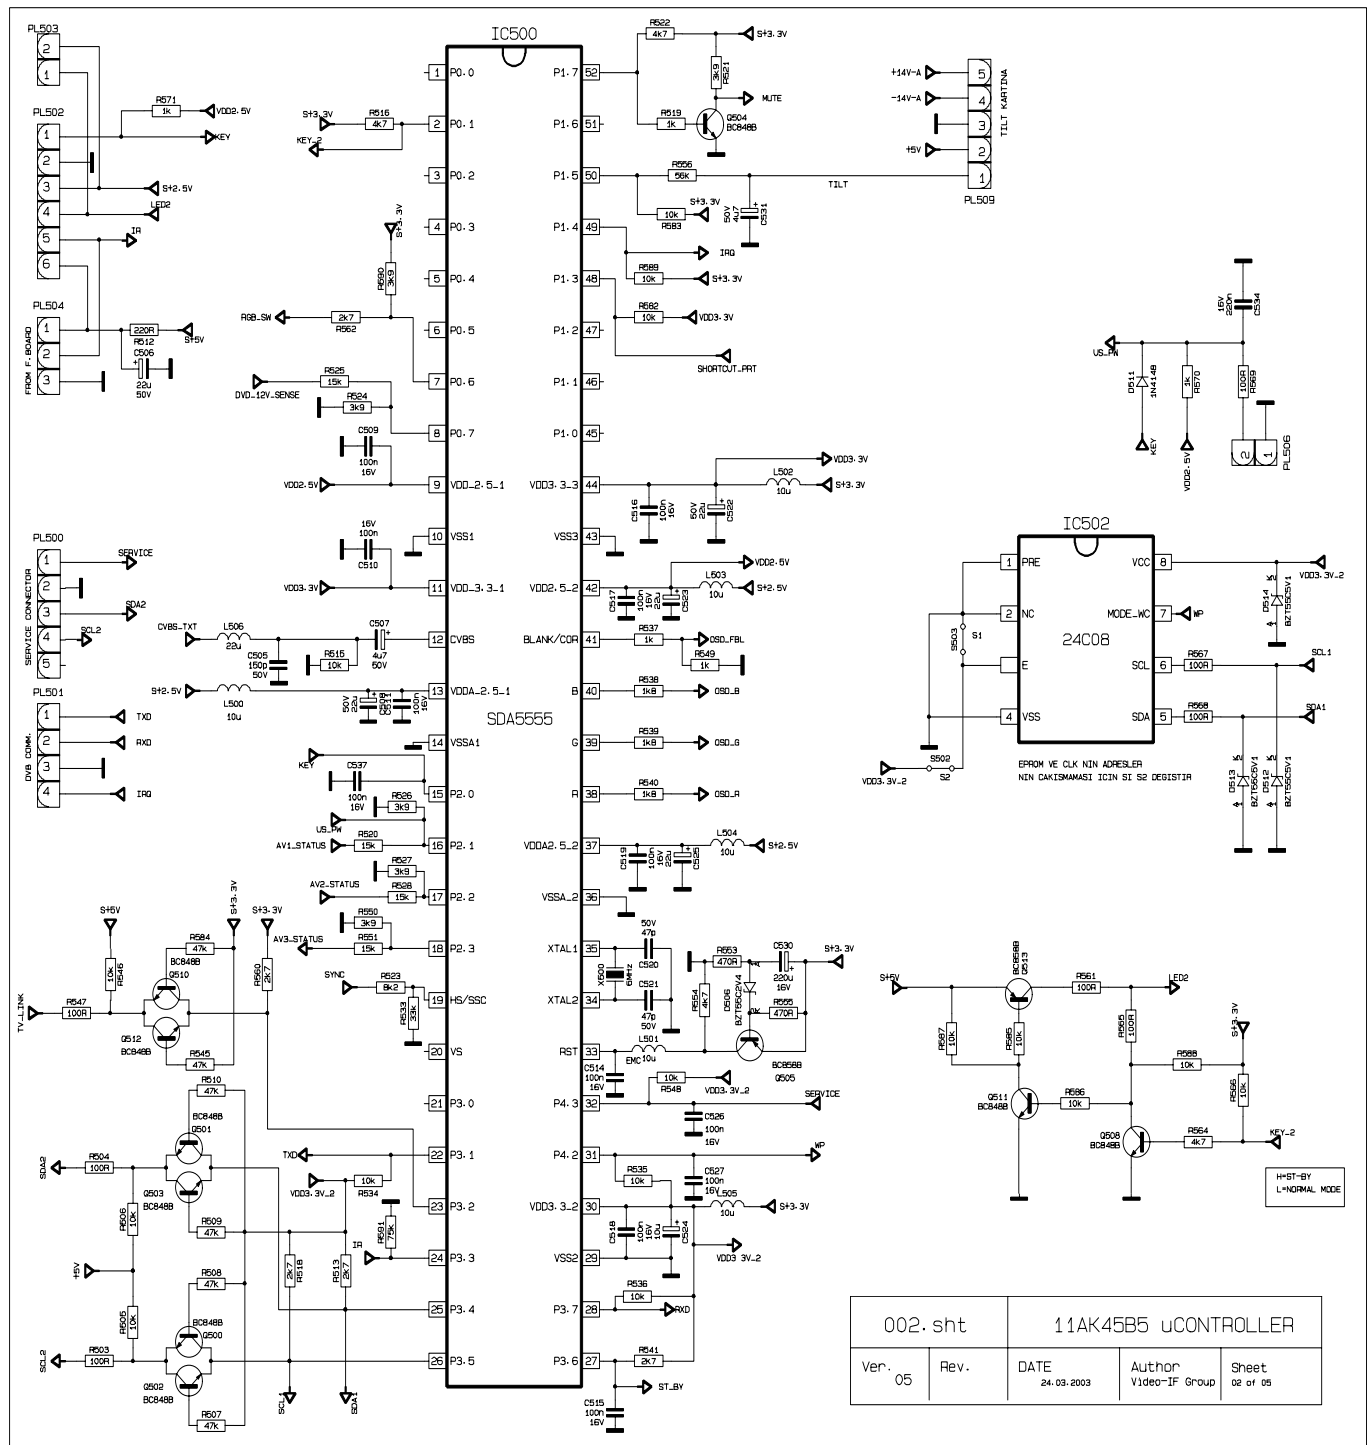


002. sht		11AK45B5 μ CONTROLLER		
Ver. 05	Rev.	DATE 24.03.2003	Author Video-IF Group	Sheet 02 of 05


16.3 Schematic Diagram of Deflection Circuit

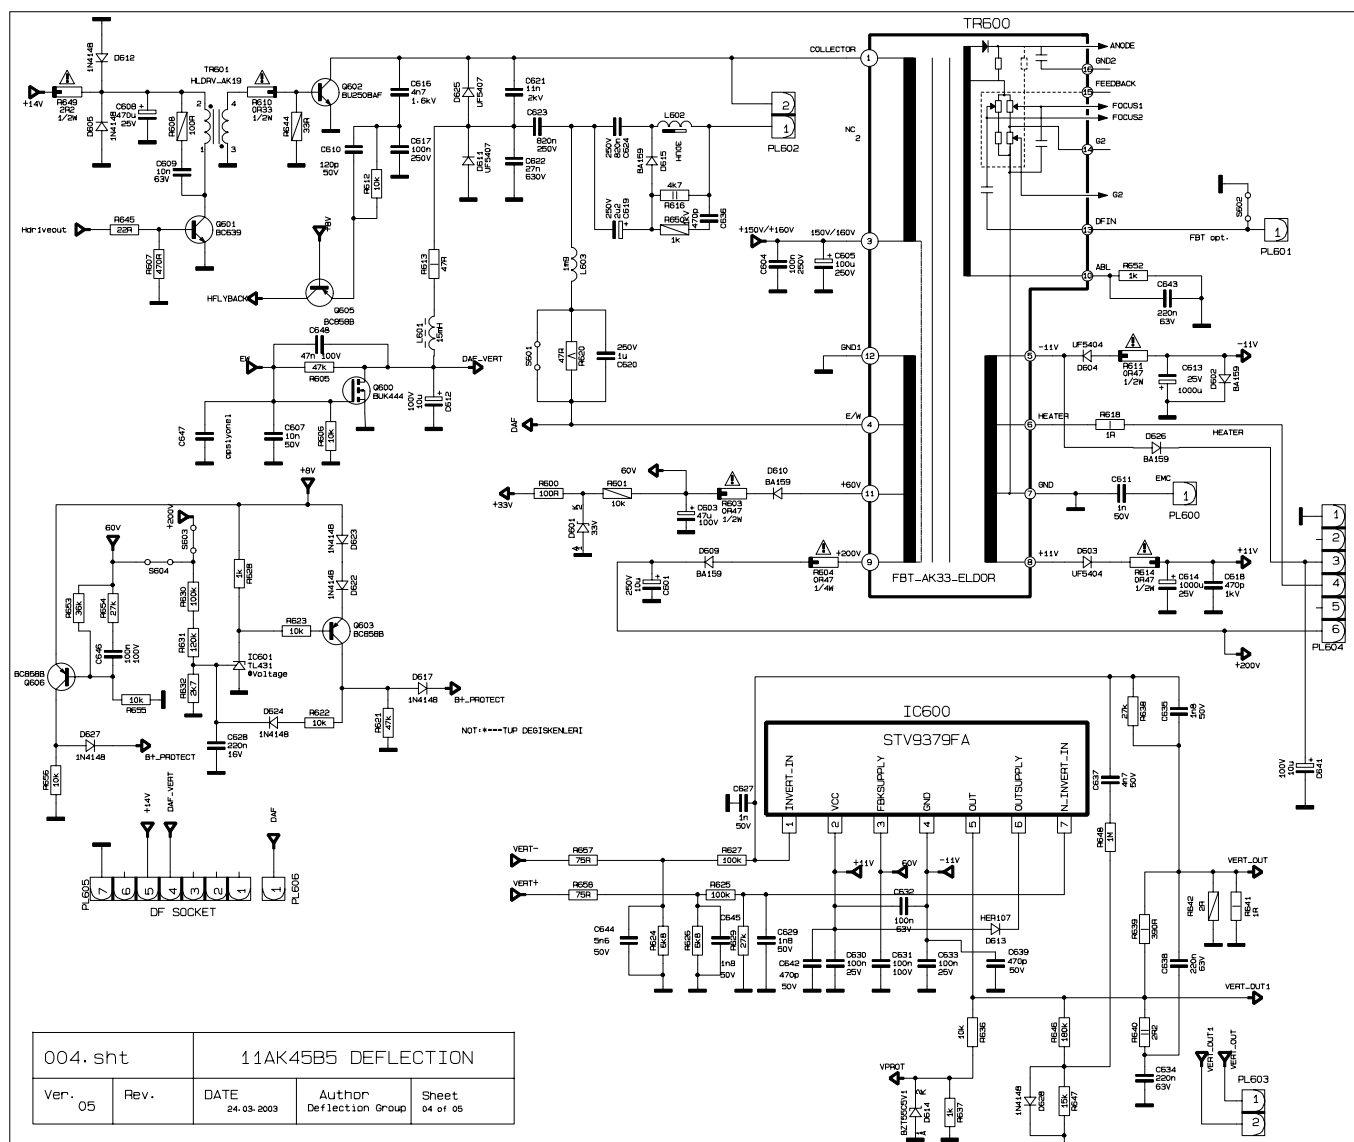


16.4 Schematic Diagram of Power Switch Circuit

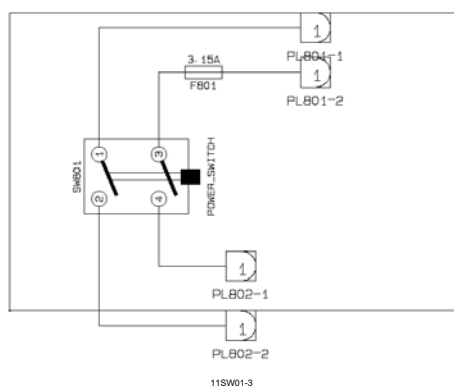


16.5 Schematic Diagram of SMPS Circuit

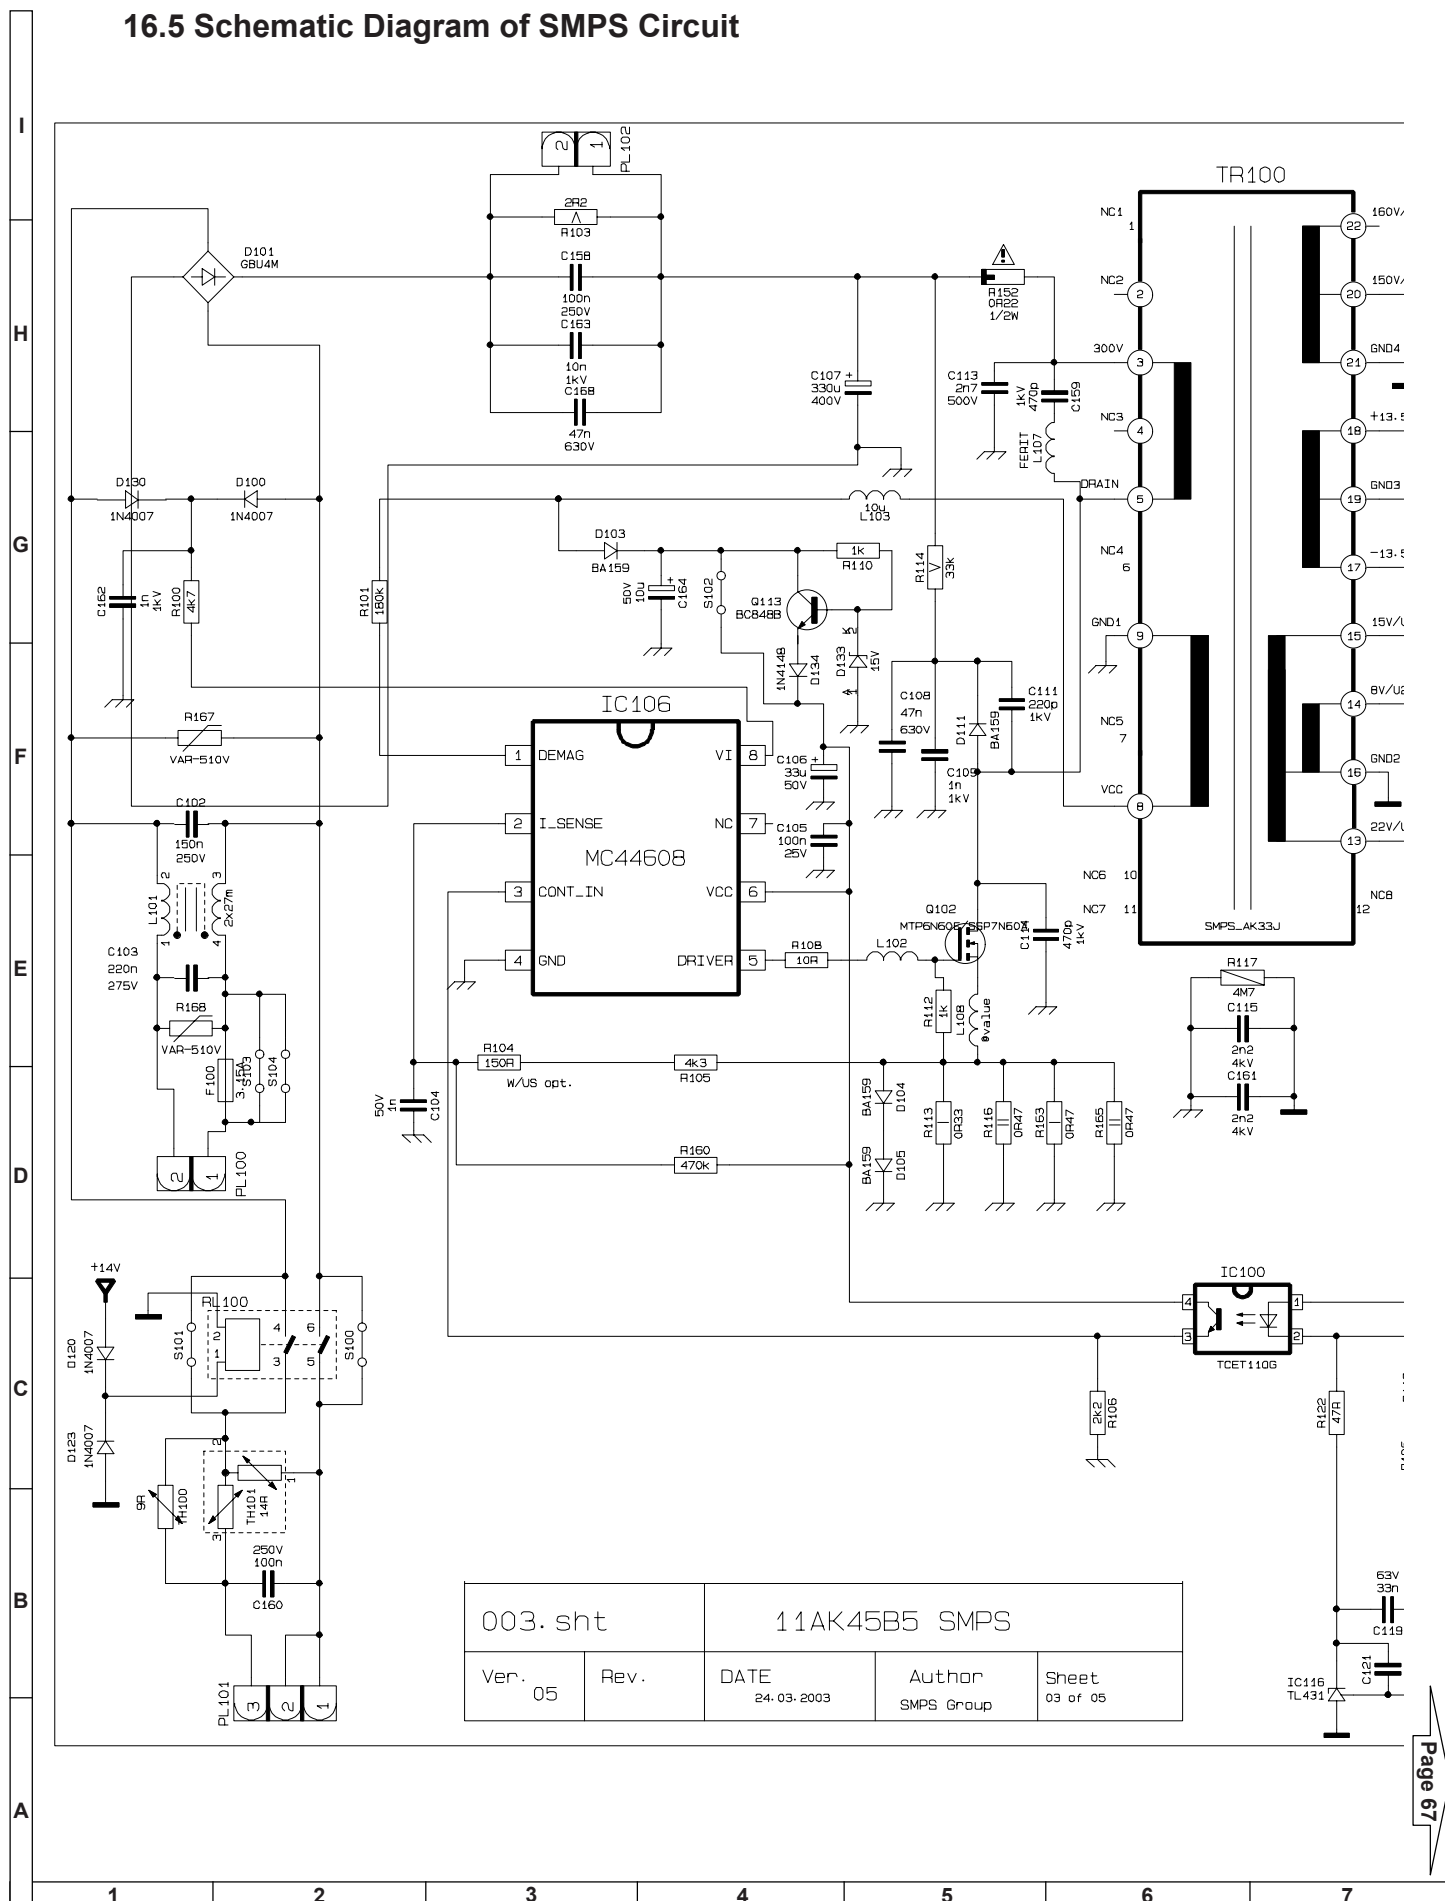


16.5 Schematic Diagram of SMPS Circuit

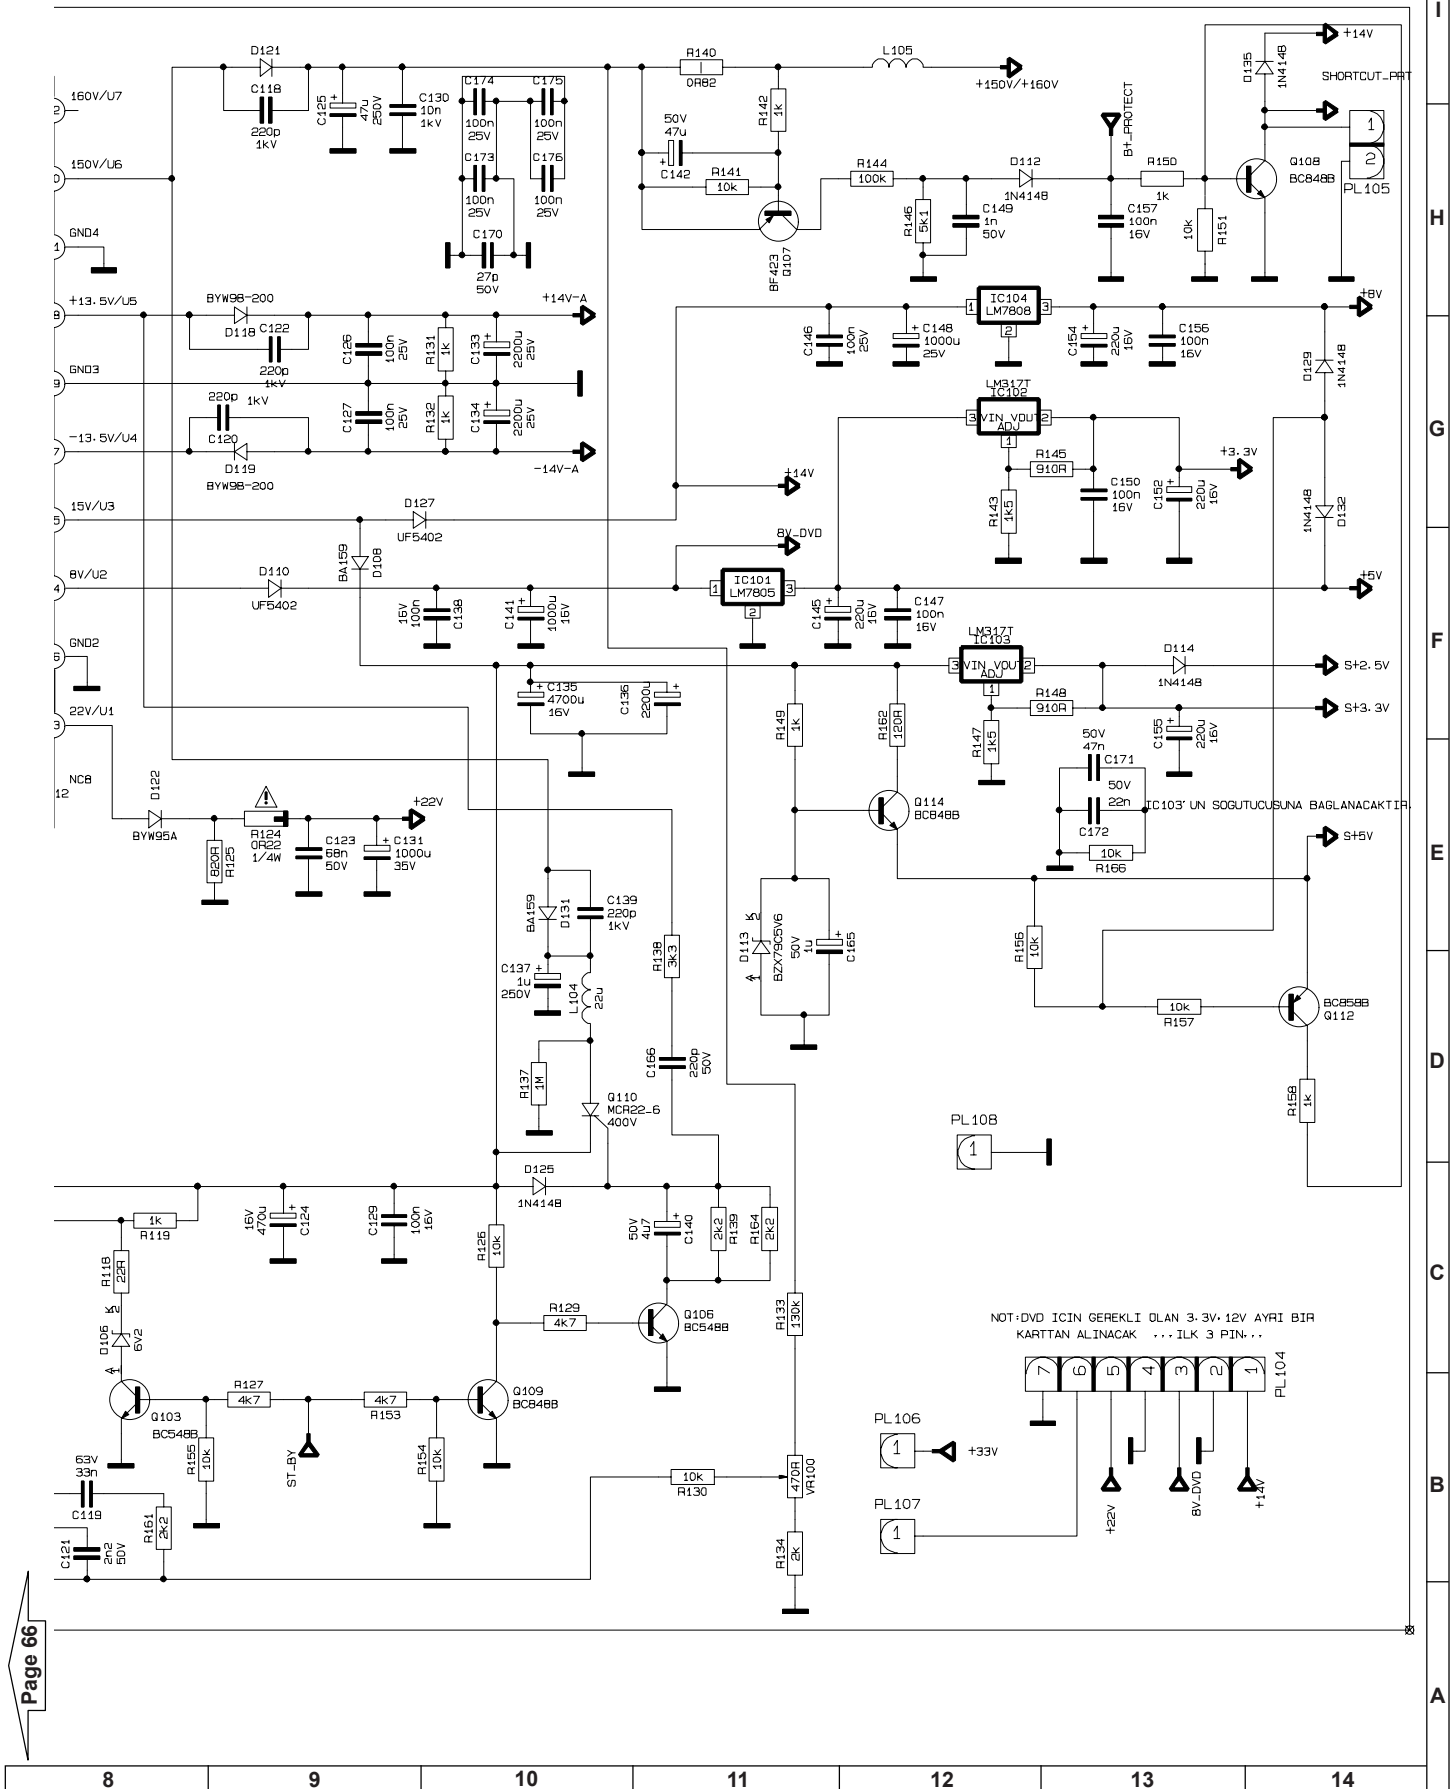


16.6 Schematic Diagram of Sound Circuit

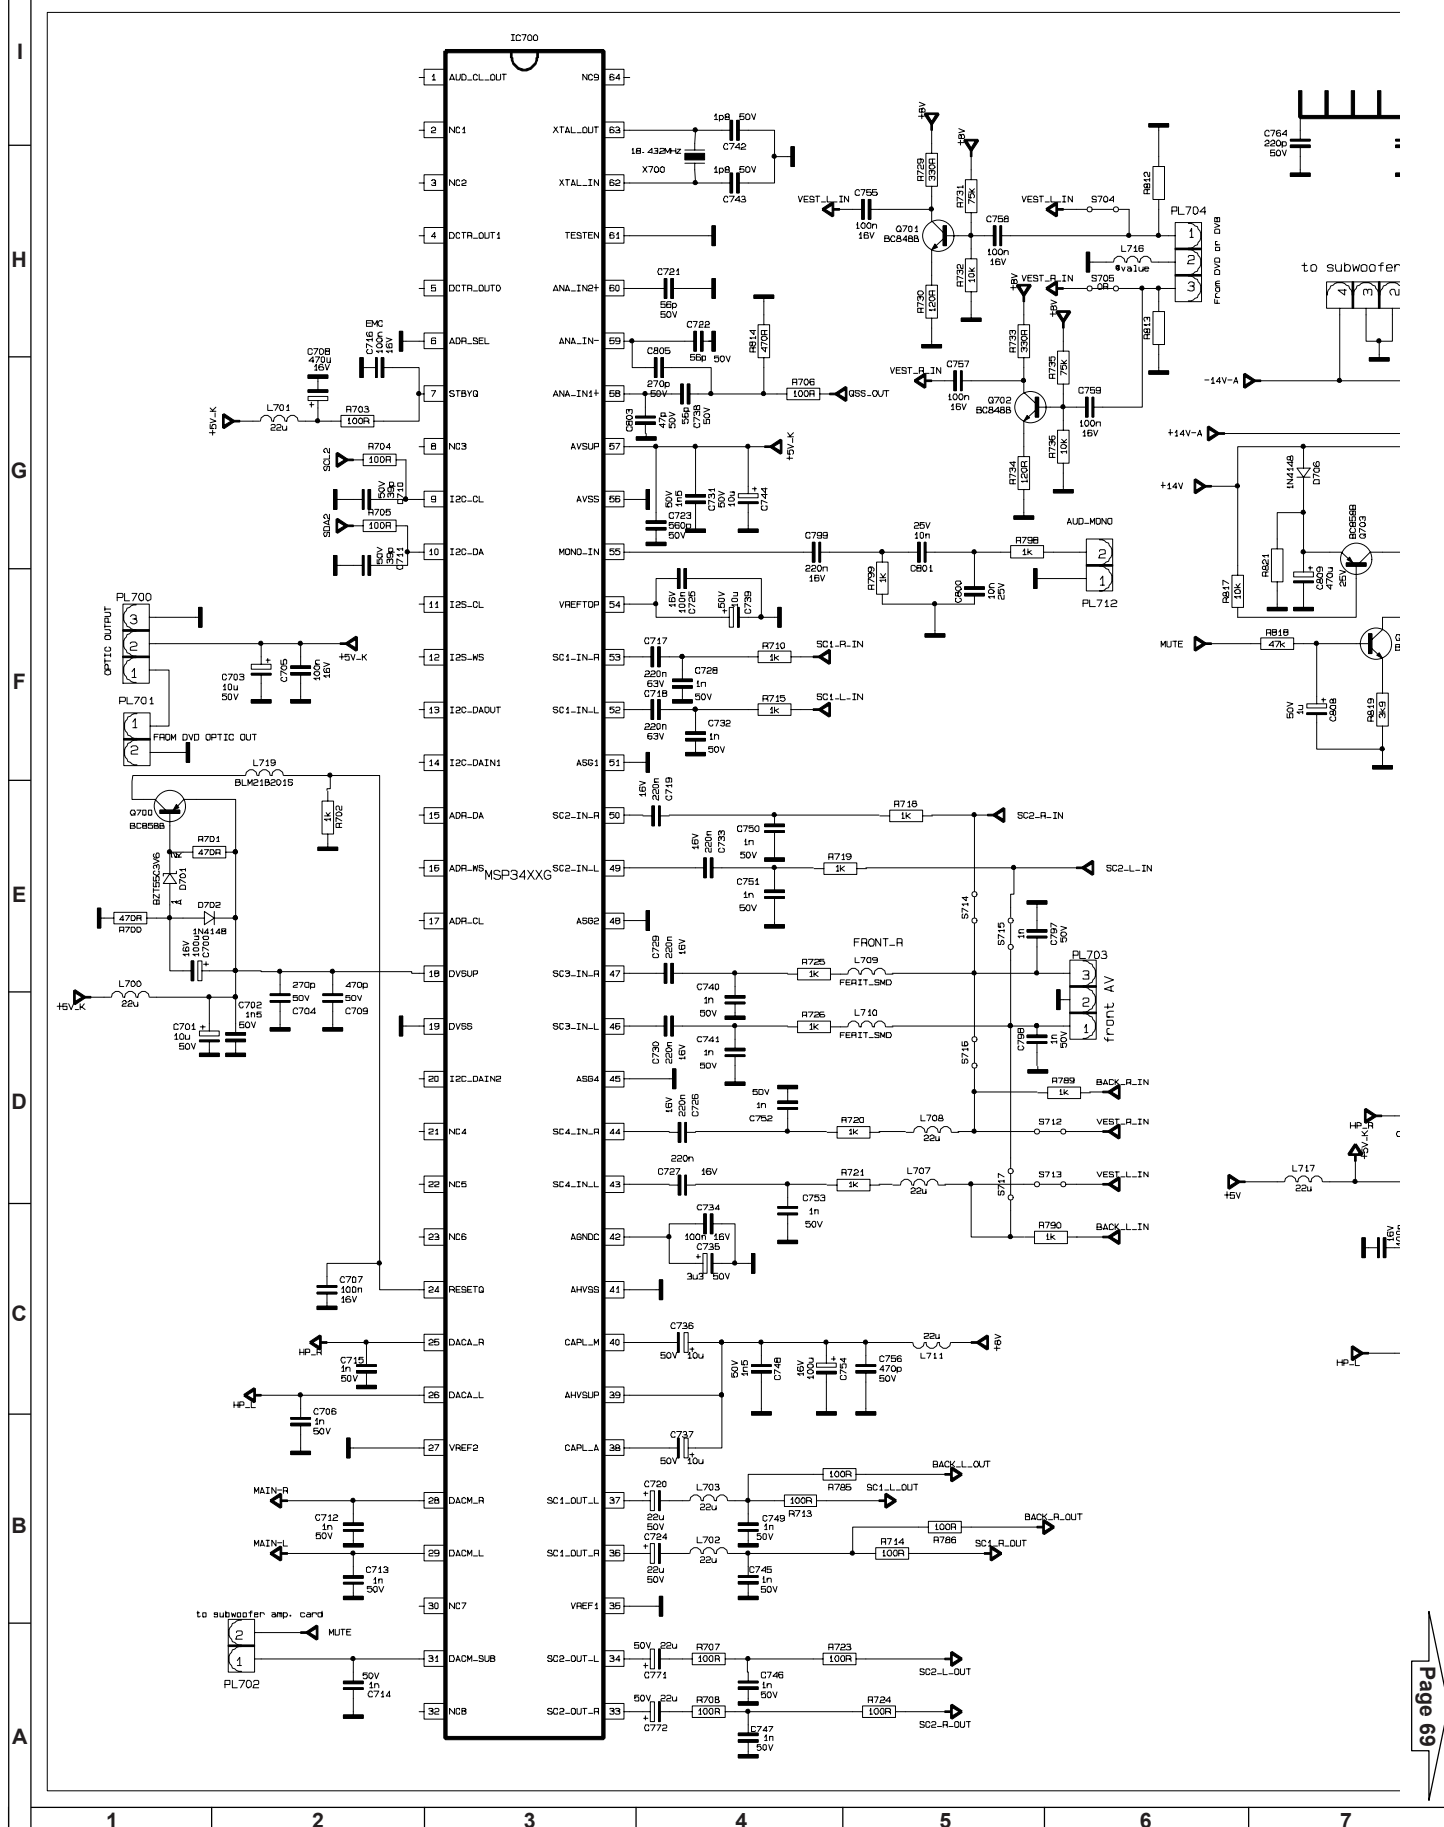


16.6 Schematic Diagram of Sound Circuit

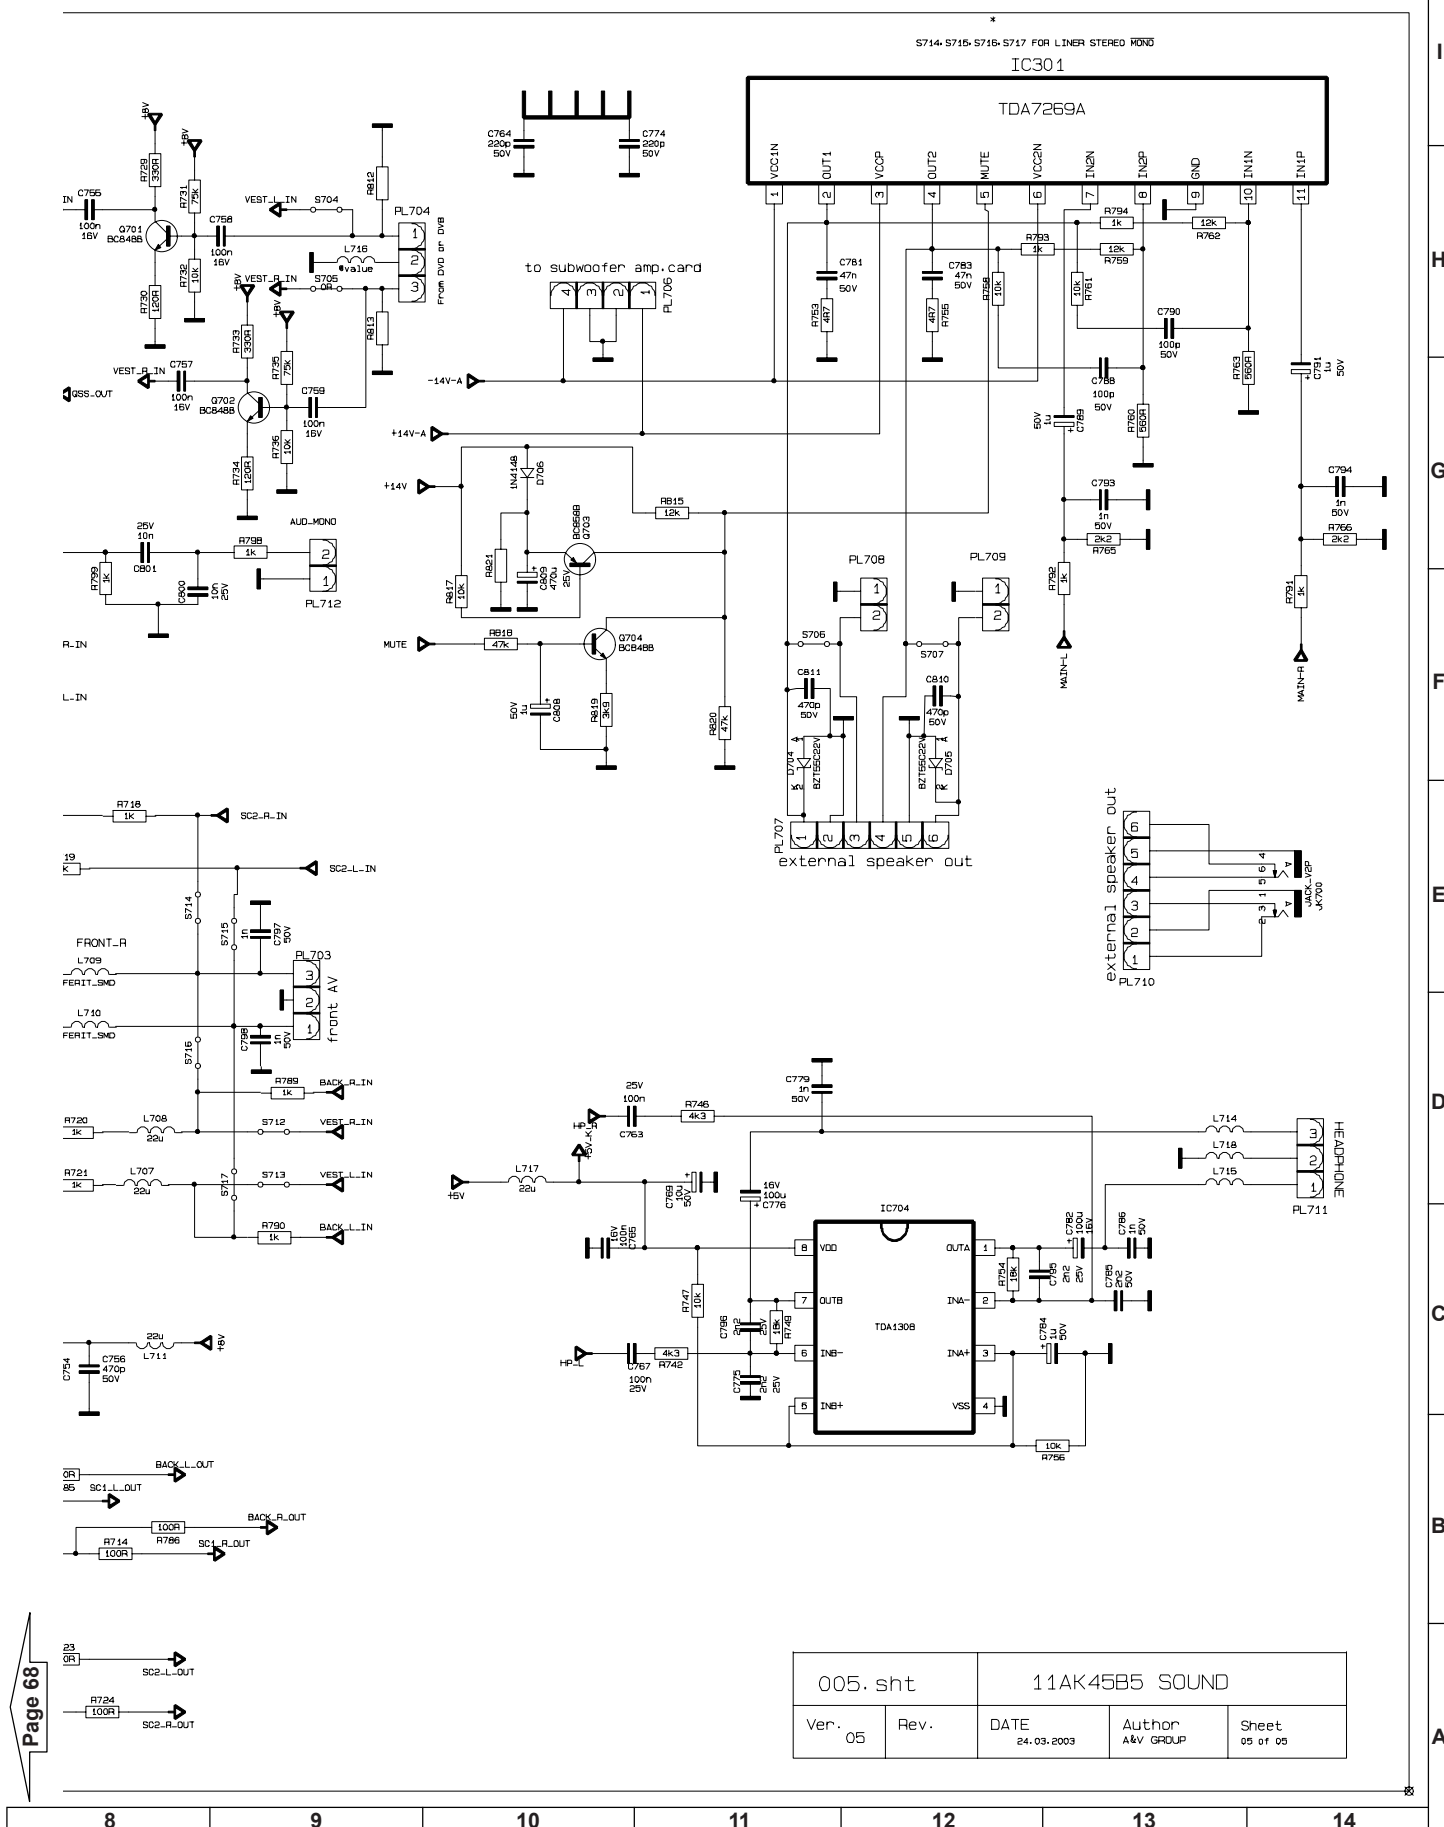


16.7 Schematic Diagram of CRT Socket Circuit

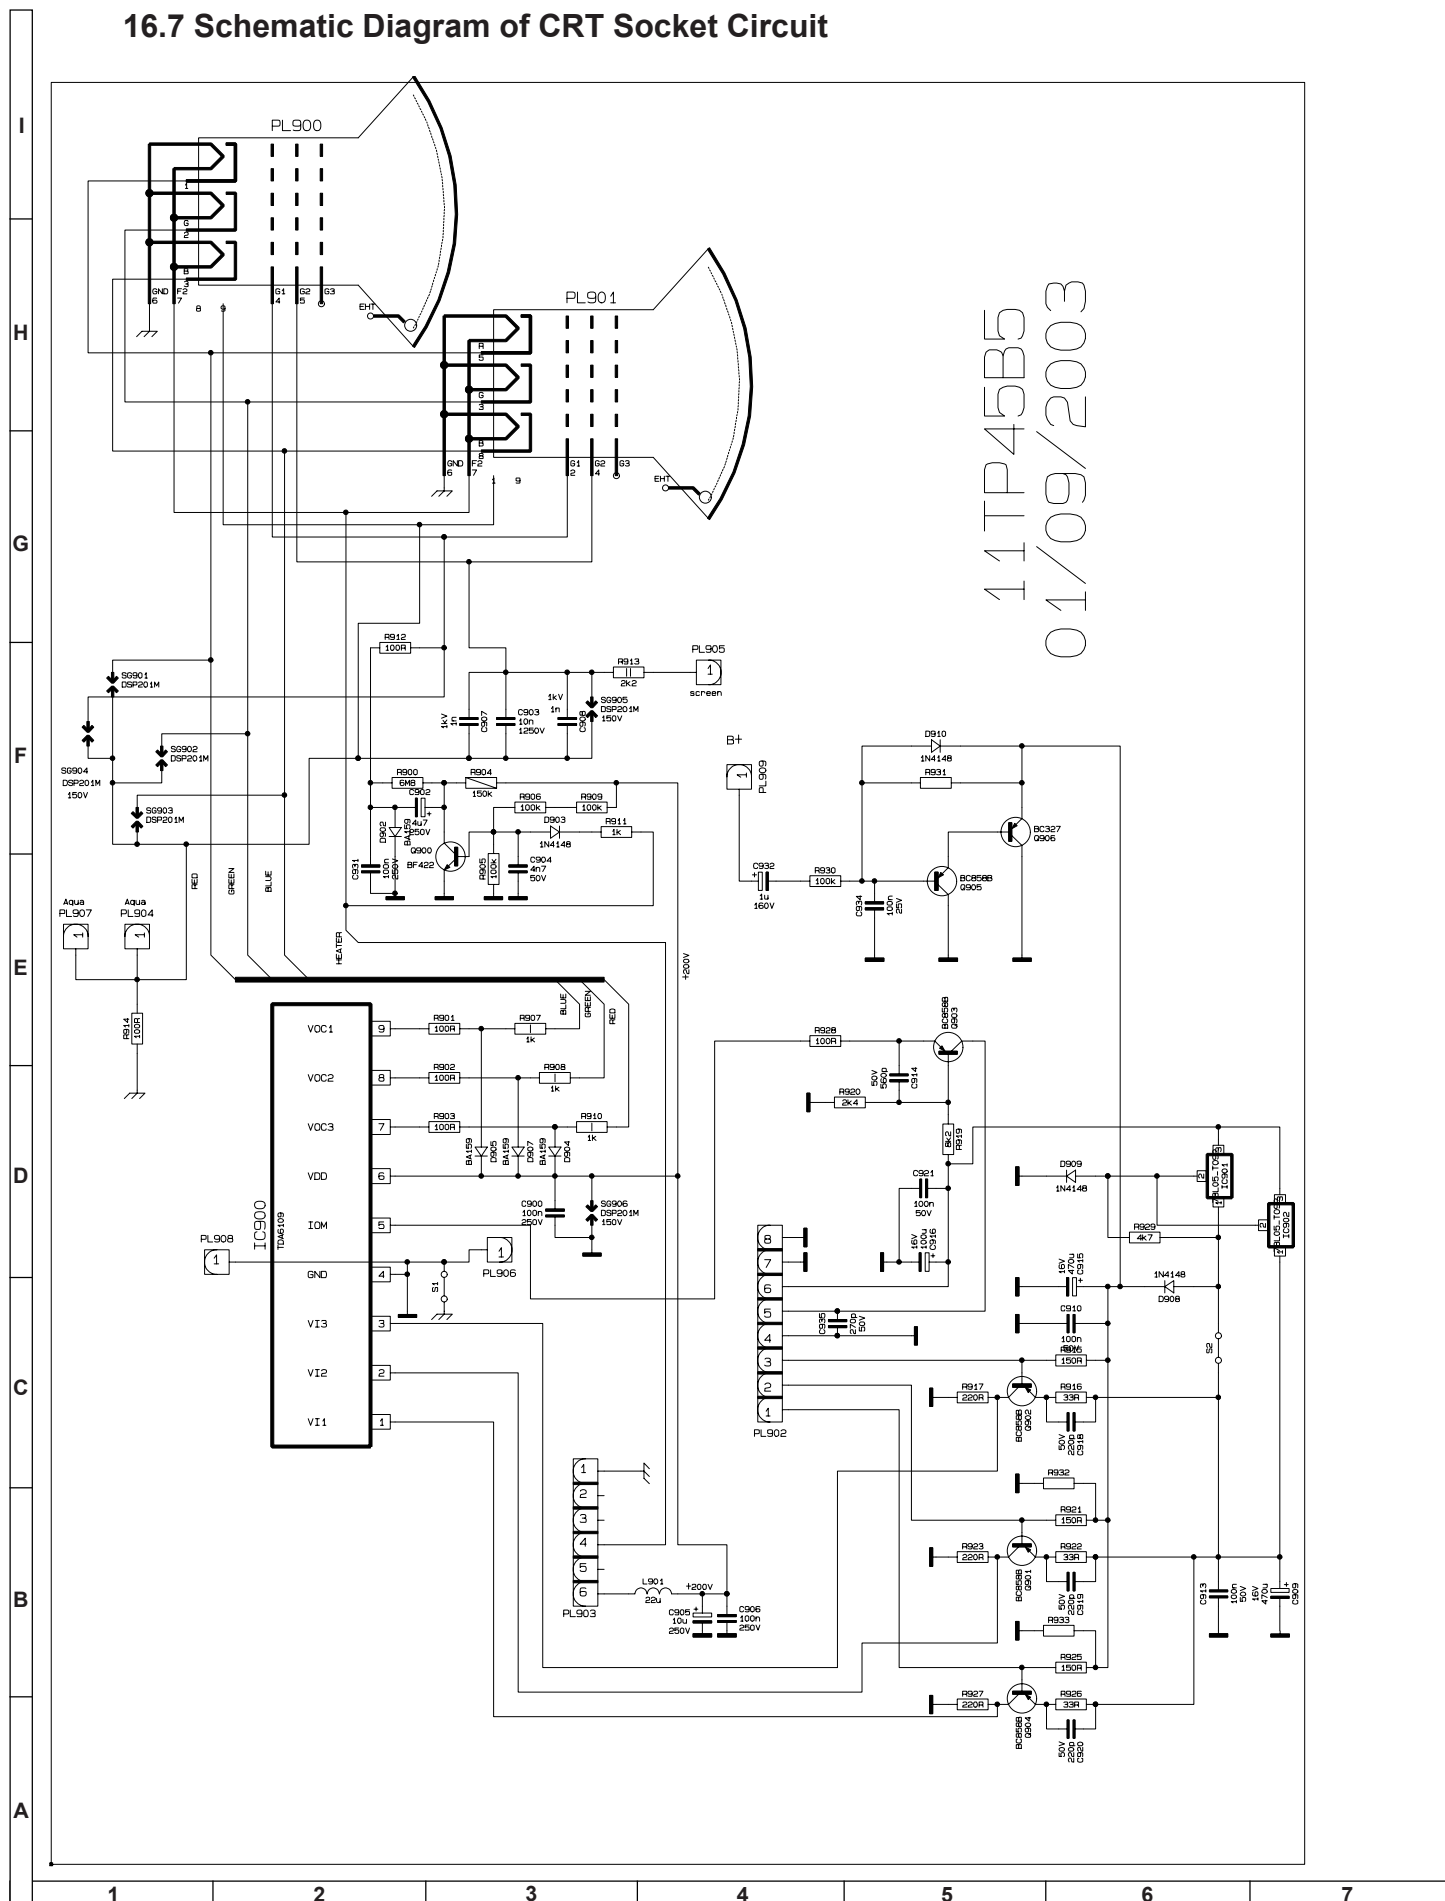

16.8 Schematic Diagrams of Control Panel Unit

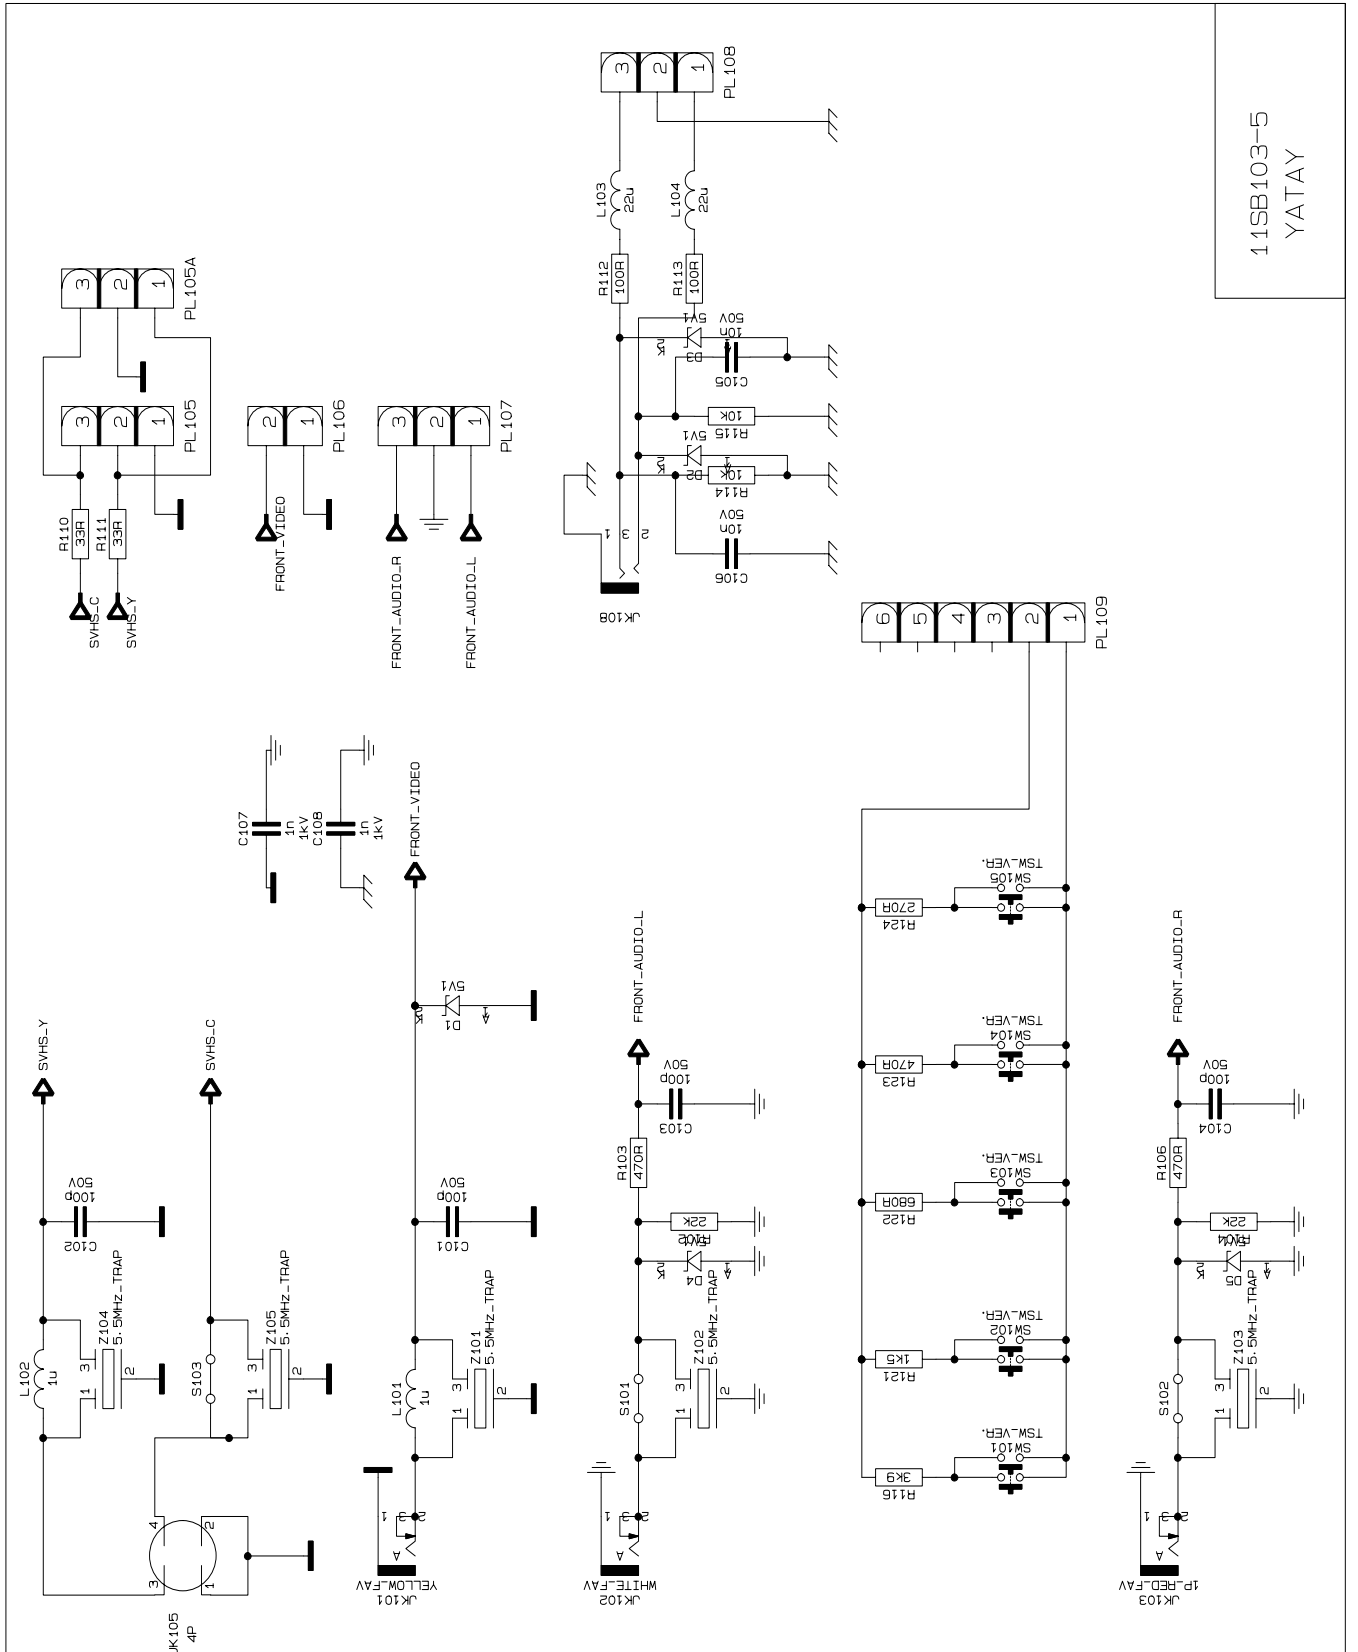

16.9 Schematic Diagram of Remote Control Circuit

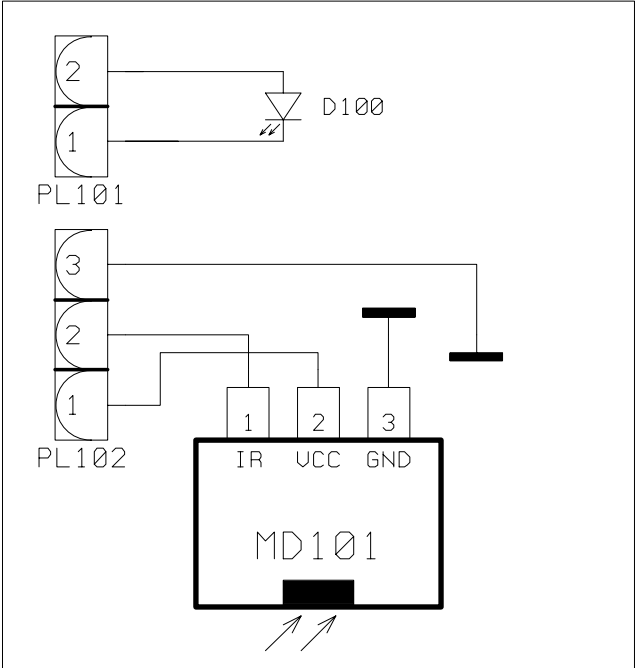

17. HOW TO UPDATE THE TECHNICAL INFORMATION

17.1 How to update the Technical Information appeared on this Service Manual (and relatives)

17.1.1. Web site: <https://www.vestelservice.com>

17.1.2. Select: [Technical Support](#)

17.1.3. Login: [101278](#)

17.1.4. Password: [SHPII278](#)

By this access you can consult the latest schematic diagram or request the Parts Listing of a concrete Production Date / Serial Number.

By this way it can be also consulted the issued Technical Reports (Service Bulletins).

It can be found a Label in every chassis with additional information, i.e. the used EEPROM. See below. On the next page are given details about the Code Bar Label.

17.2 NVM / EEPROM recorder

There is available the NVM / EEPROM recorder as spare part:

Part Reference: [V20096887](#)

Description: [MD.ASY.PONYPROG](#)


Dom. Price Code: [AT](#)

Exp. Price Code: [BE](#)


This EEPROM recorder uses the free software "Pony" available at <http://www.lancos.com/ppwin95.html>

Note: In case of Windows platform it is recommended the PonyProg v1.17h version.

17.3 Chassis Label Information

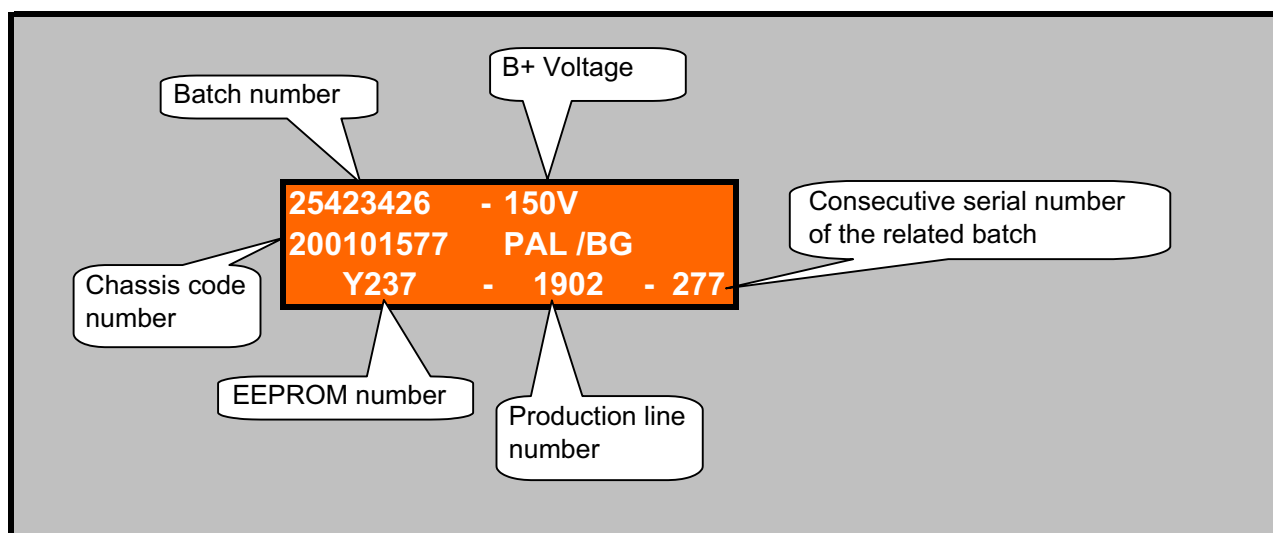

17.4 Code Bar Label Information

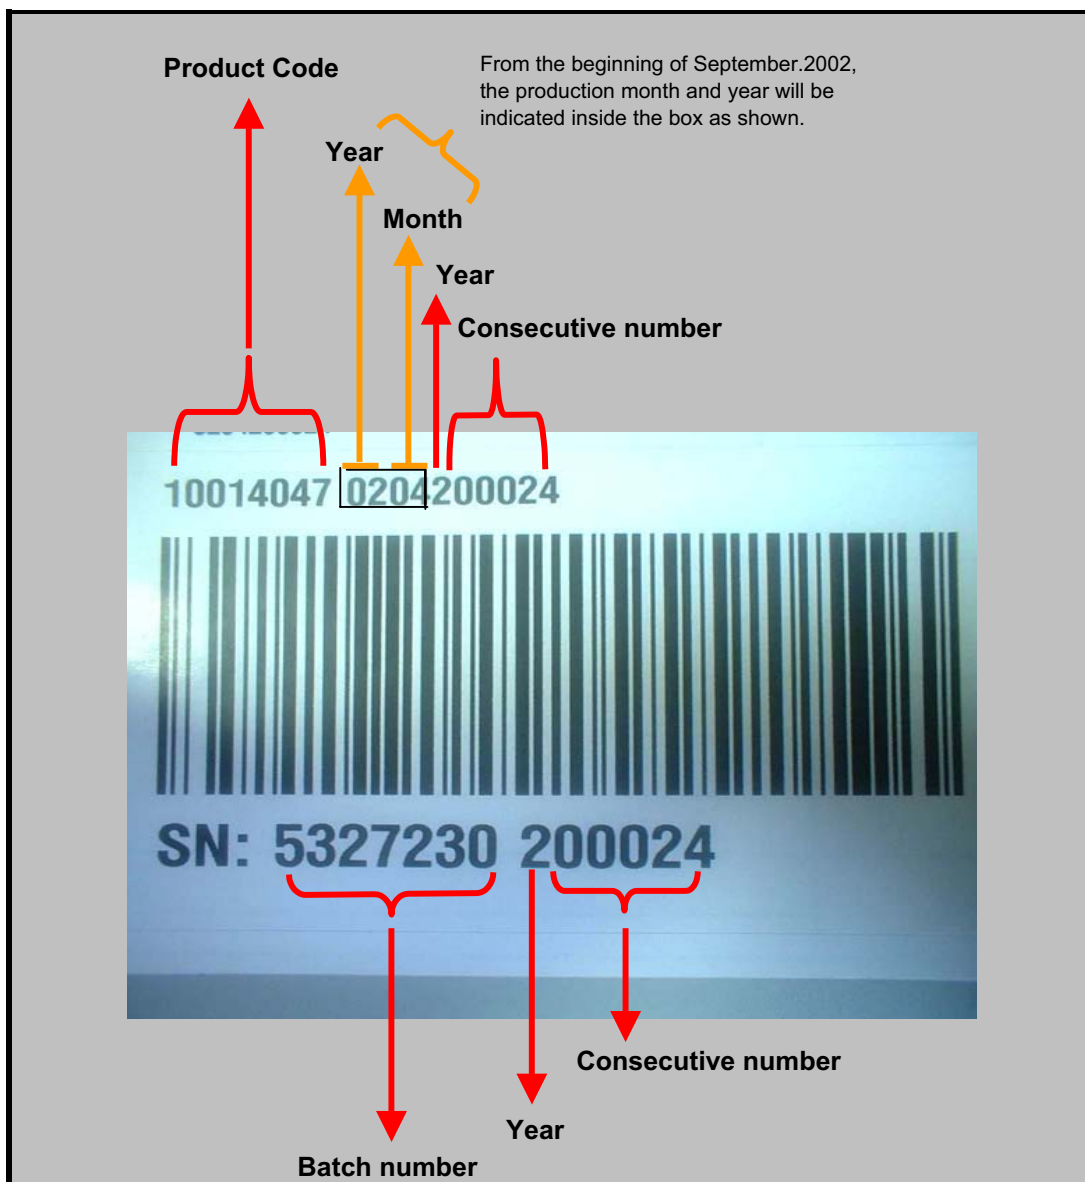

Product code:	It is the code that indicates Vestel internal identification number of the complete TV set.
Year :	Production year in two digits, e.g.: 02 for 2002
Month :	Production month in two digits; e.g.: 04 for April.
Batch number :	It is a Vestel number that is assigned by the Planning Dept. according to the customer orders. (For internal use by Vestel)
Consecutive Number:	The number that indicates the sequence of the product related to the same batch number.

Notes:

SHARP®

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written permission of the publisher.

Technical information and Production:

Vestel Electronik AS

PRINTED BY:

ON:

Technical information re-issued:

Think Ecology, please use

SHARP ELECTRONICA ESPAÑA S.A.
Service Manual Group
Engineering Dept.
Polígono Industrial Can Sant Joan
08190 Sant Cugat del Vallès
Barcelona
Spain



RECYCLED PAPER