


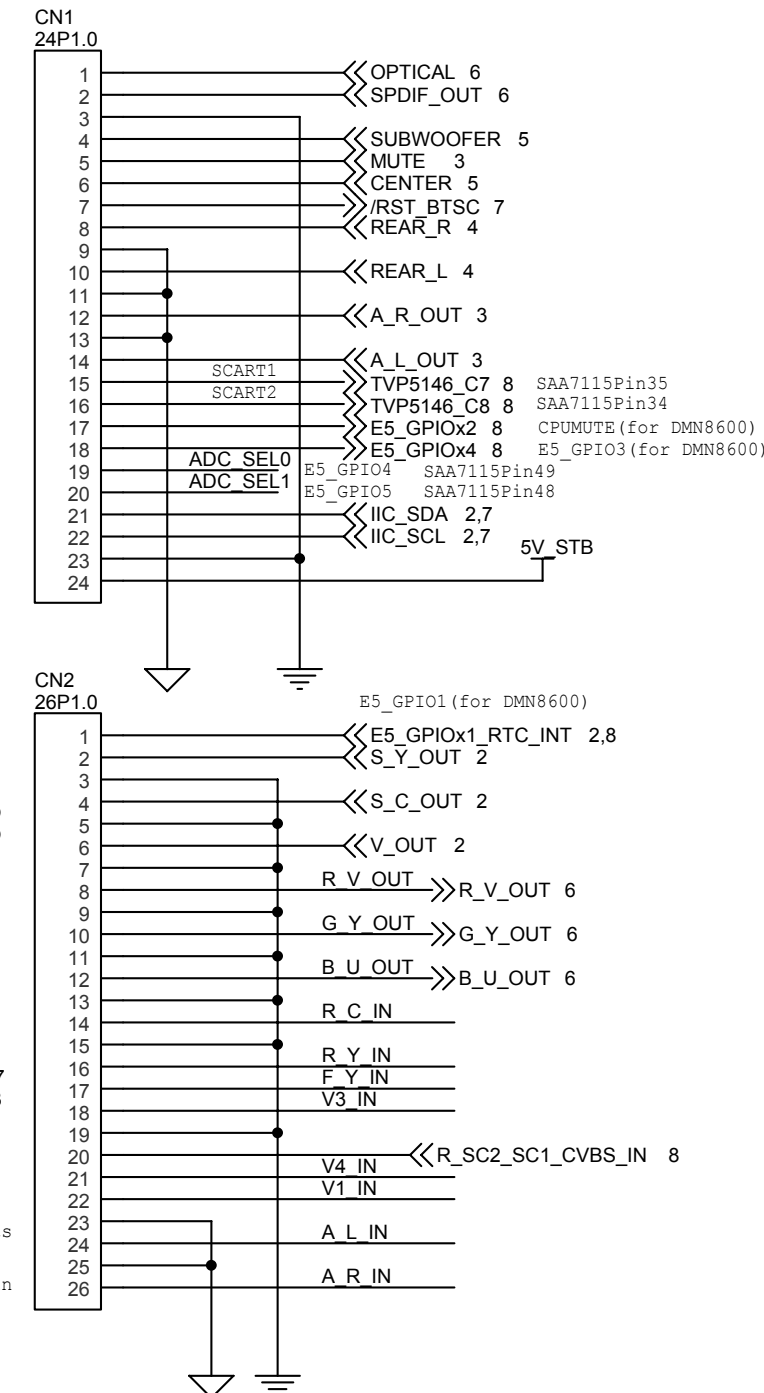
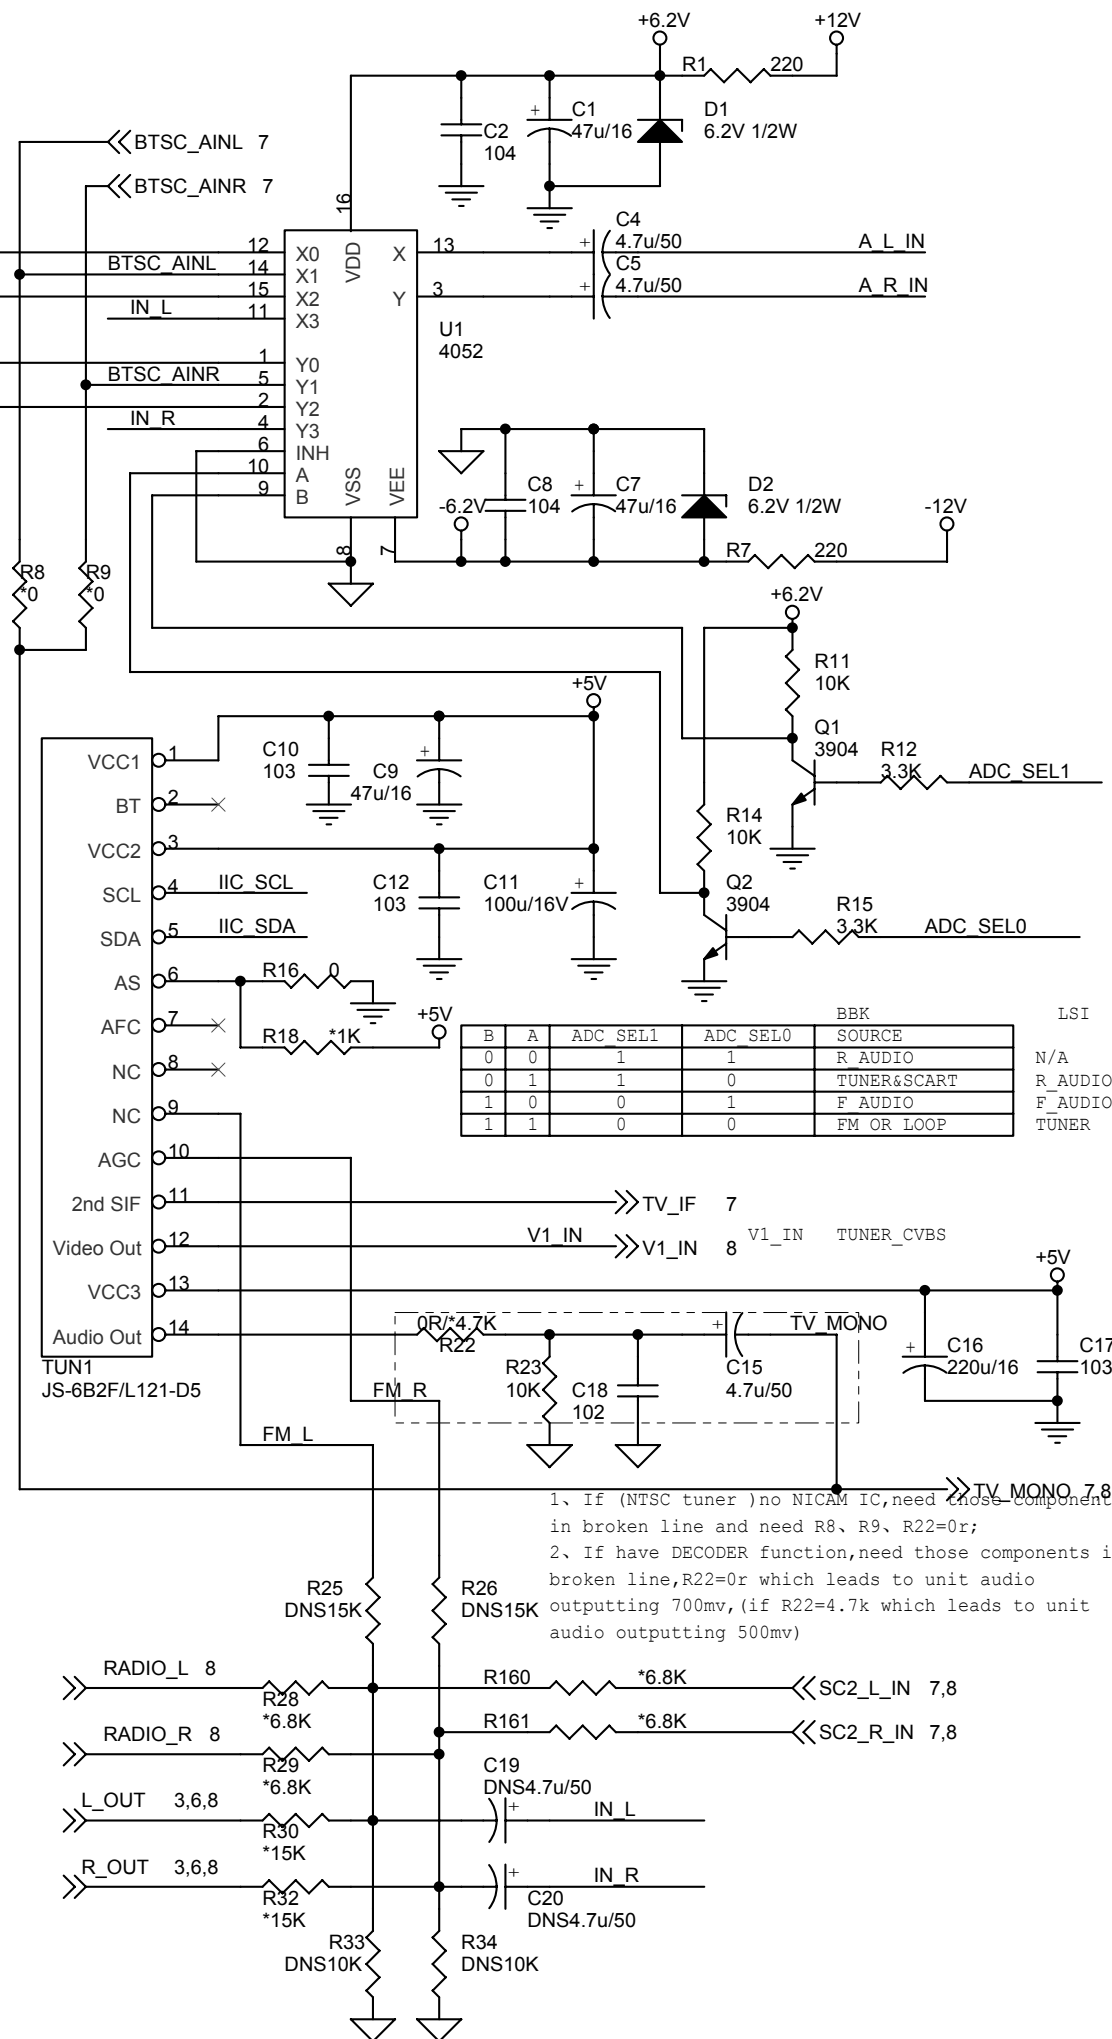


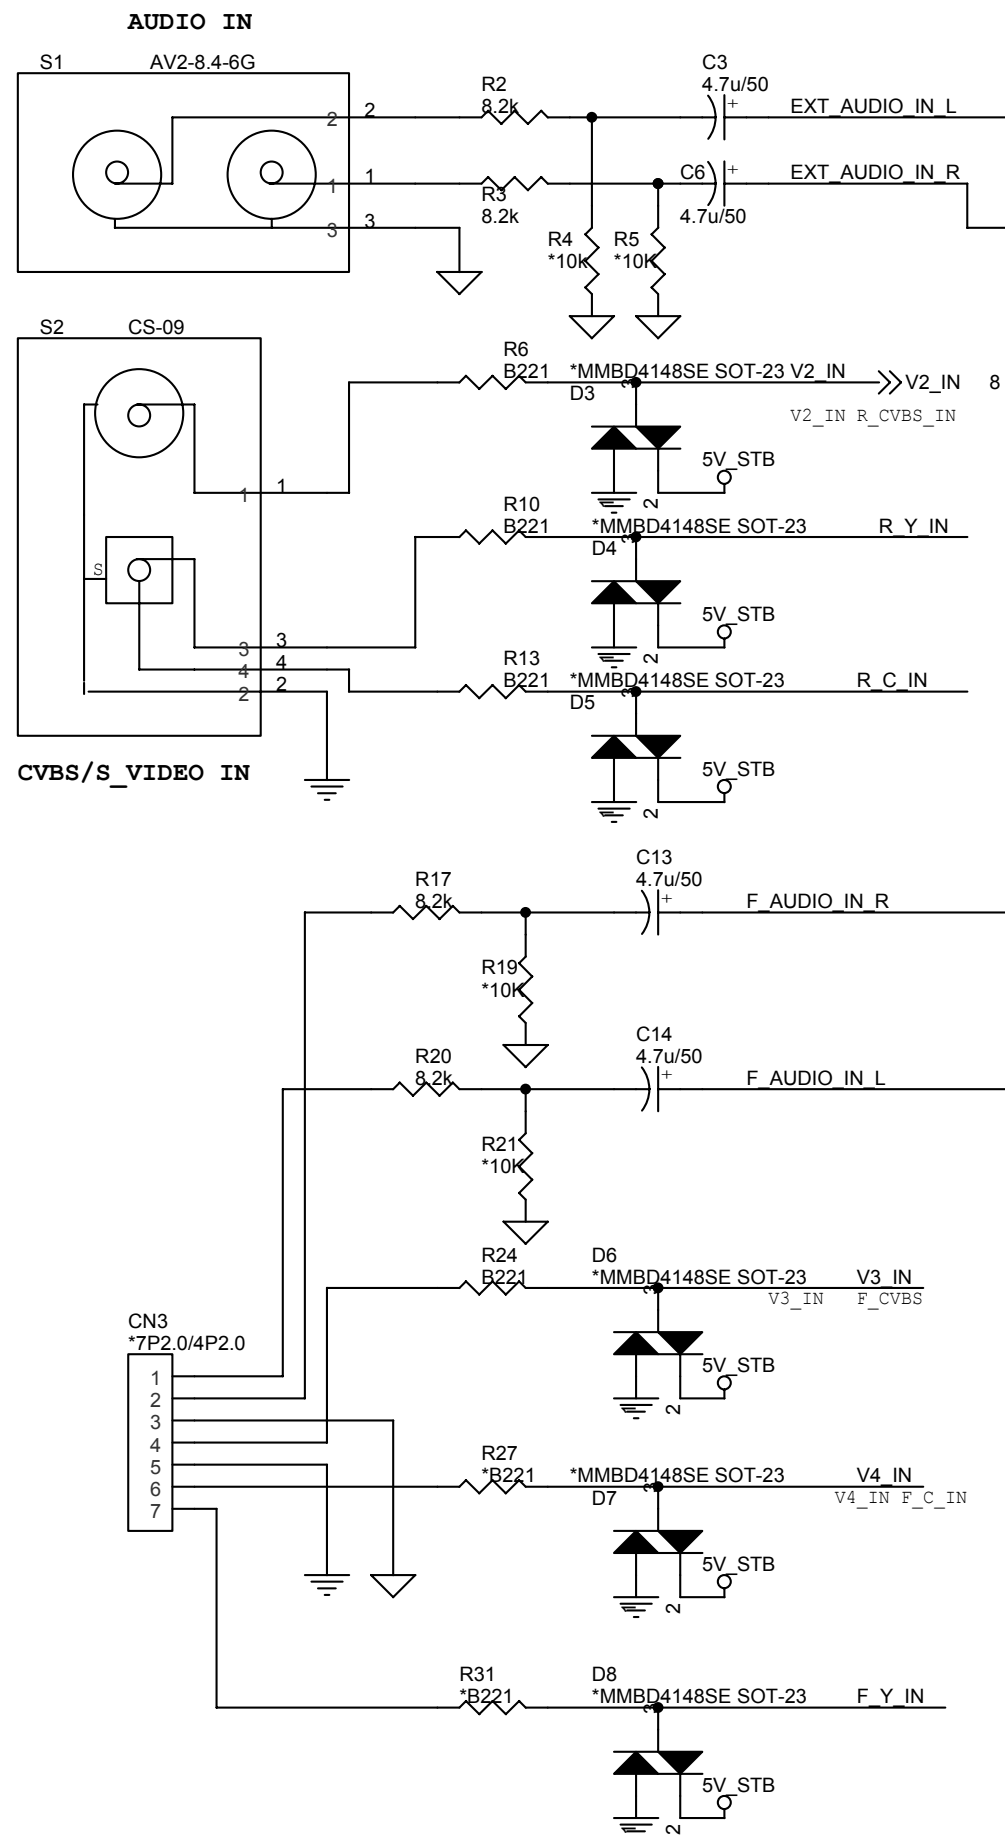


Title		
AV BOARD		
Size	Document Number	Rev
	7DW9917-0	1.0
Date:	Wednesday, August 17, 2005	Sheet 1 of 10

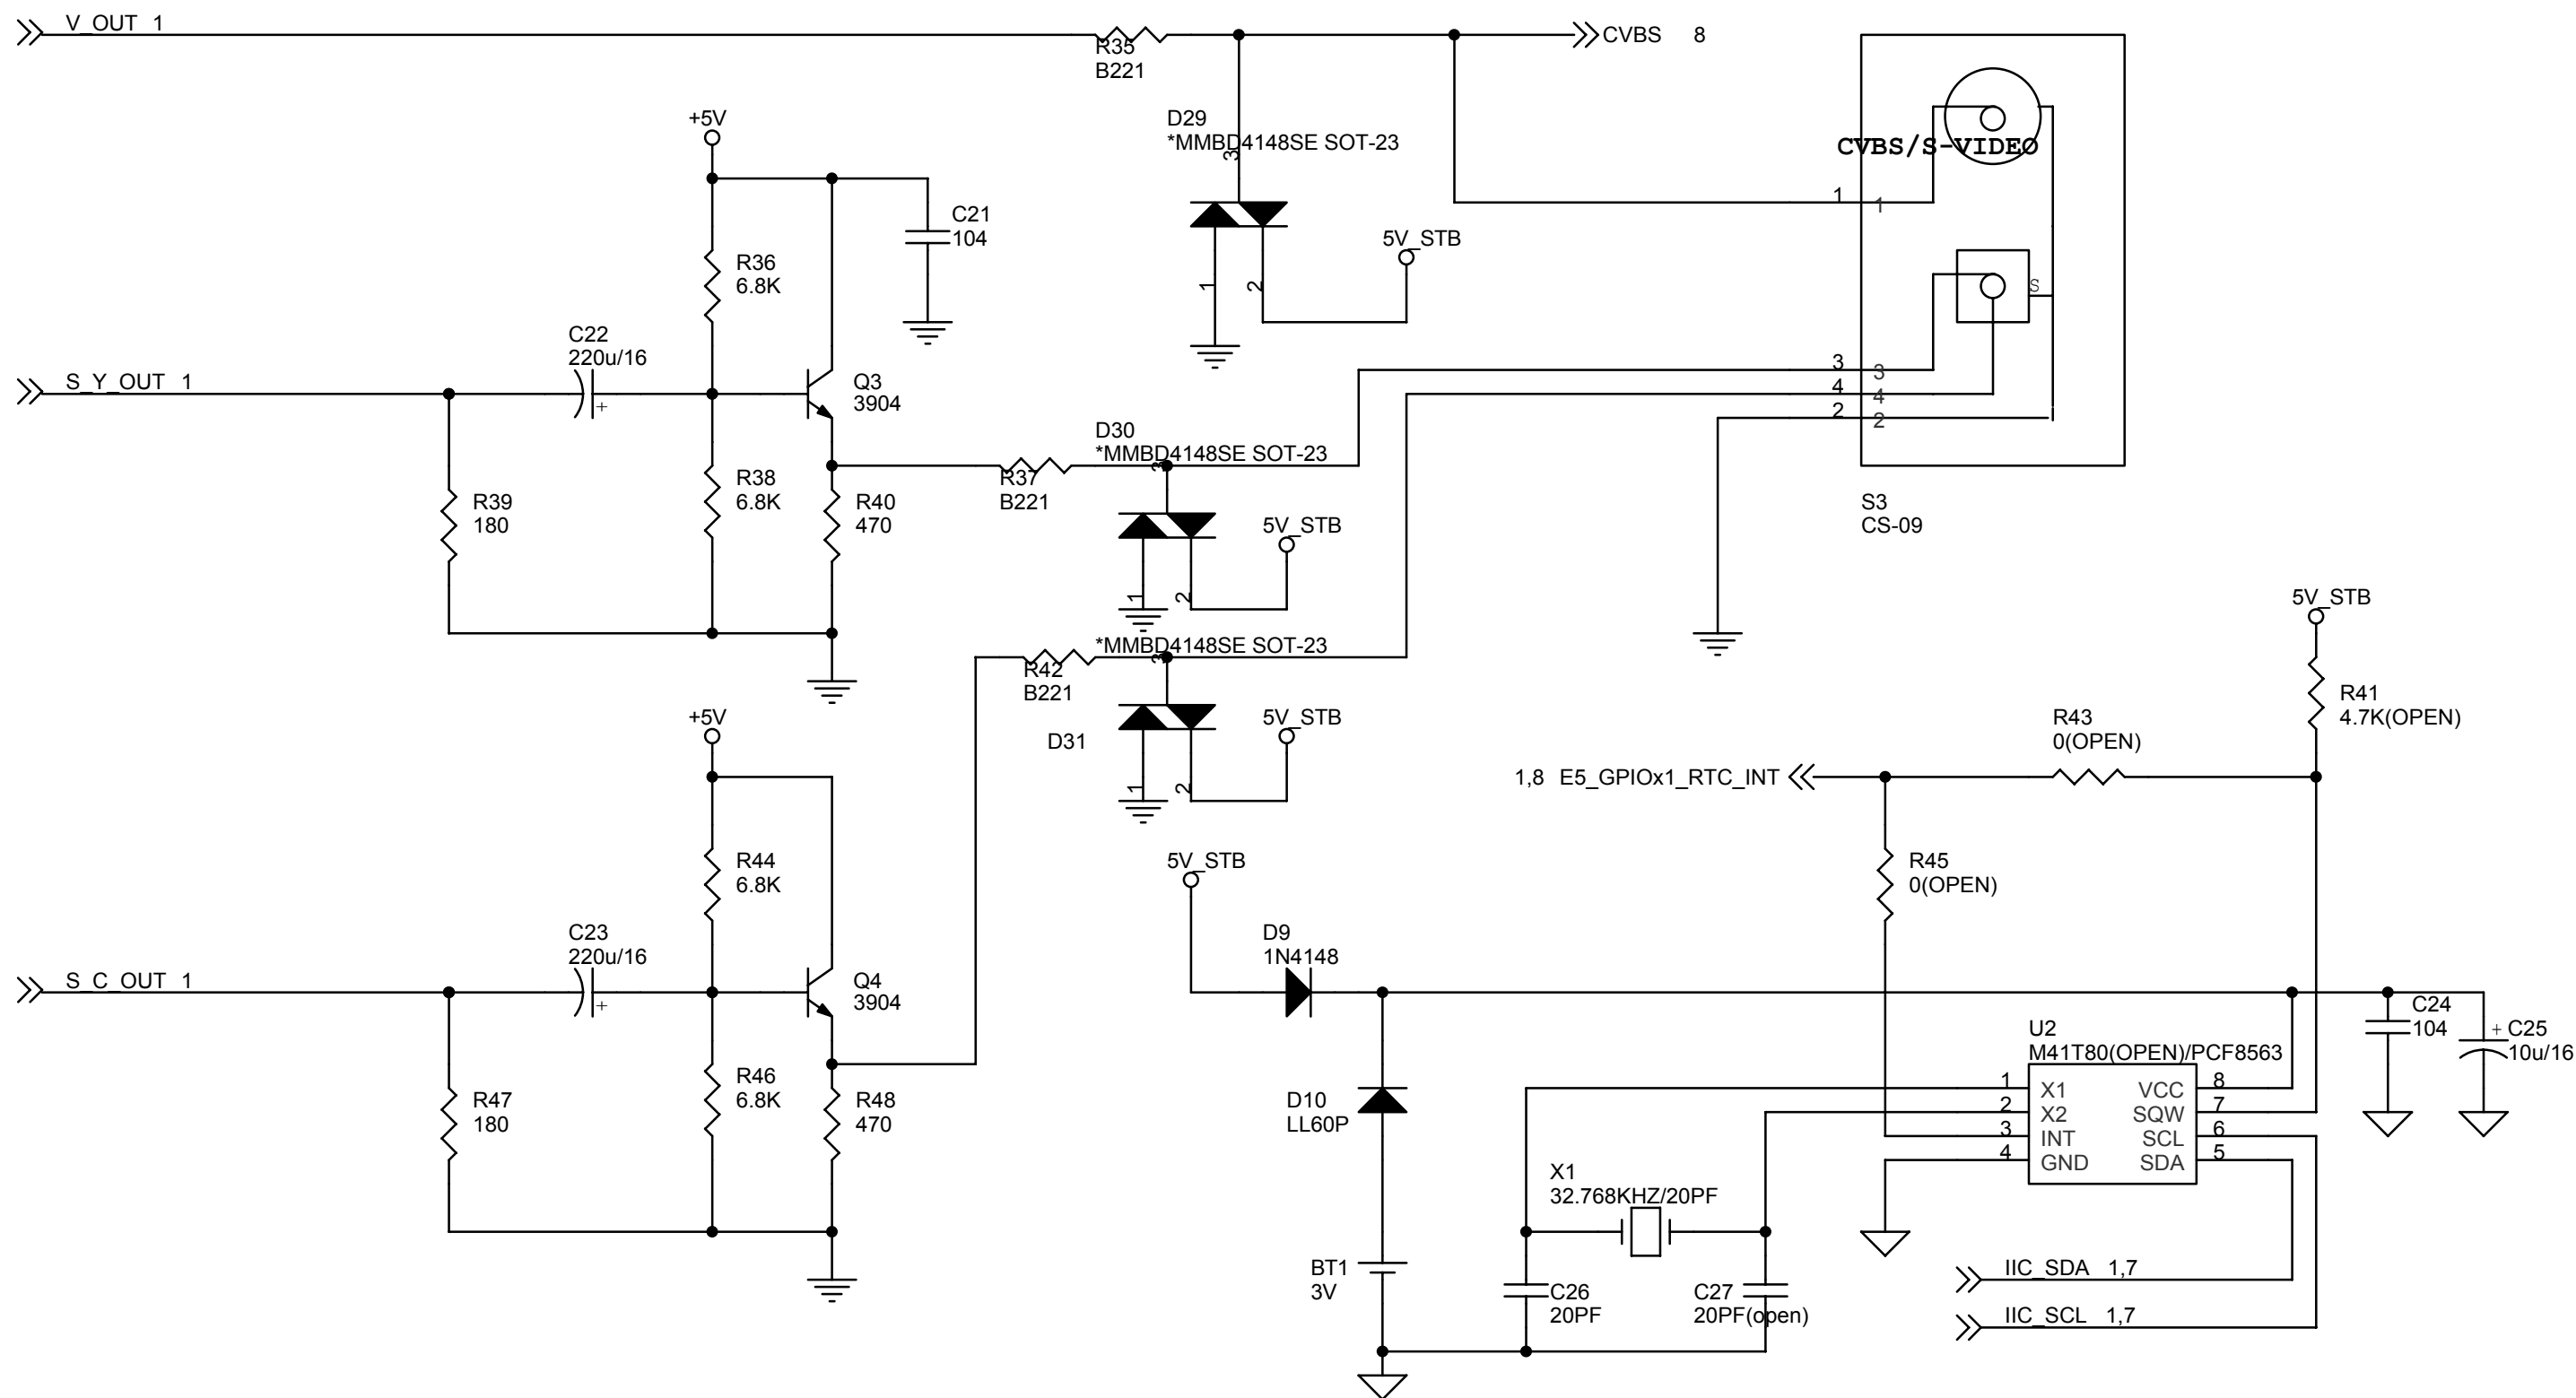


Title		
<Title>		
Size	Document Number	Rev
A4	<Doc>	1.0
Date:	Wednesday, August 17, 2005	
Sheet	2	of 10

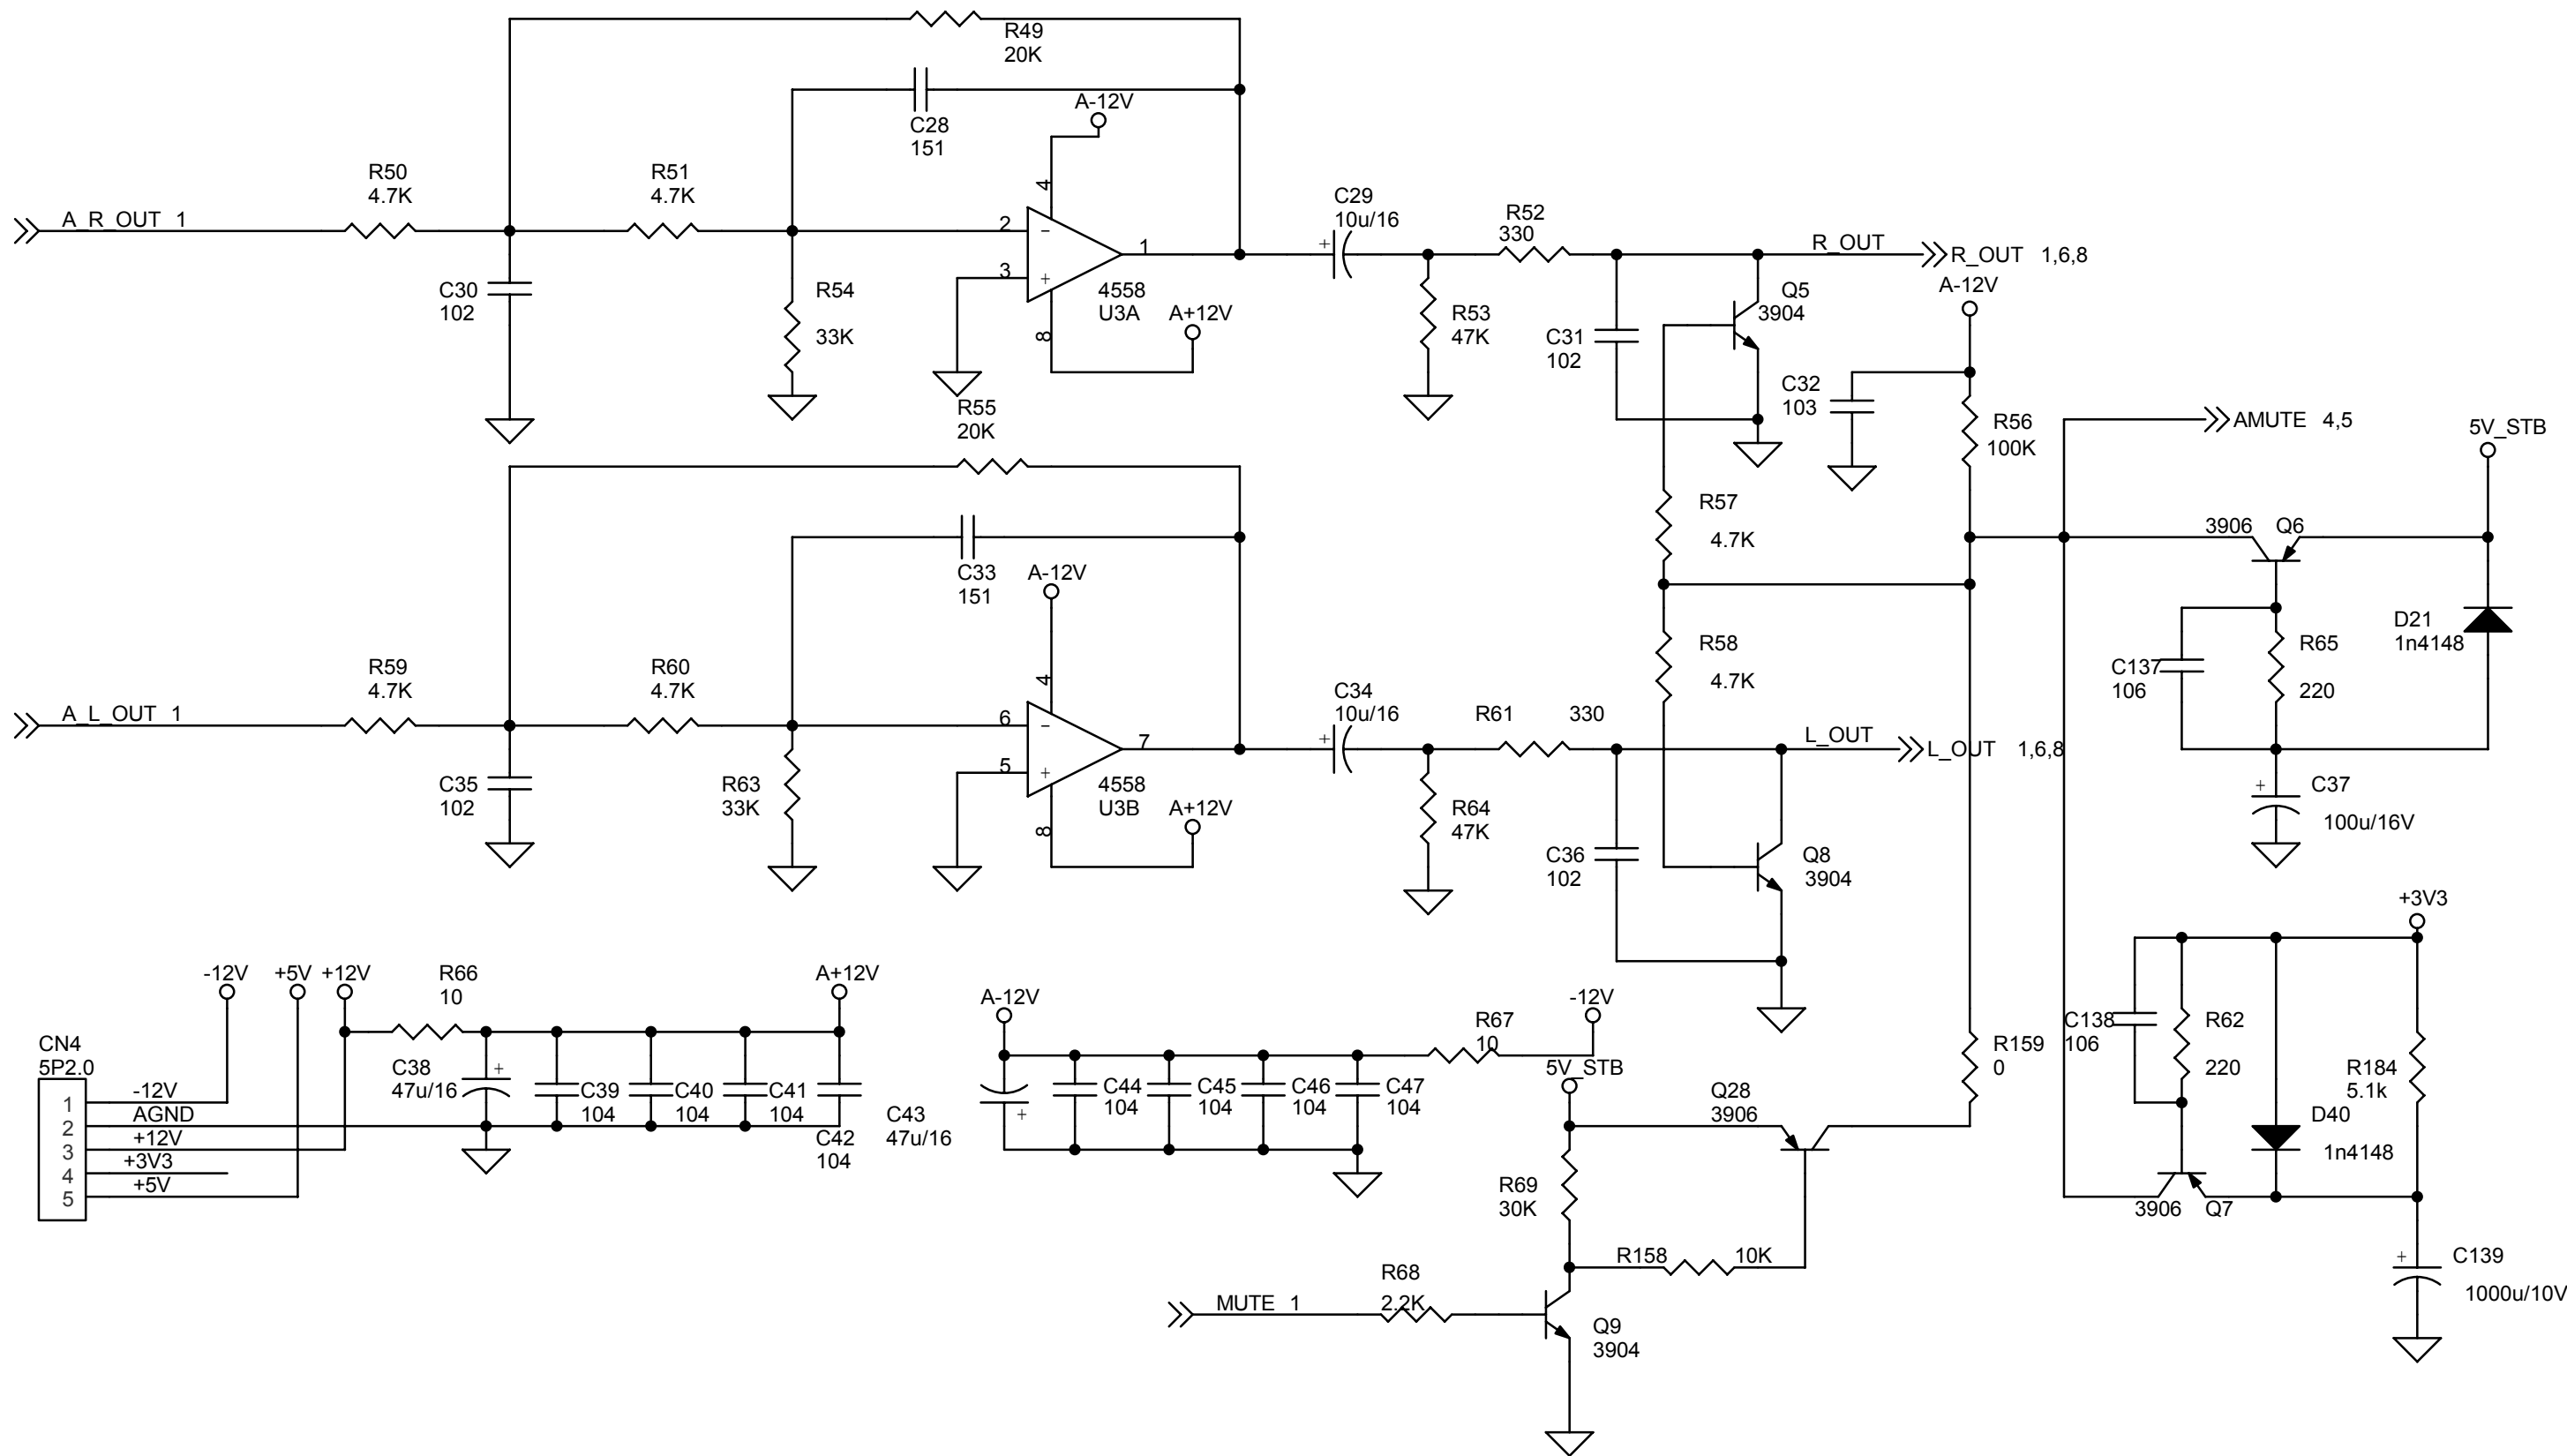


Title		
<Title>		
Size	Document Number	Rev
A4	<Doc>	1.0
Date:	Wednesday, August 17, 2005	Sheet 3 of 10

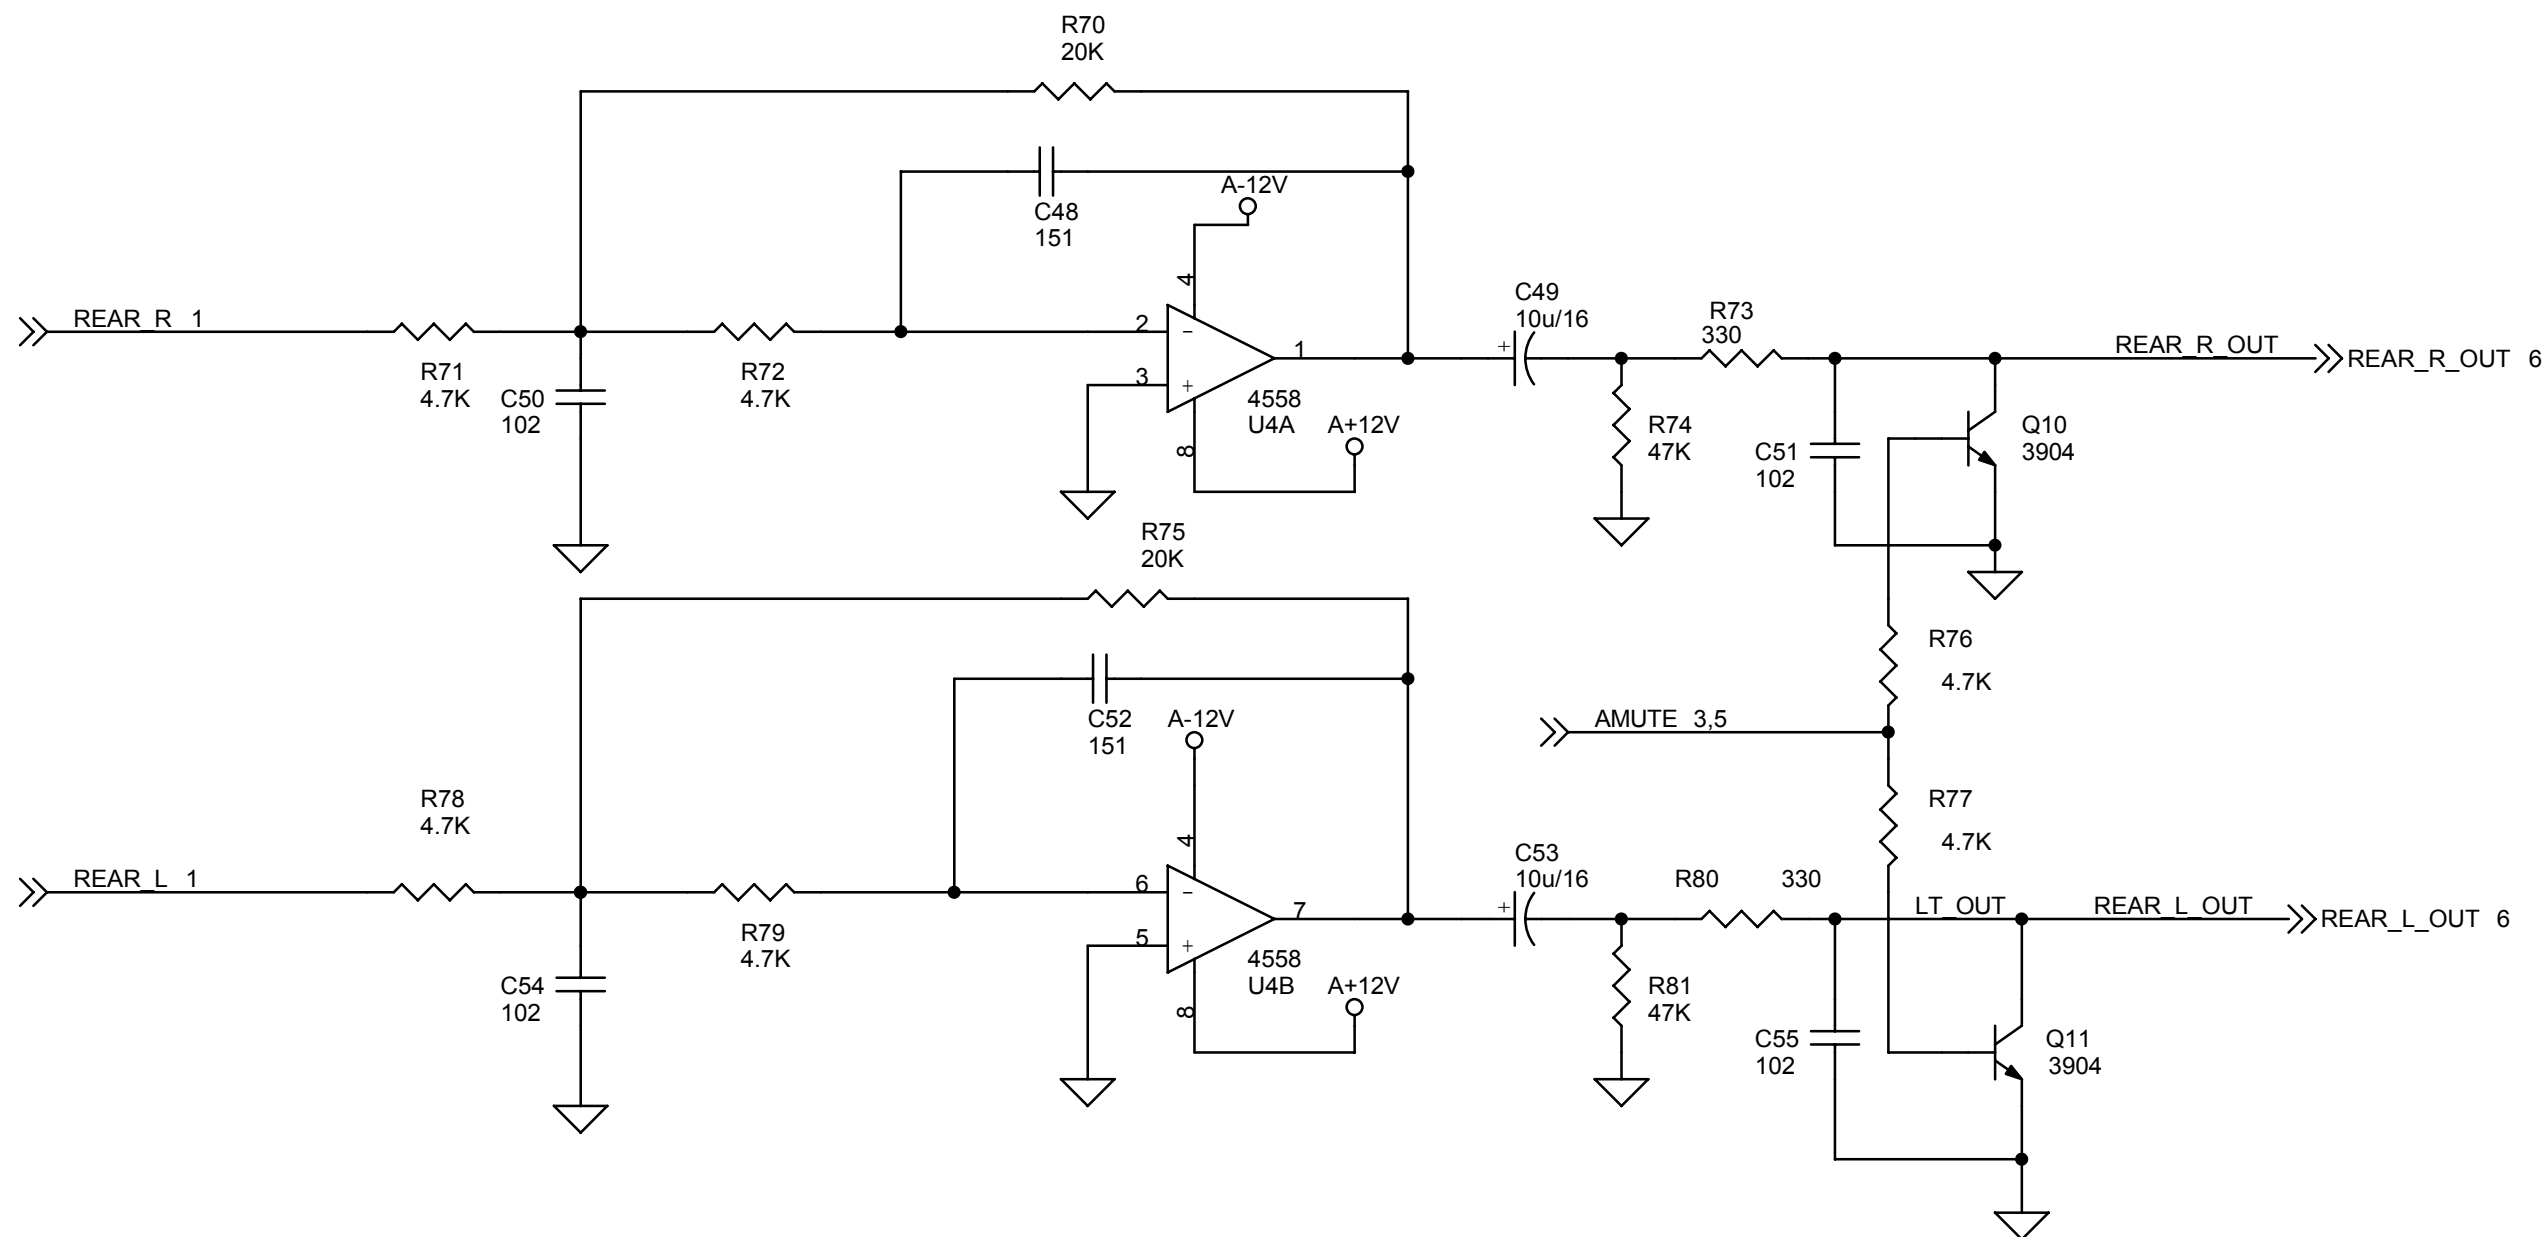


Title		
<Title>		
Size	Document Number	Rev
A4	<Doc>	1.0
Date:	Wednesday, August 17, 2005	Sheet 4 of 10

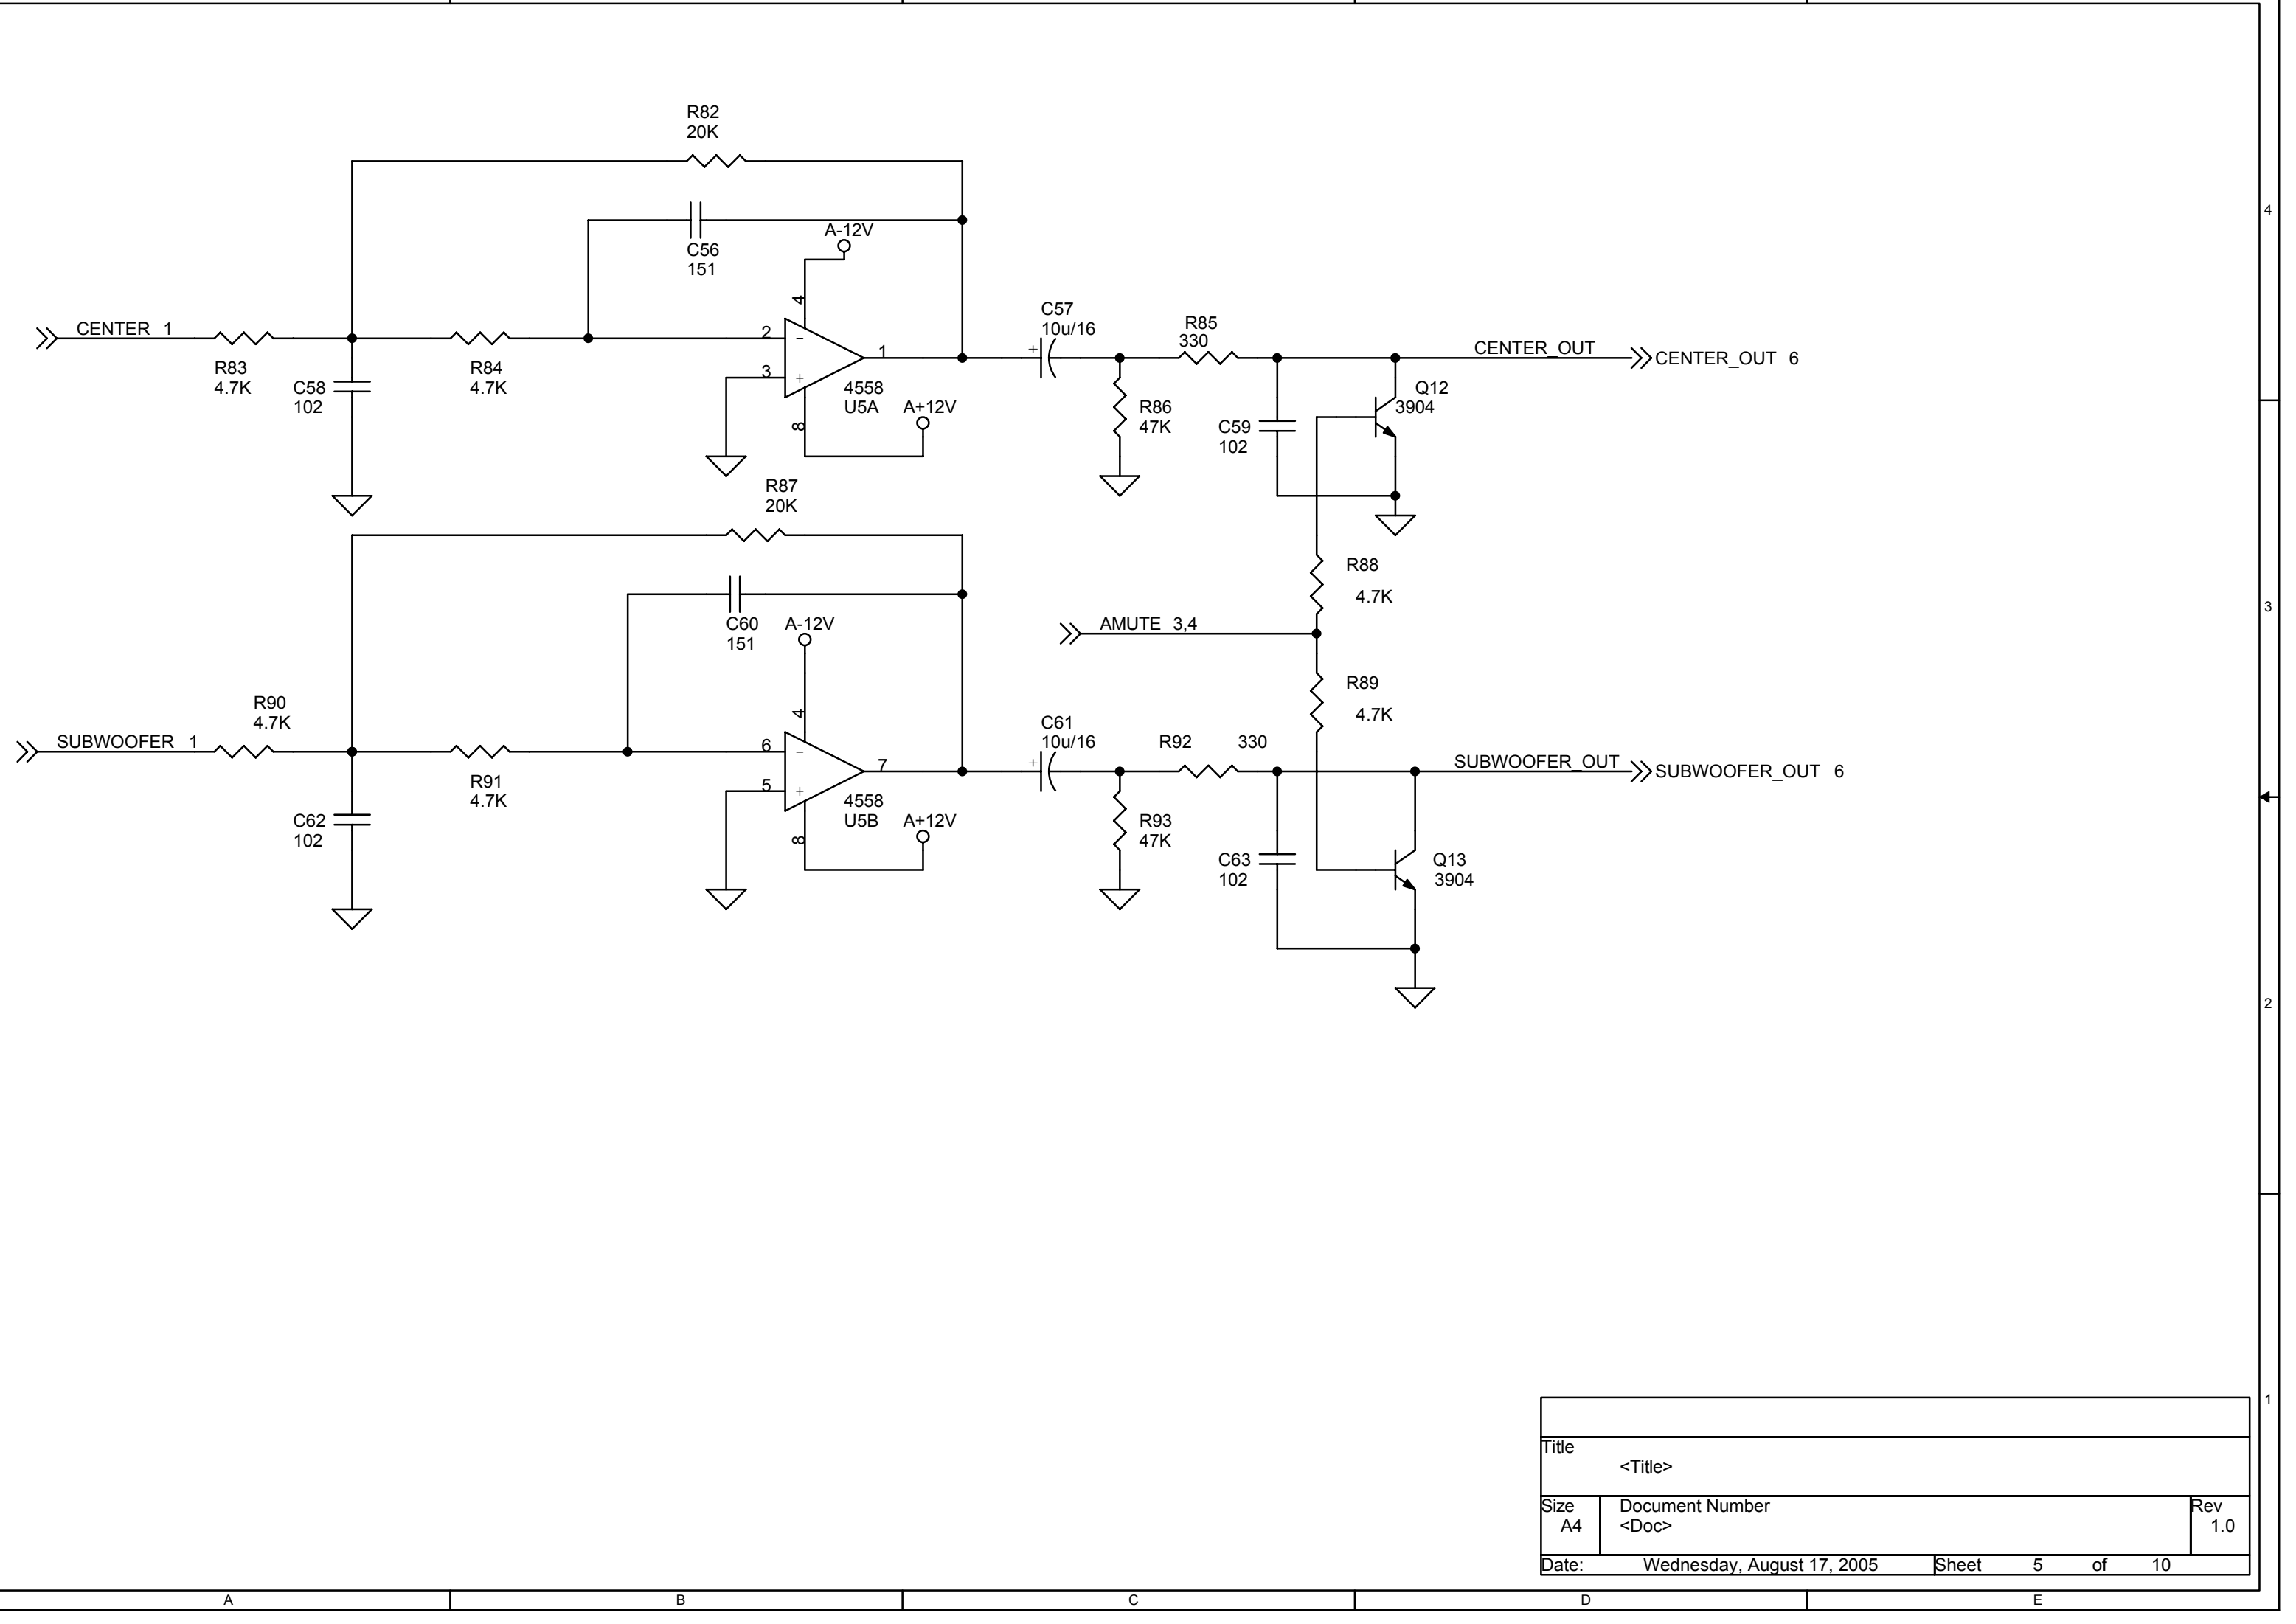


Title		
<Title>		
Size	Document Number	Rev
A4	<Doc>	1.0
Date:	Wednesday, August 17, 2005	Sheet 5 of 10

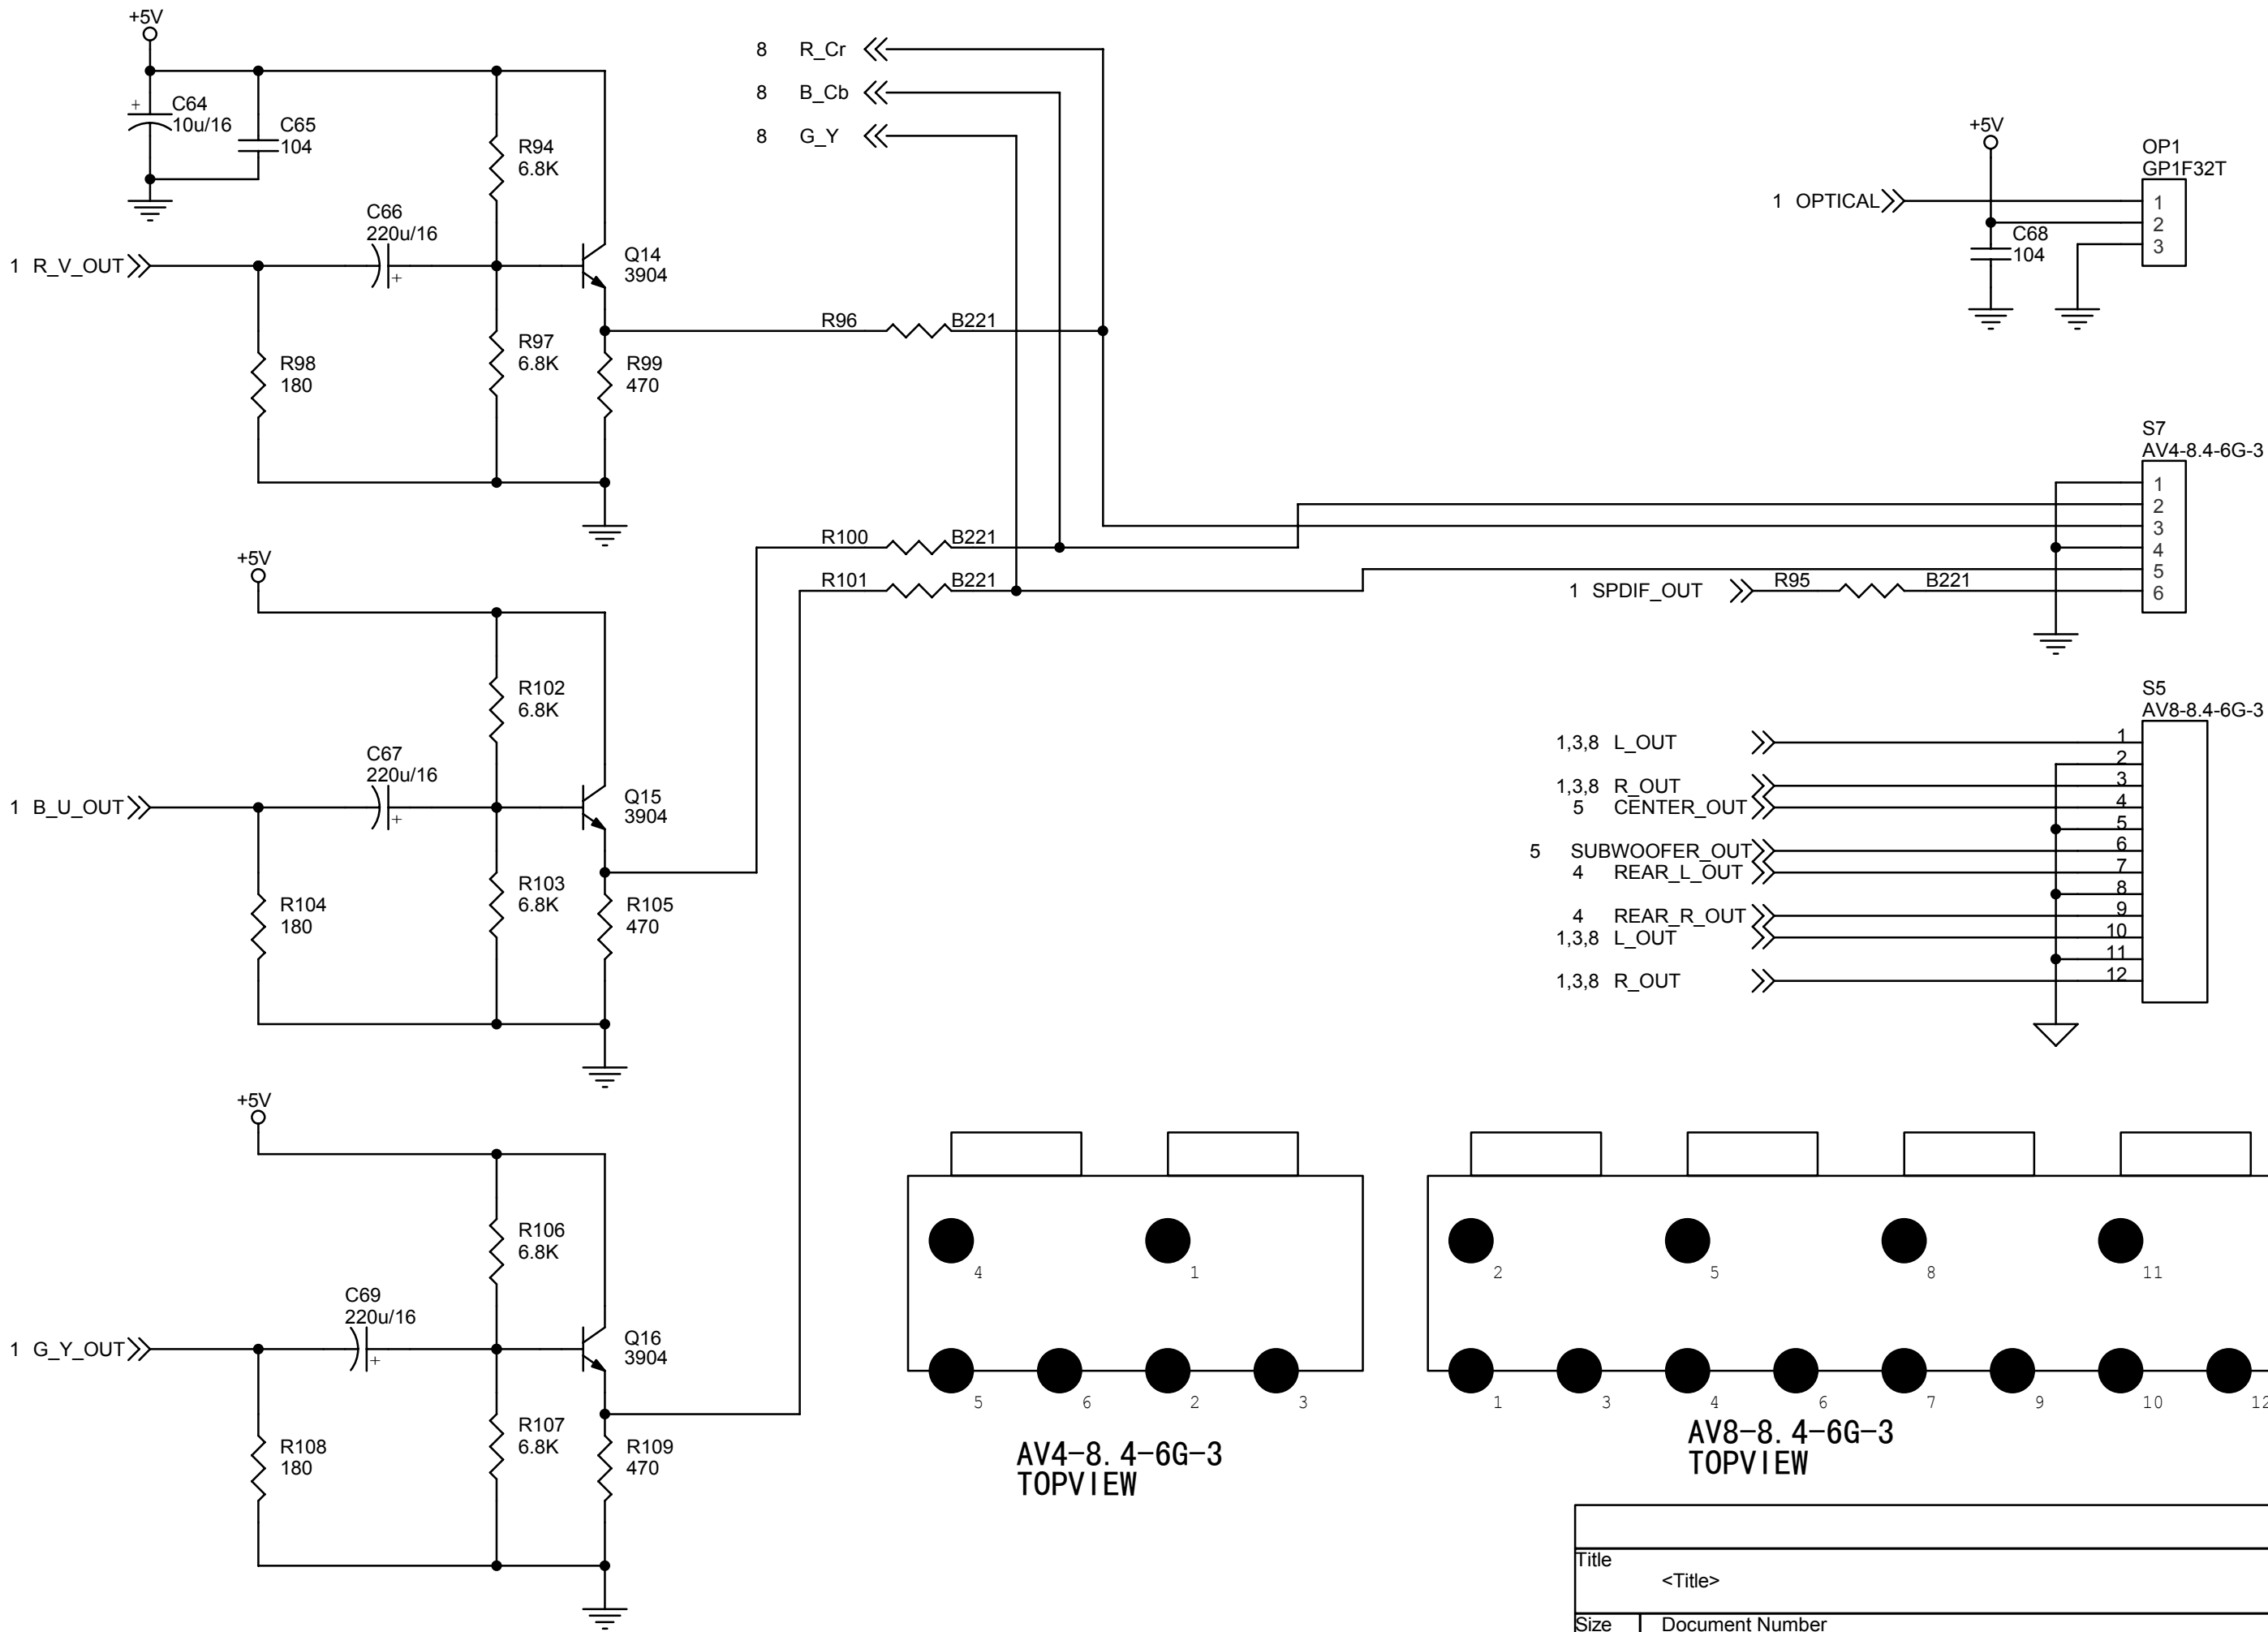

Title		
<Title>		
Size	Document Number	Rev
A4		1.0
Date:	Wednesday, August 17, 2005	Sheet 6 of 10

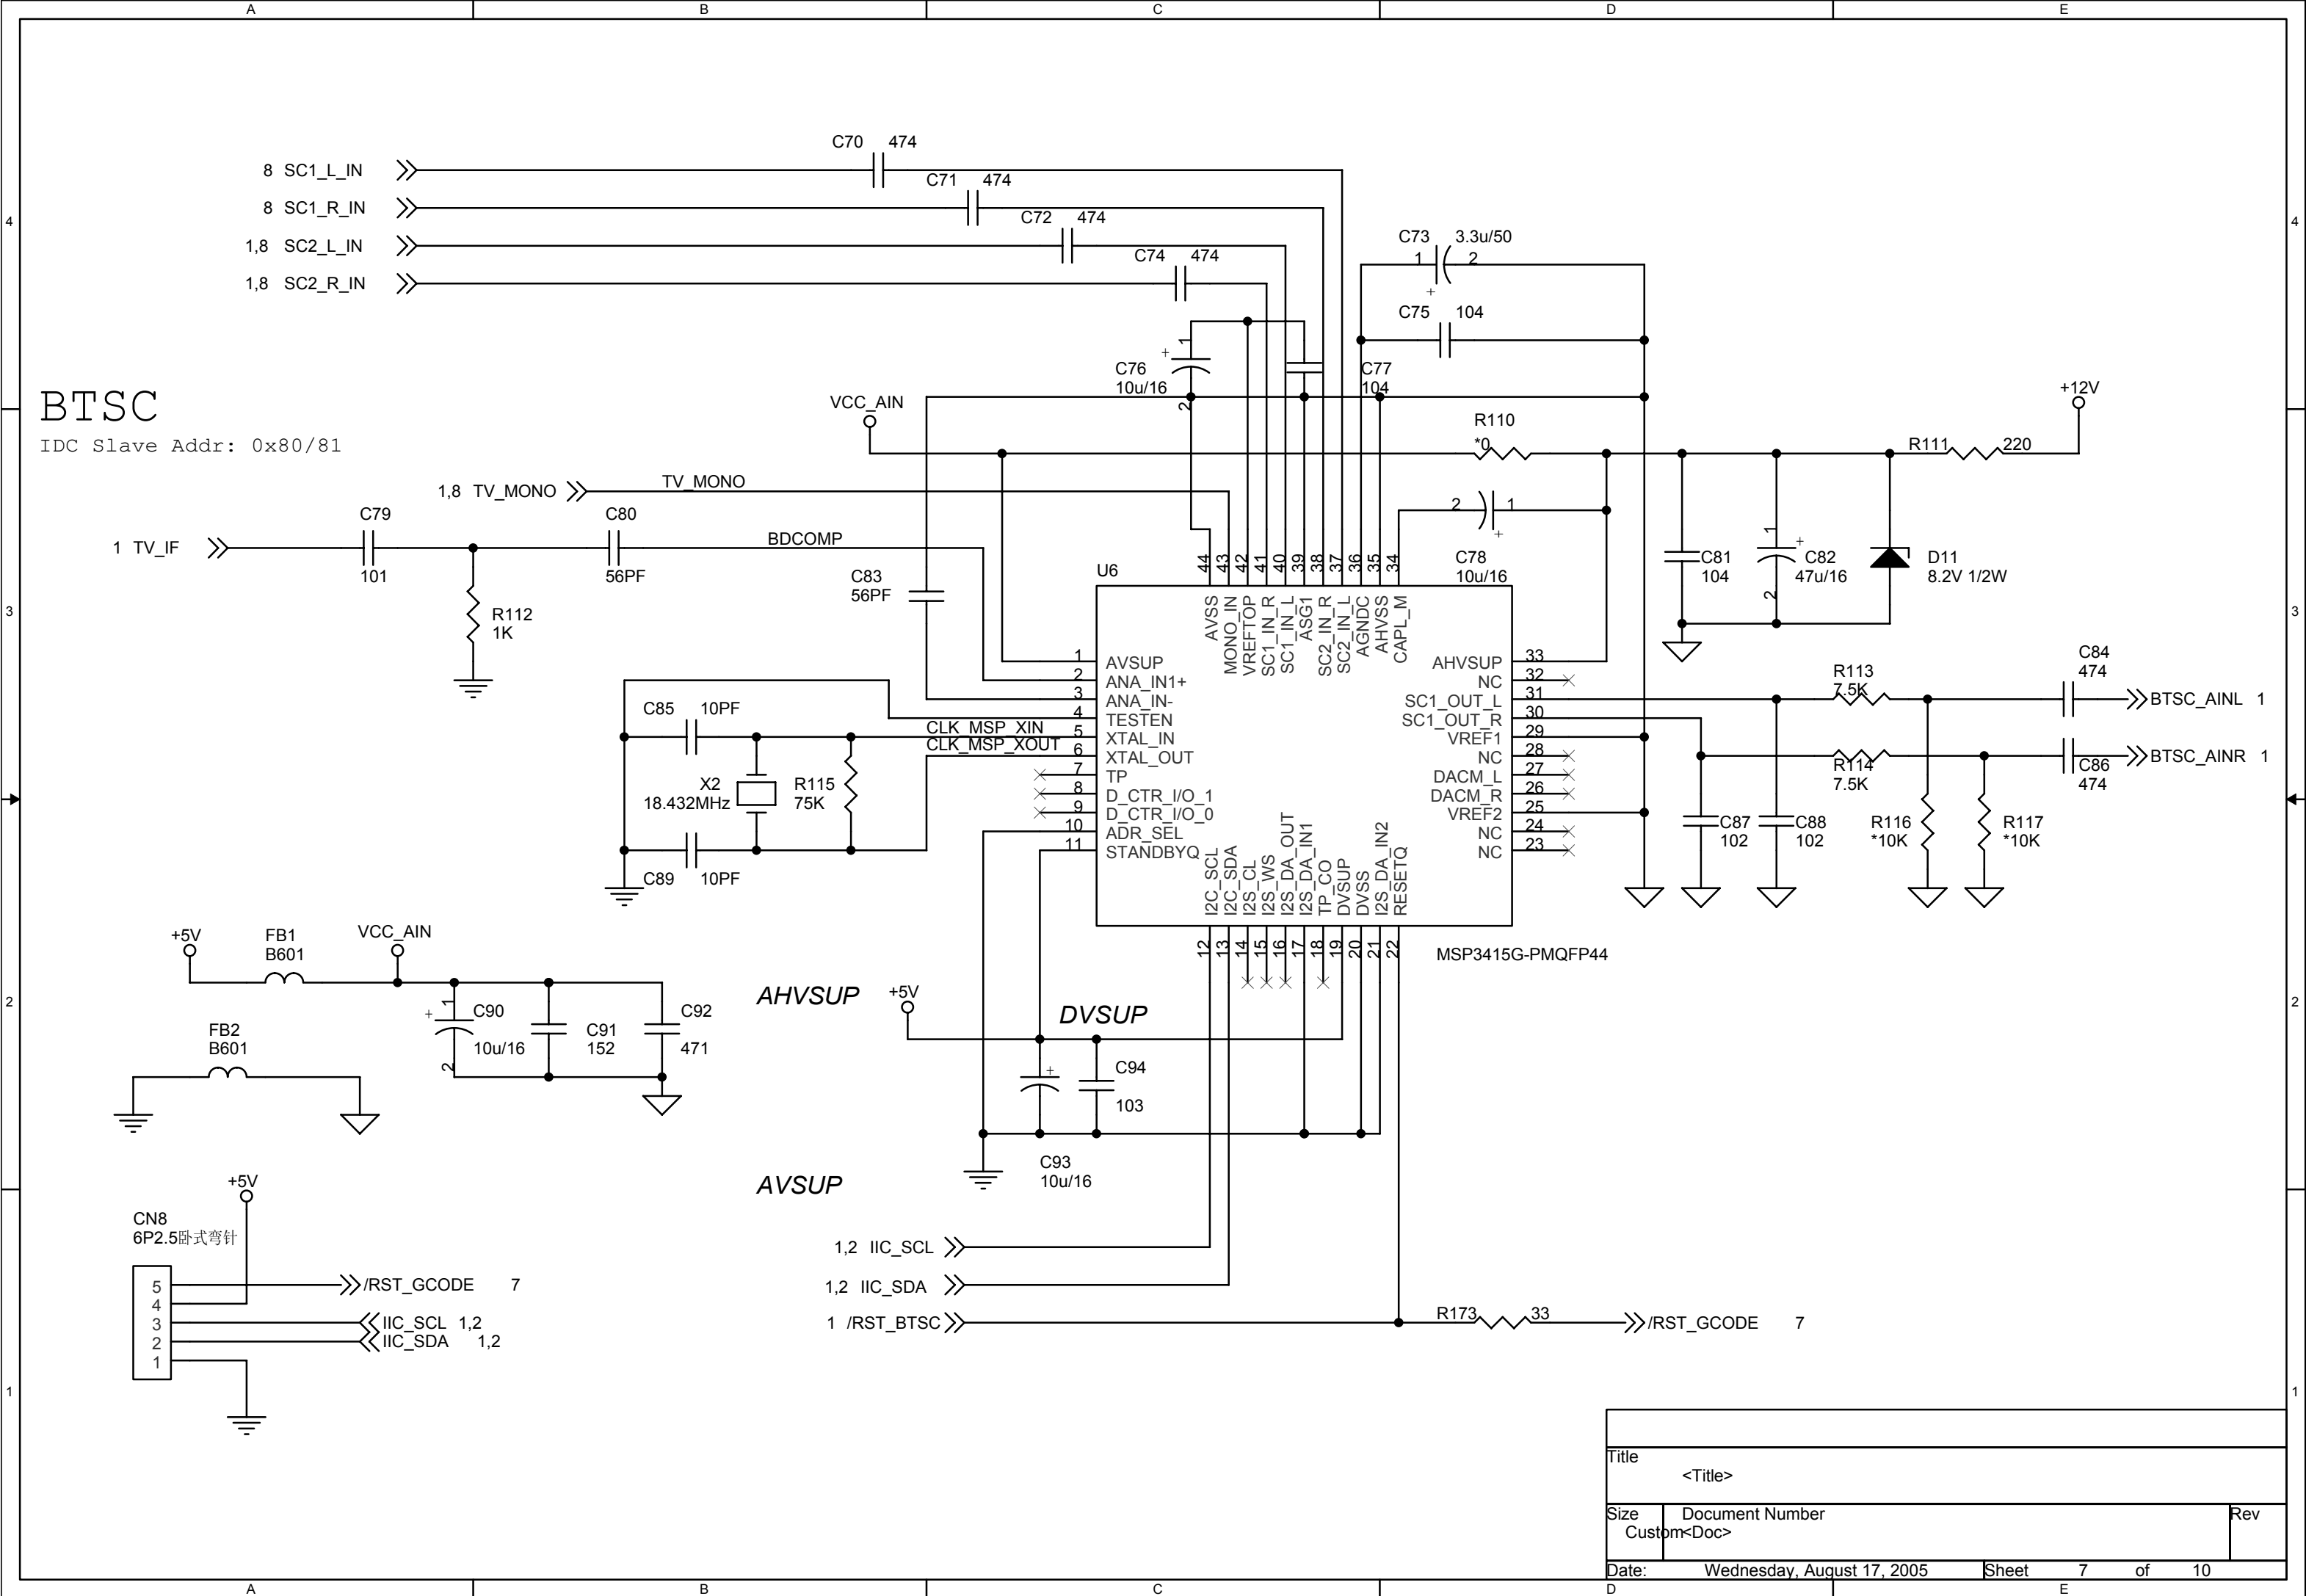

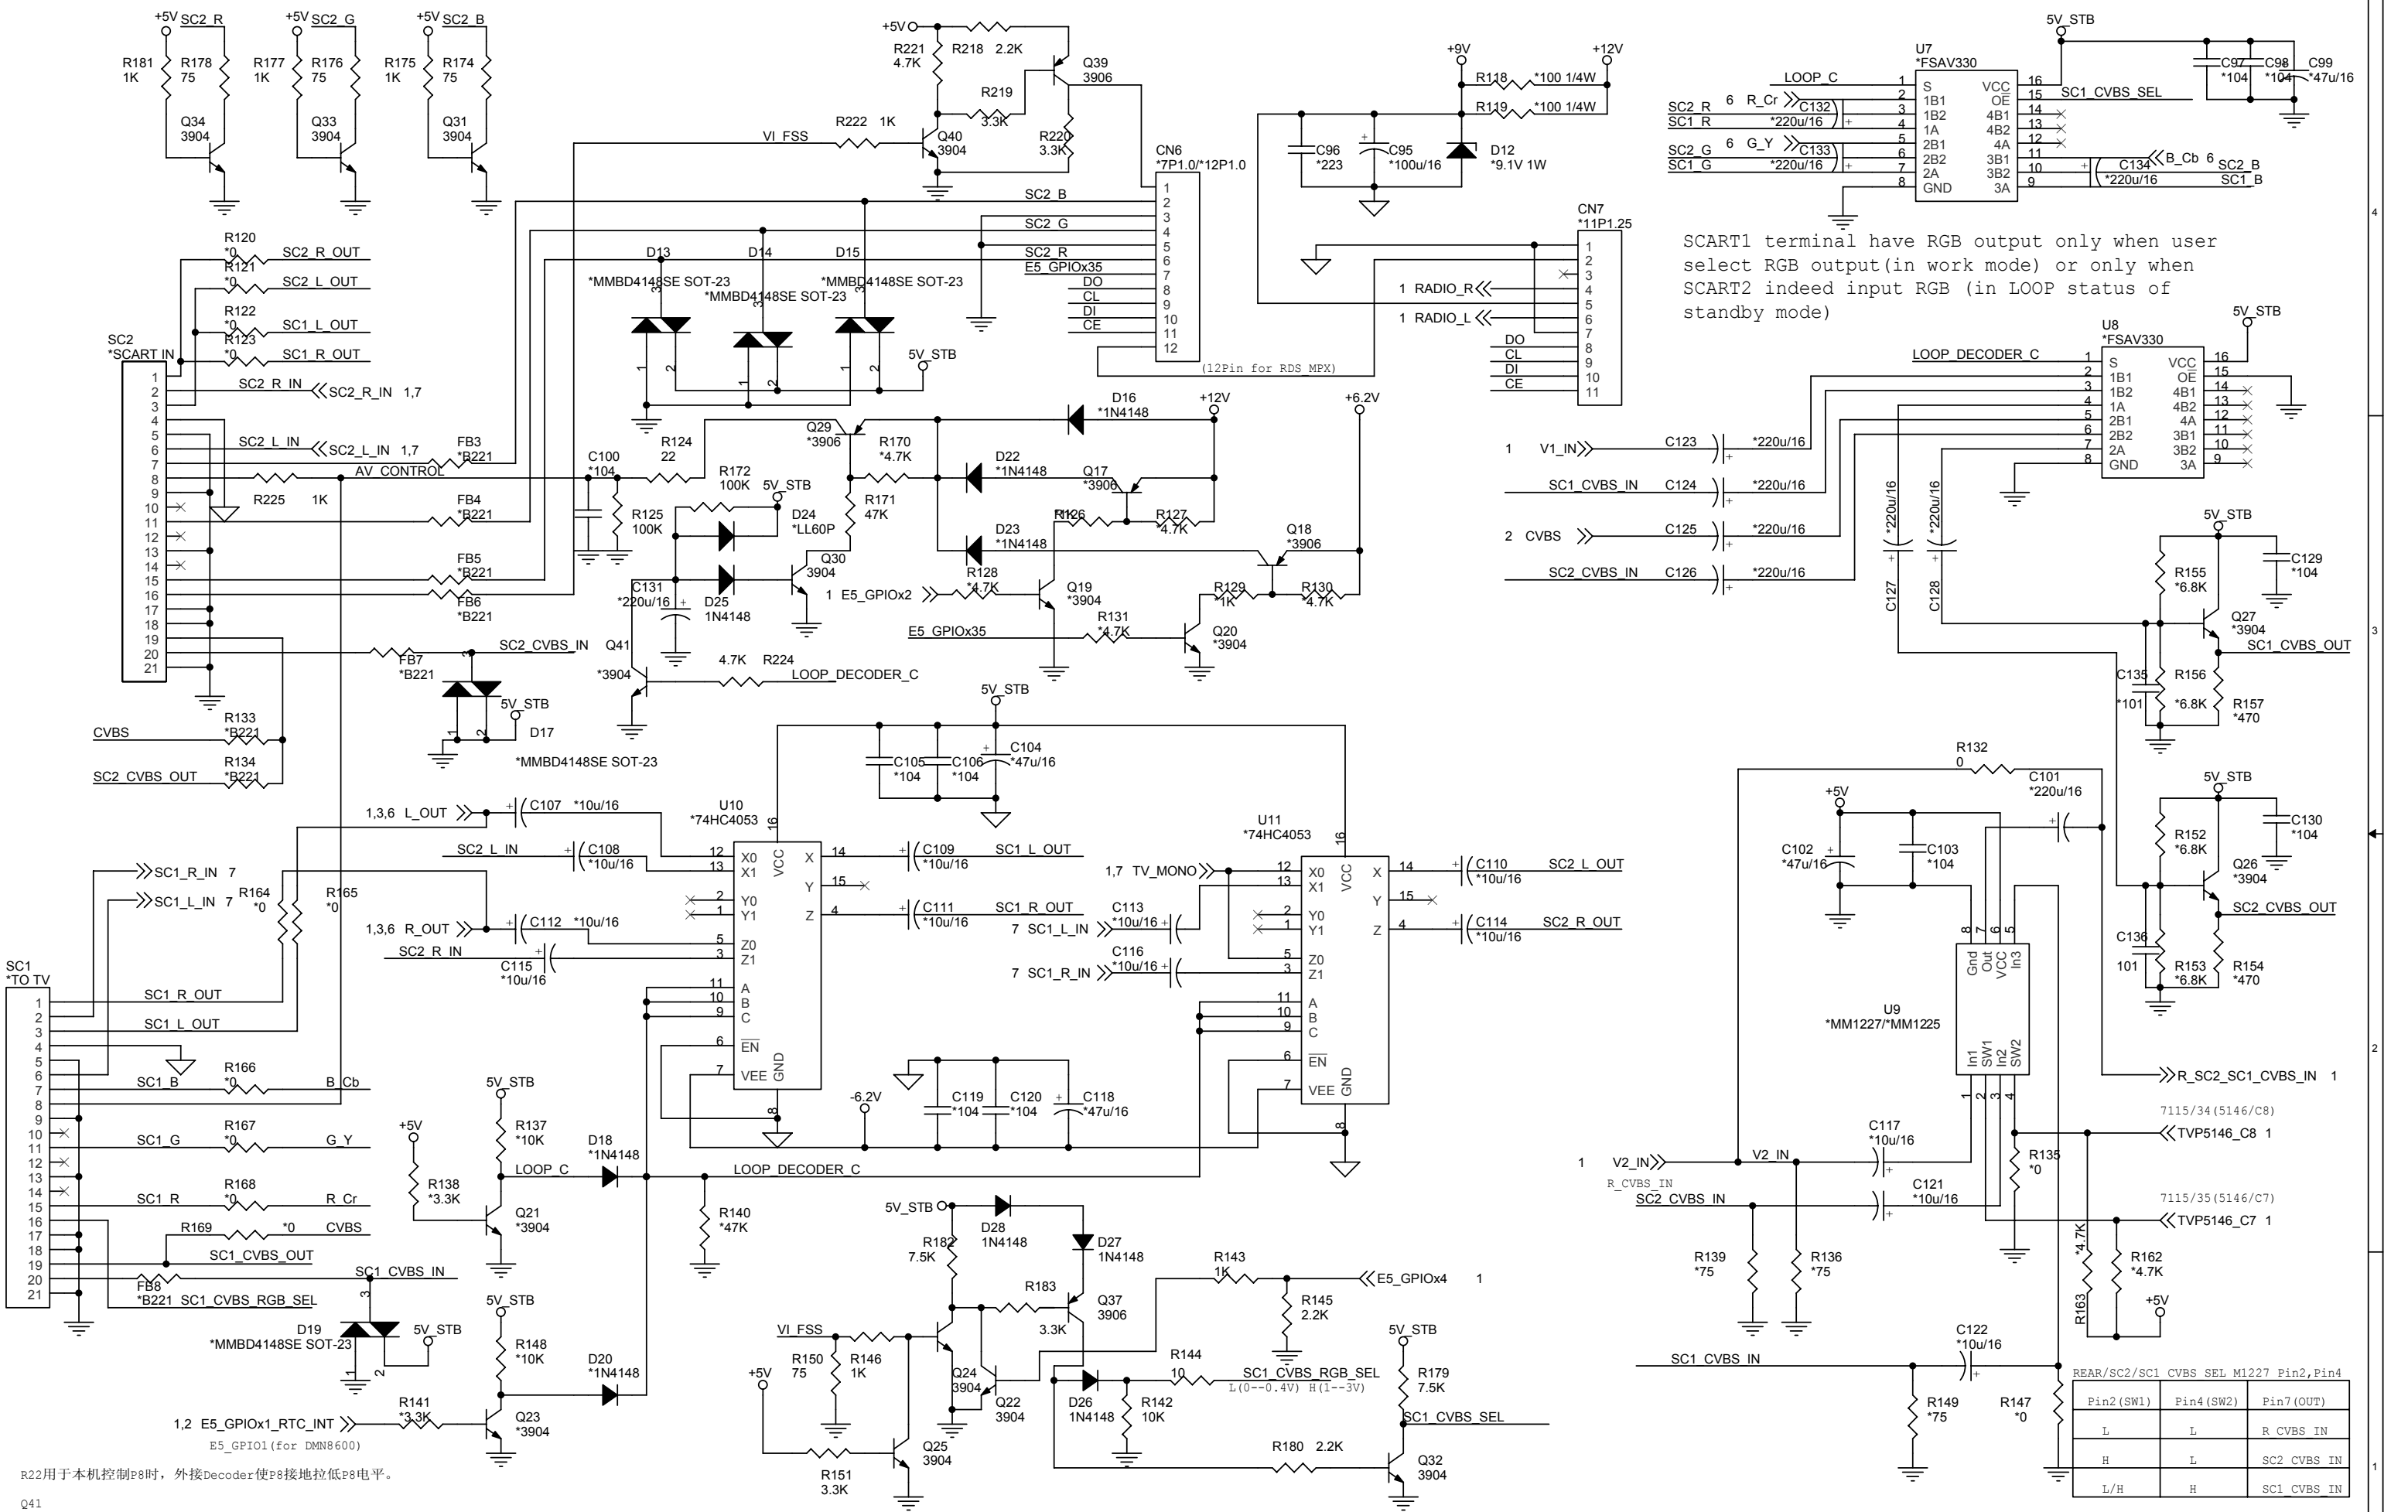

R22用于本机控制P8时，外接Decoder使P8接地拉低P8电平。
Q41
用于Decoder控制P8使，切断本机对P8的影响。

Function select(AV CONTROL) Pin8		Fast Blanking Pin16	
High(9.5-12V)	AV mode	High(1-3V)	RGB
Mid(5-8V)	Wide-screen	Low(0-0.4V)	Composite
Low(0-2V)	TV mode		

SCART LOOP AND DECODER Function							
STATE	NET	LOOP DECODER OFF C	E5_GPIOx1_RTC_INT	SC1 AUDIO OUT	SC2 AUDIO OUT	SC1 CVBS OUT	SC2 CVBS OUT
STANDBY/DECODER OFF	H		POWER OFF	SC2 AUDIO IN	SC1 AUDIO IN	SC2 CVBS IN	SC2 RGB
POWER ON/DECODER ON	L		H	RW AUDIO OUT	TV MONO	RW CVBS OUT	RW RGB OUT
POWER ON/DECODER OFF	H		L	SC2 AUDIO IN	SC1 AUDIO IN	SC2 CVBS IN	RW RGB OUT

SCART1 terminal have RGB output only when user select RGB output(in work mode) or only when SCART2 indeed input RGB (in LOOP status of standby mode)

Pin2(SW1)	Pin4(SW2)	Pin7(OUT)
L	L	R CVBS IN
H	L	SC2 CVBS IN
L/H	H	SC1 CVBS IN

Title			
<Title>			
Size	Document Number	<RevCode>	
Custom	Docu		
Date:	Wednesday, August 17, 2005	Sheet	8 of 10