

S/M NO. : TSL601TEF0

Service Manual LCD TV

CHASSIS : SL-601T

Model : DLT-32G1

DLT-37G1

DLT-42G1



Caution

: In this Manual, some parts can be changed for improving. their performance without notice in the parts list. So, if you need the latest parts information, please refer to PPL(Parts Price List)in Service Information Center.

DAEWOO
ELECTRONICS



NOV. 2007

Contents

1.Safety Precaution	3
2.Product Specification	4
2-1.Product Specification	4
2-2.Available Input Signal	5
2-2-1.HDMI/PC/COMPONENT	5
2-2-2.VIDEO	5
3.Block Diagram	6
4.Description of Each Block	7
4-1.Overview	7
4-1-1.SCART1 RGB	8
4-1-2.SCART2_CVBS	9
4-1-3.AV3 - S-VIDEO	9
4-1-4.COMPONENT-Y Pb Pr	10
4-1-5.HDMI	11
4-1-6.PC	11
4-1-7.Sound I2S	13
4-1-8.Sound Output	14
4-2.POWER PCB	14
4-2-1.Input Requirements	14
4-2-2.Output Voltage and Current	15
4-2-3.Ripple and Noise	17
4-2-4.Connectors	15
5.SERVICE MODE	19
6.Main PCB Trouble Diagnosis	20
6-1.Main PCB Trouble Diagnosis	20
6-1-1.Common checking process when “No signal of Noraster”	20
6-1-2.When No Sound	27
6-1-3.When Control Key does not operate	29
6-1-4.When Remote Controller does not operate	30
6-2.POWER PCB	32
7.Trouble Diagnosis	33
7-1.Facts you must know when Diagnosing or Repairing	33
7-2.Typical Symptoms of PCB problem or bad connection	34
8.Structure of LCD Set	35
9.Exploded View	37
10.Service Part List	40
11.Circuit Diagram	67

1. Safety Precautions

- (1) When moving or laying down a LCD Set, please deal with care. Avoid any impact towards the LCD Set.
- (2) Do not leave a broken LCD Set on for a long time. To prevent any further damages, after check the broken Set's condition, make sure to turn the power(AC) off.
- (3) When opening the BACK COVER, you must turn off power(AC) to prevent any electric shock.
- (4) When loosening screws, check the connecting position and type of the screw. Sort out the screws and store them separately because screws holding PCBs are working as electric circuit grounding. Make sure to check if any screw is missing when assembling.
- (5) A LCD Sets contains different kinds of connector cables. When connecting or disconnecting connector cables, check the direction and position of the cable beforehand.
- (6) When disconnecting connectors unplug the connectors slowly with care.
- (7) Connecotrs are designed so that if the number of pins or the direction does not match, connectors will not fit. When having problem in plugging the connectors, make sure to check their kind, position and direction.

2. Product Specification

2-1.PRODUCT SPECIFICATION

Features		DLT-32G1LPBD	DLT-37G1LPBD	DLT-42G1LPBD
LCD Panel	Screen Size	32"	37"	42"
	Aspect Ratio	16 : 9	16 : 9	16 : 9
	Resolution	1366×768(WXGA)	1366×768(WXGA)	1366×768(WXGA)
	Pixel Pitch	170.25um × 510.75um × RGB	0.200mm × 0.600mm × RGB	0.227mm × 0.681mm × RGB
	Contrast Ratio	5000 : 1	5000 : 1	5000 : 1
TV System	Receiving System	PAL, SECAM, NTSC(AV)	PAL, SECAM, NTSC(AV)	PAL, SECAM, NTSC(AV)
	Stereo System	FM MONO / 2-Carrier, NICAM	FM MONO / 2-Carrier, NICAM	FM MONO / 2-Carrier, NICAM
	Channel Memory	ANALOG : 0~99CH	ANALOG : 0~99CH	ANALOG : 0~99CH
Input Connector	RF	75 Ohm Coaxial	75 Ohm Coaxial	75 Ohm Coaxial
	S_Video	1	1	1
	SCART	2	2	2
	Component	RCA × 1	RCA × 1	RCA × 1
	PC RGB	D-Sub × 1	D-Sub × 1	D-Sub × 1
	PC Audio	3.5mm Mini-Jack	3.5mm Mini-Jack	3.5mm Mini-Jack
	HDMI	2	2	2
Output Connector	Headphone	3.5mm Mini-Jack	3.5mm Mini-Jack	3.5mm Mini-Jack
Sound Output		10W	10W	10W
Power Consumption	Max	115W	150W	200W
	Power Source	220VAC~240VAC, 50~60Hz	220VAC~240VAC, 50~60Hz	110VAC~240VAC, 50~60Hz
Dimension(W × H × D)		806 × 590 × 260	940 × 682 × 260	1044 × 757 × 345

Product Specification

2-2.Available Input Signal

2-2-1.HDMI/PC/COMPONENT

Resolution	V-freq	HDMI	PC(D-Sub)	Component	Standard
640 x 480	60Hz	O	O	X	
	72Hz	O	O	X	
	75Hz	O	O	X	VESA Standard
800 x 600	60Hz	O	O	X	VESA Standard
	72Hz	O	O	X	VESA Standard
	75Hz	O	O	X	
1024 x 768	60Hz	O	O	X	VESA Standard
	70Hz	O	O	X	VESA Standard
	75Hz	O	O	X	VESA Standard
1360 x 768	60Hz	O	O	X	
	75Hz	O	O	X	
720 x 480	60Hz	O	X	O	
720 x 576	50Hz	O	X	O	
1280 x 720	50Hz	O	O	O	
	60Hz	O	O	O	
1920 x 1080i	50Hz	O	X	O	
	60Hz	O	X	O	
720 x 480i	60Hz	X	X	O	
720 x 576i	50Hz	X	X	O	


2-2-2.VIDEO

- PAL, PAL-M, PAL-N
- NTSC, NTSC4.43
- SECAM

4. Description of Each Block

4-1. Overview


Digital PCB is Multi Media circuit board that can process various input signals such as Video, Component, PC, HDMI and analog TV signal.

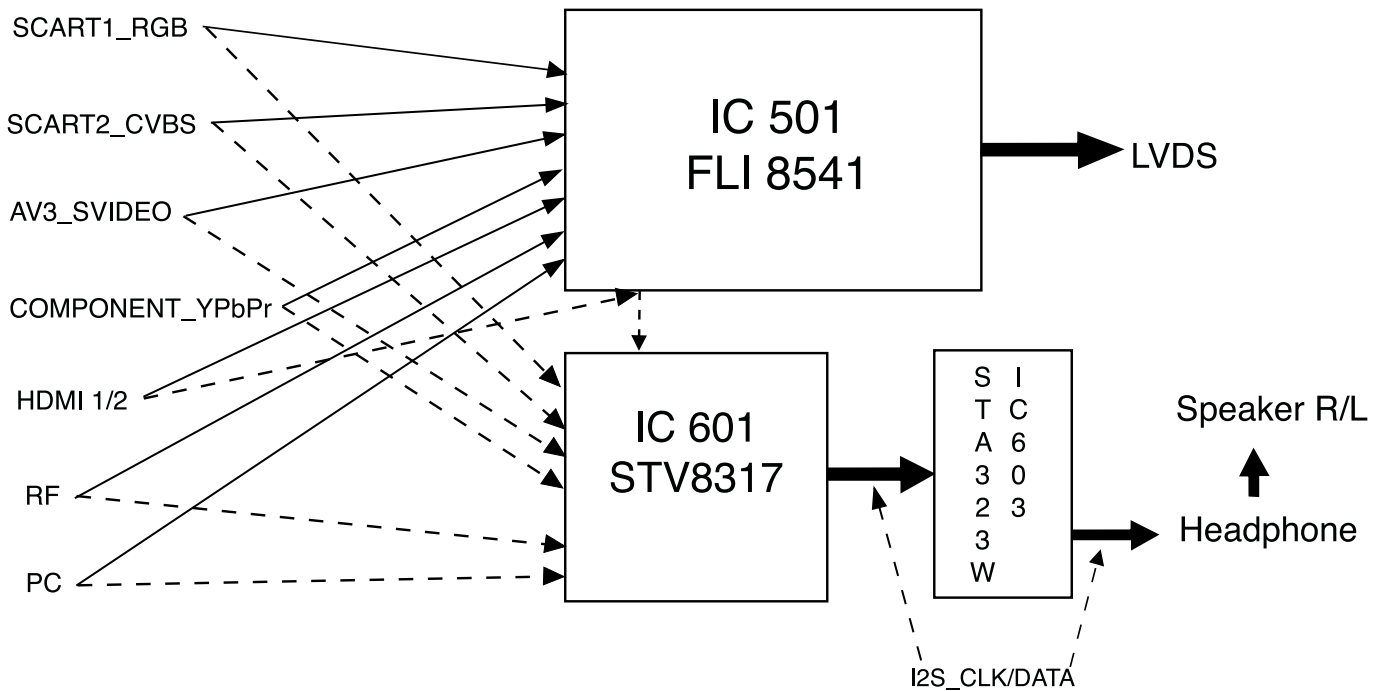


Description of Each Block

4-1-1. SCART1_RGB


R signal(input to IC501), LOC : LCA12

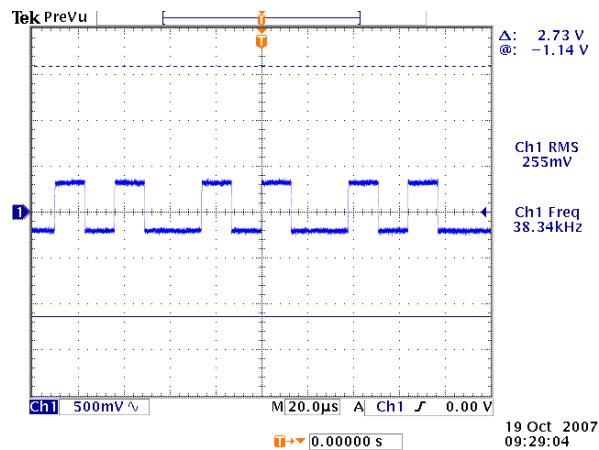

G signal(input to IC501), LOC : LCA11

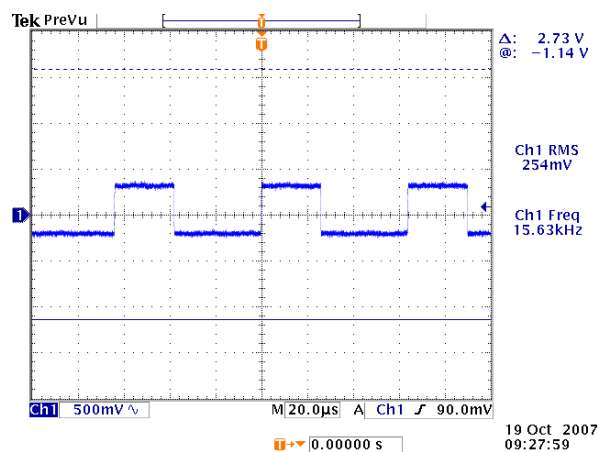


B signal(input to IC501), LOC : LCA10

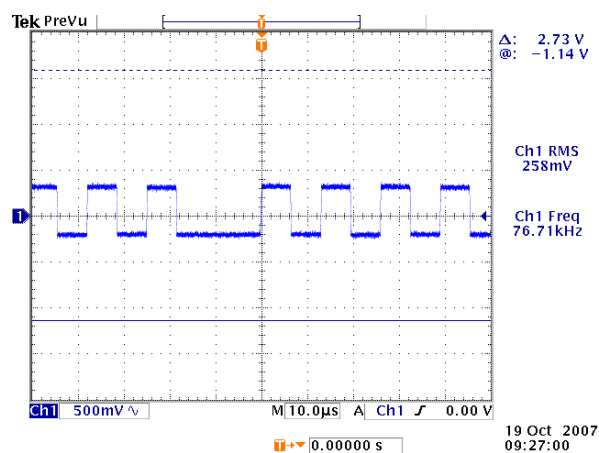

Description of Each Block


4-1-2. SCART2_CVBS

CVBS signal(input to IC501), LOC : CA02

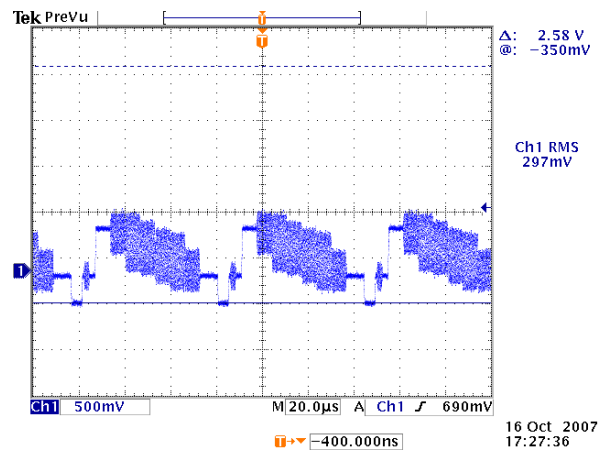


4-1-3. AV3_S-VIDEO

Y signal(input to IC501), LOC : #14 of IC506

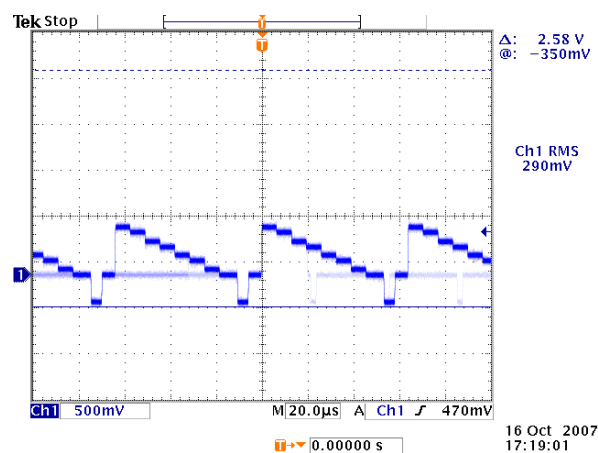


Color signal(input to IC501), LOC : RC515

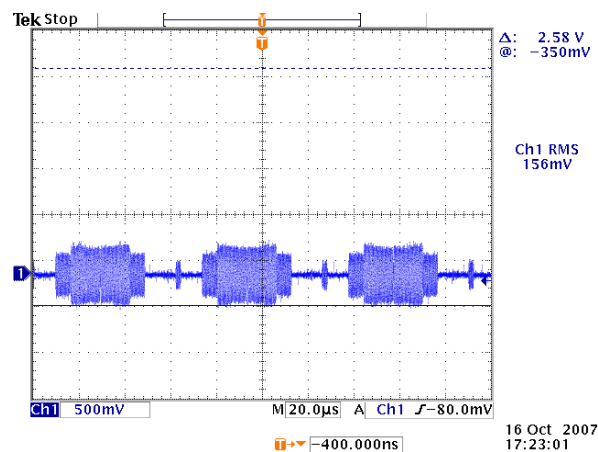


Description of Each Block

4-1-4. COMPONENT_YPbPr


Y signal(input to IC501), LOC : LCA08

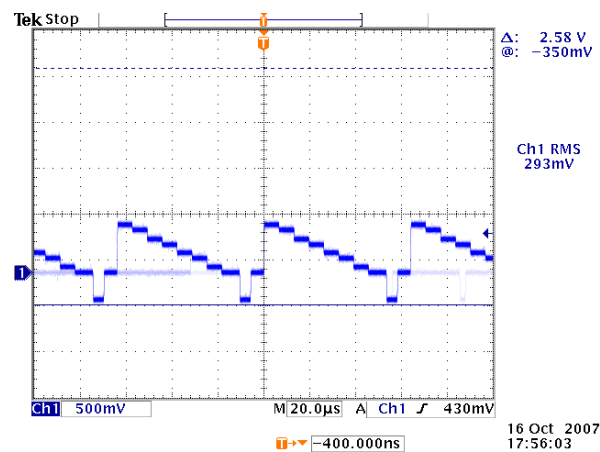

Pb signal(input to IC501), LOC : LCA06

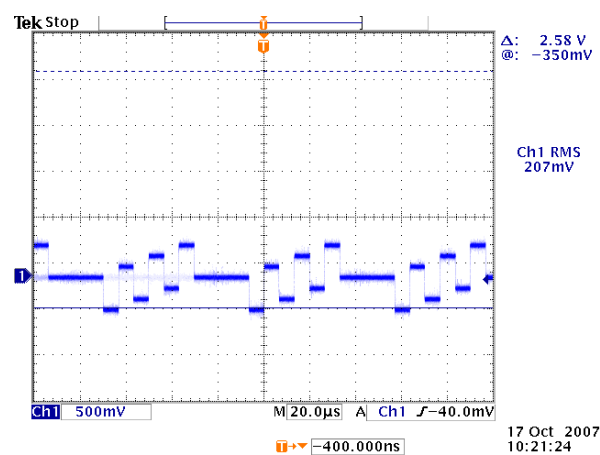


Pr signal(input to IC501), LOC : LCA04

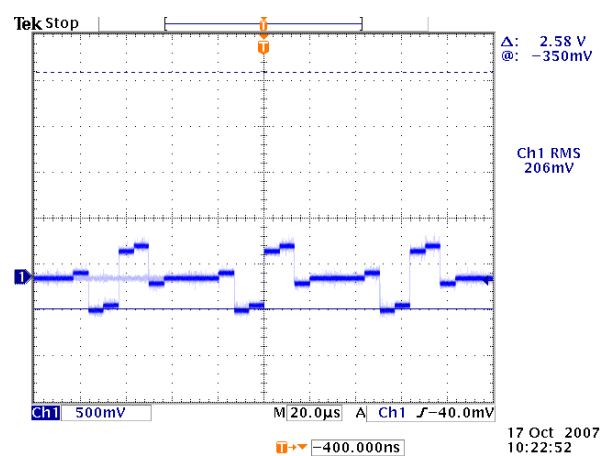

Description of Each Block


4-1-5. HDMI

HDMI signal(input to IC 501), LOC : RCA31 ~ RCA38, RCA12 ~ RCA19

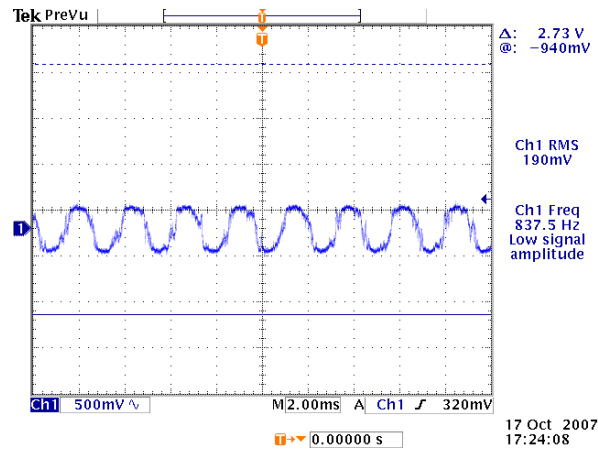


4-1-6. PC

R signal(input to IC501), LOC : LC209

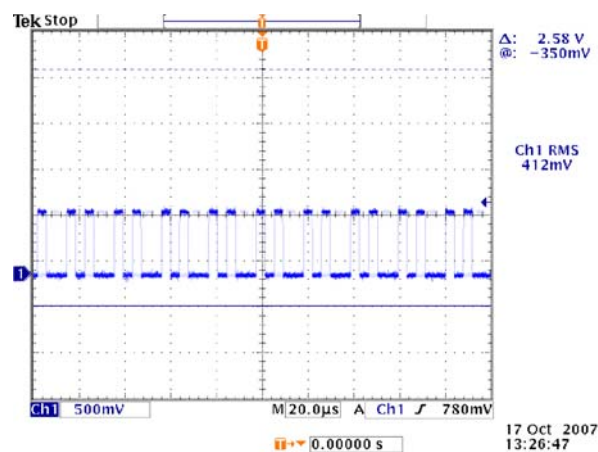


G signal(input to IC501), LOC : LC207

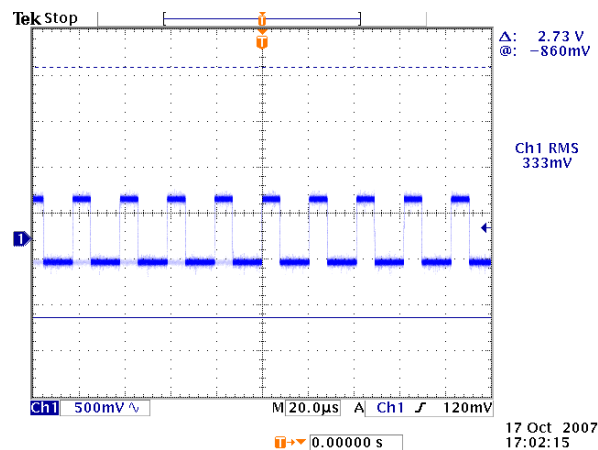


Description of Each Block


B signal(input to IC501), LOC : LC205

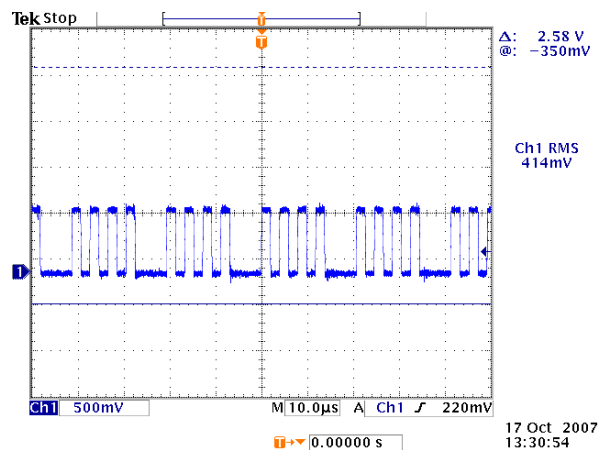

Horizontal sync(input to IC501), LOC : LC204

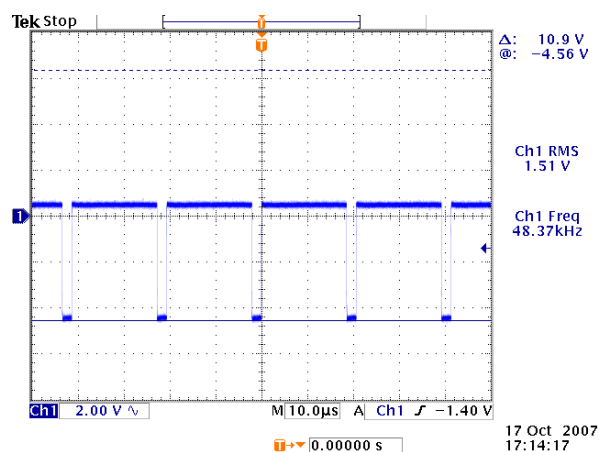


Vertical sync9input to IC501), LOC : LC203

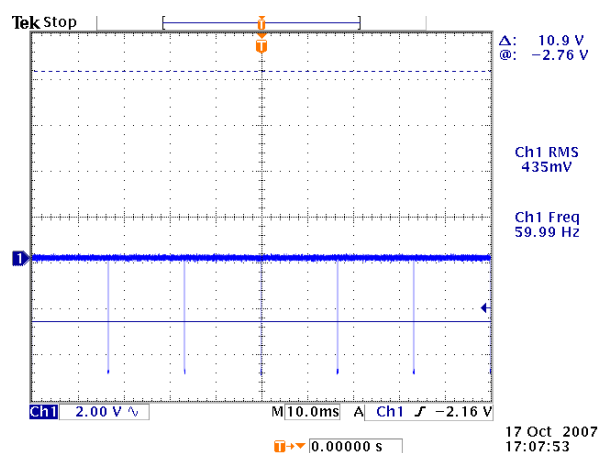


Description of Each Block

4-1-7. Sound I2S


I2S data(output of IC601), LOC : #30 of IC603

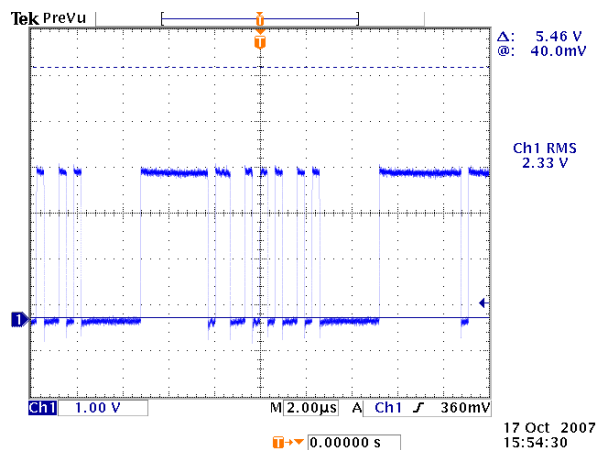

I2S L/R clock(output of IC601), LOC : #31 of IC603

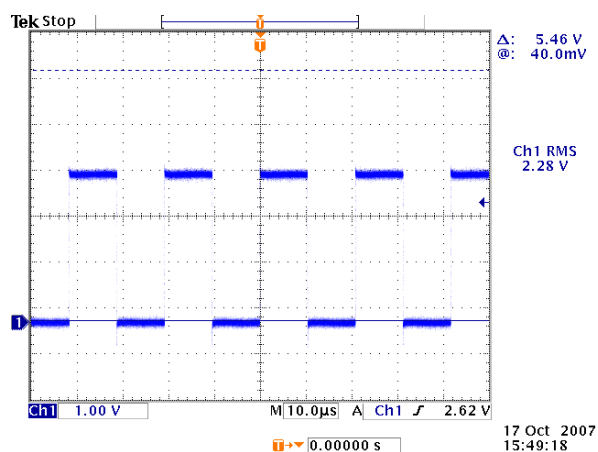


I2S B clock(output of IC601), LOC : #32 of IC603

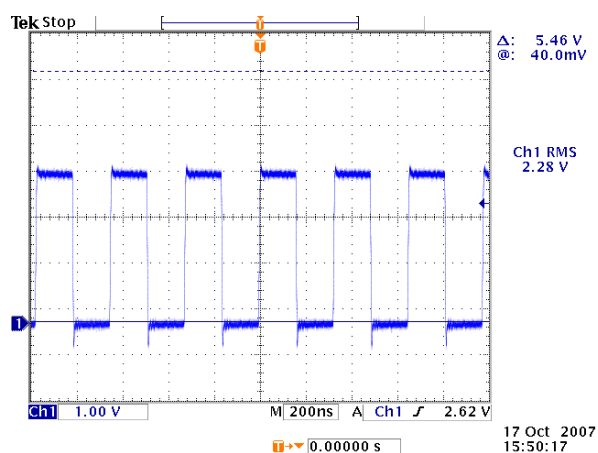

Description of Each Block

4-1-8. Sound Output Speaker Output

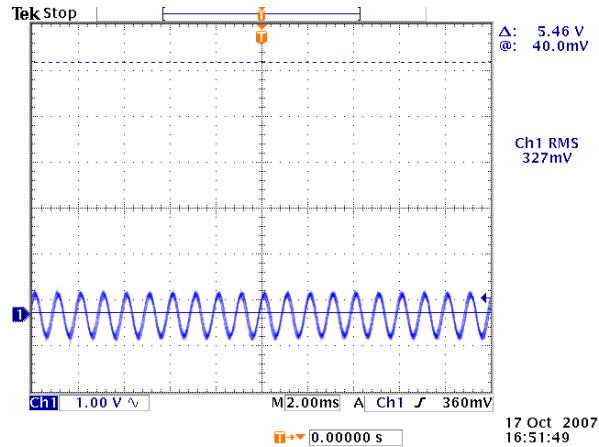

4-2. Power PCB

4-2-1. Input Requirements 32" & 37"

Input Voltage Range	AC 180V ~ 264V
Normal Voltage	AC 200V ~ 240V
Normal Frequency	50/60Hz
Input Current	<1.2 Arms at 230 Vac input
Inrush Current	230V 80A peak
Earth Leakage Current	0.5mA MAX(250AC)

42"

Input Voltage Range	AC 90V ~ 264V
Normal Voltage	AC 110V ~ 240V
Normal Frequency	50/60Hz
Input Current	<1.8 Arms at 230 Vac input
Inrush Current	230V 80A peak
Earth Leakage Current	0.5mA MAX(250AC)

Description of Each Block

4-2-2. Output Voltage and Current

32" & 37"

Board	Output Voltage	Minimum Output Voltage	Maximum Output Voltage	Output Current			Condition
				MIN	NOR	MAX	
DEF	+29Vdc	+27.0Vdc	+32.0Vdc	0.1A	0.5A	0.7A	PWR-CTL ON
	+24Vdc	+22.3Vdc	+25.4Vdc	0.3A	5.6A	6.5A	
	+12Vdc	+11.00Vdc	+12.0Vdc	0.3A	1.2A	2.0A	
	+5Vdc	+4.75Vdc	+5.25Vdc	0.1A	1.5A	2.0A	
	ST+5Vdc	+4.75Vdc	+5.25Vdc	0.1A	0.2A	0.3A	PWR-CTL OFF

42"

Board	Output Voltage	Minimum Output Voltage	Maximum Output Voltage	Output Current			Condition
				MIN	NOR	MAX	
DEF	+30Vdc	+27.0Vdc	+33.0Vdc	0.1A	0.5A	1.0A	PWR-CTL ON
	+24Vdc	+22.3Vdc	+25.4Vdc	0.3A	8.0A	9.0A	
	+12Vdc	+11.00Vdc	+12.0Vdc	0.3A	1.2A	2.0A	
	ST+5Vdc	+4.75Vdc	+5.25Vdc	0.1A	0.2A	0.3A	PWR-CTL OFF

Description of Each Block

4-2-3. Ripple and Noise

32" & 37"

Output Name	Output Voltage		AC ripple, Switching ripple and noise	Condition
	Minimum Output Voltage	Maximum Output Voltage	Continuous	
+29V	+27.0Vdc	+32.0Vdc	500mVp-p	PWR-CTL ON MAX LOAD
+24V	+22.3Vdc	+25.4Vdc		
+V12	+11.0Vdc	+12.0Vdc		
+5V	+4.75Vdc	+5.25Vdc		
ST-5V	+4.75Vdc	+5.25Vdc		PWR-CTL OFF
	Other Lines		Don't Care	

42"

Output Name	Output Voltage		AC ripple, Switching ripple and noise	Condition
	Minimum Output Voltage	Maximum Output Voltage	Continuous	
+30V	+27.0Vdc	+33.0Vdc	500mVp-p	PWR-CTL ON MAX LOAD
+24V	+22.3Vdc	+25.4Vdc		
+V12	+11.0Vdc	+12.0Vdc		
ST-5V	+4.75Vdc	+5.25Vdc		PWR-CTL OFF
	Other Lines		Don't Care	

Description of Each Block

4-2-4 Connectors

A. Panel to Power(CN7,CN8) pin spec

CN7(LPL PANNEL)

PIN No.	Output
1	+24V
2	+24V
3	+24V
4	+24V
5	+24V
6	GND
7	GND
8	GND
9	GND
10	GND
11	DIMMING
12	INV ON/OFF
13	N/C
14	GND

CN8(SAMSUNG PANNEL)

PIN No.	Output
1	+24V
2	+24V
3	+24V
4	+24V
5	+24V
6	GND
7	GND
8	GND
9	GND
10	GND
11	N/C
12	INV ON/OFF
13	DIMMING
14	N/C

B. Power to Main(CN2, CN3, CN4) pin spec

CN2

PIN No.	Output
1	+29V
2	+29V
3	GND
4	GND

CN3

PIN No.	Output
1	DIMMING
2	INV ON/OFF
3	N/C
4	GND
5	GND
6	+5V
7	+5V
8	+12V

Description of Each Block

C.CN4

PIN No.	Output
1	+12V
2	+12V
3	GND
4	GND
5	+5V
6	PWR ON/OFF
7	GND
8	GND
9	+5V

5. SERVICE MODE

Using the Service Remote controller(R-34SVC), you can enter service mode directly.

Key	Menu	Sub Menu	Default Vallue	Description
S1	Heat Run Mode		Full White	To enter into Heat Run Mode
S2	Gumi Ch Map Write			To set Gumi factory channels directly
S3	Volume Test		Volume Min	To set sound(display in sequence) Perss S3 key again and again, change like this: 'Volume Min' - 'Volume Middle' - 'Volume Max' - 'Balance L' - Balance R'
S4	HDMI EDID WRITE		EDID Write...Wait!	To wite HDMI EDID data directly from main chip When it is finished, display like this: FINISH HDMI1 EDID Success, HDMI2 EDID Success
S5				
S6				
S7	DEMPOL Ch Map Write			To set DEMPOL channels dirctly
S8	White Balance	CUT OFF_R	0	To display offset and drive value at mode above
		CUT OFF_G	0	
		CUT OFF_B	0	
		DRIVE_R	0	
		DRIVE_G	0	
		DRIVE_B	0	
S9				
S10	Select Type	MODEL	SL-601T	Using ◀/▶ buttons, select between 'SL-601T' and 'SL-601P'
		PANEL	LG-32	Using ◀/▶ buttons 'LG_32' -' SAMSUNG_32' -' LG_37' - 'SAMSUNG_37' -' LG_42' -' SMASUNG_42'
S11		Bus Stop	No	Using ◀/▶ button, select 'No' or 'Yes'
		EEPROM Reset	>>>	If you want to EEPROM Reset, press OK but ton.
		Date and Version		Display the version of soft
S12	Shipping Mode			To initialize TV and make TV standby mode


6. Main PCB Trouble Diagnosis

6-1.Main PCB Trouble Diagnosis

6-1-1.Common checking process when “No signal of No raster”

No signal : OSD is work but no images are displaying

No raster : OSD as well as images in not working

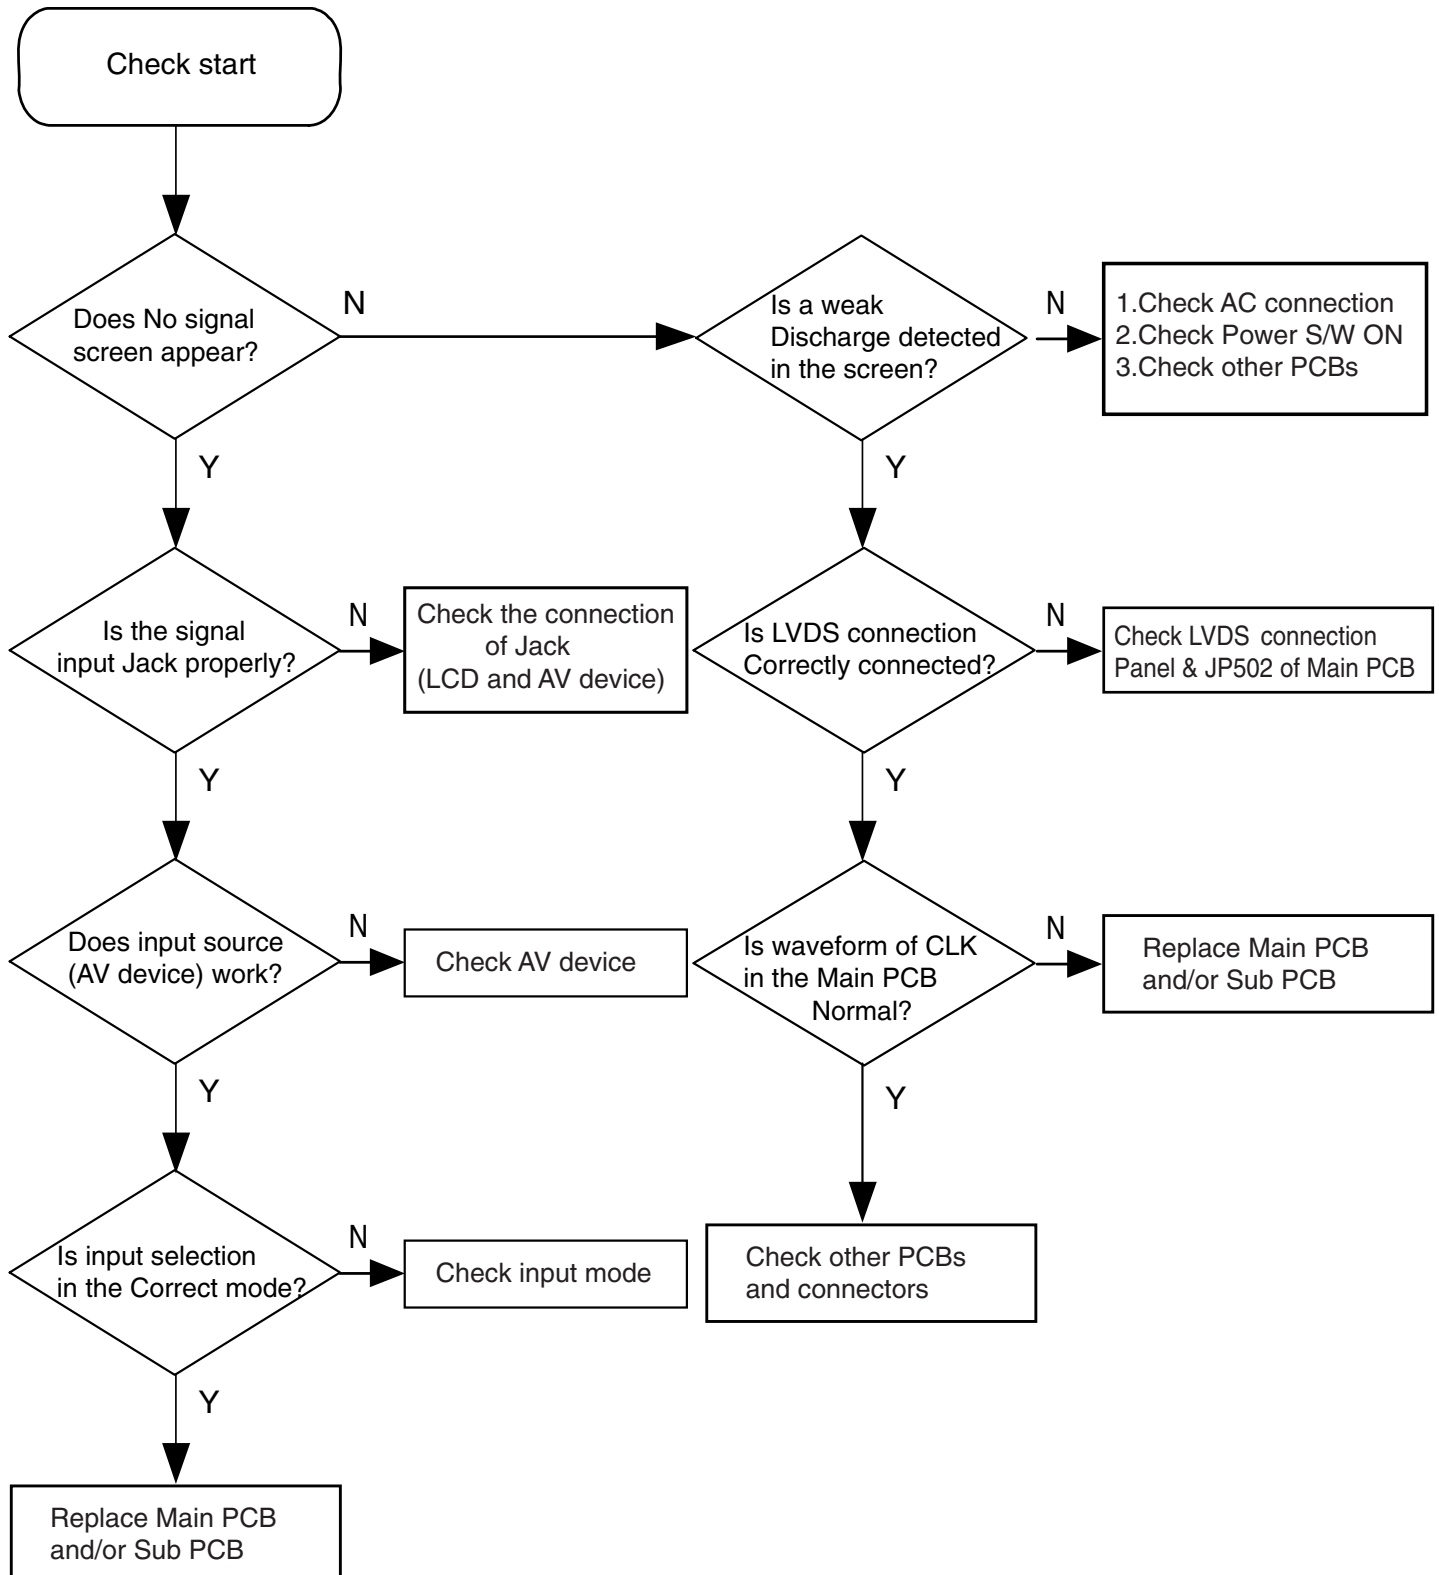

Main PCBs Trouble Diagnosis


A. When "No signal" in CVBS(RF, AV)

1) First check if other inputs are working


=> if other inputs are not working, replace MAIN PCB

2) Checking waveforms with Color Bar Pattern(Using the oscilloscope)

- Main TP(RF) : R524

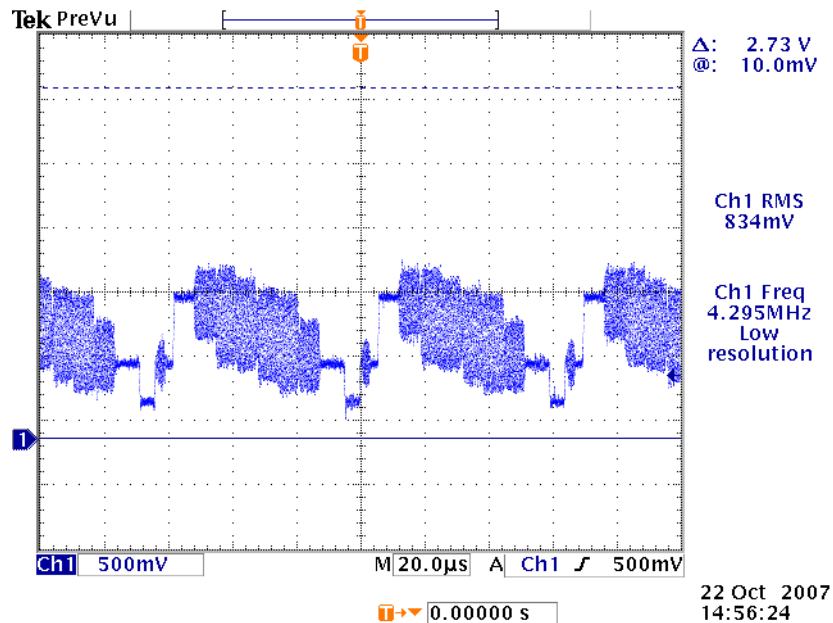

- Main TP(AV2) : CA02

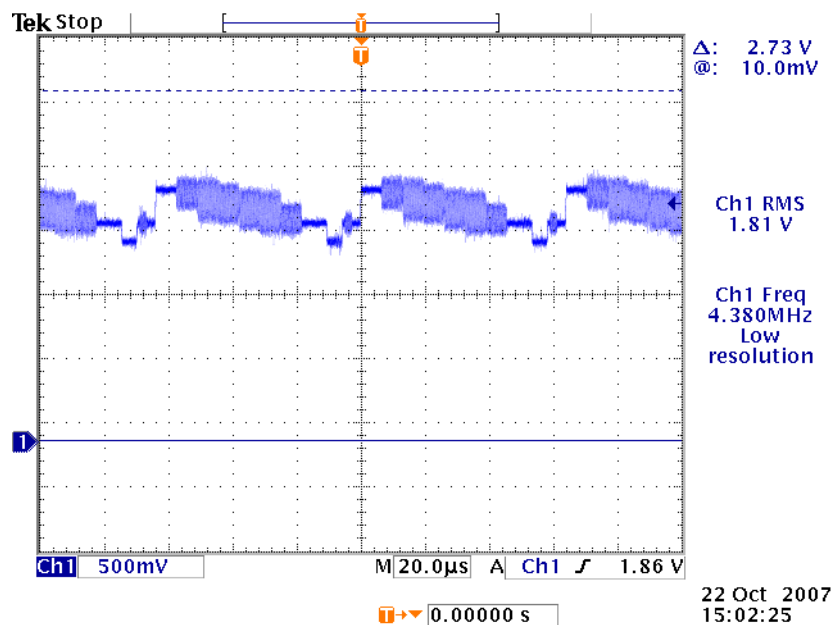

Main PCBs Trouble Diagnosis


B. When “No signal” in Y/C signal(S-Video)

1) First check if other inputs are working


=> if other inputs are not working, replace MAIN PCB

2) Checking waveforms with Color Bar Pattern(Using the oscilloscope)

- Main TP(Y signal) : RCA31

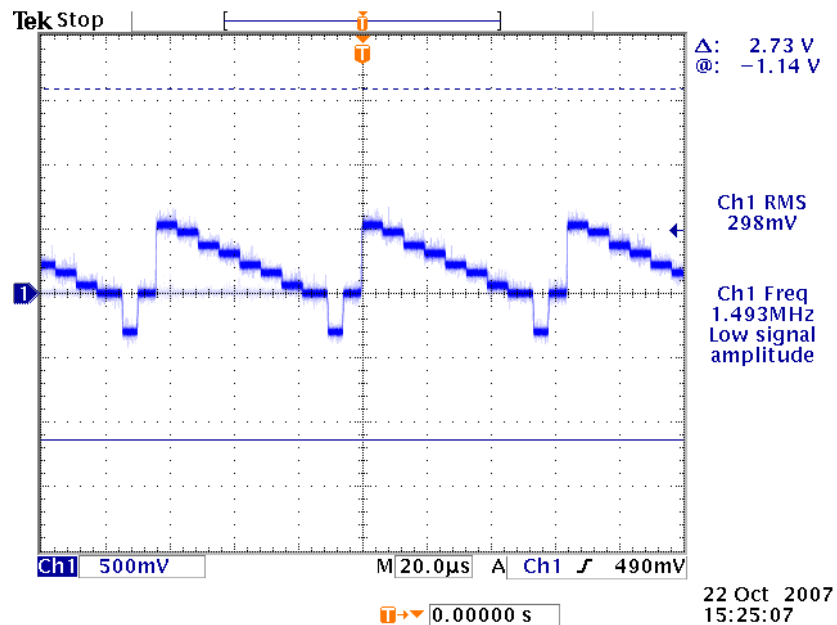

- Main TP(C signal) : RC515

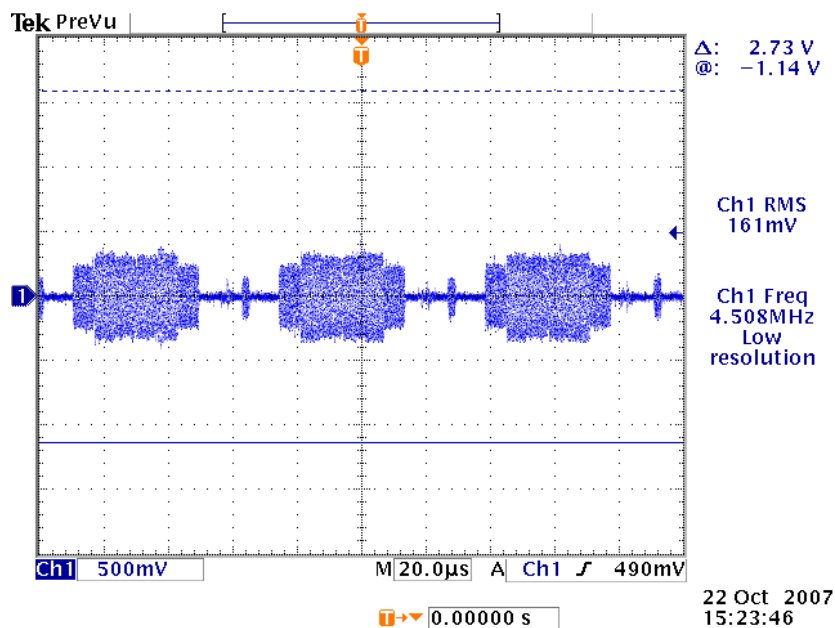

Main PCBs Trouble Diagnosis


C. When "No signal" in Y/Pb/Pr signal(Component)

1) First check if other inputs are working


=> if other inputs are not working, replace MAIN PCB

2) Checking waveforms with Color Bar Pattern(Using the oscilloscope)

- Main TP(COMP1- Y) : LCA07

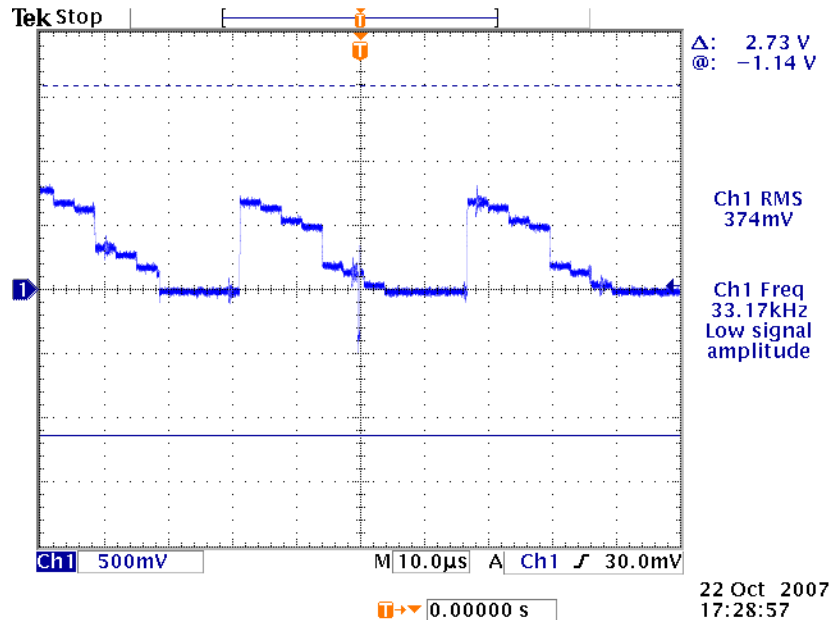


- Main TP(COMP1-Pb) : LCA05

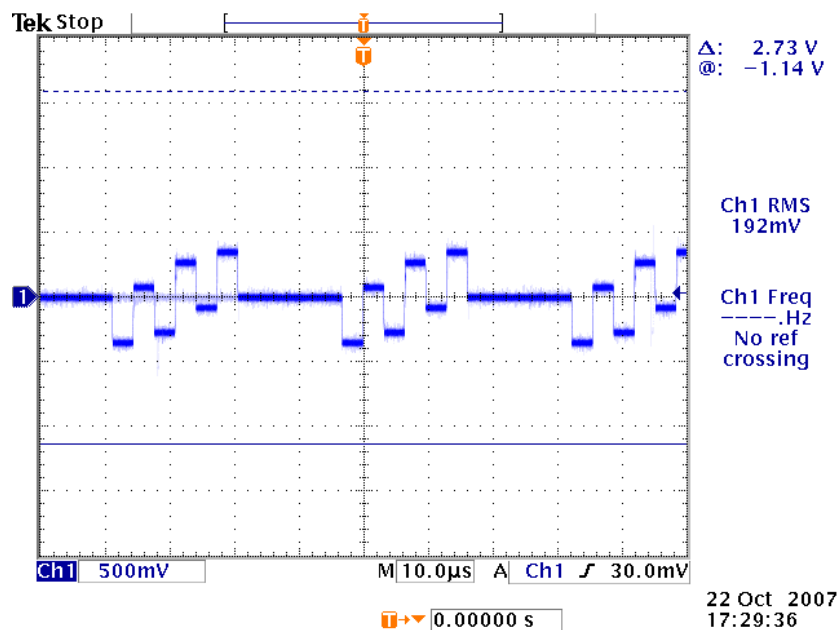

Main PCBs Trouble Diagnosis

- Main TP(COMP1-Pr) : LCA03

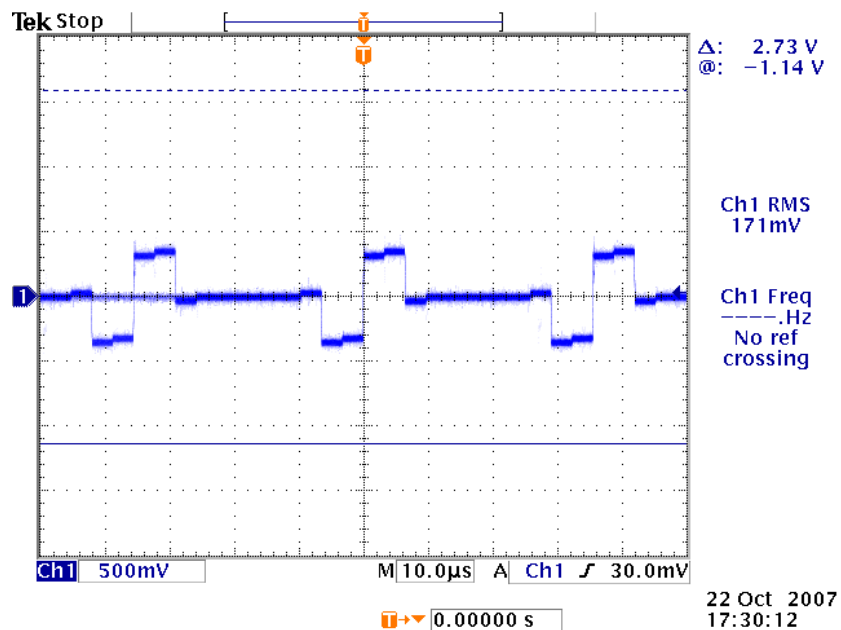


D.When “No signal”in PC

1)First check if other inputs are working

=>if other inputs are not working, replace MAIN PCB


2)Checking waveforms with Color Bar Pattern(Using the oscilloscope)

- Main TP(R signal) : LC209

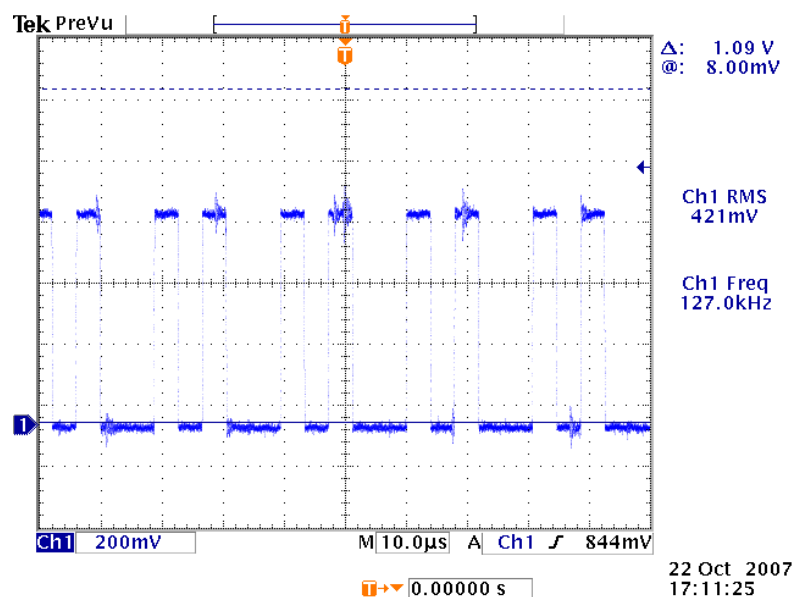


Main PCBs Trouble Diagnosis


- Main TP(G signal) : LC207

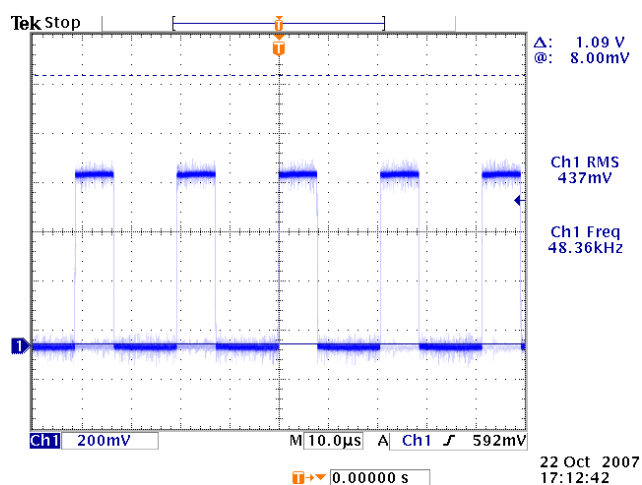

- Main TP(B signal) : LC205

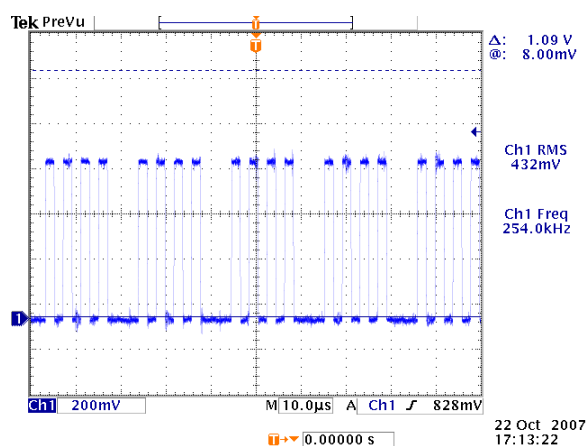


- Main TP(H-sync) : RC212

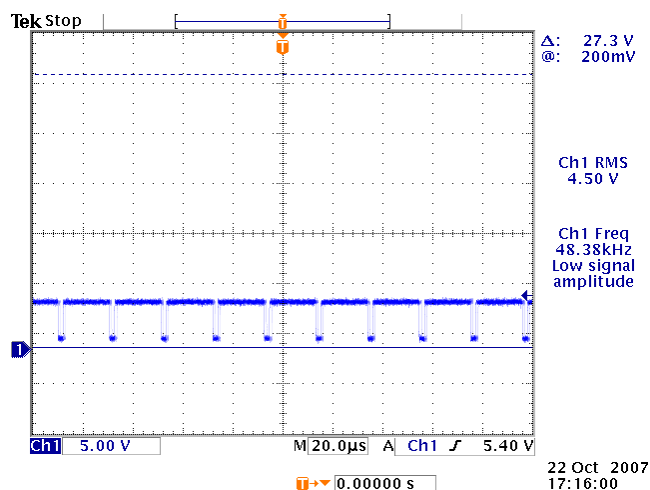

Main PCBs Trouble Diagnosis

- Main TP(V-sync) : RC213

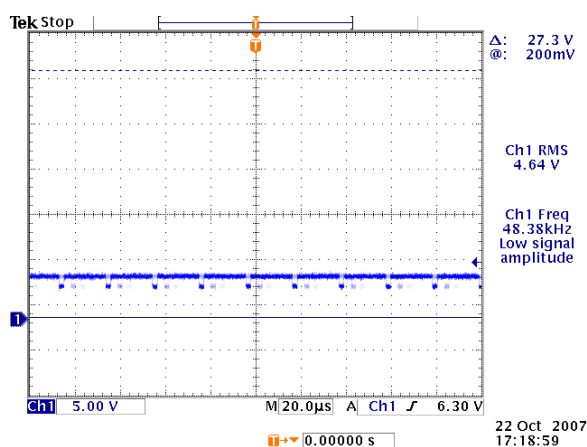


E.When “No signal”in HDMI

1)First check if other inputs are working

=>if other inputs are not working, replace MAIN PCB


2)Checking waveforms with Color Bar Pattern(Using the oscilloscope)

- Main TP : RC433~RC438, RC412~RC417

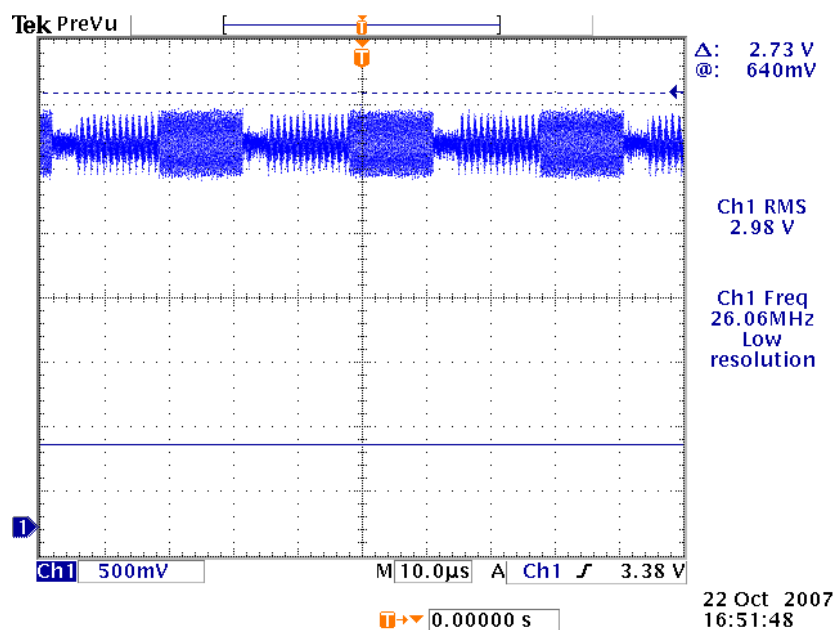

Main PCBs Trouble Diagnosis


6-1-2.When No Sound

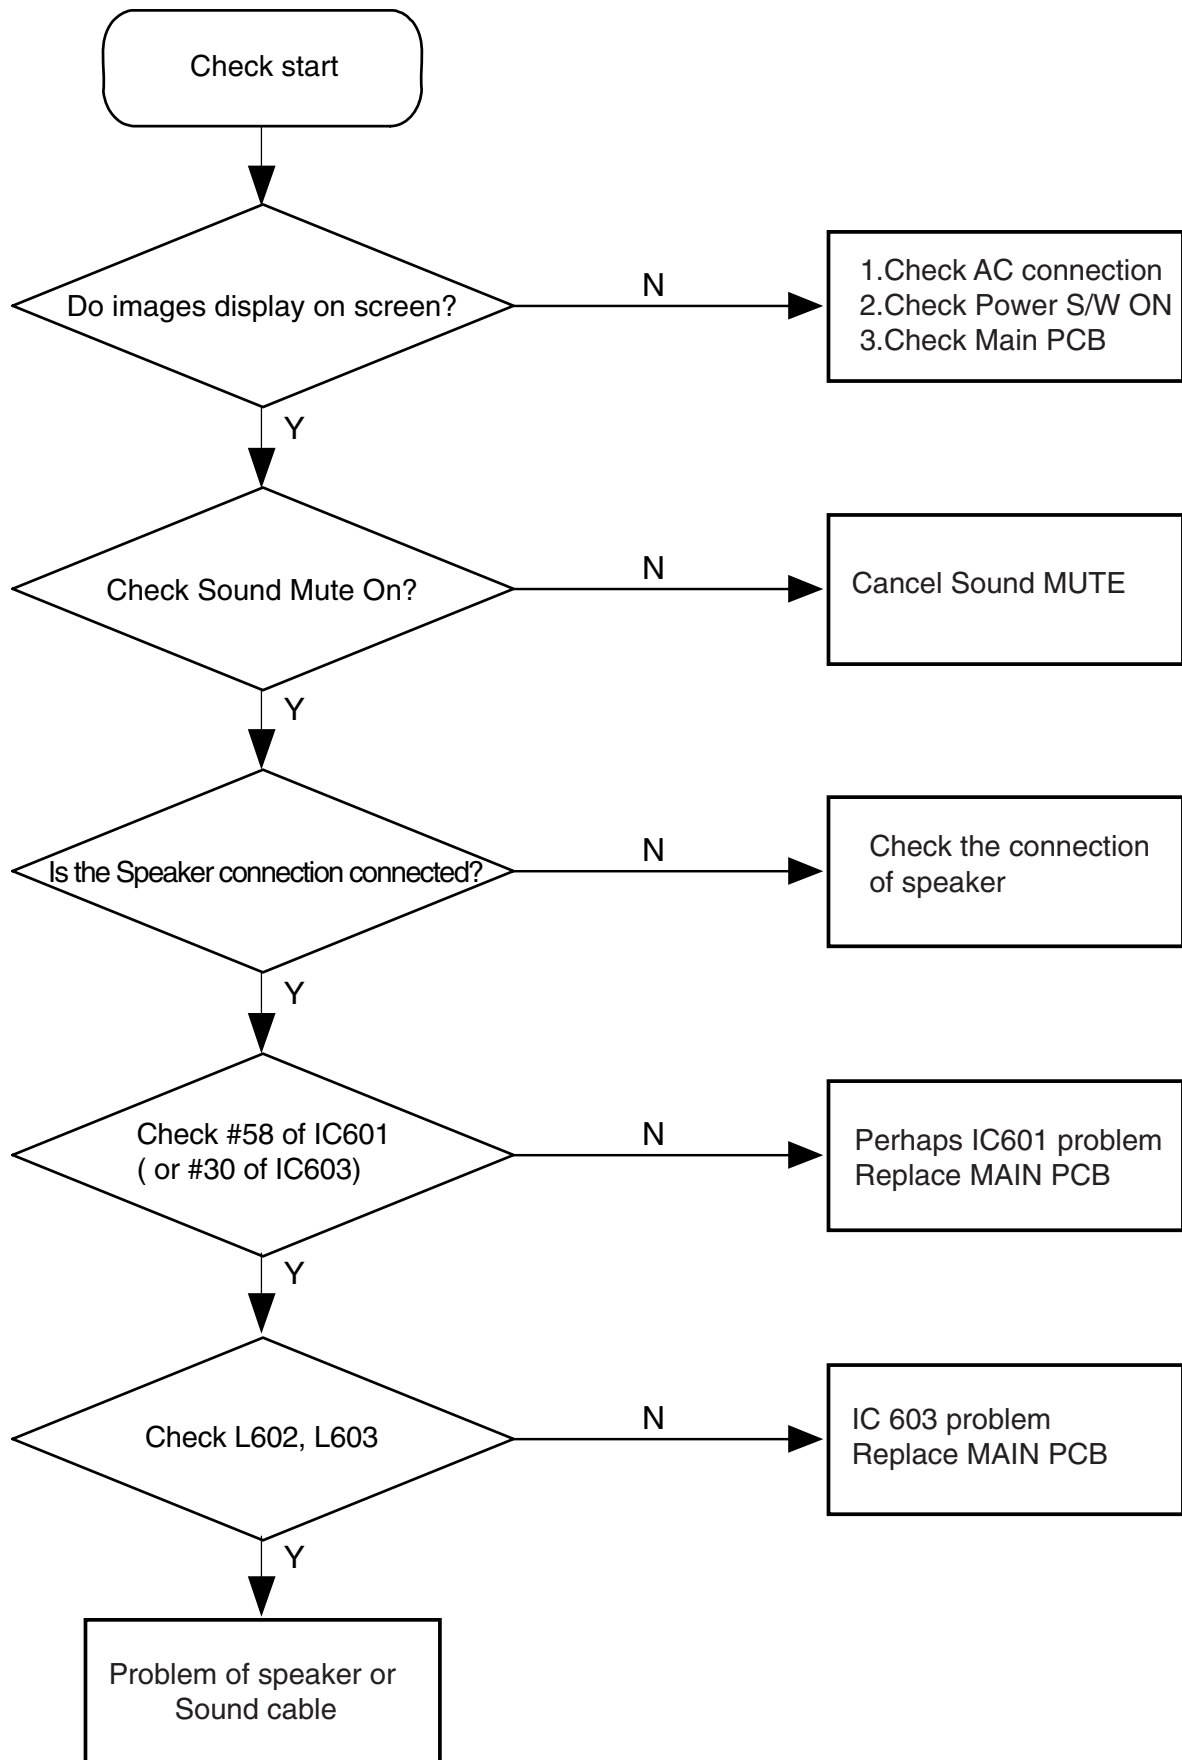


Main PCBs Trouble Diagnosis

- 1) First check if images are displaying
=> If images are not displaying, replace MAIN PCB
- 2) Checking waveforms with 1KHz Sound pattern

Input to #30 or IC603

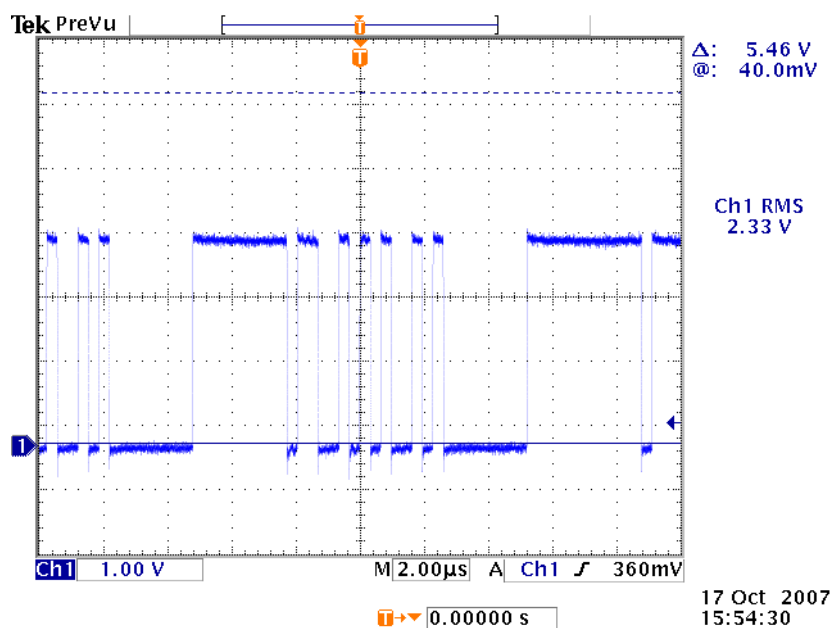


- Output of L602

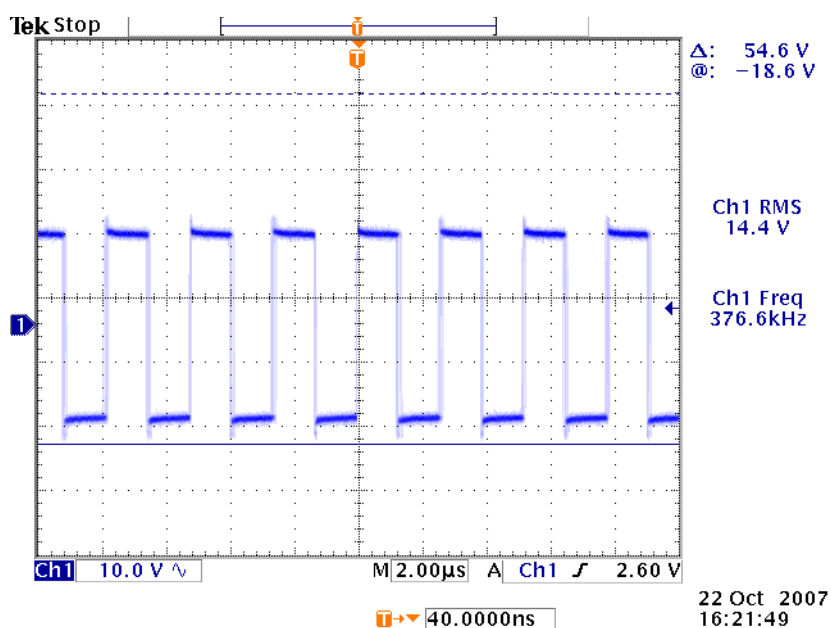


Main PCBs Trouble Diagnosis

6-1-3. When Control Key does not operate

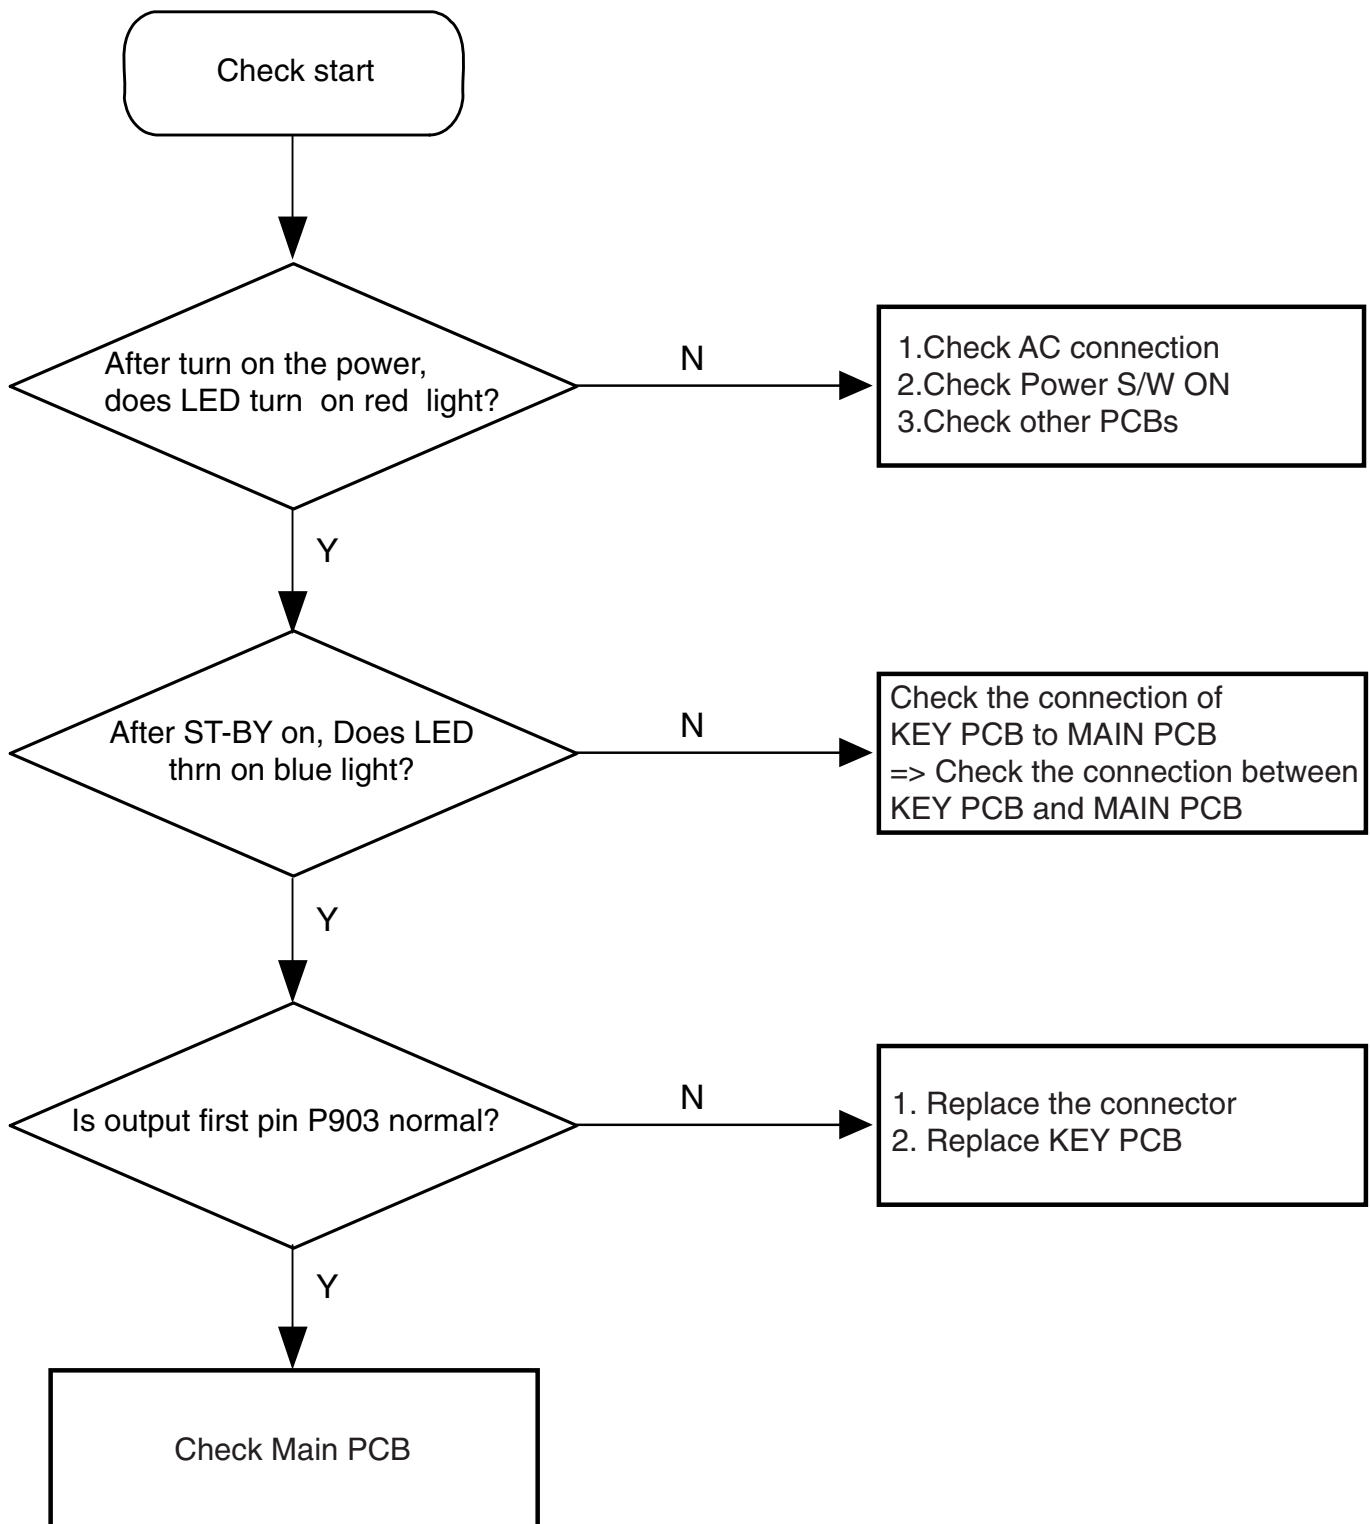

Main PCBs Trouble Diagnosis

6-1-4. When Remote Controller does not operate

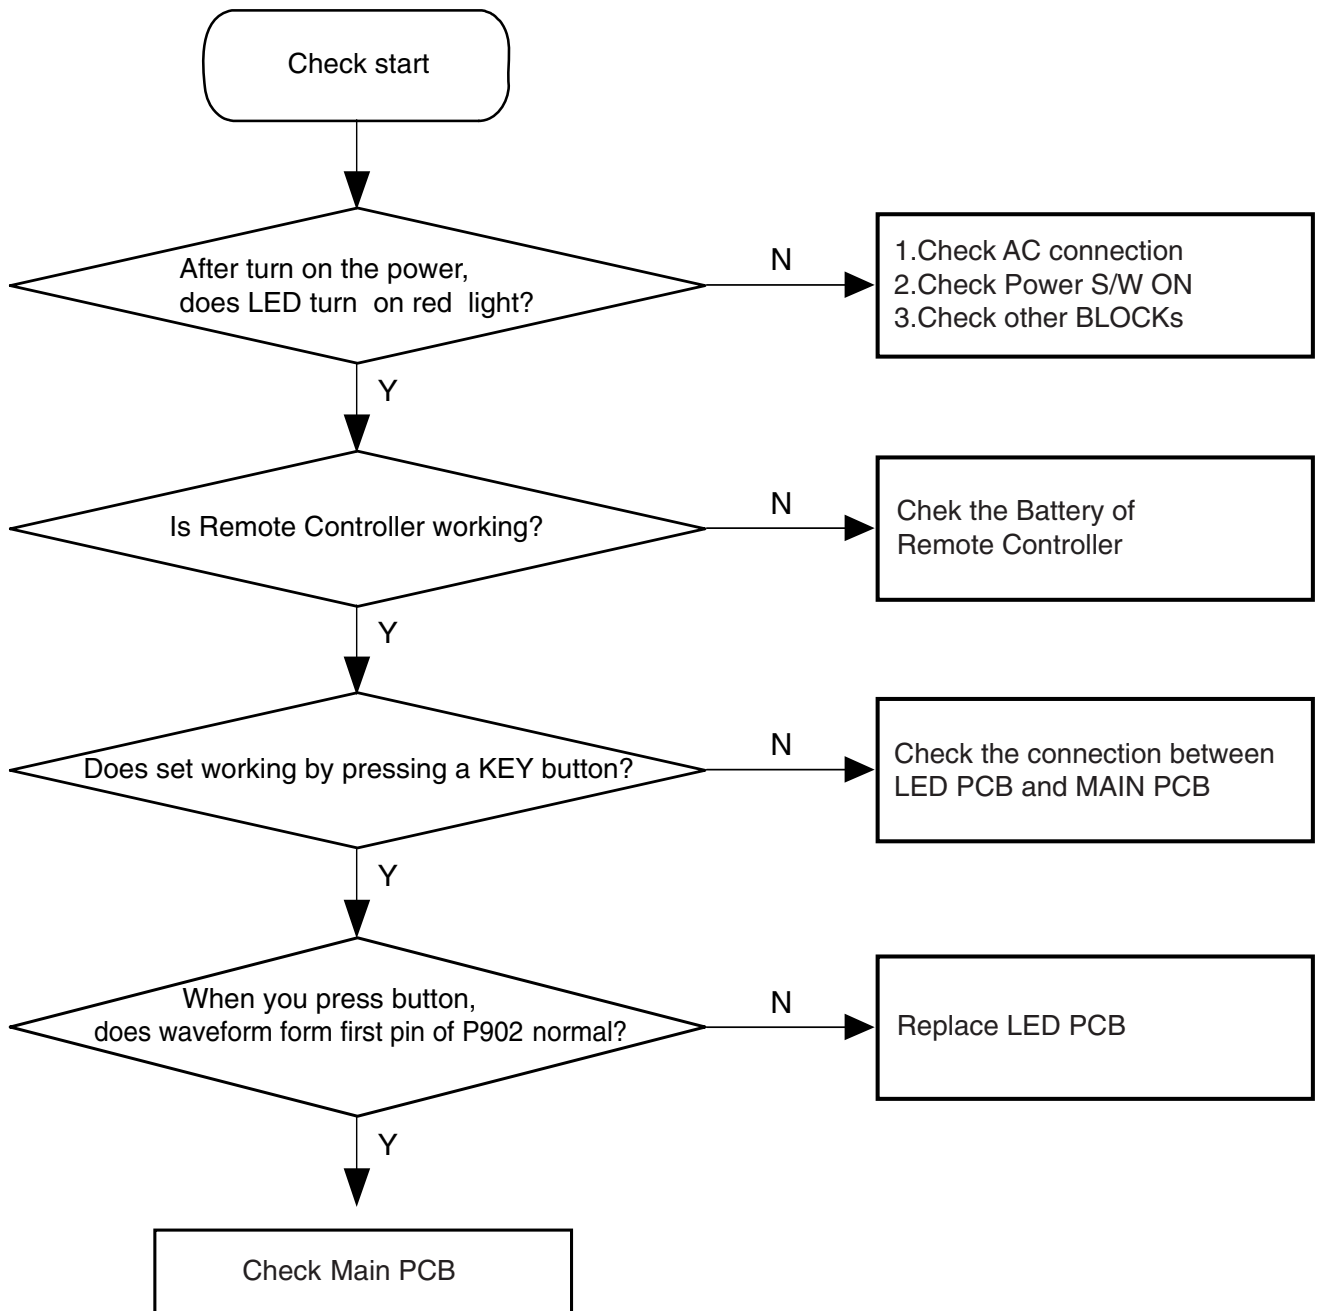


A. Check the connection between Main PCB and LED PCB.

B. Check the waveform first pin(IR) of P902A to confirm IR operation.

If IR is not working, replace the LED PCB.


Main PCBs Trouble Diagnosis

Remote Controller signal(RC529)

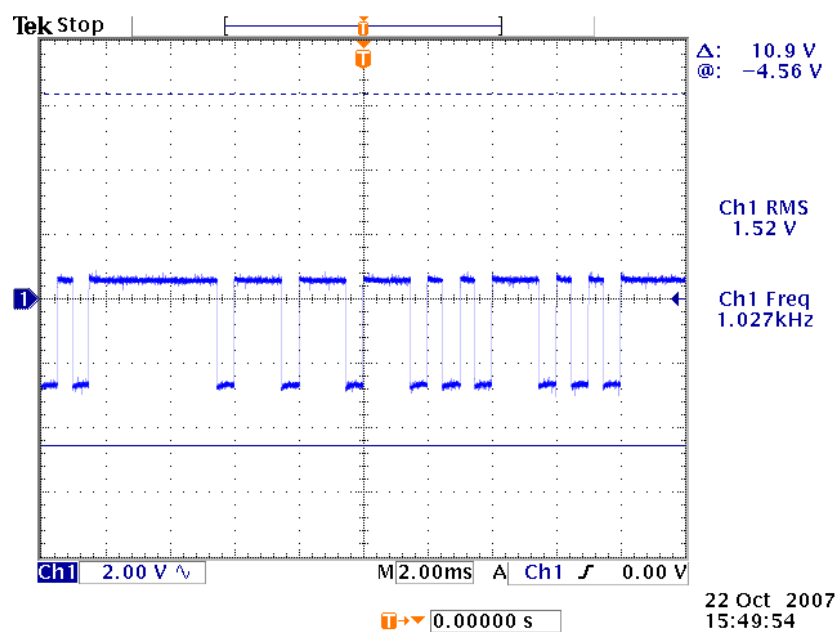

Main PCBs Trouble Diagnosis

6-2.POWER PCB

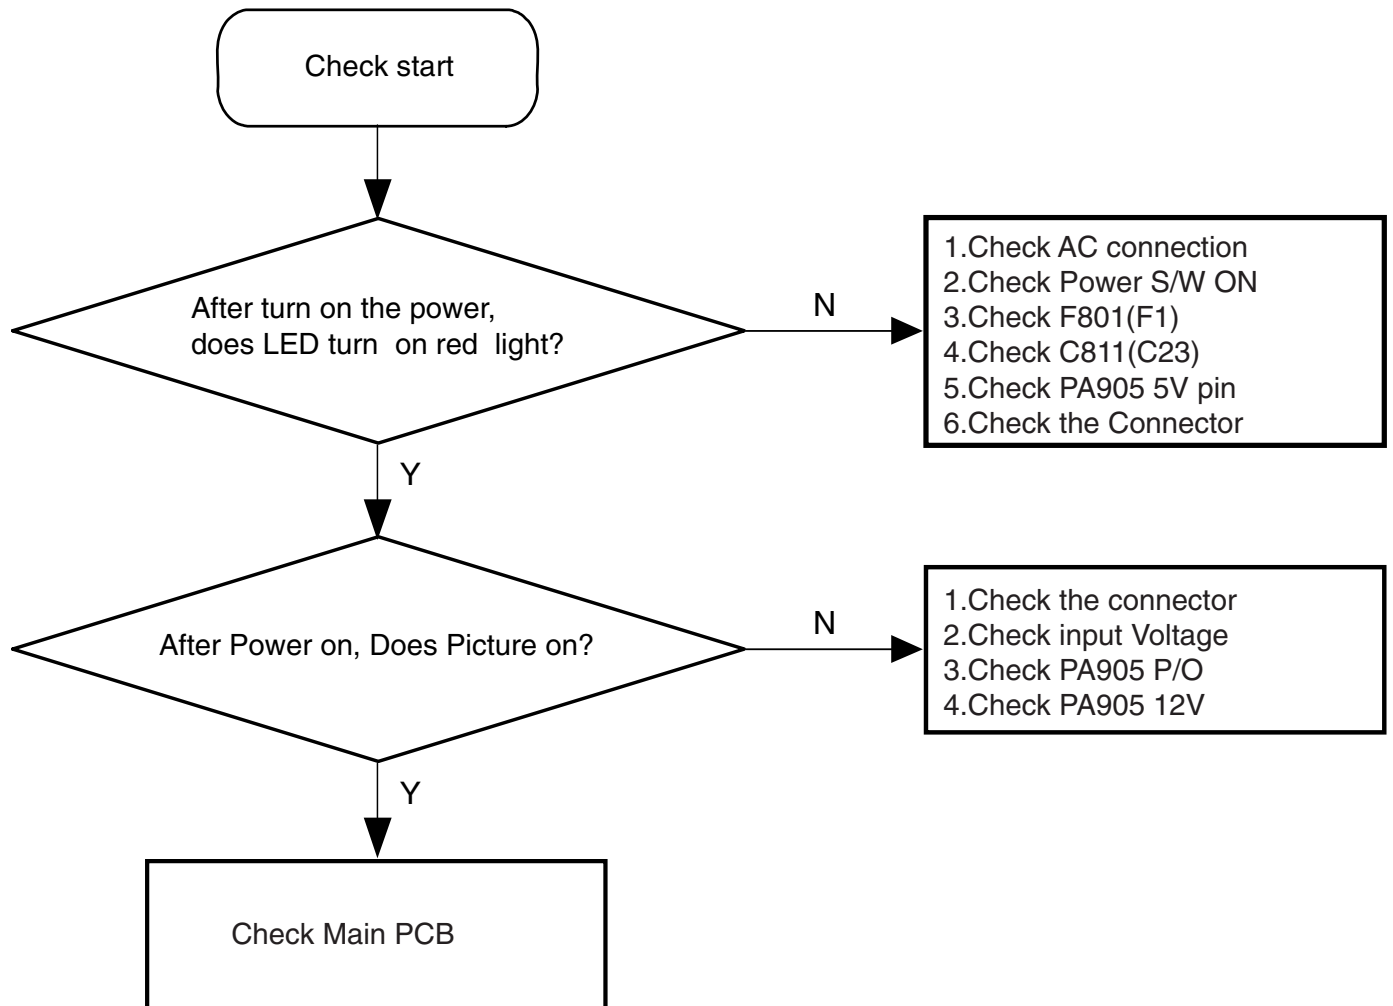

- Check AC connection is correct.
- Check AC Switch ON.
- Check F801(Fuse) is working.
- Check all wafer output is correct.


7. Trouble Diagnosis

7-1. Facts you must know when trouble Diagnosing or Repairing.

A. Trouble diagnosing and repairing of set mean find out which PCBs or blocks are not working and replace them with new PCBs. Repairing the broken PCBs are not necessary. Keep the broken PCBs and return to service center or R&D center.

B. This TROUBLE DIAGNOSIS list only contains representative and simple PCB trouble diagnosis or to repair, contact R&D center.

C. Basic TROUBLE DIAGNOSIS process.

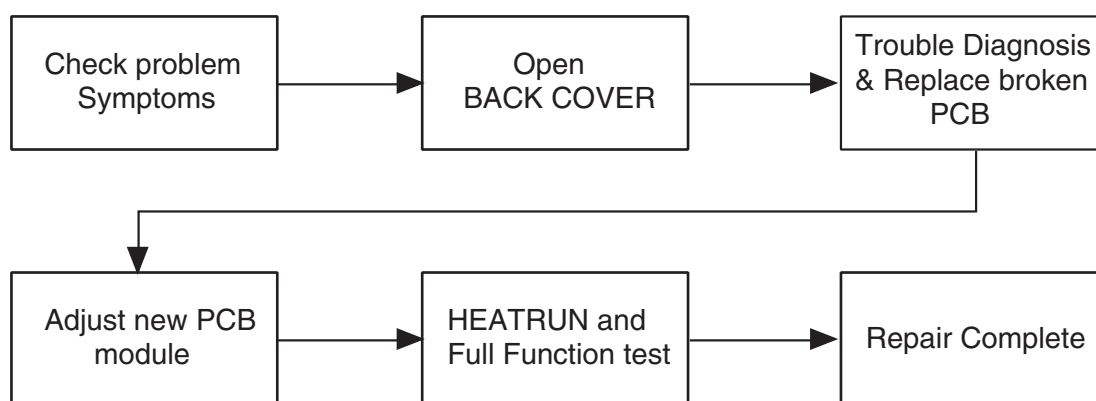

Note: HEATRAN is conducted for at least 30 minutes with input TEST PATTERN FULL WHITE.

D. Required equipments for trouble diagnosis

-Digital Multimeter

User Mode : measure DC VOLTAGE, DIODE VOLTAGE, SHORT/OPEN TEST

-Screwdriver or electric screwdriver, plastic adjusting tool

-Oscilloscope(for detailed examination only)

E. Each BLOCK operations explained in this manual include oscilloscope waveforms, but these are for reference only and utilizing them to repair PCBs is not necessary.

F. Before replacing PCBs, you MUST turn off the AC switch.

G. After the set is repaired, leave BACK COVER open for followings. Run HEATRAN for at least 30 minutes by displaying TEST PATTERN(Full White) of SERVICE MODE(Refer to Service Manual, 5, Service Mode). Check the screen conditions and basic functions.(Remote Controller operation etc.)

H. After BACK COVER is closed, redo HEATRAN for at least one hour with Full White input using TEST PATTERN of SERVICE MODE.
Check the screen conditions and basic functions.

Trouble Diagnosis

7-2. Typical Symptoms of PCBs problem or bad connection

A. Symptom of No image when LED and Back Light are working.

-Define No image : LED and BACK LIGHT of panel are correctly working but any image does not display.

-Repairing method : This is typical symptom when LVDS cable incorrectly connects.




So if you find this symptom, check LVDS connection.

-As this method, TV set is not repaired, replace Main or Sub PCB.

B. Representative Symptom caused by bad Connections between PCBs

=>Note : Dust or extraneous material may cause bad connections. Most of the time, applying soft brush, AIR FRESHER, or breath to clean dust or extraneous materials can solve it. And then reassemble the Connector.

8. Structure of LCD Set

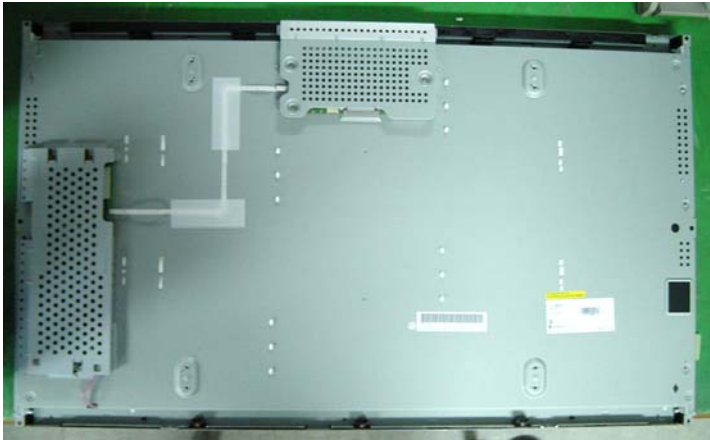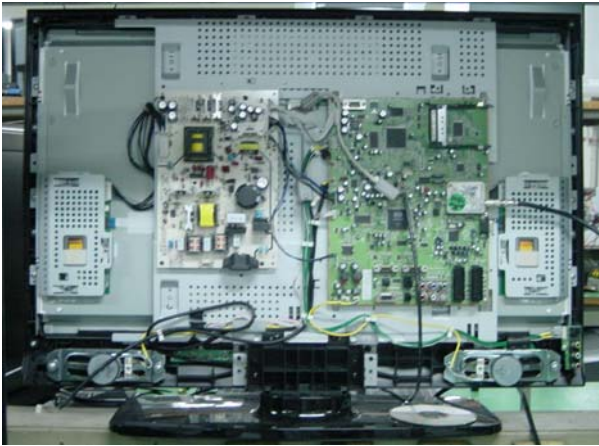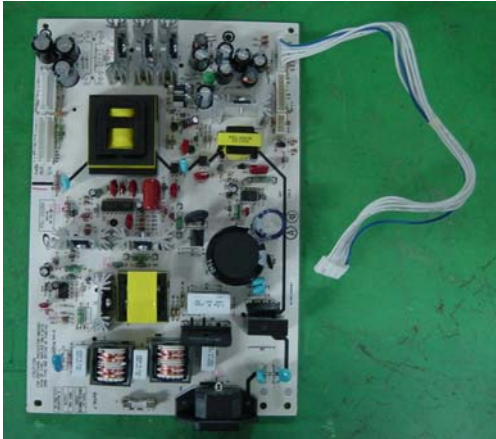
COMPONENT	PICTURE	REMARK
LCD PANEL		
ALL CONNECTOR CONNECTION		
POWER BOARD		
MAIN BOARD		

Structure of LCD Set

COMPONENT	PICTURE	REMARK
FRONT MASK		
BACK COVER		
STAND		


9. Exploded View

32''

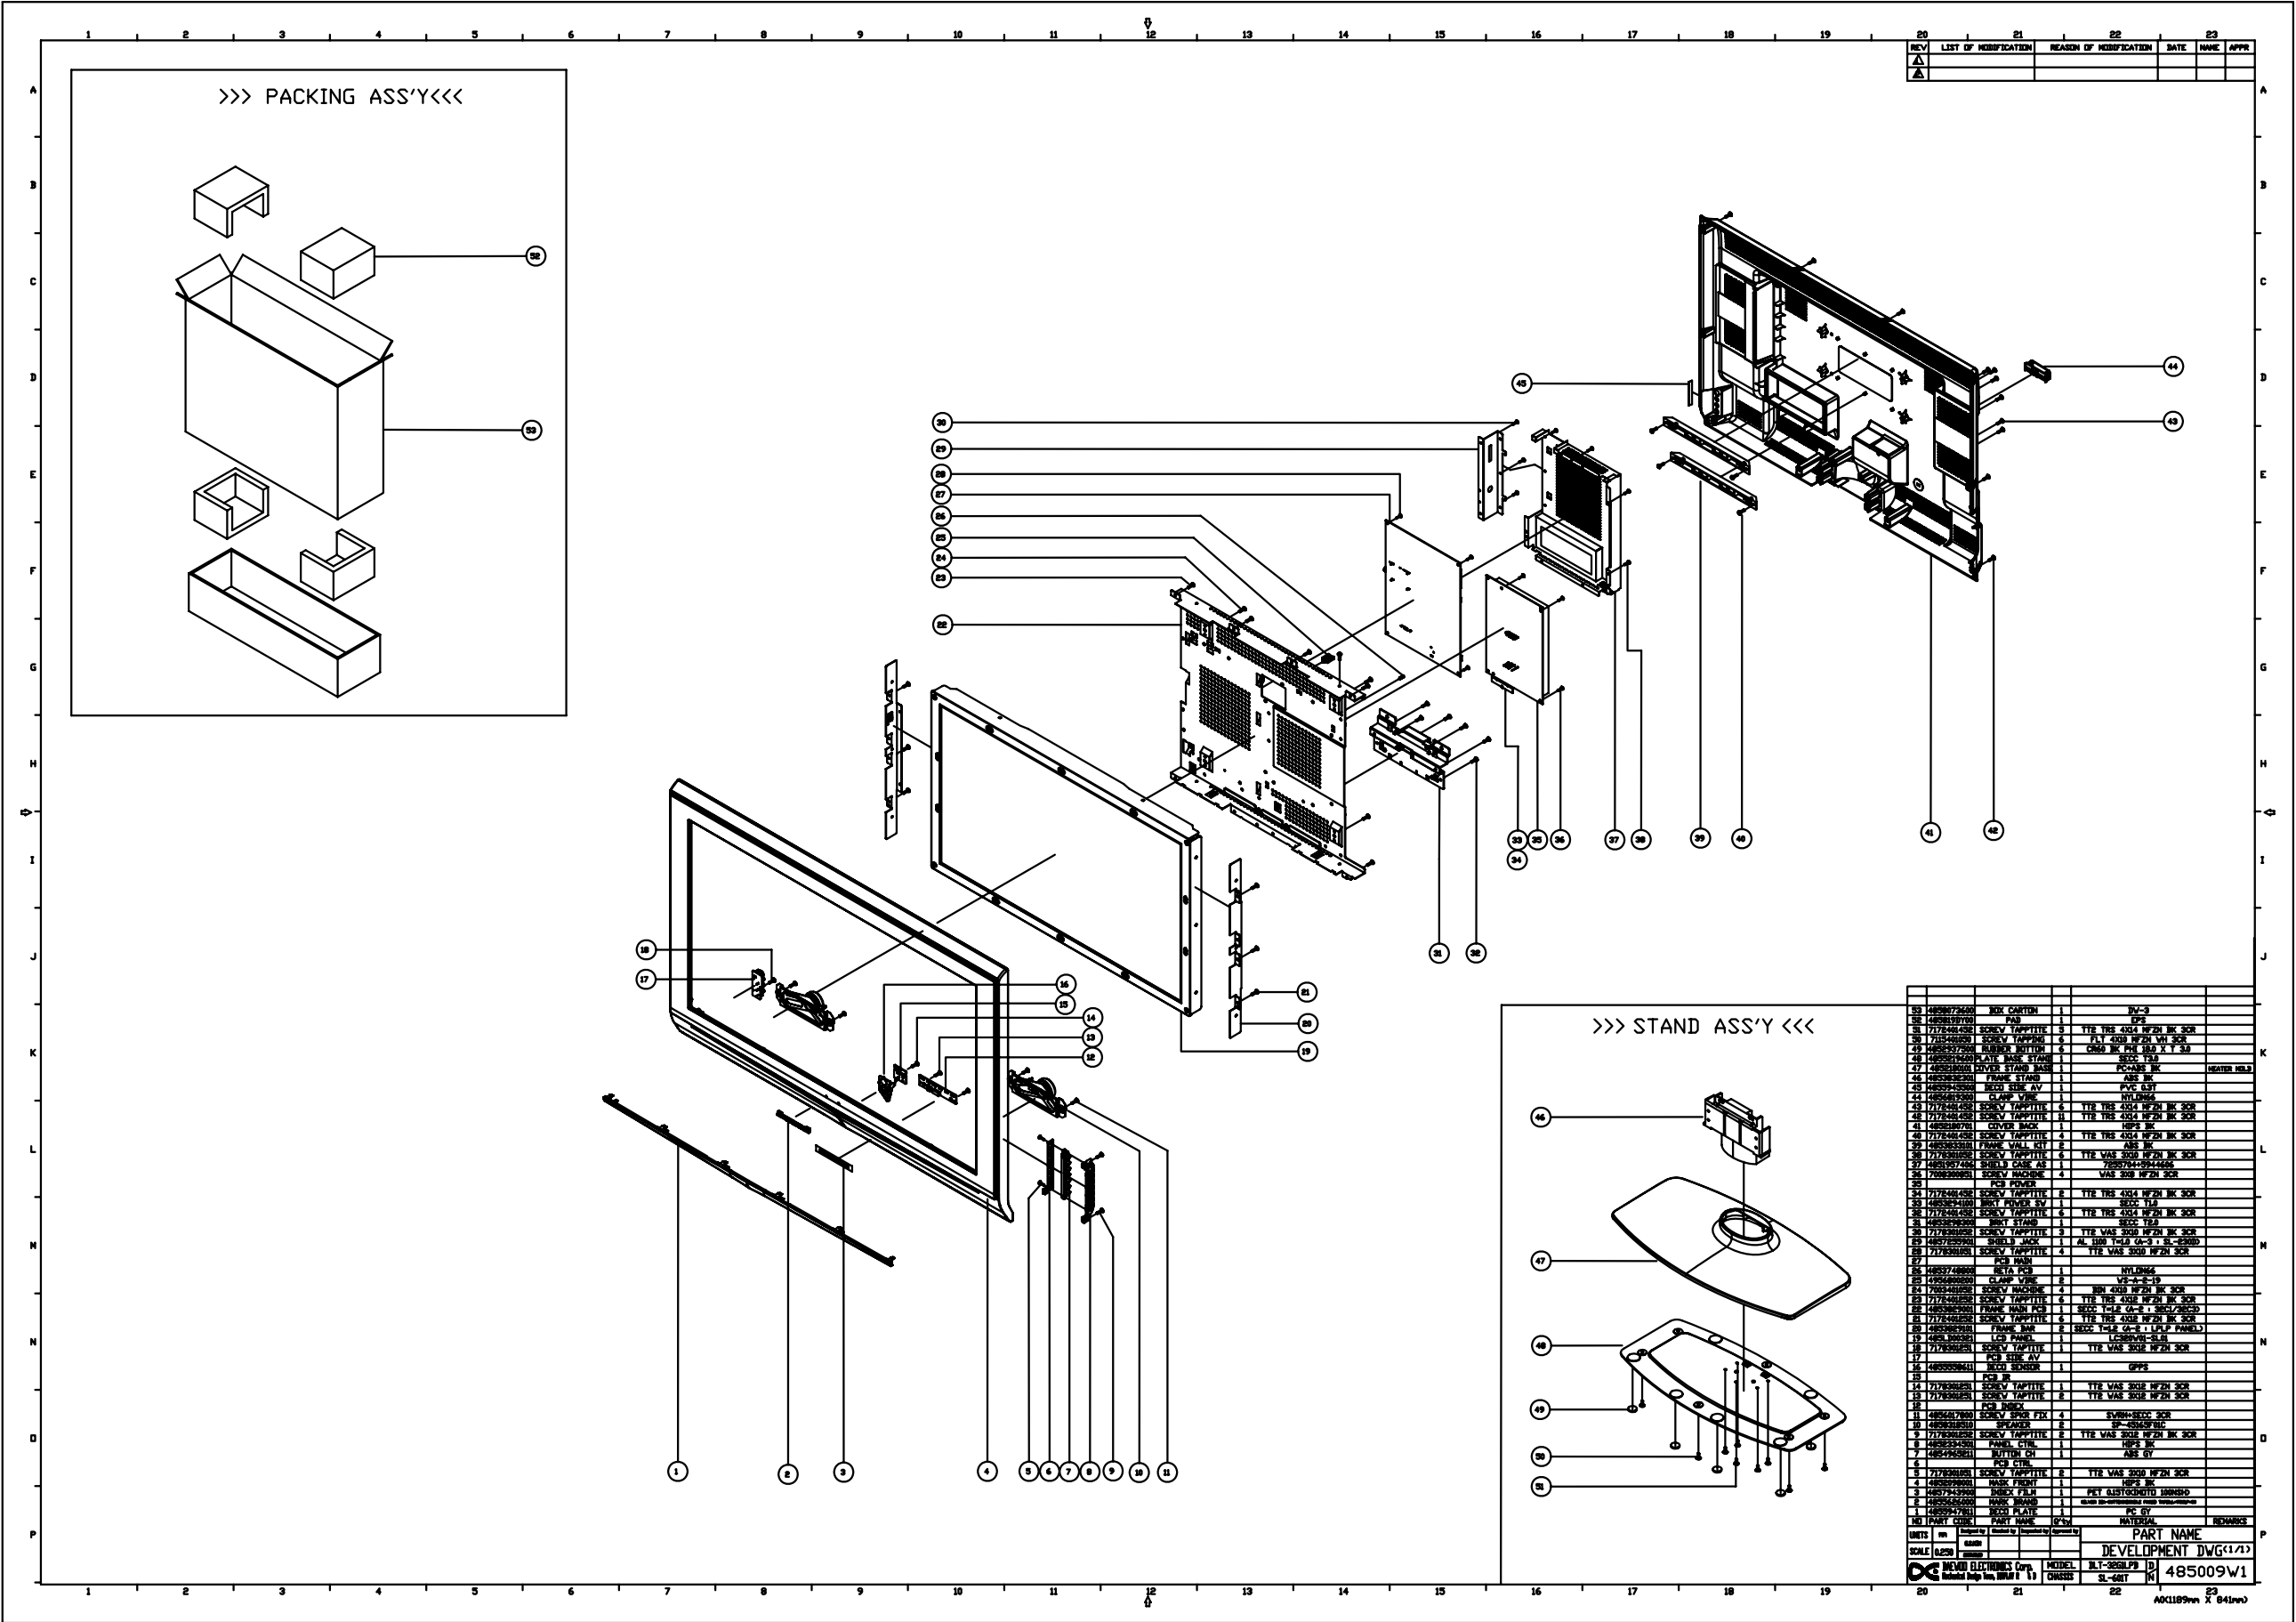


Exploded View

37''

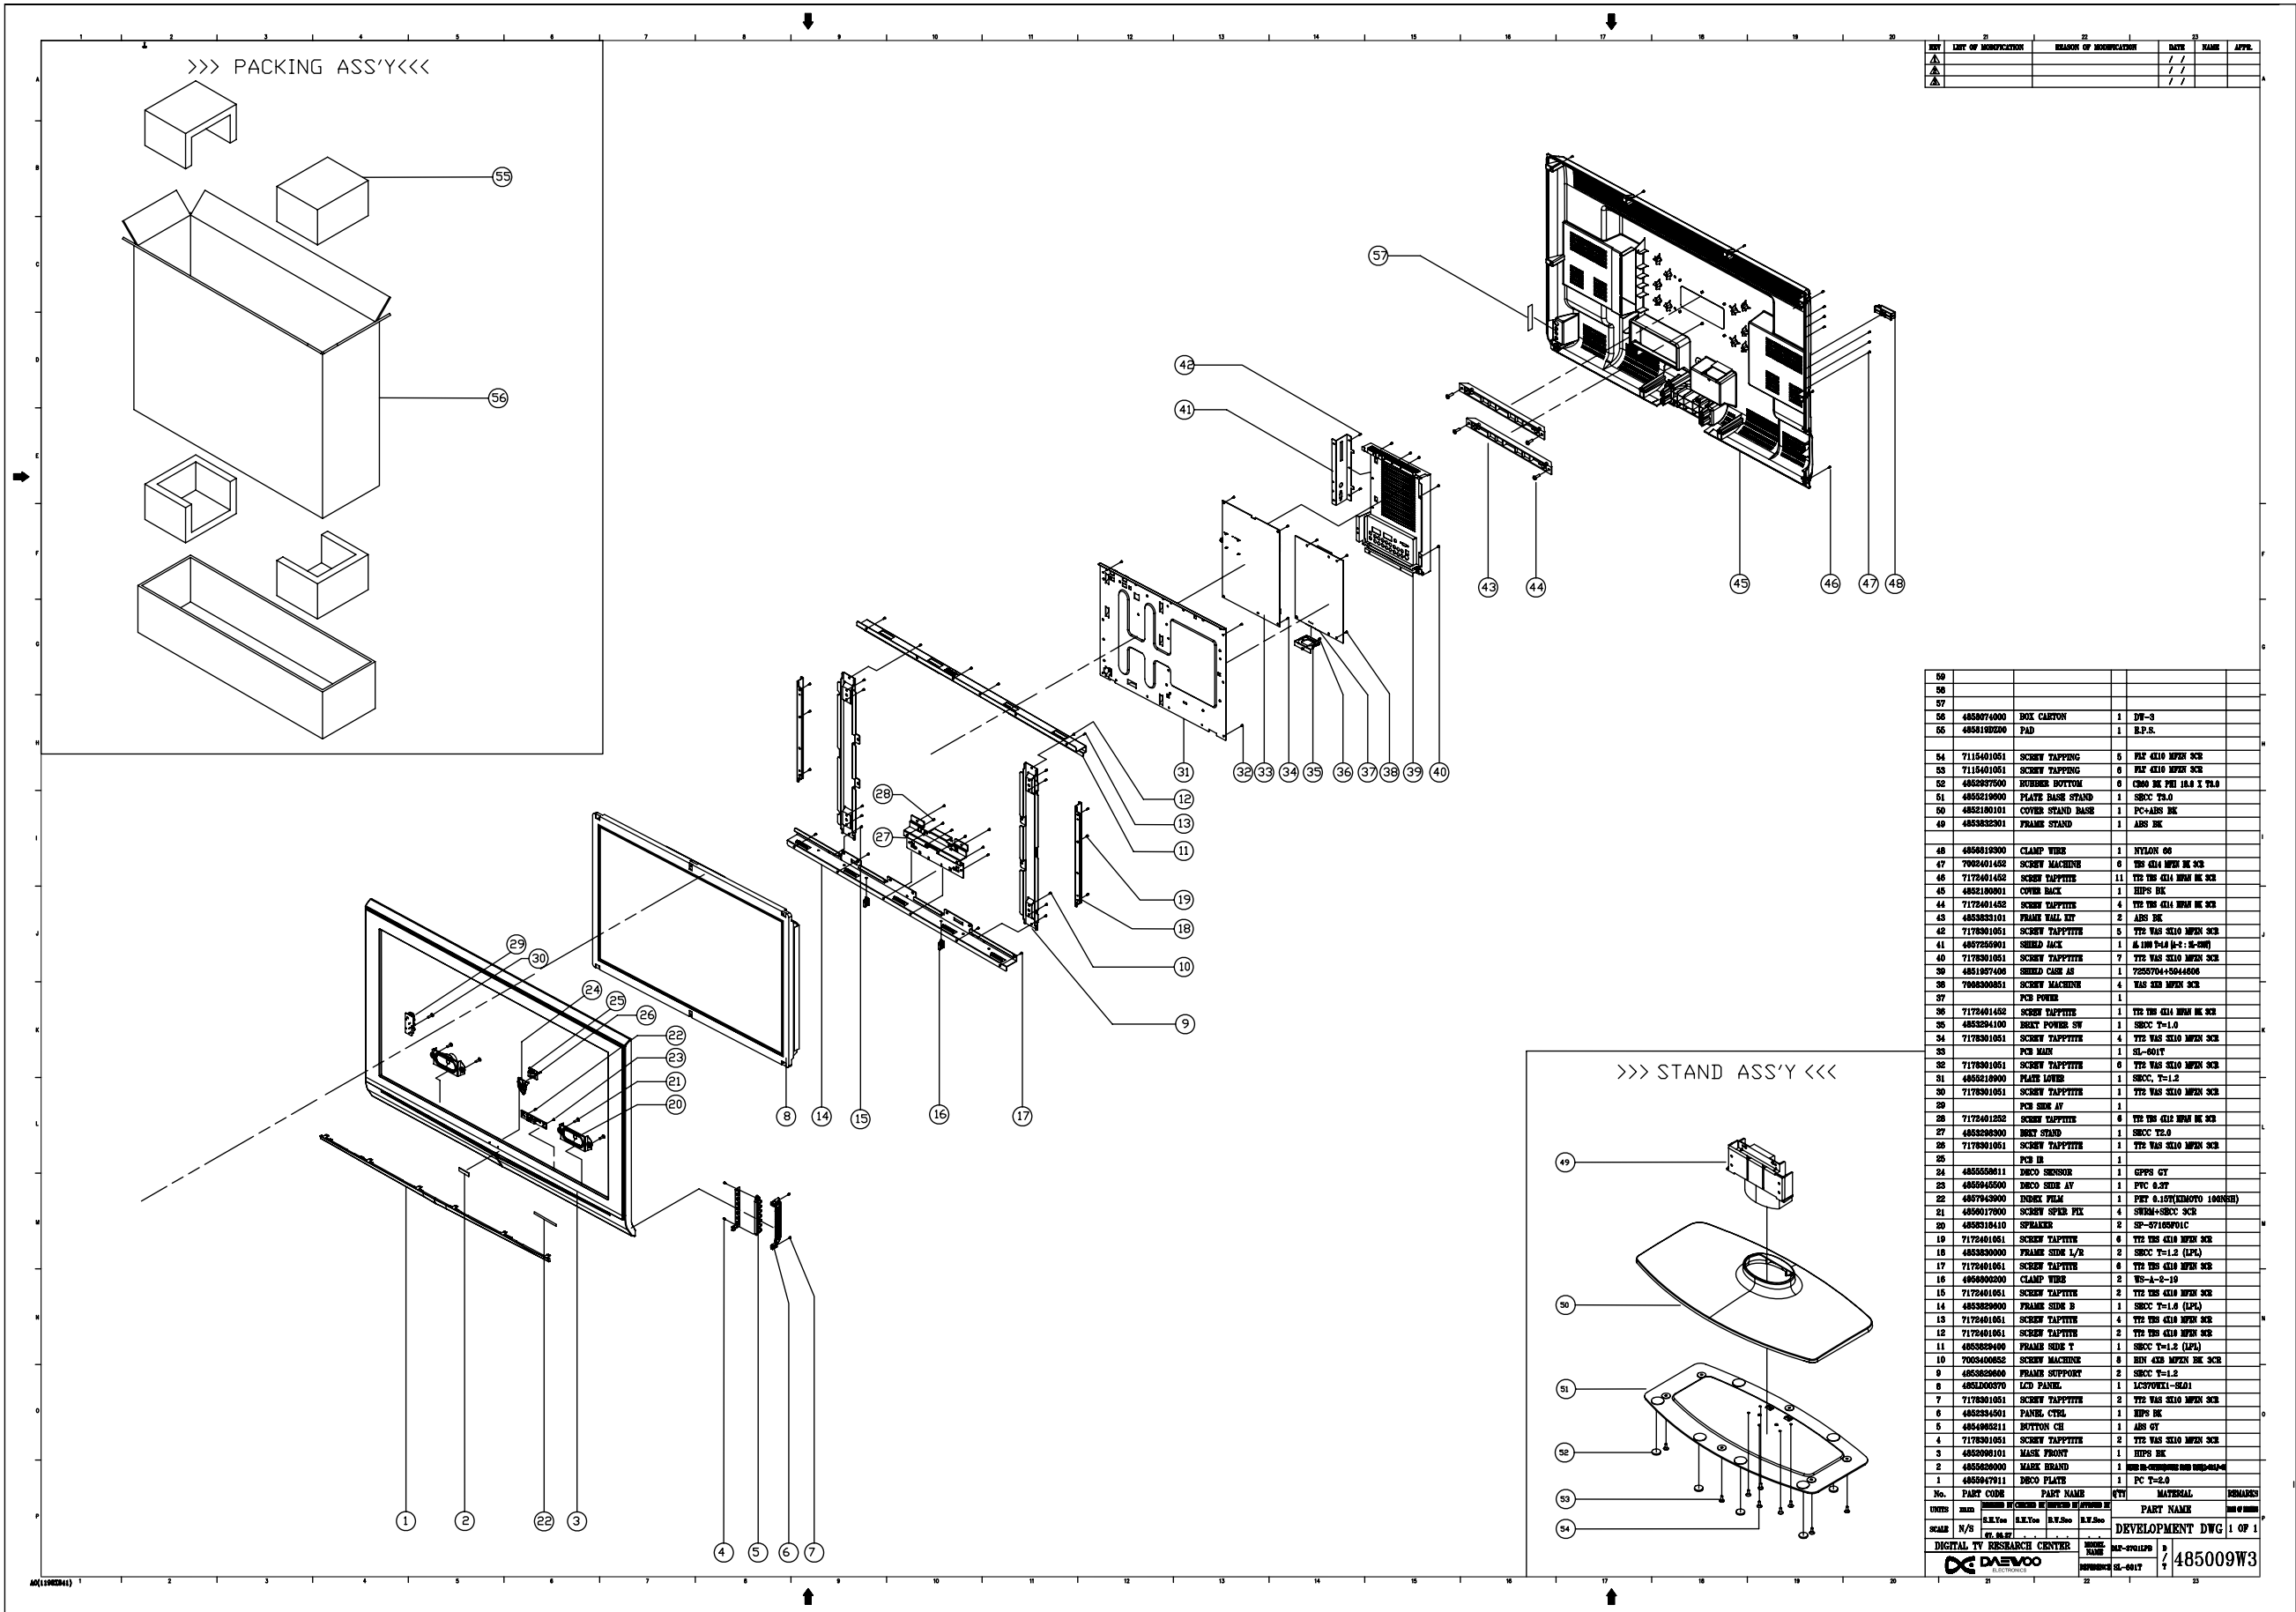

Exploded View

42''

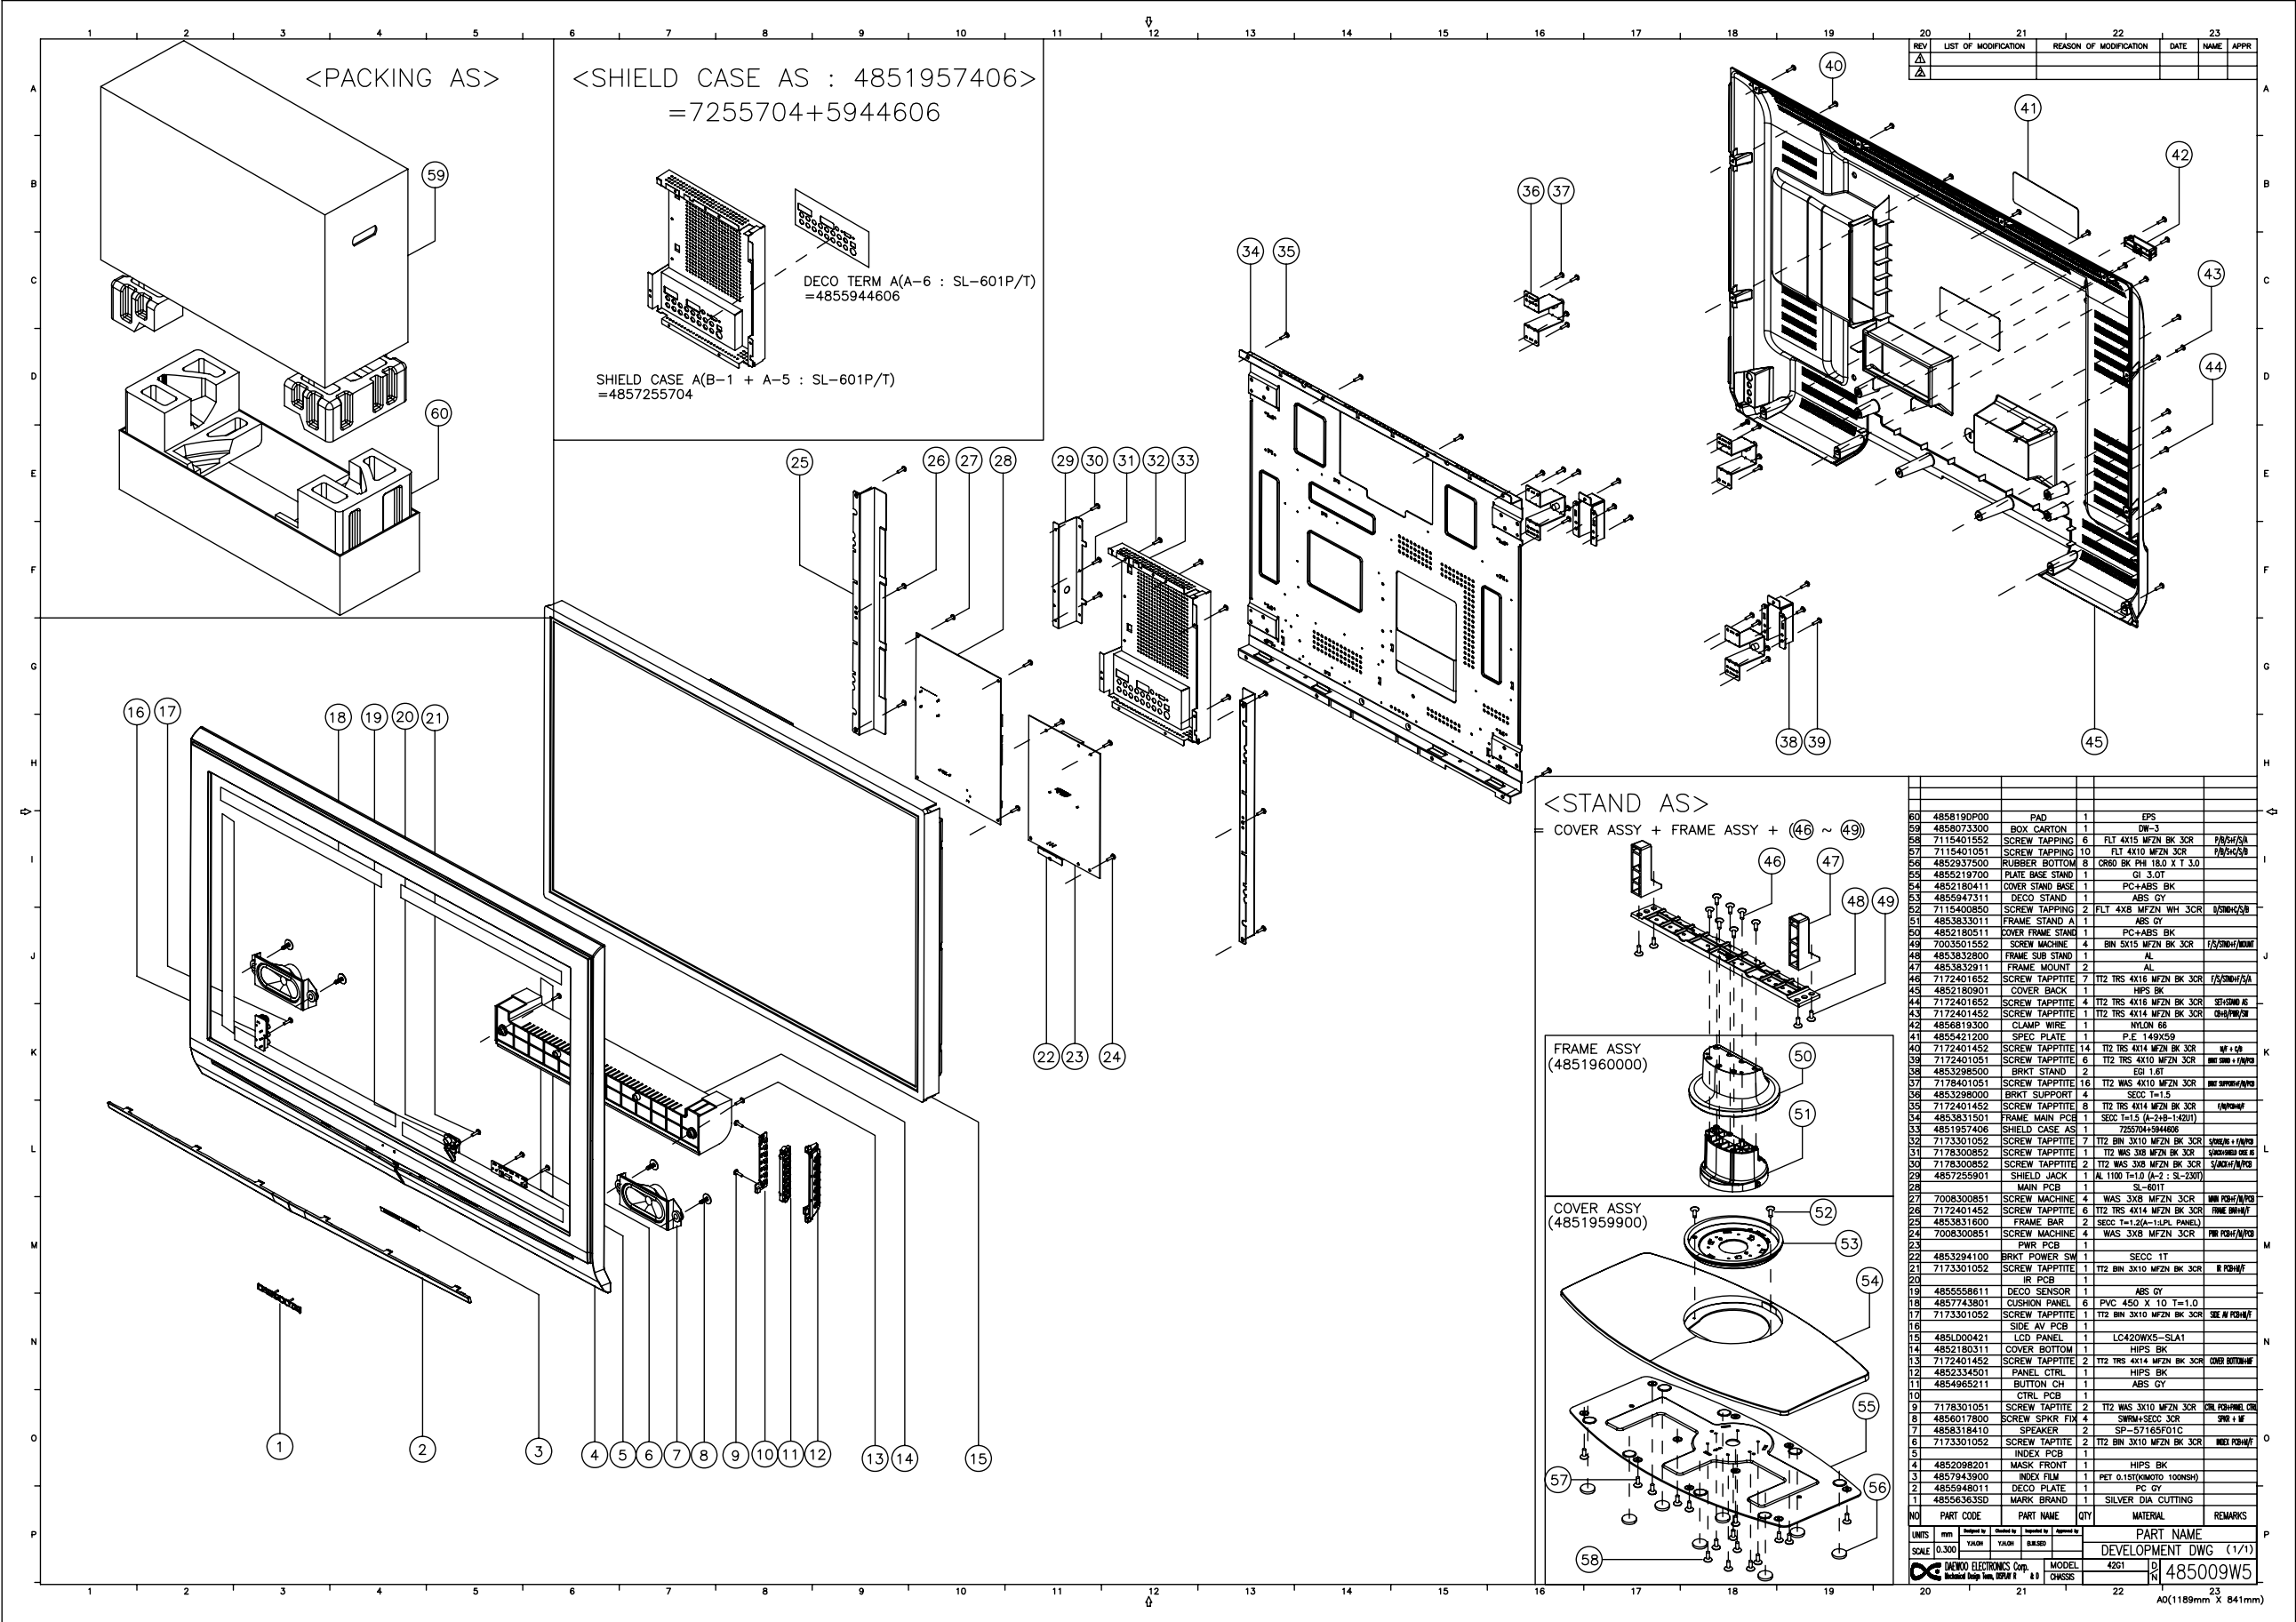

10. Service part list

32”

LOC	PART CODE	PART NAME	DESCRIPTION
ZZ100	48B5454H09	TRANSMITTER REMOCON	R-54H09(AAA)
ZZ110	PTACPWG301	ACCESSORY AS	DLT-32G1LPBD
60	4850Q00910	BATTERY	R03/NN
M212	4852176101	COVER BOTTOM	ABS BK
M681	4856819300	CLAMP WIRE	NYLON 66
M821	4858219401	BAG INSTRUCTION	L.D.P.E.T0.05X280X470
M861	48586210E1	MANUAL INSTRUCTION	ENGLISH
P801A	48599DM001	CORD POWER AS	EU LP-33+LS-60=2.0M(LF)
ZZ120	PTBCSHG301	COVER BACK AS	DLT-32G1LPBD
M211	4852180701	COVER BACK	HIPS BK
M384	4853833101	FRAME WALL KIT	ABS BK
M384A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M593	4855945500	DECO SIDE AV	PVC 0.3T
ZZ130	PTPCPG301	PACKING AS	DLT-32G1LPBD
M681	4856812400	BAND PP AUTO	T1.1XW17MMXL770M
M801	4858073600	BOX CARTON	DW-3
M811	485819DY00	PAD	EPS
M822	4858215701	BAG P.E	PE FOAM 10.5x1050x950
ZZ140	PTCACAG301	CABINET AS	DLT-32G1LPBD
M191	4851957406	SHIELD CASE AS	7255704+5944606
M201E	7003400651	SCREW MACHINE	BIN 4X6 MFZN 3CR
M201F	4856815910	CLAMP WIRE	EGI T0.4+TUBE+PIE 4.2
M211A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M211B	7172401652	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK 3CR
M211C	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M321	4853298300	BRKT STAND	SECC T2.0
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M382	4853829102	FRAME BAR	SECC T=1.2(A-2 FINAL:LPL PANEL)
M382B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M491B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M541	4855421200	SPEC PLATE	P.E 149X59
M551	4855558611	DECO SENSOR	ABS GY
M551A	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK 3CR
M592	4855944700	DECO TERM B	PC 0.25T
M721A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723	4857255901	SHIELD JACK	AL 1100 T=1.0 (A-2: SL-230T)
M723A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723B	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
P803B	4850714504	CONNECTOR	20022HS-14+20022HS-14(B)+ULW=300
PA502	4859006760	CABLE LVDS	LPL:FMW1214A-31A+FH10001-30+32C6LMBD=250
SP01	4858318510	SPEAKER	SP-45165F01C
SP01A	4850702539	CONNECTOR	YH025-02+YRT205+YRT110+USW=400
SP02	4858318510	SPEAKER	SP-45165F01C
SP02A	4850703574	CONNECTOR	YH025-03+YRT205+YRT110+USW=400
V901	485LD16320	LCD PANEL	LC320W01-SLA1
ZZ200	PTFMSJG301	MASK FRONT AS	DLT-32G1LPBD
M201	4852098001	MASK FRONT	HIPS BK
M561	4855626000	MARK BRAND	SILVER DIA-CUTTING(DOUBLE FACED TAPE),L=85,P=30
M591	4855947811	DECO PLATE	PC GY
M791	4857943900	INDEX FILM	PET 0.15T(KIMOTO 100NSH)
ZZ250	PTSNSWG301	STAND AS	DLT-32G1LPBD
M213	4852180101	COVER STAND BASE	ABS PMMA BK
M383	4853832301	FRAME STAND	ABS BK
M383A	7115401051	SCREW TAPPING	FLT 4X10 MFZN 3CR
M521	4855219600	PLATE BASE STAND	SECC T3.0
M521A	7115401051	SCREW TAPPING	FLT 4X10 MFZN 3CR
M521C	4852937500	RUBBER BOTTOM	CR60 BK PHI 18.0 X T 3.0
ZZ290	PTMPMSG242	PCB MAIN MANUAL AS	DLT-32C6LPBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3.0)
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
300	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
400	2291050312	FLUX SOLVENT	S-3000
D102	DBA282—	DIODE	BA282
I503	1M24C32BN6	IC EEPROM	M24C32WRN6
ICD07	14C64WBN6-	IC EEPROM	M24C64-WBN6
JP201	4959200160	CONN D-SUB	SHF-015-B111-22/BR2-J0.6
JP202	4959102340	JACK PHONE	SPJ-358H(3.5 STRAIGHT)
JPA01	97P6316100	JACK HEAD PHONE	DHSE-9959

LOC	PART CODE	PART NAME	DESCRIPTION
JPA02	4859117550	JACK PIN	DPSE-0375S
JPA03	4859112950	JACK SCART	DSSM-0378 STR
JPA04	4859112950	JACK SCART	DSSM-0378 STR
JPA07	4859201170	CONN OPTICAL SENSOR	QJ107A-T050-SHS
L602	58C0000157	COIL CHOKE	CH-470X
L603	58C0000157	COIL CHOKE	CH-470X
M321	4853294100	BRKT POWER SW	SECC 1T
M321A	7172401252	SCREW TAPPTITE	TT2 TRS 4X12 MFZN BK 3CR
M371	4853748800	RETA PCB	NYLON 66
M372	4956800200	CLAMP WIRE	WS-A-2-19
M381	4853829001	FRAME MAIN PCB	SECC T=1.2 (A-2: 32C1/32C3)
M381A	7172401252	SCREW TAPPTITE	TT2 TRS 4X12 MFZN BK 3CR
M381B	7178301052	SCREW TAPPTITE	TT2 WAS 3X10 MFZN BK 3CR
M381C	7008300851	SCREW MACHINE	WAS 3X8 MFZN 3CR
M381D	4856815900	CLAMP WIRE	EGI T0.4+TUBE+PIE 3.2
P602	4859231520	CONN WAFER	YW025-02
P904	4859284920	CONN WAFER	SMW250-08
PA703	4850704574	CONNECTOR	YH025-04+YBNH250-04+ULW=300
PA905	4850709519	CONNECTOR	SMH250-09+YBNH250-09+ULW=200
PD1	4959200360	CONN D-SUB	SDF-009-M900-22/N
PD107	4859201460	CONN D-SUB 9P	SHRA0209011
PI01	4859200440	CONN PCMCIA	PC68PRA5513XZ
PM100	4850M14410	MODULE POWER	FEL-3226H
TU1	4859731230	TUNER DIGITAL	TD1318AF/HP-3(DV-IF-H-P)
X501	5XJX19R6JE	CRYSTAL QUARTZ	HC-49/S 19.6608MHZ 18PF 30PPM
X601	5XJ27R00AC	CRYSTAL QUARTZ	HC-49/S 27.000MHZ 15PF 20PPM
Z101	5PK3953M—	FILTER SAW	K3953M
Z102	5PK9650M—	FILTER SAW	K9650M
ZZ200	PTMPJ2G242	PCB MAIN CHIP B AS	DLT-32C6LPBD
CC101	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC103	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC104	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC105	HCBK152KBA	C CHIP CERA	50V X7R 1500PF K 1608
CC106	HCQK180JBA	C CHIP CERA	50V CH 18PF J 1608
CC108	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC201	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC202	HCQK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC203	HCQK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC204	HCQK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC205	HCQK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC206	HCQK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC207	HCQK470JBA	C CHIP CERA	50V CH 47PF J 1608
CC208	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC210	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CC212	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CC401	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC402	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC403	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC404	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC501	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC502	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC503	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC504	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC505	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC506	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC507	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC508	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC509	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC511	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC512	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC513	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC515	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC518	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC523	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC525	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC528	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC530	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC531	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
CCD13	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD14	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD16	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD18	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD19	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD20	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD21	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD22	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD23	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD24	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD25	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD26	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD27	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD28	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD34	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD38	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD42	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD49	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD53	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD54	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD55	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD58	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
CCD60	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD61	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD62	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD64	HCQK330JBA	C CHIP CERA	50V CH 33PF J 1608
CCD65	HCQK330JBA	C CHIP CERA	50V CH 33PF J 1608
CCD66	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD67	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD68	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD69	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD70	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD73	HCQK391JBA	C CHIP CERA	50V CH 390PF J 1608
CCD76	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD77	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE02	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
CCE06	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE07	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE08	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE09	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE10	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCE11	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE12	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE13	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE14	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CCE15	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE16	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE17	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE28	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE29	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE30	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE40	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
LCQ01	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ03	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
RC102	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC103	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
RC104	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
RC105	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC106	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC107	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC108	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC109	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC110	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RC115	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC120	HRFT680JBA	R CHIP	1/10 68 OHM J 1608
RC203	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC206	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC207	HRFT750JBA	R CHIP	1/10 75 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
RC208	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC210	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC211	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC218	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RC219	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RC401	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC402	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC403	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC404	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC406	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC407	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC408	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC411	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC420	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC421	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC422	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC423	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC425	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC426	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC427	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC512	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC518	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC521	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC526	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC528	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC534	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC535	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC536	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC539	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
RC540	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC541	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC546	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC548	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC550	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RC556	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC557	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC558	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC559	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC560	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC561	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC580	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC587	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC594	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC595	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC598	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC601	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC602	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC614	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC615	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC646	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC647	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC649	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
RC652	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
RC653	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC654	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC660	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC669	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC670	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC903	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC909	HRFT242JBA	R CHIP	1/10 2.4K OHM J 1608
RC910	HRFT431JBA	R CHIP	1/10 430 OHM J 1608
RCA01	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCA02	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA03	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCA04	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA05	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA06	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA07	HRFT750JBA	R CHIP	1/10 75 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
RCA17	HRFT303JBA	R CHIP	1/10 30K OHM J 1608
RCA23	HRFT680JBA	R CHIP	1/10 68 OHM J 1608
RCA24	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCA25	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA26	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCA27	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCA28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA32	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA33	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA35	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCA39	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
RCD07	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD09	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD17	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD31	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD65	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
RCD66	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD80	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCD88	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RCD90	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RCD92	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RCE07	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
RCE08	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
RCE09	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCE10	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCE11	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCE16	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCE17	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
RCE18	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE19	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
RCE20	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE4	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE5	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE59	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE60	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE61	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE62	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE63	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE64	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE65	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCE66	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCE67	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE73	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE74	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE76	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE87	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE88	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE89	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE90	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE91	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE94	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE95	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE96	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE97	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCE99	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCQ08	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCQ09	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCQ10	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCQ11	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCQ12	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCQ13	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCQ14	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCX11	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCX13	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCX47	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCX60	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX62	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
ZZ200	PTMPJ0G242	PCB MAIN (RHU) AS	DLT-32C6LPBD

LOC	PART CODE	PART NAME	DESCRIPTION
C618	CEXF1H471V	C ELECTRO	50V RSS 470MF (13X20) TP
C619	CEXF1H471V	C ELECTRO	50V RSS 470MF (13X20) TP
C919	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C924	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C925	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C933	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C934	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C938	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12)TP
C943	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C944	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C945	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C946	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
ZZ200	PTMPJBG242	PCB MAIN M-10 AS	DLT-32C6LPBD
P501	485923172S	CONN WAFER	YW025-04 (STICK)
P601	485923162S	CONN WAFER	YW025-03 (STICK)
ZZ200	PTMPJRG242	PCB MAIN RADIAL AS	DLT-32C6LPBD
C101	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C102	CMXL1J224J	C MYLAR	63V MEU 0.22MF J (TP)
C103	CEXF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP
C104	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
C105	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C106	CEXF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP
C402	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
C501	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C502	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C503	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C504	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C505	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C506	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C507	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C508	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C509	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C510	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C511	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C512	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C513	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C514	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C515	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C516	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C517	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C518	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C519	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C520	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C521	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C522	CEXF1C220A	C ELECTRO	16V RSM 22MF (5X7)
C523	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
C524	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C525	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C601	CMXL1J474J	C MYLAR	63V MEU 0.47MF J
C602	CMXL1J474J	C MYLAR	63V MEU 0.47MF J
C603	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C604	CEXF1C331V	C ELECTRO	16V RSS 330MF (8X11.5) TP
C605	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C606	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C607	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C608	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C609	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C610	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C611	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C616	CEXF1C470A	C ELECTRO	16V RSS 47MF (5X7) TP
C617	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
C621	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C628	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C629	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C633	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C637	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C901	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C904	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C909	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C915	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C916	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C917	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C920	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C927	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C929	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C930	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C931	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C936	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C940	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C942	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
C947	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CA01	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
CA02	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CA03	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
CA04	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
CD101	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD102	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD103	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD104	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD105	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD106	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD107	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD108	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD110	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD111	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD202	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CD203	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CD301	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CD302	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CD303	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CD304	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE607	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE608	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE613	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE614	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE615	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE616	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE617	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE618	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE619	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE620	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CEA01	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CEA02	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CEQ01	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
ICD06	1K1A7029AP	IC RESET	KIA7029AP
R901	RN02B339JS	R METAL FILM	2W 3.3 OHM J SMALL
R902	RN02B339JS	R METAL FILM	2W 3.3 OHM J SMALL
R903	RN02B479JS	R METAL FILM	2W 4.7 OHM J SMALL
SW1	5S50101Z90	SW TACT	THVV502GDA
SW100	5S50101Z90	SW TACT	THVV502GDA
SW601	5S50101Z90	SW TACT	THVV502GDA
X101	5XEX4R000C	CRYSTAL QUARTZ	HC-49/U 4.000MHZ 20PPM TP
ZZ200	PTMPJAG242	PCB MAIN AXIAL AS	DLT-32C6LPBD
ZZ200	PTMPJ1G242	PCB MAIN CHIP A AS	DLT-32C6LPBD
110	2193220010	SOLDER CREAM(PB-FREE)	LST309-M(SN+3.0AG(0.5CU))
A001	4859815993	PCB MAIN	288X234 D4V
CC102	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC107	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC110	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC111	HCQK391JBA	C CHIP CERA	50V CH 390PF J 1608
CC112	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC209	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC211	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC213	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC510	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC514	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC516	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC517	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

LOC	PART CODE	PART NAME	DESCRIPTION
CC519	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC520	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC521	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC522	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC524	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC526	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC527	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC529	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC532	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC533	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC534	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC547	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
CC548	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
CC579	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC580	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC581	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC604	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC620	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC621	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC622	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC626	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC627	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC628	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC629	HCBK122KBA	C CHIP CERA	50V X7R 1200PF K 1608
CC632	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC633	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC634	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC635	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC636	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
CC637	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC638	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC640	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC643	HCFK105ZEA	C CHIP CERA	50V Y5V 1MF Z 3216
CC645	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC647	HCFK105ZEA	C CHIP CERA	50V Y5V 1MF Z 3216
CC660	HCBF224KBA	C CHIP CERA	16V X7R 0.22MF K 1608
CC661	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 1608
CC662	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC669	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
CC932	HCBK103KBA	C CHIP CERA	50V Y5V 0.1MF K 1608
CCA01	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
CCA02	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
CCA06	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CCA09	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CCA15	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCA17	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCA21	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCD17	HCBK332KBA	C CHIP CERA	50V X7R 3300PF K 1608
CCD39	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD40	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD41	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD56	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD57	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD63	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD71	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE27	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CCE41	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CCE77	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCQ04	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
DC101	DMMBD1204B	DIODE CHIP	MMBD1204
DC201	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC202	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC203	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC204	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC205	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC206	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC207	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC208	DBAV70—B	DIODE CHIP	BAV70
DC209	DBAV70—B	DIODE CHIP	BAV70
DC401	DBAV70—B	DIODE CHIP	BAV70

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
DC402	D0502B—B	DIODE CHIP	RCLAMP0502B
DC403	DBAV70—B	DIODE CHIP	BAV70
DC404	D0502B—B	DIODE CHIP	RCLAMP0502B
DC901	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
DC902	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
DC903	DBAV70—B	DIODE CHIP	BAV70
DCA01	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA02	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA03	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA04	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA05	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA06	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA07	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA08	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA09	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA10	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA11	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA12	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA13	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA14	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA15	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA16	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA17	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA18	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA19	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA20	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA21	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA22	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA23	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA24	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA25	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA26	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA27	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA28	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA29	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
IC101	1TDA9886T-	IC CHIP IF	TDA9886T
IC202	1M74HC14TC	IC CHIP LOGIC	M74HC14TTR
IC401	1CD74HC52D	IC CHIP LOGIC	CD74HC4052M96
IC402	1HDM1412BQ	IC CHIP HDMI SIGNAL SWITCH	P13HDM1412-B
IC403	124C02MN6D	IC CHIP EEPROM	M24C02-WMN6T
IC404	124C02MN6D	IC CHIP EEPROM	M24C02-WMN6T
IC501	1FL18541-Q	IC CHIP VIDEO DECODER	FL18541
IC504	125VF016-Q	IC CHIP FLASH MEMORY	SST25VF016
IC505	1PCF8574DD	IC CHIP I/O EXPANDER	PCF8574DWR SOIC 16 REEL
IC506	1P15V330S-	IC CHIP VIDEO SWITCH	P15V330S
IC507	1C2256164D	IC CHIP DDR SDRAM	V58C2256164SC15(256MB 200MHZ 66P TSOP)
IC601	1STV8317-Q	IC CHIP AUDIO PROCESSOR	STV8317
IC602	1K1A7027TB	IC CHIP RESET	KIA7027AT 2.7V TSM TYPE
IC603	1STA323W-Q	IC CHIP AUDIO AMP	STA323W
IC604	1K1A7027TB	IC CHIP RESET	KIA7027AT 2.7V TSM TYPE
IC607	1ST232CD-Q	IC CHIP DRIVE	ST232CD
IC901	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC902	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC903	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC904	1AZ117H25C	IC CHIP REGULATOR	AZ1117H-2.5TREI 2.5V SOT-223
IC905	1AZ117H18C	IC CHIP REGULATOR	AZ1117H-1.8TREI 1.8V SOT-223
IC906	1Z1085S18D	IC CHIP REGULATOR	AZ1085S18E1450BJ
IC907	1MP1583—D	IC CHIP CONVERTER	MP1583DN
IC908	1AZ117H25C	IC CHIP REGULATOR	AZ1117H-2.5TREI 2.5V SOT-223
IC909	1AZ117HAJC	IC CHIP REGULATOR	AZ1117H-ADJ.TREI ADJ SOT-223
IC910	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC911	1AZ117H18C	IC CHIP REGULATOR	AZ1117H-1.8TREI 1.8V SOT-223
IC912	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5A D2PAK
IC913	1MP1583—D	IC CHIP CONVERTER	MP1583DN
IC914	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC916	T1RF7233—	FET CHIP	IRF7233
IC917	1AZ117H18C	IC CHIP REGULATOR	AZ1117H-1.8TREI 1.8V SOT-223
ICD01	1NX8314HSQ	IC CHIP MEDIA PROCESOR	PNX8314HS
ICD02	1S281632DD	IC CHIP SDRAM	K4S281632F-UC75

LOC	PART CODE	PART NAME	DESCRIPTION
ICD04	1320ET70NQ	IC CHIP FLASH MEMORY	M29W320ET70N6E
ICD05	1ST232CD-Q	IC CHIP DRIVE	ST232CD
ICD10	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
ICD11	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
ICD12	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
ICD13	110046AHTD	IC CHIP CHANNEL DECODER	TDA10046AHT
ICD30	1C1MAXSP2Q	IC CHIP DE-SCRAMBLER	CIMAX-SP2
ICD31	1ST890BDR	IC CHIP CURRENT SWITCH	ST890BDR
ICD32	1VC573ADB	IC CHIP LATCH	74LVC573ADB
ICD33	1VC573ADB	IC CHIP LATCH	74LVC573ADB
ICD34	1C245APW-D	IC CHIP TRANSCEIVER	74LVC245APW
J901	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
JP401	4859201360	CONN HDMI	51V019S-36WT-A1R
JP402	4859201360	CONN HDMI	51V019S-36WT-A1R
JP502	4859293820	CONN WAFER	GT121-31P-TD-A 31P ST
LC101	HLC109K00C	L CHIP COIL	1.0UH K NLC 3225
LC203	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC204	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC205	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC206	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC207	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC208	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC209	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC210	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC211	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC401	HLC109K00C	L CHIP COIL	1.0UH K NLC 3225
LC402	HLC109K00C	L CHIP COIL	1.0UH K NLC 3225
LC517	HLC479J00A	L CHIP COIL	4.7UH MLF2012
LC601	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC602	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC604	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC605	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC606	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC607	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC608	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC609	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC616	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC617	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC901	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC902	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC903	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC904	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC905	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC906	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC907	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC908	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC909	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC910	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC911	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC912	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC913	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC914	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC915	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC916	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC917	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC918	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC919	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC920	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC921	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC922	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC923	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC924	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC925	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC926	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC927	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC928	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC929	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC930	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC931	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
LC932	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC933	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC934	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC935	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC936	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC937	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC938	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC939	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
LC946	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC947	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC950	HLC150KECE	L CHIP COIL	15UH K 1280
LC951	HLC220KECE	L CHIP COIL	22UH K 1280
LCA03	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA04	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA05	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA06	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA07	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA08	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA09	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA10	HRFT000-CA	R CHIP	1/10 0 OHM 2012
LCA11	HRFT000-CA	R CHIP	1/10 0 OHM 2012
LCA12	HRFT000-CA	R CHIP	1/10 0 OHM 2012
LCA13	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA14	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA15	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA16	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ05	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ06	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ07	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ09	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LD101	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD102	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD103	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD104	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD105	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD106	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD108	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD110	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD202	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD204	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD206	HLC229K02B	L CHIP COIL	2.2UH MLF 1608
LD208	HLC229K02B	L CHIP COIL	2.2UH MLF 1608
LD209	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD212	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD213	HLC229K02B	L CHIP COIL	2.2UH MLF 1608
LD214	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD215	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD301	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD302	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD303	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD304	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD305	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
P204	4859299520	CONN WAFER	12505WS-07P
P901	4859297820	CONN WAFER	12505WS-10A00
P902	4859295220	CONN WAFER	12505WS-06A00
P903	4859295120	CONN WAFER	12505WS-05A00
QC101	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QC102	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QC401	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QC402	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QC501	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QC502	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QC503	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QC608	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QC901	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QCA01	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QCA03	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QCA04	T2SA1037KB	TR CHIP	2SA1037AKT146-R
QCQ01	T2SC2412KB	TR CHIP	25C2412K-T146-BR
QCQ02	T2SC2412KB	TR CHIP	25C2412K-T146-BR

LOC	PART CODE	PART NAME	DESCRIPTION
RA501	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA502	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA503	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA504	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA506	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA507	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RC101	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC111	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RC112	HRFT752JBA	R CHIP	1/10 7.5K OHM J 1608
RC113	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RC117	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC118	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC119	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
RC121	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC122	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC147	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC201	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC202	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC204	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC205	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC214	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC215	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC220	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC221	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC222	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC410	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC412	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC413	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC414	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC415	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC416	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC417	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC418	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC419	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC429	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC430	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC431	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC432	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC433	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC434	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC435	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC436	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC437	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC438	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC501	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC503	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC504	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC506	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC507	HRT2490FBA	R CHIP	1/10 249 OHM F 1608
RC508	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC509	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC510	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC511	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC513	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC514	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC515	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC517	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC519	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC520	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC522	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC523	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC524	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC529	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC530	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC531	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC532	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC533	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC549	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RC551	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC553	HRFT103JBA	R CHIP	1/10 10K OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
RC562	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC563	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC564	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC565	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC567	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC568	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC569	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC570	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC57C	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC581	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC582	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC583	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC584	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC585	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC588	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC589	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC590	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC591	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC592	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC593	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC596	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC597	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC599	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC59A	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59B	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59C	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59D	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59E	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59F	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59G	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59H	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59I	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59J	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC609	HRFT561JBA	R CHIP	1/10 560 OHM J 1608
RC612	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC613	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC618	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC621	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC624	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC628	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC629	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC630	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC631	HRFT131JBA	R CHIP	1/10 130 OHM J 1608
RC634	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC639	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
RC640	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC641	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC645	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC655	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC671	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC901	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC902	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
RC905	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
RC906	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
RC907	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC908	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC911	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC912	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RC913	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA08	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA09	HRFT303JBA	R CHIP	1/10 30K OHM J 1608
RCA10	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
RCA11	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
RCA12	HRFT560JBA	R CHIP	1/10 56 OHM J 1608
RCA13	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCA14	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
RCA15	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA16	HRFT750JBA	R CHIP	1/10 75 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
RCA18	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA19	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA20	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA21	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA22	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCA29	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA30	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA31	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA34	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA40	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
RCD02	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD03	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD05	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD06	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD08	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCD10	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD11	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD13	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD14	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD15	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD20	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD21	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD22	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD23	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD24	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD25	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD26	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD27	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD29	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD30	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD32	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD33	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD34	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD35	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD45	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCD46	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCD48	HRFT122FBA	R CHIP	1/10 1.2K OHM F 1608
RCD49	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD50	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD51	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCD52	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD53	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD67	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD68	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCD74	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD82	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
RCD83	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD84	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD85	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCD86	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCD87	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCD89	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCD93	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD94	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD95	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD96	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD97	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD98	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RCD99	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RCE01	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE02	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE03	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE06	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCE12	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCE13	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE14	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
RCE15	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE56	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE57	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE58	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
RCE68	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE69	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE70	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE71	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE72	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE77	HRTS8E470J	R CHIP ARRAY	1/16 8P 47 OHM J 3216
RCE78	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE79	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE80	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE81	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE82	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE83	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE84	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE85	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE86	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE92	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE93	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE98	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCX10	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCX12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCX19	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCX20	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCX30	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX32	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCX33	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCX34	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX35	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX42	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX43	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX46	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX59	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX65	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX67	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
XD104	5227R000TF	CRYSTAL OSCILLATOR	4P 27.000MHZ 50PPM (BMS-873R)
ZC201	HFEACF470B	F CHIP EMI	ACF321825 47P
ZC202	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA01	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA02	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA03	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA04	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA05	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA06	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA07	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA08	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA09	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA10	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA11	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA12	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA13	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA14	HFEACF470B	F CHIP EMI	ACF321825 47P
ZZ310	PTUNSWG301	PCB UNION AS	DLT-32G1LPBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3.0)
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
ICQ01	1R24FH1B—	IC PREAMP	R24FH1B
JPA05	4859105340	JACK S-VHS	DSW-10 (STRAIGHT)
JPA08	4859112850	JACK PIN	DPSS-0173(3P ST)
LEDQ1	DH1L25BRCT	LED LAMP	HL-L25BRCTGOT
M232	4852334501	PANEL CTRL	HIPS BK
M491	4854965211	BUTTON CH	ABS GY
M491A	7178301051	SCREW TAPPTITE	TT2 WAS 3X10 MFXN 3CR
PA204	4850707N17	CONNECTOR	12505HS-07+12505HS-07+USW=500
PA901	4850710N33	CONNECTOR	12505HS-10+12505HS-10+ULW=800
PA902	4850706N26	CONNECTOR	12505HS-06+12505HS-06+ULW+CORE=550
PA903	4850705N35	CONNECTOR	12505HS-05+12505HS-05+ULW+CORE=800

LOC	PART CODE	PART NAME	DESCRIPTION
ZZ200	PTUNJ2G301	PCB UNION CHIP B AS	DLT-32G1LPBD
CC01	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC02	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC03	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC04	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC05	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC06	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC08	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CCQ03	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
QC01	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC02	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC03	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC04	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC05	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC06	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
RC01	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC02	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC03	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC05	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC07	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC09	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC11	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC13	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC15	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC18	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC20	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC22	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC24	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC25	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC27	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCQ01	HRFT432JBA	R CHIP	1/10 4.3K OHM J 1608
RCQ02	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
RCQ03	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCQ04	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCQ05	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
RCQ06	HRFT432JBA	R CHIP	1/10 4.3K OHM J 1608
RCQ07	HRFT113JBA	R CHIP	1/10 11K OHM J 1608
ZZ200	PTUNJRG301	PCB UNION RADIAL AS	DLT-32G1LPBD
SWQ01	5S50101Z90	SW TACT	THV502GDA
SWQ02	5S50101Z90	SW TACT	THV502GDA
SWQ03	5S50101Z90	SW TACT	THV502GDA
SWQ04	5S50101Z90	SW TACT	THV502GDA
SWQ05	5S50101Z90	SW TACT	THV502GDA
SWQ06	5S50101Z90	SW TACT	THV502GDA
SWQ07	5S50101Z90	SW TACT	THV502GDA
ZZ200	PTUNJAG301	PCB UNION AXIAL AS	DLT-32G1LPBD
ZZ200	PTUNJ1G301	PCB UNION CHIP A AS	DLT-32G1LPBD
A001	4859806610	PCB UNION	124X65(288X234/2X3) D2V
IC01	1CA9557PWD	IC CHIP CONVERTER	PCA9557PW 16PIN TSSOP
LED01	DSM160804T	LED CHIP	OPW-SM1608-04T
LED02	DSM160804T	LED CHIP	OPW-SM1608-04T
LED03	DSM160804T	LED CHIP	OPW-SM1608-04T
LED04	DSM160804T	LED CHIP	OPW-SM1608-04T
LED05	DSM160804T	LED CHIP	OPW-SM1608-04T
LED06	DSM160804T	LED CHIP	OPW-SM1608-04T
LED07	DSM160804T	LED CHIP	OPW-SM1608-04T
LED08	DSM160804T	LED CHIP	OPW-SM1608-04T
LED09	DSM160804T	LED CHIP	OPW-SM1608-04T
LED10	DSM160804T	LED CHIP	OPW-SM1608-04T
LED11	DSM160804T	LED CHIP	OPW-SM1608-04T
LED12	DSM160804T	LED CHIP	OPW-SM1608-04T
P204A	4859298020	CONN WAFER	12505WR-07A00
P901A	4859297920	CONN WAFER	12505WR-10A00
P902A	49590001S0	CONN WAFER	12505WR-06A00
P903A	49590009S0	CONN WAFER	12505WR-05A00

Service part list

37''

LOC	PART CODE	PART NAME	DESCRIPTION
ZZ100	48B5454H09	TRANSMITTER REMOCON	R-54H09(AAA)
ZZ110	PTACPWG301	ACCESSORY AS	DLT-32G1LPBD
60	4850Q00910	BATTERY	R03INN
M212	4852176101	COVER BOTTOM	ABS BK
M681	4856819300	CLAMP WIRE	NYLON 66
M821	4858219401	BAG INSTRUCTION	L.D.P.E T0.05X280X470
M861	48586210E1	MANUAL INSTRUCTION	ENGLISH
P801A	48599DM001	CORD POWER AS	EU LP-33+LS-60=2.0M(LF)
ZZ120	PTBCHSG302	COVER BACK AS	DLT-37G1LPBD
M211	4852180801	COVER BACK	HIPS BK
M211A	4857818702	CLOTH BLACK	FELT T0.7 L=350 W=15
M384	4853833101	FRAME WALL KIT	ABS BK
M384A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M593	4855945500	DECO SIDE AV	PVC 0.3T
ZZ130	PTPKCPG302	PACKING AS	DLT-37G1LPBD
M681	4856812400	BAND PP AUTO	T1.1XW17MMXL770M
M801	4858074000	BOX CARTON	DW-3
M811	485819DZ00	PAD	EPS
M822	4858215001	BAG P.E	PE FOAM 10.5x1200x1150
ZZ140	PTCACAG302	CABINET AS	DLT-37G1LPBD
M191	4851957406	SHIELD CASE AS	7255704+5944606
M201E	7003400651	SCREW MACHINE	BIN 4X6 MFZN 3CR
M201F	4856815910	CLAMP WIRE	EGI T0.4-TUBE+PIE 4.2
M211A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M211B	7172401652	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK 3CR
M211C	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M321	4853298300	BRKT STAND	SECC T2.0
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M382	4853829800	FRAME SURPORT	SECC T1.2
M382A	7003400651	SCREW MACHINE	BIN 4X6 MFZN 3CR
M383	4853829400	FRAME SIDE T	SECC T1.2 (LPL)
M383A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M383B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M384	4853829600	FRAME SIDE B	SECC T1.6 (LPL)
M384A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M384B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M384C	4856815900	CLAMP WIRE	EGI T0.4-TUBE+PIE 3.2
M385	4853830000	FRAME SIDE L/R	SECC T1.2 (LPL)
M385A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M491B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M541	4855421200	SPEC PLATE	P.E 149X59
M551	4855558611	DECO SENSOR	ABS GY
M551A	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK 3CR
M592	4855944700	DECO TERM B	PC 0.25T
M721A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723	4857255901	SHIELD JACK	AL 1100 T=1.0 (A-2 : SL-230T)
M723A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723B	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
P803B	4850714504	CONNECTOR	20022HS-14+20022HS-14(B)+ULW=300
PA502	4859006360	CABLE LVDS	LPL.FMW1214A-31A+FH10001-30+26/32LMBS=400
SP01	4858318510	SPEAKER	SP-45165F01C
SP01A	4850702539	CONNECTOR	YH025-02+YRT205+YRT110+USW=400
SP02	4858318510	SPEAKER	SP-45165F01C
SP02A	4850703574	CONNECTOR	YH025-03+YRT205+YRT110+USW=400
V901	485LD16370	LCD PANEL	LC370WX4-SLA1
ZZ200	PTFMSJG302	MASK FRONT AS	DLT-37G1LPBD
M201	4852098101	MASK FRONT	HIPS BK
M201A	4857743800	CUSION PANEL	PVC 400 X 10 T=1.0
M561	4855626000	MARK BRAND	"SILVER DIA-CUTTING(DOUBLE FACED TAPE)L=86,P=30"
M591	4855947911	DECO PLATE	PC GY
M791	4857943900	INDEX FILM	PET 0.15T(KIMOTO 100NSH)
ZZ250	PTSNWSG301	STAND AS	DLT-32G1LPBD
M213	4852180101	COVER STAND BASE	ABS PMMA BK
M383	4853832301	FRAME STAND	ABS BK
M383A	7115401051	SCREW TAPPING	FLT 4X10 MFZN 3CR
M521	4855219600	PLATE BASE STAND	SECC T3.0
M521A	7115401051	SCREW TAPPING	FLT 4X10 MFZN 3CR
M521C	4852937500	RUBBER BOTTOM	CR60 BK PHI 18.0 X T 3.0
ZZ290	PTMPMSG302	PCB MAIN MANUAL AS	DLT-37G1LPBD

LOC	PART CODE	PART NAME	DESCRIPTION
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3.0)
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
300	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
400	2291050312	FLUX SOLVENT	S-3000
D102	DBA282—	DIODE	BA282
I503	1M24C32BN6	IC EEPROM	M24C32WRN6
ICD07	14C64WBN6—	IC EEPROM	M24C64-WBN6
JP201	4959200160	CONN D-SUB	SHF-015-B111-22/BR2-J0.6
JP202	4959102340	JACK PHONE	SPJ-358H(3.5 STRAIGHT)
JPA01	97P6316100	JACK HEAD PHONE	DHSE-9959
JPA02	4859117550	JACK PIN	DPSE-0375S
JPA03	4859112950	JACK SCART	DSSM-0378 STR
JPA04	4859112950	JACK SCART	DSSM-0378 STR
JPA07	4859201170	CONN OPTICAL SENSOR	OJ107A-T050-SHS
L602	58C0000157	COIL CHOKE	CH-470X
L603	58C0000157	COIL CHOKE	CH-470X
M321	4853294100	BRKT POWER SW	SECC 1T
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M371	4853748800	RETA PCB	NYLON 66
M381	4855218900	PLATE LOWER	"SECC, T=1.2"
M381B	7178301051	SCREW TAPPTITE	TT2 WAS 3X10 MFZN 3CR
M381C	7178301051	SCREW TAPPTITE	TT2 WAS 3X10 MFZN 3CR
M381D	7008300851	SCREW MACHINE	WAS 3X8 MFZN 3CR
M381E	4856815900	CLAMP WIRE	EGI T0.4-TUBE+PIE 3.2
M381F	4956800200	CLAMP WIRE	WS-A-2-19
P602	4859231520	CONN WAFER	YW025-02
P904	4859284920	CONN WAFER	SMW250-08
PA703	4850704574	CONNECTOR	YH025-04+YBNH250-04+ULW=300
PA905	4850709519	CONNECTOR	SMH250-09+YBNH250-09+ULW=200
PD1	4959200360	CONN D-SUB	SDF-009-M900-22N
PD107	4859201460	CONN D-SUB 9P	SHRA0209011
PI01	4859200440	CONN PCMCIA	PC688PRA5513XZ
PM100	4850M14510	MODULE POWER	FEL-37H
TU1	4859731230	TUNER DIGITAL	TD1318AF/IHP-3/DV-IF-H-P)
X501	5XJX19R6JE	CRYSTAL QUARTZ	HC-49/S 19.6608MHZ 18PF 30PPM
X601	5XJ27R00AC	CRYSTAL QUARTZ	HC-49/S 27.000MHZ 15PF 20PPM
Z101	5PK3953M—	FILTER SAW	K3953M
Z102	5PK9650M—	FILTER SAW	K9650M
ZZ200	PTMPJ2G302	PCB MAIN CHIP B AS	DLT-37G1LPBD
CC101	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC103	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC104	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC105	HCBK152KBA	C CHIP CERA	50V X7R 1500PF K 1608
CC106	HCBK180JBA	C CHIP CERA	50V CH 18PF J 1608
CC108	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC201	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC202	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC203	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC204	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC205	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC206	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC207	HCBK470JBA	C CHIP CERA	50V CH 47PF J 1608
CC208	HCBK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC210	HCBK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CC212	HCBK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CC401	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC402	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC403	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC404	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC501	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC502	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC503	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC504	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC505	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC506	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC507	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC508	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC509	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC511	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC512	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
CCD09	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD10	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD11	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD12	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD13	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD14	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD16	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD18	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD19	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD20	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD21	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD22	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD23	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD24	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD25	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD26	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD27	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD28	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD34	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD38	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD42	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD49	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD53	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD54	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD55	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD58	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
CCD60	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD61	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD62	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD64	HCQK330JBA	C CHIP CERA	50V CH 33PF J 1608
CCD65	HCQK330JBA	C CHIP CERA	50V CH 33PF J 1608
CCD66	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD67	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD68	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD69	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD70	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD73	HCQK391JBA	C CHIP CERA	50V CH 390PF J 1608
CCD76	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD77	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE02	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
CCE06	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE07	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE08	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE09	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE10	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCE11	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE12	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE13	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE14	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CCE15	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE16	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE17	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE28	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE29	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE30	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE40	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
LCQ01	FFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ03	FFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
RC102	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC103	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
RC104	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
RC105	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC106	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC107	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC108	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC109	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC110	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RC115	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC120	HRFT680JBA	R CHIP	1/10 68 OHM J 1608
RC203	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
RC206	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC207	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC208	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC210	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC211	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC218	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RC219	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RC401	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC402	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC403	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC404	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC406	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC407	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC408	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC411	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC420	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC421	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC422	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC423	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC425	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC426	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC427	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC512	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC518	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC521	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC526	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC528	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC534	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC535	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC536	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC539	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
RC540	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC541	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC546	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC548	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC550	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RC556	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC557	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC558	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC559	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC560	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC561	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC580	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC587	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC594	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC595	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC598	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC601	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC602	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC614	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC615	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC646	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC647	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC649	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
RC652	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
RC653	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC654	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC660	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC669	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC670	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC903	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC909	HRFT242JBA	R CHIP	1/10 2.4K OHM J 1608
RC910	HRFT431JBA	R CHIP	1/10 430 OHM J 1608
RCA01	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCA02	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA03	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCA04	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA05	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA06	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA07	HRFT750JBA	R CHIP	1/10 75 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
RCA17	HRFT303JBA	R CHIP	1/10 30K OHM J 1608
RCA23	HRFT680JBA	R CHIP	1/10 68 OHM J 1608
RCA24	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCA25	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA26	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCA27	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCA28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA32	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA33	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA35	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCA39	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
RCD07	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD09	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD17	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD31	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD65	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
RCD66	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD80	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCD88	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RCD90	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RCD92	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RCE07	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
RCE08	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
RCE09	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCE10	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCE11	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCE16	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCE17	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
RCE18	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE19	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
RCE20	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE4	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE5	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE59	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE60	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE61	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE62	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE63	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE64	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE65	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCE66	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCE67	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE73	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE74	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE76	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE87	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE88	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE89	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE90	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE91	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE94	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE95	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE96	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE97	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCE99	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCQ08	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCQ09	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCQ10	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCQ11	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCQ12	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCQ13	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCQ14	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCX11	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCX13	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCX47	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCX60	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX62	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
ZZ200	PTMPJ0G302	PCB MAIN (RHU) AS	DLT-37G1LPBD
C618	CEXF1H471V	C ELECTRO	50V RSS 470MF (13X20) TP
C619	CEXF1H471V	C ELECTRO	50V RSS 470MF (13X20) TP

LOC	PART CODE	PART NAME	DESCRIPTION
C919	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C924	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C925	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C933	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C934	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C938	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12) TP
C943	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C944	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C945	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C946	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
ZZ200	PTMPJBG302	PCB MAIN M-10 AS	DLT-37G1LPBD
P501	485923172S	CONN WAFER	YW025-04 (STICK)
P601	485923162S	CONN WAFER	YW025-03 (STICK)
ZZ200	PTMPJRG302	PCB MAIN RADIAL AS	DLT-37G1LPBD
C101	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C102	CMXL1J224J	C MYLAR	63V MEU 0.22MF J (TP)
C103	CEXF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP
C104	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
C105	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C106	CEXF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP
C402	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
C501	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C502	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C503	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C504	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C505	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C506	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C507	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C508	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C509	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C510	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C511	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C512	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C513	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C514	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C515	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C516	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C517	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C518	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C519	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C520	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C521	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C522	CEXF1C220A	C ELECTRO	16V RSM 22MF (5X7)
C523	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
C524	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C525	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C601	CMXL1J474J	C MYLAR	63V MEU 0.47MF J
C602	CMXL1J474J	C MYLAR	63V MEU 0.47MF J
C603	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C604	CEXF1C331V	C ELECTRO	16V RSS 330MF (8X11.5) TP
C605	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C606	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C607	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C608	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C609	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C610	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C611	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C616	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
C617	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
C621	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C628	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C629	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C633	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C637	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C901	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C904	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C909	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C915	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C916	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C917	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C920	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C927	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C929	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C930	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C931	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C936	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C940	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C942	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
C947	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CA01	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
CA02	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CA03	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
CA04	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
CD101	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD102	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD103	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD104	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD105	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD106	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD107	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD108	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD110	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD111	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD202	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CD203	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CD301	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CD302	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CD303	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CD304	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE607	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE608	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE613	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE614	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE615	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE616	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE617	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE618	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE619	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE620	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CEA01	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CEA02	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CEQ01	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
ICD06	1K1A7029AP	IC RESET	KIA7029AP
R901	RN02B339JS	R METAL FILM	2W 3.3 OHM J SMALL
R902	RN02B339JS	R METAL FILM	2W 3.3 OHM J SMALL
R903	RN02B479JS	R METAL FILM	2W 4.7 OHM J SMALL
SW1	5S50101Z90	SW TACT	THVV502GDA
SW100	5S50101Z90	SW TACT	THVV502GDA
SW601	5S50101Z90	SW TACT	THVV502GDA
X101	5XEX4R000C	CRYSTAL QUARTZ	HC-49/U 4.000MHZ 20PPM TP
ZZ200	PTMPJAG302	PCB MAIN AXIAL AS	DLT-37G1LPBD
ZZ200	PTMPJ1G302	PCB MAIN CHIP A AS	DLT-37G1LPBD
110	2193220010	SOLDER CREAM(PB-FREE)	LST309-M(SN+3.0AG/0.5CU)
A001	4859815993	PCB MAIN	288X234 D4V
CC102	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC107	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC110	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC111	HCQK391JBA	C CHIP CERA	50V CH 390PF J 1608
CC112	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC209	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC211	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC213	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC510	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC514	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC516	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC517	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC519	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC520	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC521	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC522	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

LOC	PART CODE	PART NAME	DESCRIPTION
CC524	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC526	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC527	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC529	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC532	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC533	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC534	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC547	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
CC548	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
CC579	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC580	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC581	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC604	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC620	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC621	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC622	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC626	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC627	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC628	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC629	HCBK122KBA	C CHIP CERA	50V X7R 1200PF K 1608
CC632	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC633	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC634	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC635	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC636	HCBK122KBA	C CHIP CERA	50V X7R 1200PF K 1608
CC637	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC638	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC640	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC643	HCFK105ZEA	C CHIP CERA	50V Y5V 1MF Z 3216
CC645	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC647	HCFK105ZEA	C CHIP CERA	50V Y5V 1MF Z 3216
CC660	HCBF224KBA	C CHIP CERA	16V X7R 0.22MF K 1608
CC661	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 1608
CC662	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC669	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
CC932	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CCA01	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
CCA02	HCBK392KBA	C CHIP CERA	50V X7R 3900PF K 1608
CCA08	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CCA09	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CCA15	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCA17	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCA21	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCD17	HCBK332KBA	C CHIP CERA	50V X7R 3300PF K 1608
CCD39	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD40	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD41	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD56	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD57	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD63	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD71	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE27	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CCE41	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CCE77	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCQ04	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
DC101	DMMBD1204B	DIODE CHIP	MMBD1204
DC201	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC202	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC203	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC204	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC205	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC206	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC207	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC208	DBAV70—B	DIODE CHIP	BAV70
DC209	DBAV70—B	DIODE CHIP	BAV70
DC401	DBAV70—B	DIODE CHIP	BAV70
DC402	D0502B—B	DIODE CHIP	RCLAMP0502B
DC403	DBAV70—B	DIODE CHIP	BAV70
DC404	D0502B—B	DIODE CHIP	RCLAMP0502B
DC901	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
DC902	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
DC903	DBAV70—B	DIODE CHIP	BAV70
DCA01	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA02	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA03	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA04	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA05	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA06	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA07	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA08	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA09	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA10	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA11	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA12	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA13	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA14	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA15	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA16	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA17	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA18	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA19	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA20	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA21	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA22	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA23	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA24	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA25	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA26	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA27	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA28	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA29	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
IC101	1TDA9886T-	IC CHIP IF	TDA9886T
IC202	1M74HC14TC	IC CHIP LOGIC	M74HC14TTR
IC401	1CD74HC52D	IC CHIP LOGIC	CD74HC4052M96
IC402	1HDM1412BQ	IC CHIP HDMI SIGNAL SWITCH	P13HDM1412-B
IC403	124C02MN6D	IC CHIP EEPROM	M24C02-WMN6T
IC404	124C02MN6D	IC CHIP EEPROM	M24C02-WMN6T
IC501	1FL18541-Q	IC CHIP VIDEO DECODER	FL18541
IC504	125VF016-Q	IC CHIP FLASH MEMORY	SST25VF016
IC505	1PCF8574DD	IC CHIP I/O EXPANDER	PCF8574DWR SOIC 16 REEL
IC506	1P15V330S-	IC CHIP VIDEO SWITCH	P15V330S
IC507	1C2256164D	IC CHIP DDR SDRAM	V58C2256164SCi5(256MB 200MHZ 66P TSOP)
IC601	1STV8317-Q	IC CHIP AUDIO PROCESSOR	STV8317
IC602	1K1A7027TB	IC CHIP RESET	KIA7027AT 2.7V TSM TYPE
IC603	1STA323W-Q	IC CHIP AUDIO AMP	STA323W
IC604	1K1A7027TB	IC CHIP RESET	KIA7027AT 2.7V TSM TYPE
IC607	1ST232CD-Q	IC CHIP DRIVE	ST232CD
IC901	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC902	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC903	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC904	1AZ117H25C	IC CHIP REGULATOR	AZ1117H-2.5TREI 2.5V SOT-223
IC905	1AZ117H18C	IC CHIP REGULATOR	AZ1117H-1.8TREI 1.8V SOT-223
IC906	1Z1085S18D	IC CHIP REGULATOR	AZ1085S18E1450BJ
IC907	1MP1583—D	IC CHIP CONVERTER	MP1583DN
IC908	1AZ117H25C	IC CHIP REGULATOR	AZ1117H-2.5TREI 2.5V SOT-223
IC909	1AZ117HAJC	IC CHIP REGULATOR	AZ1117H-ADJ TREI ADJ SOT-223
IC910	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC911	1AZ117H18C	IC CHIP REGULATOR	AZ1117H-1.8TREI 1.8V SOT-223
IC912	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5A D2PAK
IC913	1MP1583—D	IC CHIP CONVERTER	MP1583DN
IC914	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC916	11RF7233—	FET CHIP	11RF7233
IC917	1AZ117H18C	IC CHIP REGULATOR	AZ1117H-1.8TREI 1.8V SOT-223
ICD01	1NX8314HSQ	IC CHIP MEDIA PROCESOR	PNX8314HS
ICD02	1S281632DD	IC CHIP SDRAM	K4S281632F-UC75
ICD04	1320ET70NQ	IC CHIP FLASH MEMORY	M29W320ET70N6E
ICD05	1ST232CD-Q	IC CHIP DRIVE	ST232CD
ICD10	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
ICD11	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
ICD12	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW

LOC	PART CODE	PART NAME	DESCRIPTION
ICD13	110046AHTD	IC CHIP CHANNEL DECODER	TDA10046AHT
ICD30	1C1MAXSP2Q	IC CHIP DE-SCRAMBLER	CIMAX-SP2
ICD31	1ST890BDR	IC CHIP CURRENT SWITCH	ST890BDR
ICD32	1VC573ADB	IC CHIP LATCH	74LVC573ADB
ICD33	1VC573ADB	IC CHIP LATCH	74LVC573ADB
ICD34	1C245APW-D	IC CHIP TRANSCEIVER	74LVC245APW
J901	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
JP401	4859201360	CONN HDMI	51V019S-36WT-A1R
JP402	4859201360	CONN HDMI	51V019S-36WT-A1R
JP502	4859293820	CONN WAFER	GT121-31P-TD-A 31P ST
LC101	HLC109K00C	L CHIP COIL	1.0UH K NLC 3225
LC203	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC204	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC205	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC206	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC207	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC208	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC209	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC210	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC211	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC401	HLC109K00C	L CHIP COIL	1.0UH K NLC 3225
LC402	HLC109K00C	L CHIP COIL	1.0UH K NLC 3225
LC517	HLC479J00A	L CHIP COIL	4.7UH MLF2012
LC601	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC602	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC604	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC605	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC606	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC607	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC608	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC609	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC616	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC617	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC901	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC902	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC903	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC904	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC905	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC906	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC907	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC908	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC909	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC910	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC911	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC912	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC913	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC914	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC915	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC916	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC917	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC918	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC919	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC920	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC921	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC922	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC923	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC924	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC925	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC926	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC927	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC928	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC929	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC930	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC931	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC932	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC933	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC934	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC935	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC936	HFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC937	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
LC938	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC939	HFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
LC946	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC947	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC950	HLC150KECE	L CHIP COIL	15UH K 1280
LC951	HLC220KECE	L CHIP COIL	22UH K 1280
LCA03	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA04	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA05	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA06	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA07	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA08	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA09	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA10	HRFT000-CA	R CHIP	1/10 0 OHM 2012
LCA11	HRFT000-CA	R CHIP	1/10 0 OHM 2012
LCA12	HRFT000-CA	R CHIP	1/10 0 OHM 2012
LCA13	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA14	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA15	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA16	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ05	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ06	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ07	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ09	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LD101	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD102	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD103	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD104	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD105	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD106	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD108	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD110	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD202	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD204	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD206	HLC229K02B	L CHIP COIL	2.2UH MLF 1608
LD208	HLC229K02B	L CHIP COIL	2.2UH MLF 1608
LD209	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD212	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD213	HLC229K02B	L CHIP COIL	2.2UH MLF 1608
LD214	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD215	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD301	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD302	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD303	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD304	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
LD305	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PB2 2012
P204	485929520	CONN WAFER	12505WS-07P
P901	4859297820	CONN WAFER	12505WS-10A00
P902	4859295220	CONN WAFER	12505WS-06A00
P903	4859295120	CONN WAFER	12505WS-05A00
QC101	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC102	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC401	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC402	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC501	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC502	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC503	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC608	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC901	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QCA01	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QCA03	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QCA04	T2SA1037KB	TR CHIP	2SA1037AKT146-R
QCQ01	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QCQ02	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
RA501	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA502	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA503	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA504	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA506	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA507	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216

LOC	PART CODE	PART NAME	DESCRIPTION
RC101	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC111	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RC112	HRFT752JBA	R CHIP	1/10 7.5K OHM J 1608
RC113	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RC117	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC118	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC119	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
RC121	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC122	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC147	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC201	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC202	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC204	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC205	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC214	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC215	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC220	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC221	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC222	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC410	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC412	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC413	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC414	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC415	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC416	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC417	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC418	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC419	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC429	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC430	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC431	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC432	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC433	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC434	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC435	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC436	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC437	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC438	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC501	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC503	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC504	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC506	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC507	HRT2490FBA	R CHIP	1/10 249 OHM F 1608
RC508	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC509	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC510	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC511	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC513	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC514	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC515	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC517	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC519	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC520	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC522	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC523	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC524	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC529	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC530	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC531	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC532	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC533	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC549	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RC551	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC553	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC562	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC563	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC564	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC565	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC567	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC568	HRFT000JBA	R CHIP	1/10 0 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
RC569	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC570	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC57C	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC581	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC582	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC583	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC584	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC585	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC588	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC589	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC590	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC591	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC592	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC593	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC596	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC597	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC599	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC59A	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59B	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59C	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59D	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59E	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59F	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59G	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59H	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59I	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59J	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC609	HRFT561JBA	R CHIP	1/10 560 OHM J 1608
RC612	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC613	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC618	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC621	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC624	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC628	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC629	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC630	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC631	HRFT131JBA	R CHIP	1/10 130 OHM J 1608
RC634	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC639	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
RC640	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC641	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC645	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC655	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC671	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC901	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC902	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
RC905	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
RC906	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
RC907	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC908	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC911	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC912	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RC913	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA08	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA09	HRFT303JBA	R CHIP	1/10 30K OHM J 1608
RCA10	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
RCA11	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
RCA12	HRFT560JBA	R CHIP	1/10 56 OHM J 1608
RCA13	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCA14	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
RCA15	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA16	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA18	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA19	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA20	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA21	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA22	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCA29	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA30	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA31	HRFT750JBA	R CHIP	1/10 75 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
RCA34	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA40	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
RCD02	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD03	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD05	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD06	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD08	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCD10	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD11	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD13	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD14	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD15	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD20	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD21	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD22	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD23	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD24	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD25	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD26	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD27	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD29	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD30	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD32	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD33	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD34	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD35	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD45	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCD46	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCD48	HRFT122FBA	R CHIP	1/10 1.2K OHM F 1608
RCD49	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD50	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD51	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCD52	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD53	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD67	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD68	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCD74	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD82	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
RCD83	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD84	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD85	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCD86	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCD87	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCD89	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCD93	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD94	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD95	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD96	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD97	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD98	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RCD99	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RCE01	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE02	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE03	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE06	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCE12	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCE13	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE14	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE15	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE56	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE57	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE58	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
RCE68	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE69	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE70	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE71	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE72	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE77	HRTS8E470J	R CHIP ARRAY	1/16 8P 47 OHM J 3216

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
RCE78	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE79	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE80	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE81	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE82	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE83	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE84	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE85	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE86	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE92	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE93	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE98	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCX10	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCX12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCX19	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCX20	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCX30	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX32	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCX33	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCX34	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX35	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX42	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX43	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX46	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX59	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX65	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX67	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
XD104	5227R000TF	CRYSTAL OSCILLATOR	4P 27.000MHZ 50PPM (BMS-873R)
ZC201	HFEACF470B	F CHIP EMI	ACF321825 47P
ZC202	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA01	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA02	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA03	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA04	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA05	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA06	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA07	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA08	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA09	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA10	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA11	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA12	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA13	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA14	HFEACF470B	F CHIP EMI	ACF321825 47P
ZZ310	PTUNSWG301	PCB UNION AS	DLT-32G1LPBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3CO-W3.0)
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
ICQ01	1R24FH1B—	IC PREAMP	R24FH1B
JPA05	4859105340	JACK S-VHS	DSW-10 (STRAIGHT)
JPA08	4859112850	JACK PIN	DPSS-0173(3P ST)
LEDQ1	DH1L25BRCT	LED LAMP	HI-L25BRCTGOT
M232	4852334501	PANEL CTRL	HIPS BK
M491	4854965211	BUTTON CH	ABS GY
M491A	7178301051	SCREW TAPPTITE	TT2 WAS 3X10 MFZN 3CR
PA204	4850707N17	CONNECTOR	12505HS-07+12505HS-07+USW=500
PA901	4850710N33	CONNECTOR	12505HS-10+12505HS-10+ULW=800
PA902	4850706N26	CONNECTOR	12505HS-06+12505HS-06+ULW+CORE=550
PA903	4850705N35	CONNECTOR	12505HS-05+12505HS-05+ULW+CORE=800
ZZ200	PTUNJ2G301	PCB UNION CHIP B AS	DLT-32G1LPBD
CC01	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC02	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC03	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC04	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC05	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC06	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC08	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CCQ03	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
QC01	T2SC2412KB	TR CHIP	2SC2412K-T146-BR

LOC	PART CODE	PART NAME	DESCRIPTION
QC02	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC03	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC04	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC05	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC06	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
RC01	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC02	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC03	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC05	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC07	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC09	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC11	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC13	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC15	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC18	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC20	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC22	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC24	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC25	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC27	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCQ01	HRFT432JBA	R CHIP	1/10 4.3K OHM J 1608
RCQ02	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
RCQ03	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCQ04	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCQ05	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
RCQ06	HRFT432JBA	R CHIP	1/10 4.3K OHM J 1608
RCQ07	HRFT113JBA	R CHIP	1/10 11K OHM J 1608
ZZ200	PTUNJRG301	PCB UNION RADIAL AS	DLT-32G1LPBD
SWQ01	5S50101Z90	SW TACT	THVV502GDA
SWQ02	5S50101Z90	SW TACT	THVV502GDA
SWQ03	5S50101Z90	SW TACT	THVV502GDA
SWQ04	5S50101Z90	SW TACT	THVV502GDA
SWQ05	5S50101Z90	SW TACT	THVV502GDA
SWQ06	5S50101Z90	SW TACT	THVV502GDA
SWQ07	5S50101Z90	SW TACT	THVV502GDA
ZZ200	PTUNJAG301	PCB UNION AXIAL AS	DLT-32G1LPBD
ZZ200	PTUNJ1G301	PCB UNION CHIP A AS	DLT-32G1LPBD
A001	4859806610	PCB UNION	124X65(288X234/2X3) D2V
IC01	1CA9557PWD	IC CHIP CONVERTER	PCA9557PW 16PIN TSSOP
LED01	DSM160804T	LED CHIP	0PW-SM1608-04T
LED02	DSM160804T	LED CHIP	0PW-SM1608-04T
LED03	DSM160804T	LED CHIP	0PW-SM1608-04T
LED04	DSM160804T	LED CHIP	0PW-SM1608-04T
LED05	DSM160804T	LED CHIP	0PW-SM1608-04T
LED06	DSM160804T	LED CHIP	0PW-SM1608-04T
LED07	DSM160804T	LED CHIP	0PW-SM1608-04T
LED08	DSM160804T	LED CHIP	0PW-SM1608-04T
LED09	DSM160804T	LED CHIP	0PW-SM1608-04T
LED10	DSM160804T	LED CHIP	0PW-SM1608-04T
LED11	DSM160804T	LED CHIP	0PW-SM1608-04T
LED12	DSM160804T	LED CHIP	0PW-SM1608-04T
P204A	4859298020	CONN WAFER	12505WR-07A00
P901A	4859297920	CONN WAFER	12505WR-10A00
P902A	49590001S0	CONN WAFER	12505WR-06A00
P903A	49590009S0	CONN WAFER	12505WR-05A00

Service part list

42”

LOC	PART CODE	PART NAME	DESCRIPTION
ZZ100	48B5454H09	TRANSMITTER REMOCON	R-54H09(AAA)
ZZ110	PTACPWG303	ACCESSORY AS	DLT-42G1LPBD
60	4850Q00910	BATTERY	R03/NN
M681	4856819300	CLAMP WIRE	NYLON 66
M821	4858219401	BAG INSTRUCTION	L.D.P.E T.O.05X280X470
M861	48586210E1	MANUAL INSTRUCTION	ENGLISH
P801A	48599DM001	CORD POWER AS	EU LP-33+LS-60=2.0M(LF)
ZZ120	PTBCSHG303	COVER BACK AS	DLT-42G1LPBD
M211	4852180901	COVER BACK	HIPS BK
M593	4855945500	DECO SIDE AV	PVC 0.3T
ZZ130	PTPKCPG303	PACKING AS	DLT-42G1LPBD
M681	4856812400	BAND PP AUTO	T1.1XW17MMXL770M
M801	4858073300	BOX CARTON	DW-3
M811	485819DP00	PAD	EPS
M822	4858215101	BAG P.E	PE FOAM T0.5X1430X1270
ZZ140	PTCAGAG303	CABINET AS	DLT-42G1LPBD
M191	4851957406	SHIELD CASE AS	7255704+5944606
M201E	7003400651	SCREW MACHINE	BIN 4X6 MFZN 3CR
M201F	4856815910	CLAMP WIRE	EGI T0.4+TUBE+PIE 4.2
M211A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M211B	7172401652	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK 3CR
M211C	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M214	4852180311	COVER BOTTOM	HIPS BK
M214A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M321	4853298500	BRKT STAND	EGI 1.6T
M321A	7172401051	SCREW TAPPTITE	TT2 TRS 4X10 MFZN 3CR
M322	4853298000	BRKT SUPPORT	SECC T=1.5
M322A	7172401051	SCREW TAPPTITE	TT2 TRS 4X10 MFZN 3CR
M382	4853831600	FRAME BAR	SECC T=1.2(A-1:LPL PANEL)
M382B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M491B	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M541	4855421200	SPEC PLATE	P.E 149X59
M551	4855558611	DECO SENSOR	ABS GY
M551A	7173301052	SCREW TAPPTITE	TT2 BIN 3X10 MFZN BK 3CR
M592	4855944700	DECO TERM B	PC 0.25T
M721A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723	4857255901	SHIELD JACK	AL 1100 T=1.0 (A-2 : SL-230T)
M723A	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
M723B	7178300852	SCREW TAPPTITE	TT2 WAS 3X8 MFZN BK 3CR
P803B	4850712511	CONNECTOR	20022HS-12S+20022HS-12S+ULW=800
P803C	4850714S06	CONNECTOR	20022HS-14+20022HS-12+ULW=300
PA502	4859006760	CABLE LVDS	L P L : F M W 1 2 1 4 A - 3 1 A + F H 1 0 0 0 1 - 30+32C6LMBD=250
SP01	4858318410	SPEAKER	SP-57165F01C
SP01A	4850702S40	CONNECTOR	YH025-02+YRT205+YRT110+USW=700
SP01B	4856017800	SCREW SPKR FIX	SWRM+SECC 3CR
SP02	4858318410	SPEAKER	SP-57165F01C
SP02A	4850703S78	CONNECTOR	YH025-03+YRT205+YRT110+USW=500
SP02B	4856017800	SCREW SPKR FIX	SWRM+SECC 3CR
V901	485LD16424	LCD PANEL	LC420WX7-SLA1
ZZ200	PTFMSJG303	MASK FRONT AS	DLT-42G1LPBD
M201	4852098201	MASK FRONT	HIPS BK
M561	48566363SD	MARK BRAND	SILVER DIA-CUTTING
M591	4855948011	DECO PLATE	PC GY
M771	4857743801	CUSHION PANEL	PVC 450 X 10 T=1.0
M791	4857943900	INDEX FILM	PET 0.15T(KIMOTO 100NSH)
ZZ250	PTSNSWG303	STAND AS	DLT-42G1LPBD
M191	4851960000	FRAME ASSY	3833011+2180511
M192	4851959900	COVER ASSY	2180411+5219700+5947311
M382	4853832800	FRAME SUB STAND	AL
M382A	7003501552	SCREW MACHINE	BIN 5X15 MFZN BK 3CR
M382B	7172401652	SCREW TAPPTITE	TT2 TRS 4X16 MFZN BK 3CR
M383A	7115401552	SCREW TAPPING	FLT 4X15 MFZN BK 3CR
M384	4853832911	FRAME MOUNT	AL
ZZ290	PTMPMSG303	PCB MAIN MANUAL AS	DLT-42G1LPBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3.0)
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
300	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
400	2291050312	FLUX SOLVENT	S-3000
D102	DBA282—	DIODE	BA282

LOC	PART CODE	PART NAME	DESCRIPTION
I503	1M24C32BN6	IC EEPROM	M24C32WRN6
ICD07	14C64WBN6	IC EEPROM	M24C64-WBN6
JP201	4959200160	CONN D-SUB	SHF-015-B111-22/BR2-J0.6
JP202	4959102340	JACK PHONE	SPJ-358H(3.5 STRAIGHT)
JPA01	97P6316100	JACK HEAD PHONE	DHSE-9959
JPA02	4859117550	JACK PIN	DPSE-0375S
JPA03	4859112950	JACK SCART	DSSM-0378 STR
JPA04	4859112950	JACK SCART	DSSM-0378 STR
JPA07	4859201170	CONN OPTICAL SENSOR	OJ107A-T050-SHS
L602	58C0000157	COIL CHOKE	CH-470X
L603	58C0000157	COIL CHOKE	CH-470X
M321	4853294100	BRKT POWER SW	SECC 1T
M321A	7172401452	SCREW TAPPTITE	TT2 TRS 4X14 MFZN BK 3CR
M372	4956800200	CLAMP WIRE	WS-A-2-19
M381	4853831501	FRAME MAIN PCB	SECC T=1.5 (A-2+B-1:42U1)
M381C	7008300851	SCREW MACHINE	WAS 3X8 MFZN 3CR
M381D	4856815900	CLAMP WIRE	EGI T0.4+TUBE+PIE 3.2
P602	4859231520	CONN WAFER	YW025-02
P904	4859284920	CONN WAFER	SNW250-08
PA703	4850704N46	CONNECTOR	YH025-04+YBNH250-04+ULW=500
PA905	4850709N16	CONNECTOR	SMH250-09+YBNH250-09+ULW=500
PD1	4959200360	CONN D-SUB	SDF-009-M900-22N
PD107	4859201460	CONN D-SUB 9P	SHRA0209011
PI01	4859200440	CONN P/MCIA	PC68PRA5513XZ
PM100	4850M13410	MODULE POWER	FEL-42C2A
TU1	4859731230	TUNER DIGITAL	TD1318AF/IHP-3(DV-IF-H-P)
X501	5XJX19R6JE	CRYSTAL QUARTZ	HC-49/S 19.6608MHZ 18PF 30PPM
X601	5XJ27R00AC	CRYSTAL QUARTZ	HC-49/S 27.000MHZ 15PF 20PPM
Z101	5PK3953M—	FILTER SAW	K3953M
Z102	5PK3950M—	FILTER SAW	K3950M
ZZ200	PTMPJ2G303	PCB MAIN CHIP B AS	DLT-42G1LPBD
CC101	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC103	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC104	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC105	HCBK152KBA	C CHIP CERA	50V X7R 1500PF K 1608
CC106	HCBK180JBA	C CHIP CERA	50V CH 18PF J 1608
CC108	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC201	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC202	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC203	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC204	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC205	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC206	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC207	HCBK120JBA	C CHIP CERA	50V CH 12PF J 1608
CC208	HCBK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC210	HCBK102JBA	C CHIP CERA	50V CH 100PF J 1608
CC212	HCBK102JBA	C CHIP CERA	50V CH 100PF J 1608
CC401	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC402	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC403	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC404	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC501	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC502	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC503	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC504	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC505	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC506	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC507	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC508	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC509	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC511	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC512	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC513	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC515	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC518	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC523	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC525	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC528	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC530	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC531	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
CCD19	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD20	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD21	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD22	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD23	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD24	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD25	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD26	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD27	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD28	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD34	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD38	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD42	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD49	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD53	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD54	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD55	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD58	HCQK100JBA	C CHIP CERA	50V CH 10PF J 1608
CCD60	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD61	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD62	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD64	HCQK330JBA	C CHIP CERA	50V CH 33PF J 1608
CCD65	HCQK330JBA	C CHIP CERA	50V CH 33PF J 1608
CCD66	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD67	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD68	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD69	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD70	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD73	HCQK391JBA	C CHIP CERA	50V CH 390PF J 1608
CCD76	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD77	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE02	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
CCE06	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE07	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE08	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE09	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE10	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCE11	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE12	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE13	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE14	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CCE15	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE16	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE17	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE28	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE29	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE30	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCQ40	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
LQ001	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LQ003	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
RC102	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC103	HRFT682JBA	R CHIP	1/10 6.8K OHM J 1608
RC104	HRFT222JBA	R CHIP	1/10 2.2K OHM J 1608
RC105	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC106	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC107	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC108	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC109	HRFT223JBA	R CHIP	1/10 22K OHM J 1608
RC110	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RC115	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC120	HRFT680JBA	R CHIP	1/10 68 OHM J 1608
RC203	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC206	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC207	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC208	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RC210	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC211	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC218	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RC219	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RC401	HRFT101JBA	R CHIP	1/10 100 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
RC402	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC403	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC404	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC406	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC407	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC408	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC411	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC420	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC421	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC422	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC423	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC425	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC426	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RC427	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC512	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC518	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC521	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC526	HRT5769FBA	R CHIP	1/10 57.6 OHM F 1608
RC528	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC534	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC535	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC536	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC539	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
RC540	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC541	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC546	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC548	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC550	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RC556	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC557	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC558	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC559	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC560	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC561	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC580	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC587	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC594	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC595	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC598	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC601	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC602	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC614	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC615	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RC646	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC647	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC649	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
RC652	HRF4220JEA	R CHIP	1/4W 22 OHM J 3216
RC653	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC654	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC660	HRFT622JCA	R CHIP	1/10 6.2K OHM J 2012
RC669	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC670	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC903	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC909	HRFT242JBA	R CHIP	1/10 2.4K OHM J 1608
RC910	HRFT431JBA	R CHIP	1/10 430 OHM J 1608
RCA01	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCA02	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA03	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCA04	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA05	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA06	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA07	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA17	HRFT303JBA	R CHIP	1/10 30K OHM J 1608
RCA23	HRFT680JBA	R CHIP	1/10 68 OHM J 1608
RCA24	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCA25	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA26	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCA27	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCA28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA32	HRFT473JBA	R CHIP	1/10 47K OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
RCA33	HRFT473JBA	R CHIP	1/10 47K OHM J 1608
RCA35	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCA39	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
RCD07	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD09	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD17	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD31	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD65	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
RCD66	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD80	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCD88	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RCD90	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RCD92	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RCE07	HRFT391JBA	R CHIP	1/10 390 OHM J 1608
RCE08	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
RCE09	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCE10	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCE11	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCE16	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCE17	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
RCE18	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE19	HRFT360JBA	R CHIP	1/10 36 OHM J 1608
RCE20	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE4	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE5	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCE59	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE60	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE61	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE62	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE63	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE64	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE65	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCE66	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCE67	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE73	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE74	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE76	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE87	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE88	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE89	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE90	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE91	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE94	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE95	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE96	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE97	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCE99	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCQ08	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCQ09	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCQ10	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCQ11	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCQ12	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCQ13	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCQ14	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCX11	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCX13	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCX47	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCX60	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX62	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
ZZ200	PTMPJ0G303	PCB MAIN (RHU) AS	DLT-42G1LPBD
C618	CEXF1H471V	C ELECTRO	50V RSS 470MF (13X20) TP
C619	CEXF1H471V	C ELECTRO	50V RSS 470MF (13X20) TP
C919	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C924	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C925	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C933	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C934	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C938	CEXF1C471V	C ELECTRO	16V RSS 470MF (8X12) TP
C943	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C944	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP

LOC	PART CODE	PART NAME	DESCRIPTION
C945	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
C946	CEXF1C102V	C ELECTRO	16V RSS 1000MF (10X20) TP
ZZ200	PTMPJ0G303	PCB MAIN M-10 AS	DLT-42G1LPBD
P501	485923172S	CONN WAFER	YW025-04 (STICK)
P601	485923162S	CONN WAFER	YW025-03 (STICK)
ZZ200	PTMPJ0G303	PCB MAIN RADIAL AS	DLT-42G1LPBD
C101	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C102	CMXL1J224J	C MYLAR	63V MEU 0.22MF J (TP)
C103	CEXF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP
C104	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
C105	CEXF1E101V	C ELECTRO	25V RSS 100MF (6.3X11) TP
C106	CEXF1H478V	C ELECTRO	50V RSS 0.47MF (5X11) TP
C402	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
C501	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C502	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C503	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C504	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C505	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C506	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C507	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C508	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C509	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C510	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C511	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C512	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C513	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C514	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C515	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C516	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C517	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C518	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C519	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C520	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C521	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C522	CEXF1C220A	C ELECTRO	16V RSS 22MF (5X7)
C523	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
C524	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C525	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C601	CMXL1J474J	C MYLAR	63V MEU 0.47MF J
C602	CMXL1J474J	C MYLAR	63V MEU 0.47MF J
C603	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
C604	CEXF1C331V	C ELECTRO	16V RSS 330MF (8X11.5) TP
C605	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C606	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C607	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C608	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C609	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C610	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C611	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
C616	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
C617	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
C621	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C628	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C629	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C633	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C637	CEXF1H101V	C ELECTRO	50V RSS 100MF (8X11.5) TP
C901	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C904	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C909	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C915	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C916	CEXF1H220V	C ELECTRO	50V RSS 22MF (5X11) TP
C917	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C920	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C927	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C929	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C930	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C931	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C936	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C940	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
C942	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
C947	CEXF1C101V	C ELECTRO	16V RSS 100MF (6.3X11) TP
CA01	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
CA02	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CA03	CEXF1H100A	C ELECTRO	50V RSM 10MF (5X7) TP
CA04	CEXF1C470A	C ELECTRO	16V RSM 47MF (5X7) TP
CD101	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD102	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD103	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD104	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD105	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD106	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD107	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD108	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD110	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD111	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
CD202	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CD203	CEXF1C470V	C ELECTRO	16V RSS 47MF (5X11) TP
CD301	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CD302	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CD303	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CD304	CEXF1H100V	C ELECTRO	50V RSS 10MF (5X11) TP
CE607	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE608	CEXF1H109V	C ELECTRO	50V RSS 1MF (5X11) TP
CE613	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE614	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE615	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE616	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE617	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE618	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE619	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CE620	CEXF1H109A	C ELECTRO	50V RSM 1MF (4X7) TP
CEA01	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CEA02	CEXF1H479A	C ELECTRO	50V RSM 4.7MF 4X7
CEQ01	CEXF1C100V	C ELECTRO	16V RSS 10MF 4X7
ICD06	1K1A7029AP	IC RESET	KIA7029AP
R901	RN02B339JS	R METAL FILM	2W 3.3 OHM J SMALL
R902	RN02B339JS	R METAL FILM	2W 3.3 OHM J SMALL
R903	RN02B479JS	R METAL FILM	2W 4.7 OHM J SMALL
SW1	5S50101Z90	SW TACT	THVV502GDA
SW100	5S50101Z90	SW TACT	THVV502GDA
SW601	5S50101Z90	SW TACT	THVV502GDA
X101	5XEX4R000C	CRYSTAL QUARTZ	HC-49/U 4.000MHZ 20PPM TP
ZZ200	PTMPJAG303	PCB MAIN AXIAL AS	DLT-42G1LPBD
ZZ200	PTMPJ1G303	PCB MAIN CHIP A AS	DLT-42G1LPBD
110	2193220010	SOLDER CREAM(PB-FREE)	LST309-M(SN+3.0AG/0.5CU)
A001	4859815993	PCB MAIN	288X234 D4V
CC102	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC107	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC110	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC111	HCQK391JBA	C CHIP CERA	50V CH 390PF J 1608
CC112	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CC209	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC211	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC213	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC510	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC514	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC516	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC517	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC519	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC520	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC521	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC522	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC524	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC526	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC527	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC529	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC532	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC533	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC534	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608

LOC	PART CODE	PART NAME	DESCRIPTION
CC547	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
CC548	HCQK220JBA	C CHIP CERA	50V CH 22PF J 1608
CC579	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC580	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC581	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC604	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC620	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC621	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC622	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC626	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC627	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC628	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC629	HCBK122KBA	C CHIP CERA	50V X7R 1200PF K 1608
CC632	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC633	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC634	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC635	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC636	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
CC637	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC638	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC640	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC643	HCFK105ZEA	C CHIP CERA	50V Y5V 1MF Z 3216
CC645	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC647	HCFK105ZEA	C CHIP CERA	50V Y5V 1MF Z 3216
CC660	HCBF224KBA	C CHIP CERA	16V X7R 0.22MF K 1608
CC661	HCBK223KBA	C CHIP CERA	50V X7R 0.022MF K 1608
CC662	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CC669	HCBK105KBA	C CHIP CERA	10V X7R 1MF K 1608
CC932	HCBK103KBA	C CHIP CERA	50V X7R 0.01MF K 1608
CCA01	HCBK392KBA	C CHIP CERA	50V X7R 390PF K 1608
CCA02	HCBK392KBA	C CHIP CERA	50V X7R 390PF K 1608
CCA06	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CCA09	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CCA15	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCA17	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCA21	HCQK102JBA	C CHIP CERA	50V CH 1000PF J 1608
CCD17	HCBK332KBA	C CHIP CERA	50V X7R 330PF K 1608
CCD39	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD40	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD41	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD56	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD57	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD63	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCD71	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCE27	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CCE41	HCQK101JBA	C CHIP CERA	50V CH 100PF J 1608
CCE77	HCFK104ZBA	C CHIP CERA	50V Y5V 0.1MF Z 1608
CCQ04	HCBK221KBA	C CHIP CERA	50V X7R 220PF K 1608
DC101	MMBD1204B	DIODE CHIP	MMBD1204
DC201	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC202	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC203	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC204	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC205	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC206	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC207	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DC208	DBAV70—B	DIODE CHIP	BAV70
DC209	DBAV70—B	DIODE CHIP	BAV70
DC401	DBAV70—B	DIODE CHIP	BAV70
DC402	D0502B—B	DIODE CHIP	RCLAMP0502B
DC403	DBAV70—B	DIODE CHIP	BAV70
DC404	D0502B—B	DIODE CHIP	RCLAMP0502B
DC901	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
DC902	DM2FM3—C	DIODE CHIP SCHOTTKY	M2FM3 M2F TYPE
DC903	DBAV70—B	DIODE CHIP	BAV70
DCA01	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA02	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA03	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA04	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
DCA05	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA06	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA07	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA08	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA09	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA10	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA11	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA12	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA13	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA14	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA15	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA16	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA17	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA18	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA19	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA20	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA21	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA22	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA23	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA24	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA25	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA26	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA27	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA28	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
DCA29	DUMZ8R2T-B	DIODE CHIP ZENER	UMZ-8.2T (TAPING)
IC101	1TDA9886T	IC CHIP IF	TDA9886T
IC202	1M74HC14TC	IC CHIP LOGIC	M74HC14TTR
IC401	1CD74HC52D	IC CHIP LOGIC	CD74HC4052M96
IC402	1HDM1412BQ	IC CHIP HDMI SIGNAL SWITCH	P13HDM1412-B
IC403	124C02MN6D	IC CHIP EEPROM	M24C02-WMN6T
IC404	124C02MN6D	IC CHIP EEPROM	M24C02-WMN6T
IC501	1FL18541-Q	IC CHIP VIDEO DECODER	FL18541
IC504	125VF016-Q	IC CHIP FLASH MEMORY	SST25VF016
IC505	1PCF8574DD	IC CHIP I/O EXPANDER	PCF8574DWR SOIC 16 REEL
IC506	1P15V330S-	IC CHIP VIDEO SWITCH	P15V330S
IC507	1C2256164D	IC CHIP DDR SDRAM	V58C2256164SCI5(256MB 200MHZ 66P TSOP)
IC601	1STV8317-Q	IC CHIP AUDIO PROCESSOR	STV8317
IC602	1K1A7027TB	IC CHIP RESET	KIA7027AT 2.7V TSM TYPE
IC603	1STA323W-Q	IC CHIP AUDIO AMP	STA323W
IC604	1K1A7027TB	IC CHIP RESET	KIA7027AT 2.7V TSM TYPE
IC607	1ST232CD-Q	IC CHIP DRIVE	ST232CD
IC901	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC902	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC903	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC904	1AZ117H25C	IC CHIP REGULATOR	AZ1117H-2.5TREI 2.5V SOT-223
IC905	1AZ117H18C	IC CHIP REGULATOR	AZ1117H-1.8TREI 1.8V SOT-223
IC906	1Z1085S18D	IC CHIP REGULATOR	AZ1085S18E1450BJ
IC907	1MP1583-D	IC CHIP CONVERTER	MP1583DN
IC908	1AZ117H25C	IC CHIP REGULATOR	AZ1117H-2.5TREI 2.5V SOT-223
IC909	1AZ117HAJC	IC CHIP REGULATOR	AZ1117H-ADJ TREI ADJ SOT-223
IC910	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC911	1AZ117H18C	IC CHIP REGULATOR	AZ1117H-1.8TREI 1.8V SOT-223
IC912	1LM317BD2E	IC CHIP REGULATOR	LM317BD2T ADJ 1.2V 37V 1.5A D2PAK
IC913	1MP1583-D	IC CHIP CONVERTER	MP1583DN
IC914	1AZ117H33C	IC CHIP REGULATOR	AZ1117H-3.3TREI 3.3V SOT-223
IC916	T1RF7233-	FET CHIP	IRF7233
IC917	1AZ117H18C	IC CHIP REGULATOR	AZ1117H-1.8TREI 1.8V SOT-223
ICD01	1NX8314HSQ	IC CHIP MEDIA PROCESOR	PNX8314HS
ICD02	1S281632DD	IC CHIP SDRAM	K4S281632F-UC75
ICD04	1320ET70NQ	IC CHIP FLASH MEMORY	M29W320ET70N6E
ICD05	1ST232CD-Q	IC CHIP DRIVE	ST232CD
ICD10	1CD74HC53D	IC CHIP LOGIC	CD74HC4053M96
ICD11	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
ICD12	1C1GU04GWD	IC CHIP INVERTER	74AHC1GU04GW
ICD13	110046AHTD	IC CHIP CHANNEL DECODER	TDA10046AHT
ICD30	1C1MAXSP2Q	IC CHIP DE-SCRAMBLER	CIMAX-SP2
ICD31	1ST890BDR	IC CHIP CURRENT SWITCH	ST890BDR
ICD32	1VC573ADB	IC CHIP LATCH	74LVC573ADB
ICD33	1VC573ADB	IC CHIP LATCH	74LVC573ADB
ICD34	1C245APW-D	IC CHIP TRANSCEIVER	74LVC245APW

LOC	PART CODE	PART NAME	DESCRIPTION
J902	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
JP401	4859201360	CONN HDMI	51V019S-36WT-A1R
JP402	4859201360	CONN HDMI	51V019S-36WT-A1R
JP502	4859293820	CONN WAFER	GT121-31P-TD-A 31P ST
LC101	HLC109K00C	L CHIP COIL	1.0UH K NLC 3225
LC203	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC204	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC205	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC206	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC207	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC208	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC209	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC210	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC211	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC401	HLC109K00C	L CHIP COIL	1.0UH K NLC 3225
LC402	HLC109K00C	L CHIP COIL	1.0UH K NLC 3225
LC517	HLC479J00A	L CHIP COIL	4.7UH MLF2012
LC601	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC602	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC604	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC605	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC606	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC607	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC608	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC609	HLC100K02A	L CHIP COIL	10UH MLF 2012
LC616	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC617	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC901	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC902	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC903	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC904	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC905	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC906	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC907	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC908	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC909	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC910	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC911	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC912	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC913	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC914	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC915	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC916	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC917	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC918	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC919	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC920	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC921	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC922	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC923	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC924	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC925	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC926	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC927	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC928	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC929	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC930	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC931	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC932	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC933	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC934	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC935	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC936	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC937	HLC479K05C	L CHIP COIL	4.7UH K NLC322522T
LC938	FFFMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LC939	FFFH1M501B	F CHIP FERRITE BEAD	HH-1M3216-501J
LC946	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC947	HLC479K03C	L CHIP COIL	4.7UH K NLC5650T
LC950	HLC150KECE	L CHIP COIL	15UH K 1280
LC951	HLC220KECE	L CHIP COIL	22UH K 1280

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
LCA03	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA04	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA05	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA06	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA07	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA08	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA09	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA10	HRFT000-CA	R CHIP	1/10 0 OHM 2012
LCA11	HRFT000-CA	R CHIP	1/10 0 OHM 2012
LCA12	HRFT000-CA	R CHIP	1/10 0 OHM 2012
LCA13	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA14	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA15	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCA16	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ05	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ06	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ07	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LCQ09	HFFMMZ400A	F CHIP FERRITE BEAD	40 OHM MMZ 2012S
LD101	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD102	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD103	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD104	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD105	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD106	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD108	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD110	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD202	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD204	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD206	HLC229K02B	L CHIP COIL	2.2UH MLF 1608
LD208	HLC229K02B	L CHIP COIL	2.2UH MLF 1608
LD209	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD212	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD213	HLC229K02B	L CHIP COIL	2.2UH MLF 1608
LD214	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD215	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD301	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD302	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD303	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD304	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
LD305	HFF600C01A	F CHIP FERRITE BEAD	60 OHM PBV 2012
P204	4859299520	CONN WAFER	12505WS-07P
P901	4859297820	CONN WAFER	12505WS-10A00
P902	4859295220	CONN WAFER	12505WS-06A00
P903	4859295120	CONN WAFER	12505WS-05A00
QC101	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC102	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC401	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC402	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC501	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC502	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC503	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC608	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC901	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QCA01	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QCA03	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QCA04	T2SA1037KB	TR CHIP	2SA1037AKT146-R
QQC01	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QQC02	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
RA501	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA502	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA503	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA504	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA506	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RA507	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RC101	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC111	HRFT104JBA	R CHIP	1/10 100K OHM J 1608
RC112	HRFT752JBA	R CHIP	1/10 7.5K OHM J 1608
RC113	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RC117	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC118	HRFT101JBA	R CHIP	1/10 100 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
RC119	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
RC121	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC122	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC147	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC201	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC202	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC204	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC205	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC214	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC215	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC220	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC221	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC222	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC410	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC412	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC413	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC414	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC415	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC416	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC417	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC418	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC419	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC429	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC430	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RC431	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC432	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC433	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC434	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC435	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC436	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC437	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC438	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC501	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC503	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC504	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RC506	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC507	HRT2490FBA	R CHIP	1/10 249 OHM F 1608
RC508	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC509	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC510	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC511	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC513	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC514	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC515	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC517	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC519	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC520	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC522	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC523	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC524	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RC529	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC530	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC531	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC532	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC533	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC549	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RC551	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC553	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC562	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC563	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC564	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC565	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC567	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC568	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC569	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC570	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC57C	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC581	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC582	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC583	HRFT000JBA	R CHIP	1/10 0 OHM J 1608

Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
RC584	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC585	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC588	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC589	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC590	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC591	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC592	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC593	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC596	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC597	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RC599	HRT5769FBA	R CHIP	1/10 57.6 OHM J 1608
RC59A	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59B	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59C	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59D	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59E	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59F	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59G	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59H	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59I	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC59J	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC609	HRFT561JBA	R CHIP	1/10 560 OHM J 1608
RC612	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC613	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC618	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC621	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC624	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC628	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC629	HRFT100JBA	R CHIP	1/10 10 OHM J 1608
RC630	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RC631	HRFT131JBA	R CHIP	1/10 130 OHM J 1608
RC634	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC639	HRFT392JBA	R CHIP	1/10 3.9K OHM J 1608
RC640	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC641	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC645	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC655	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC671	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC901	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC902	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
RC905	HRFT562JBA	R CHIP	1/10 5.6K OHM J 1608
RC906	HRFT333JBA	R CHIP	1/10 33K OHM J 1608
RC907	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC908	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RC911	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC912	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RC913	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA08	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA09	HRFT303JBA	R CHIP	1/10 30K OHM J 1608
RCA10	HRFT471JBA	R CHIP	1/10 470 OHM J 1608
RCA11	HRFT183JBA	R CHIP	1/10 18K OHM J 1608
RCA12	HRFT560JBA	R CHIP	1/10 56 OHM J 1608
RCA13	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCA14	HRFT151JBA	R CHIP	1/10 150 OHM J 1608
RCA15	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA16	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA18	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA19	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCA20	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA21	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA22	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCA29	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA30	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA31	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA34	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCA40	HRFT512JBA	R CHIP	1/10 5.1K OHM J 1608
RCD02	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD03	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD05	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD06	HRFT101JBA	R CHIP	1/10 100 OHM J 1608

LOC	PART CODE	PART NAME	DESCRIPTION
RCD08	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCD10	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD11	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD13	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD14	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD15	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD20	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD21	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD22	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD23	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD24	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD25	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD26	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD27	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD28	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD29	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD30	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD32	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD33	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD34	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD35	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD45	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCD46	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCD48	HRFT122FBA	R CHIP	1/10 1.2K OHM F 1608
RCD49	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD50	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD51	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCD52	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD53	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD67	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCD68	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RCD74	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD82	HRFT684JBA	R CHIP	1/10 680K OHM J 1608
RCD83	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD84	HRFT220JBA	R CHIP	1/10 22 OHM J 1608
RCD85	HRFT102JBA	R CHIP	1/10 1K OHM J 1608
RCD86	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCD87	HRFT224JBA	R CHIP	1/10 220K OHM J 1608
RCD89	HRFT472JBA	R CHIP	1/10 4.7K OHM J 1608
RCD93	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD94	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD95	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD96	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCD97	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCD98	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RCD99	HRFT272JBA	R CHIP	1/10 2.7K OHM J 1608
RCE01	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE02	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCE03	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE06	HRFT331JBA	R CHIP	1/10 330 OHM J 1608
RCE12	HRFT221JBA	R CHIP	1/10 220 OHM J 1608
RCE13	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE14	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE15	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE56	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE57	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE58	HRFT202JBA	R CHIP	1/10 2K OHM J 1608
RCE68	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE69	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE70	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCE71	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE72	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE77	HRTS8E470J	R CHIP ARRAY	1/16 8P 47 OHM J 3216
RCE78	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE79	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE80	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE81	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE82	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE83	HRFT470JBA	R CHIP	1/10 47 OHM J 1608


Service part list

LOC	PART CODE	PART NAME	DESCRIPTION
RCE84	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE85	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE86	HRFT470JBA	R CHIP	1/10 47 OHM J 1608
RCE92	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE93	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCE98	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCX10	HRTS8E330J	R CHIP ARRAY	1/16 8P 33 OHM J 3216
RCX12	HRFT103JBA	R CHIP	1/10 10K OHM J 1608
RCX19	HRFT750JBA	R CHIP	1/10 75 OHM J 1608
RCX20	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCX30	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX32	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RCX33	HRFT330JBA	R CHIP	1/10 33 OHM J 1608
RCX34	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX35	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX42	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX43	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX46	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX59	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX65	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCX67	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
XD104	5Z27R000TF	CRYSTAL OSCILLATOR	4P 27.000MHZ 50PPM (BMS-873R)
ZC201	HFEACF470B	F CHIP EMI	ACF321825 47P
ZC202	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA01	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA02	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA03	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA04	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA05	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA06	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA07	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA08	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA09	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA10	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA11	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA12	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA13	HFEACF470B	F CHIP EMI	ACF321825 47P
ZCA14	HFEACF470B	F CHIP EMI	ACF321825 47P
ZZ310	PTUNSWG303	PCB UNION AS	DLT-42G1LPBD
100	2193110012	SOLDER WIRE	SAC3000 *3.0MM (LFA3C0-W3.0)
200	2193110024	SOLDER WIRE	SAC3005 *1.6MM (LFA3-107-W1.6)
300	2291050623	FLUX SOLDER LF	SV-PBF-304P(0.823)
400	2291050312	FLUX SOLVENT	S-3000
ICQ01	1R24FH1B—	IC PREAMP	R24FH1B
JPA05	4859105340	JACK S-VHS	DSW-10 (STRAIGHT)
JPA08	4859112850	JACK PIN	DPSS-0173(3P ST)
LEDQ1	DH1L25BRCT	LED LAMP	HI-L25BRCTGOT
M232	4852334501	PANEL CTRL	HIPS BK
M491	4854965211	BUTTON CH	ABS GY
MA91A	7178301051	SCREW TAPPTITE	TT2 5M 3X10 MFIN 3CR
PA204	4850707N17	CONNECTOR	12505HS-07+12505HS-07+USW=500
PA901	4850710N28	CONNECTOR	12505HS-10+12505HS-10+ULW=900
PA902	4850706N26	CONNECTOR	12505HS-06+12505HS-06+ULW+CORE=550
PA903	4850705N35	CONNECTOR	12505HS-05+12505HS-05+ULW+CORE=800
ZZ200	PTUNJ2G303	PCB UNION CHIP B AS	DLT-42G1LPBD
CC01	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC02	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC03	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC04	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC05	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC06	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CC08	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
CCQ03	HCBK104KBA	C CHIP CERA	50V X7R 0.1MF K 1608
QC01	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC02	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC03	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC04	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC05	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
QC06	T2SC2412KB	TR CHIP	2SC2412K-T146-BR
RC01	HRFT101JBA	R CHIP	1/10 100 OHM J 1608


LOC	PART CODE	PART NAME	DESCRIPTION
RC02	HRFT101JBA	R CHIP	1/10 100 OHM J 1608
RC03	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC05	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC07	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC09	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC11	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC13	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC15	HRFT620JBA	R CHIP	1/10 62 OHM J 1608
RC18	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC20	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC22	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC24	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RC25	HRFT332JBA	R CHIP	1/10 3.3K OHM J 1608
RC27	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCQ01	HRFT432JBA	R CHIP	1/10 4.3K OHM J 1608
RCQ02	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
RCQ03	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCQ04	HRFT000JBA	R CHIP	1/10 0 OHM J 1608
RCQ05	HRFT152JBA	R CHIP	1/10 1.5K OHM J 1608
RCQ06	HRFT432JBA	R CHIP	1/10 4.3K OHM J 1608
RCQ07	HRFT113JBA	R CHIP	1/10 11K OHM J 1608
ZZ200	PTUNJRG303	PCB UNION RADIAL AS	DLT-42G1LPBD
SWQ01	5S50101Z90	SW TACT	THVV502GDA
SWQ02	5S50101Z90	SW TACT	THVV502GDA
SWQ03	5S50101Z90	SW TACT	THVV502GDA
SWQ04	5S50101Z90	SW TACT	THVV502GDA
SWQ05	5S50101Z90	SW TACT	THVV502GDA
SWQ06	5S50101Z90	SW TACT	THVV502GDA
SWQ07	5S50101Z90	SW TACT	THVV502GDA
ZZ200	PTUNJAG303	PCB UNION AXIAL AS	DLT-42G1LPBD
ZZ200	PTUNJ1G303	PCB UNION CHIP A AS	DLT-42G1LPBD
A001	4859806610	PCB UNION	124X65(288X234/2X3) D2V
IC01	1CA9557PWD	IC CHIP CONVERTER	PCA9557PW 16PIN TSSOP
LED01	DSM160804T	LED CHIP	0PW-SM1608-04T
LED02	DSM160804T	LED CHIP	0PW-SM1608-04T
LED03	DSM160804T	LED CHIP	0PW-SM1608-04T
LED04	DSM160804T	LED CHIP	0PW-SM1608-04T
LED05	DSM160804T	LED CHIP	0PW-SM1608-04T
LED06	DSM160804T	LED CHIP	0PW-SM1608-04T
LED07	DSM160804T	LED CHIP	0PW-SM1608-04T
LED08	DSM160804T	LED CHIP	0PW-SM1608-04T
LED09	DSM160804T	LED CHIP	0PW-SM1608-04T
LED10	DSM160804T	LED CHIP	0PW-SM1608-04T
LED11	DSM160804T	LED CHIP	0PW-SM1608-04T
LED12	DSM160804T	LED CHIP	0PW-SM1608-04T
P204A	4859298020	CONN WAFER	12505WR-07A00
P901A	4859297920	CONN WAFER	12505WR-10A00
P902A	49590001S0	CONN WAFER	12505WR-06A00
P903A	49590009S0	CONN WAFER	12505WR-05A00


11. Circuit Diagram

SL-601T MAIN_LVDS INTERFACE(2007.10.09)
S/N : 4859815993-00 MP PCB 02_VER

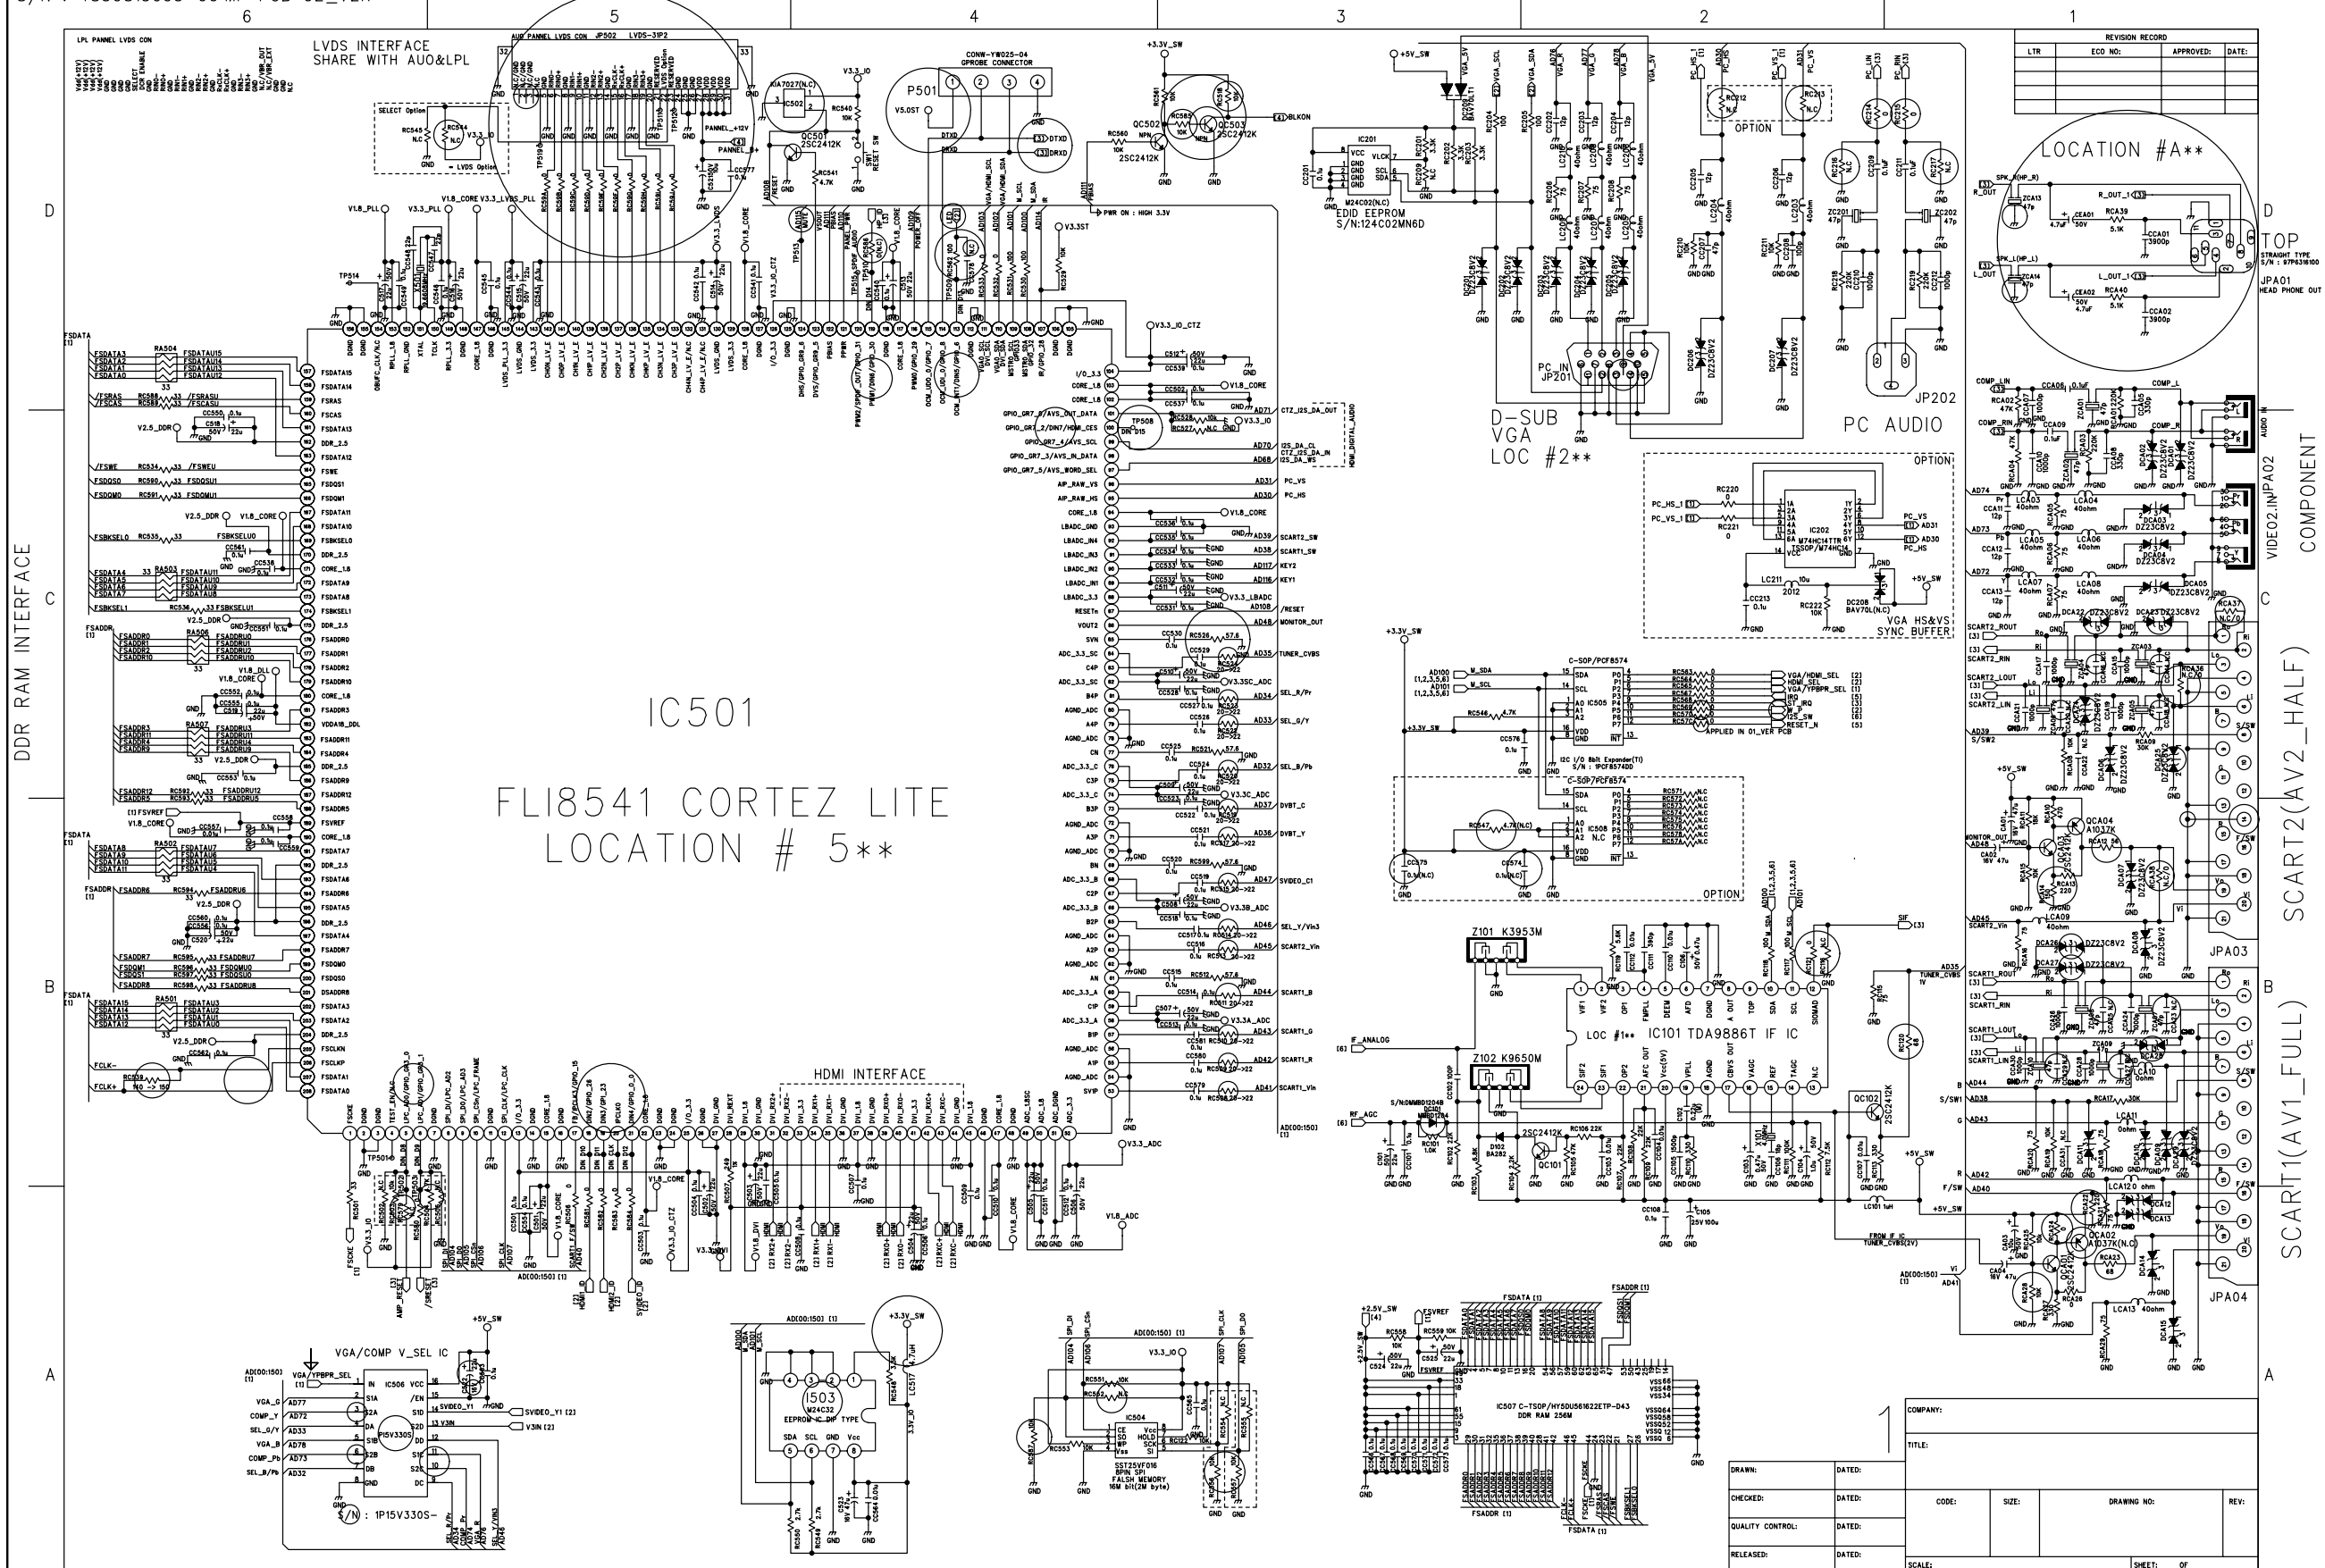


Circuit Diagram

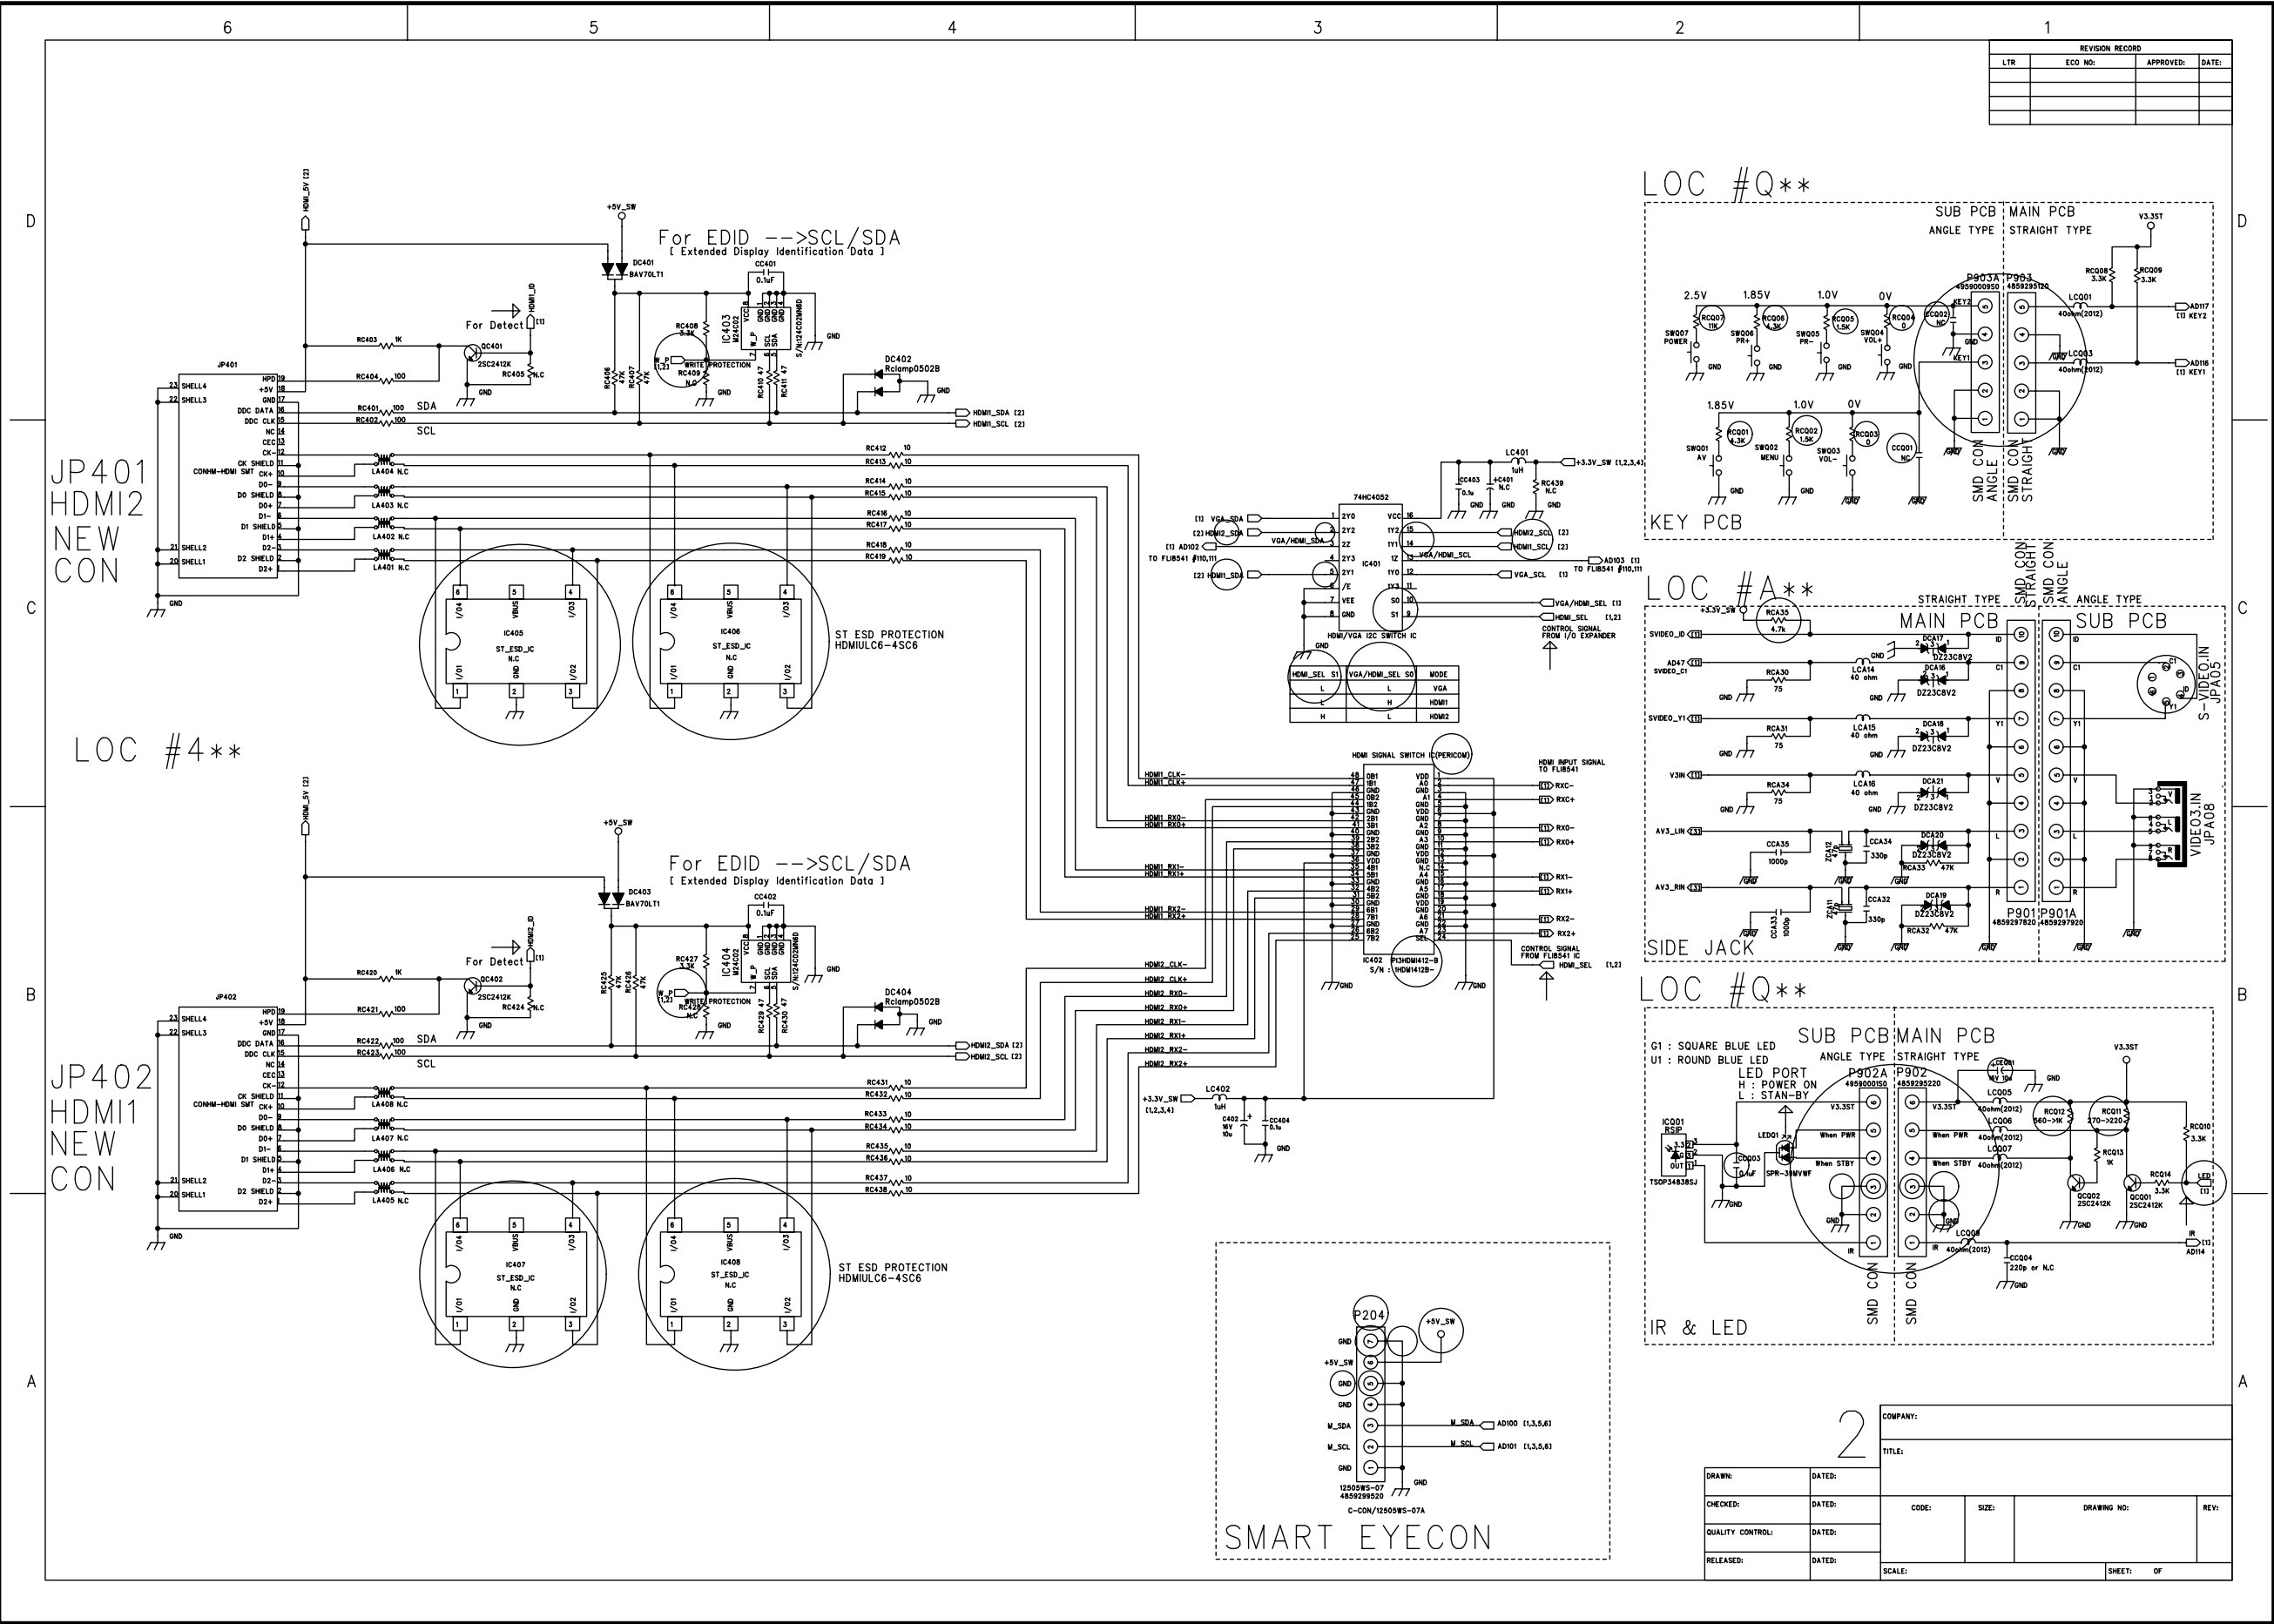


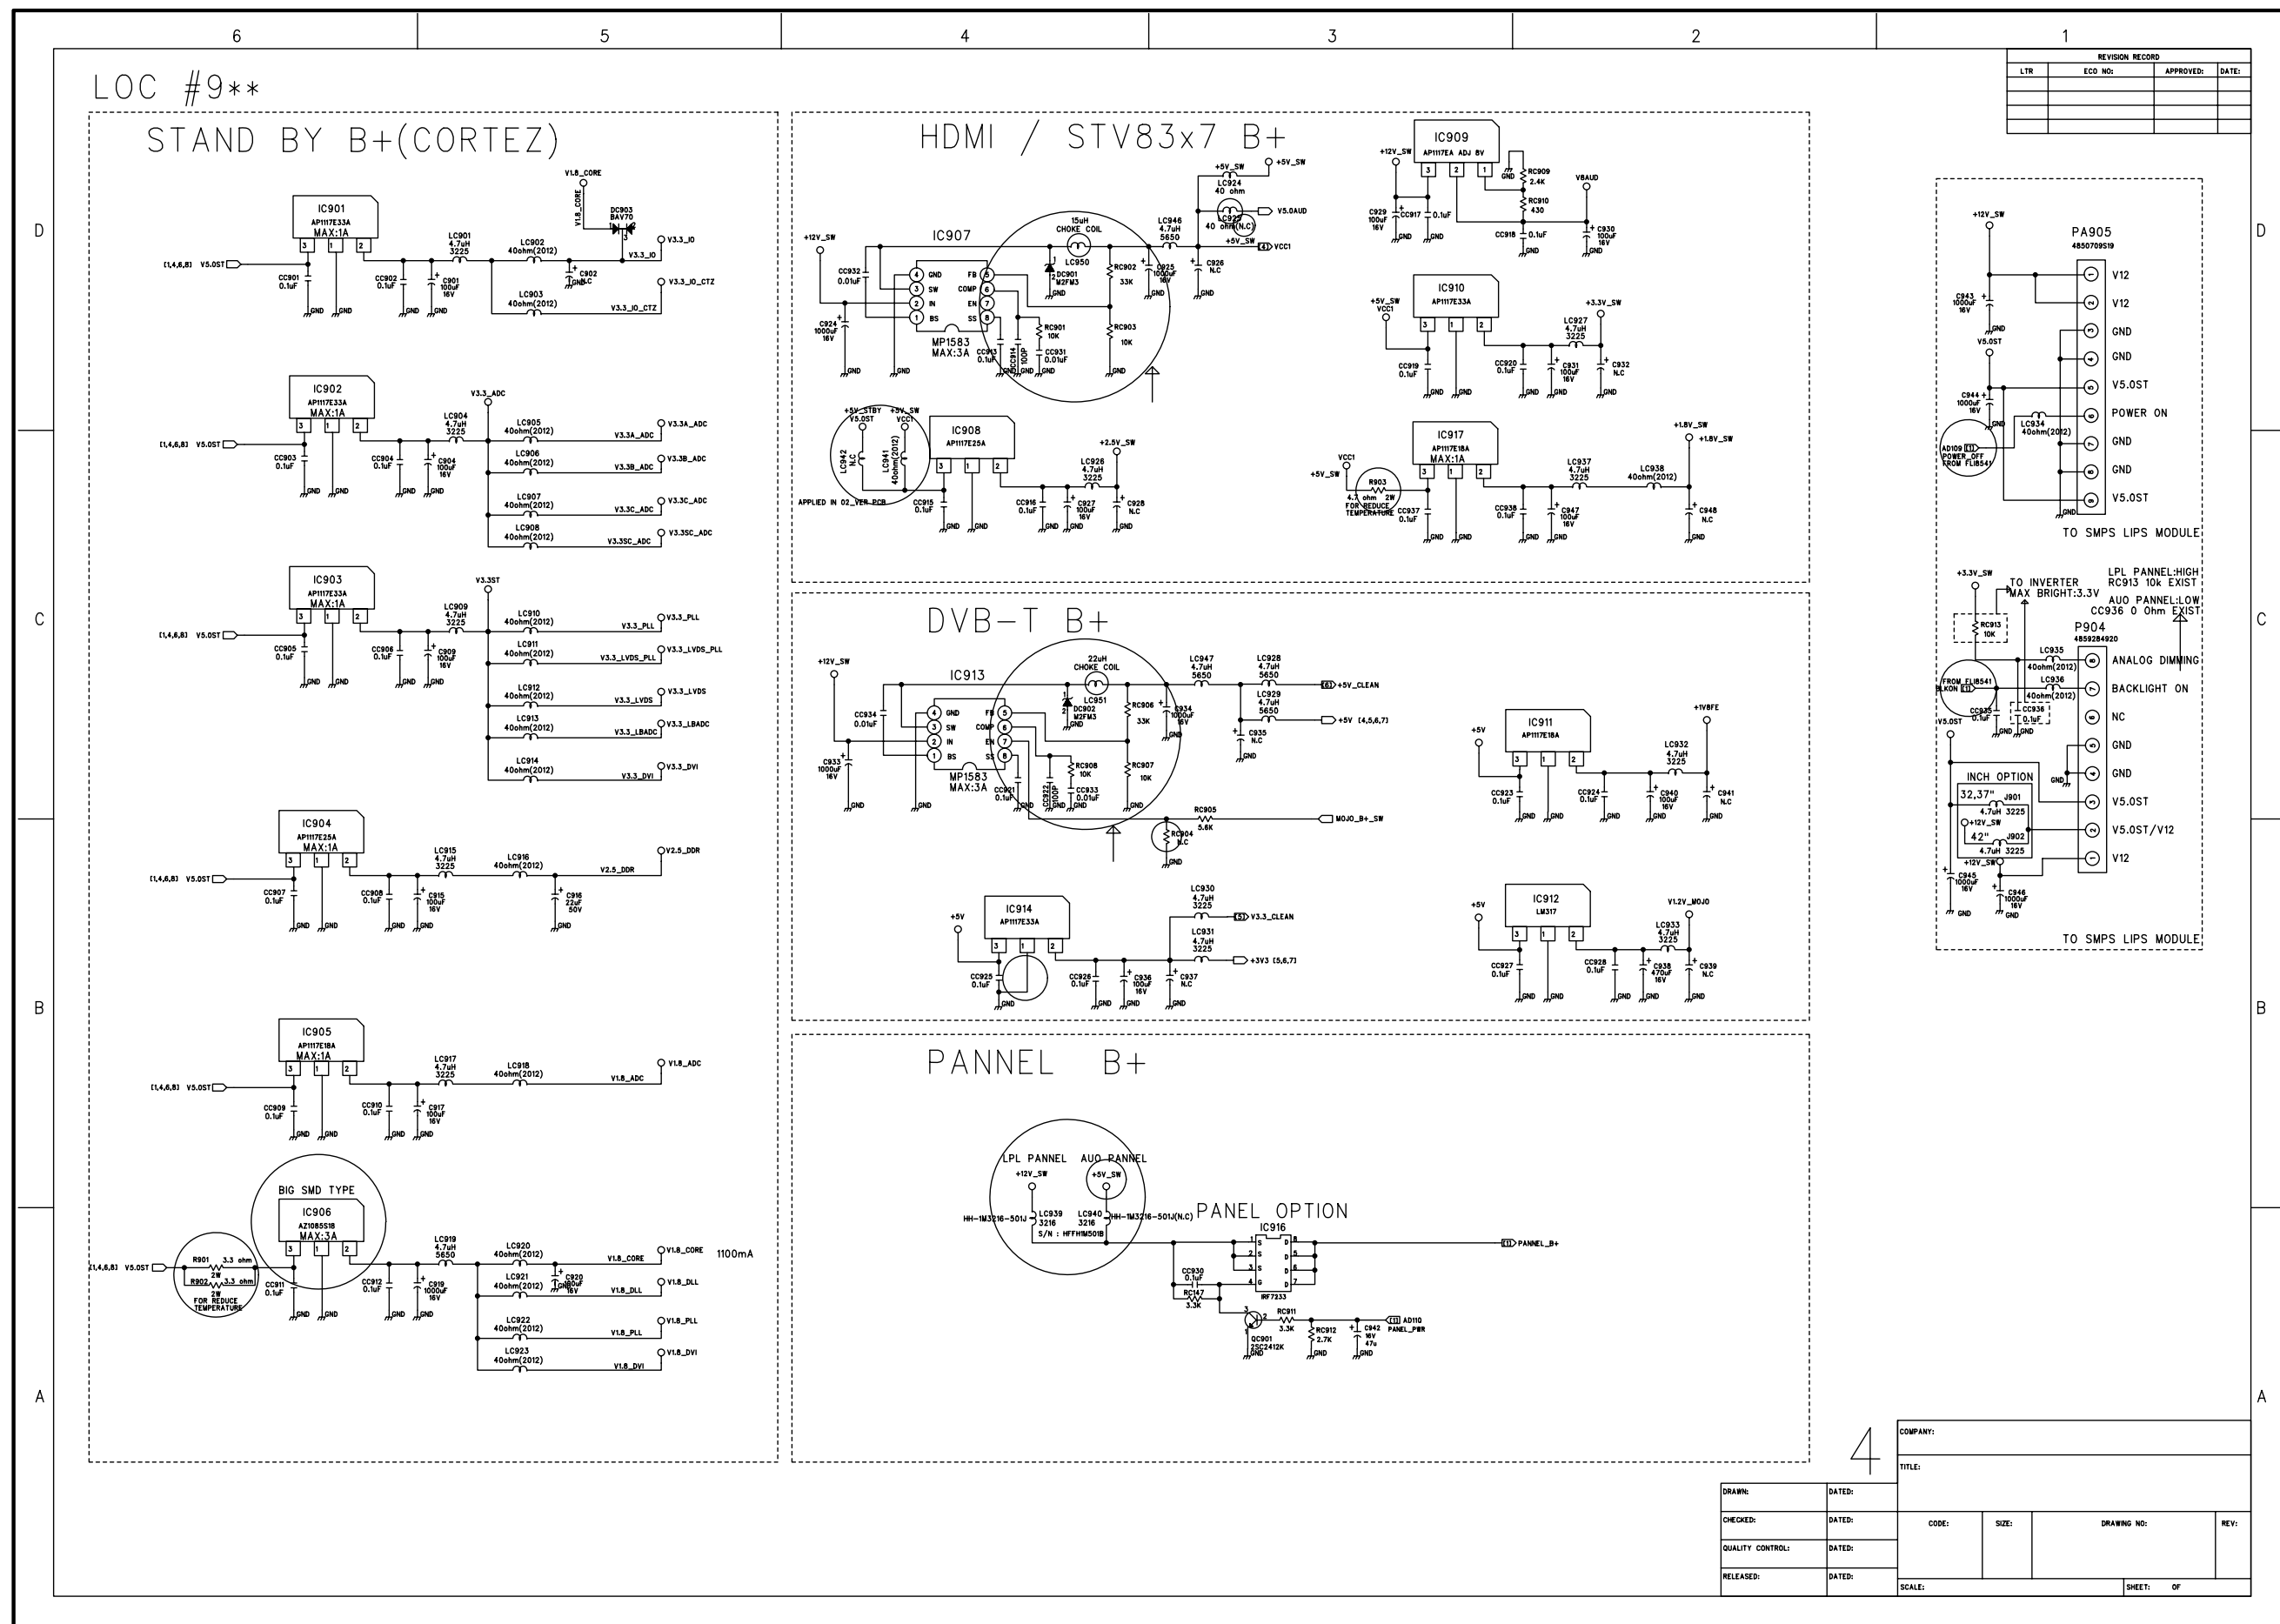


Circuit Diagram

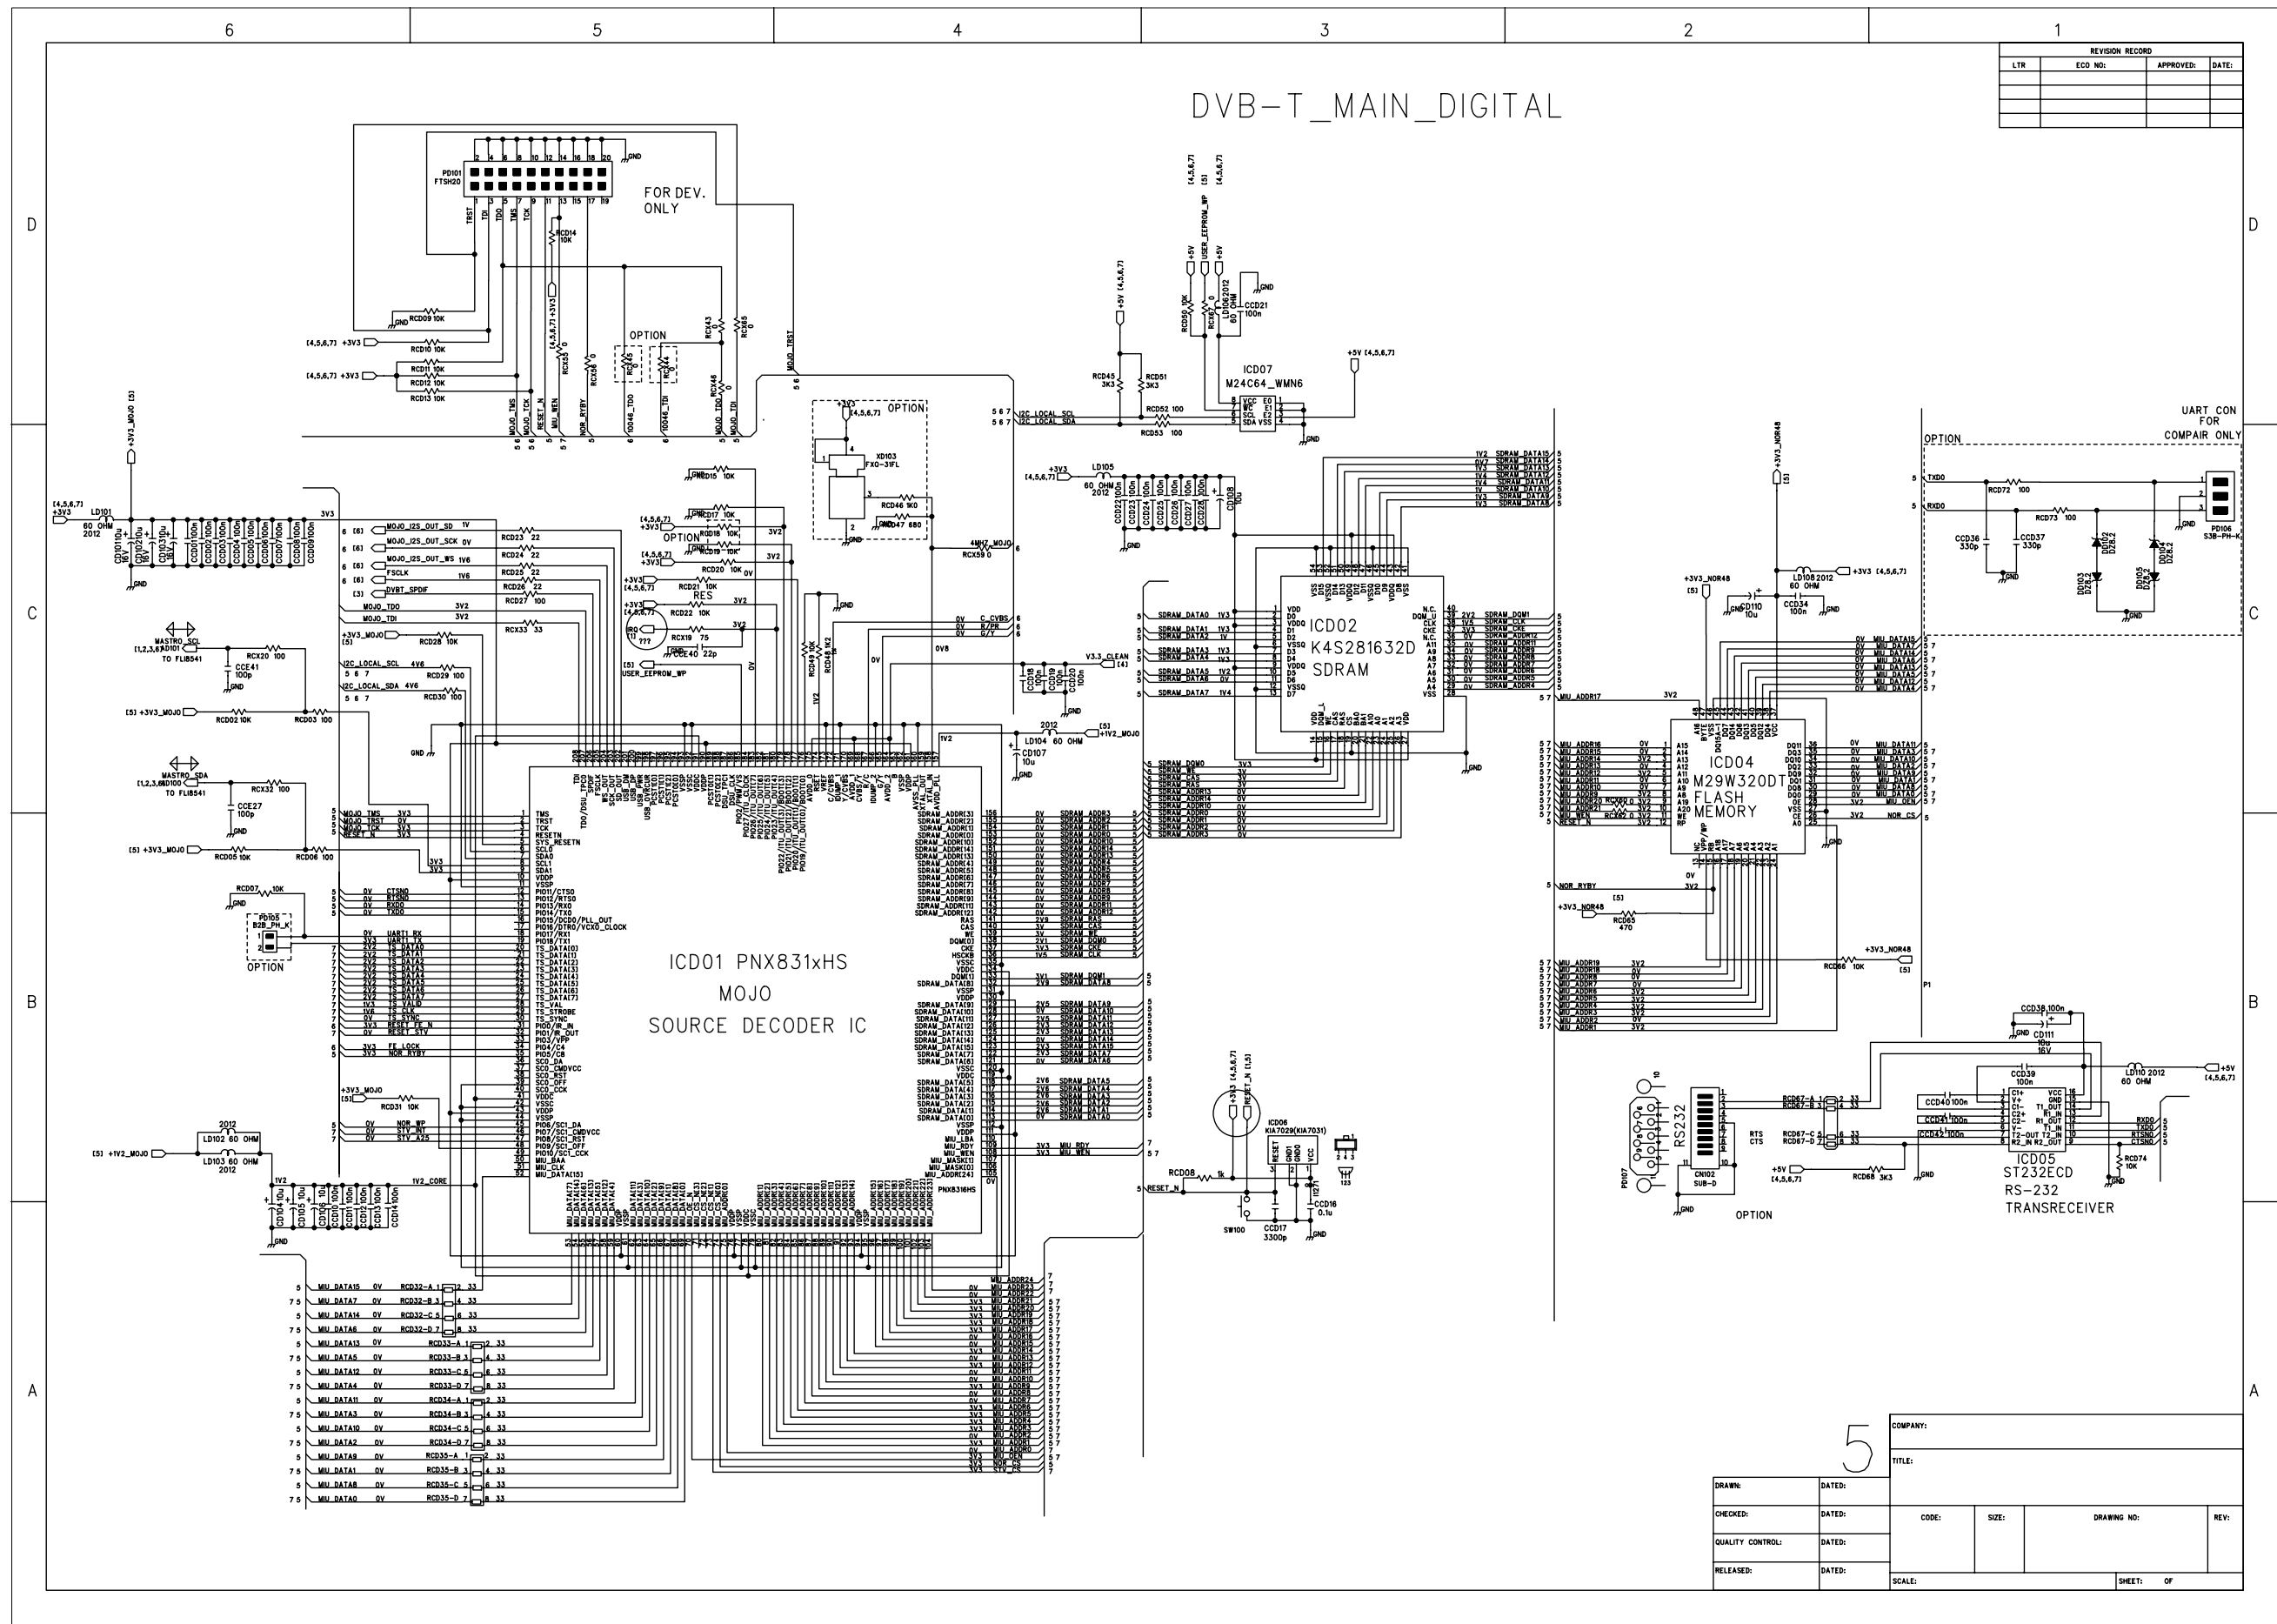


Circuit Diagram

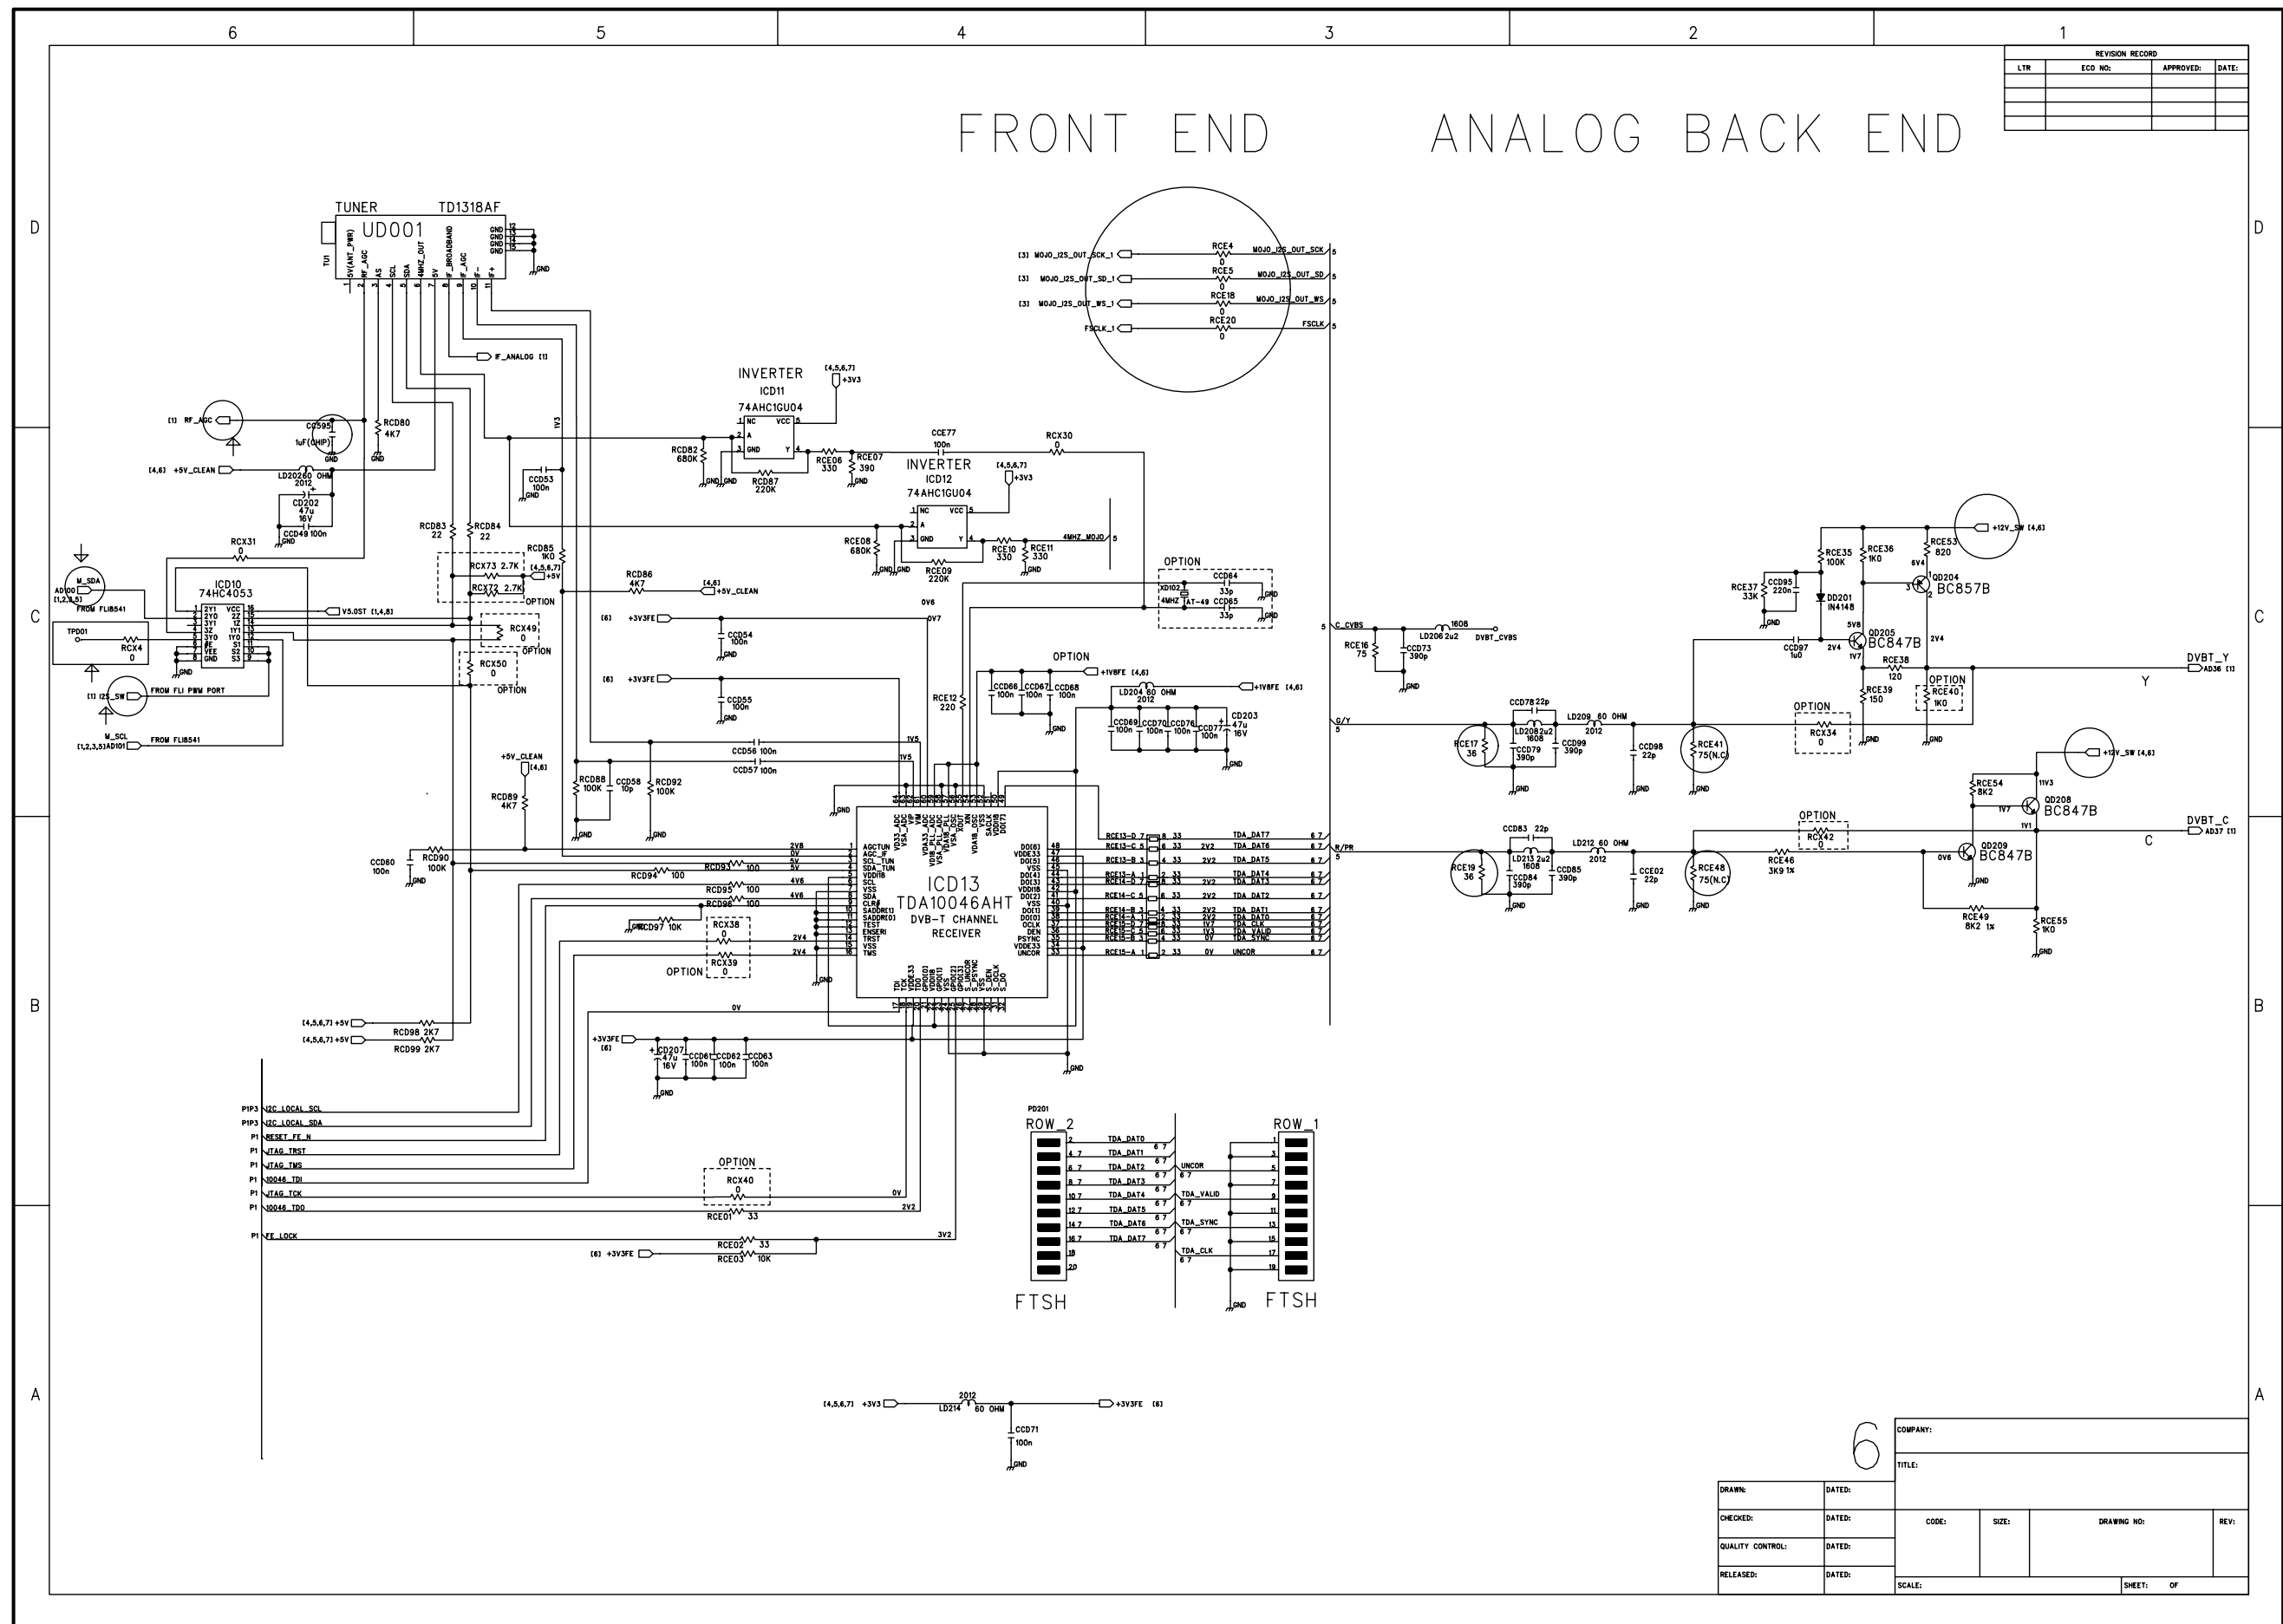

Circuit Diagram

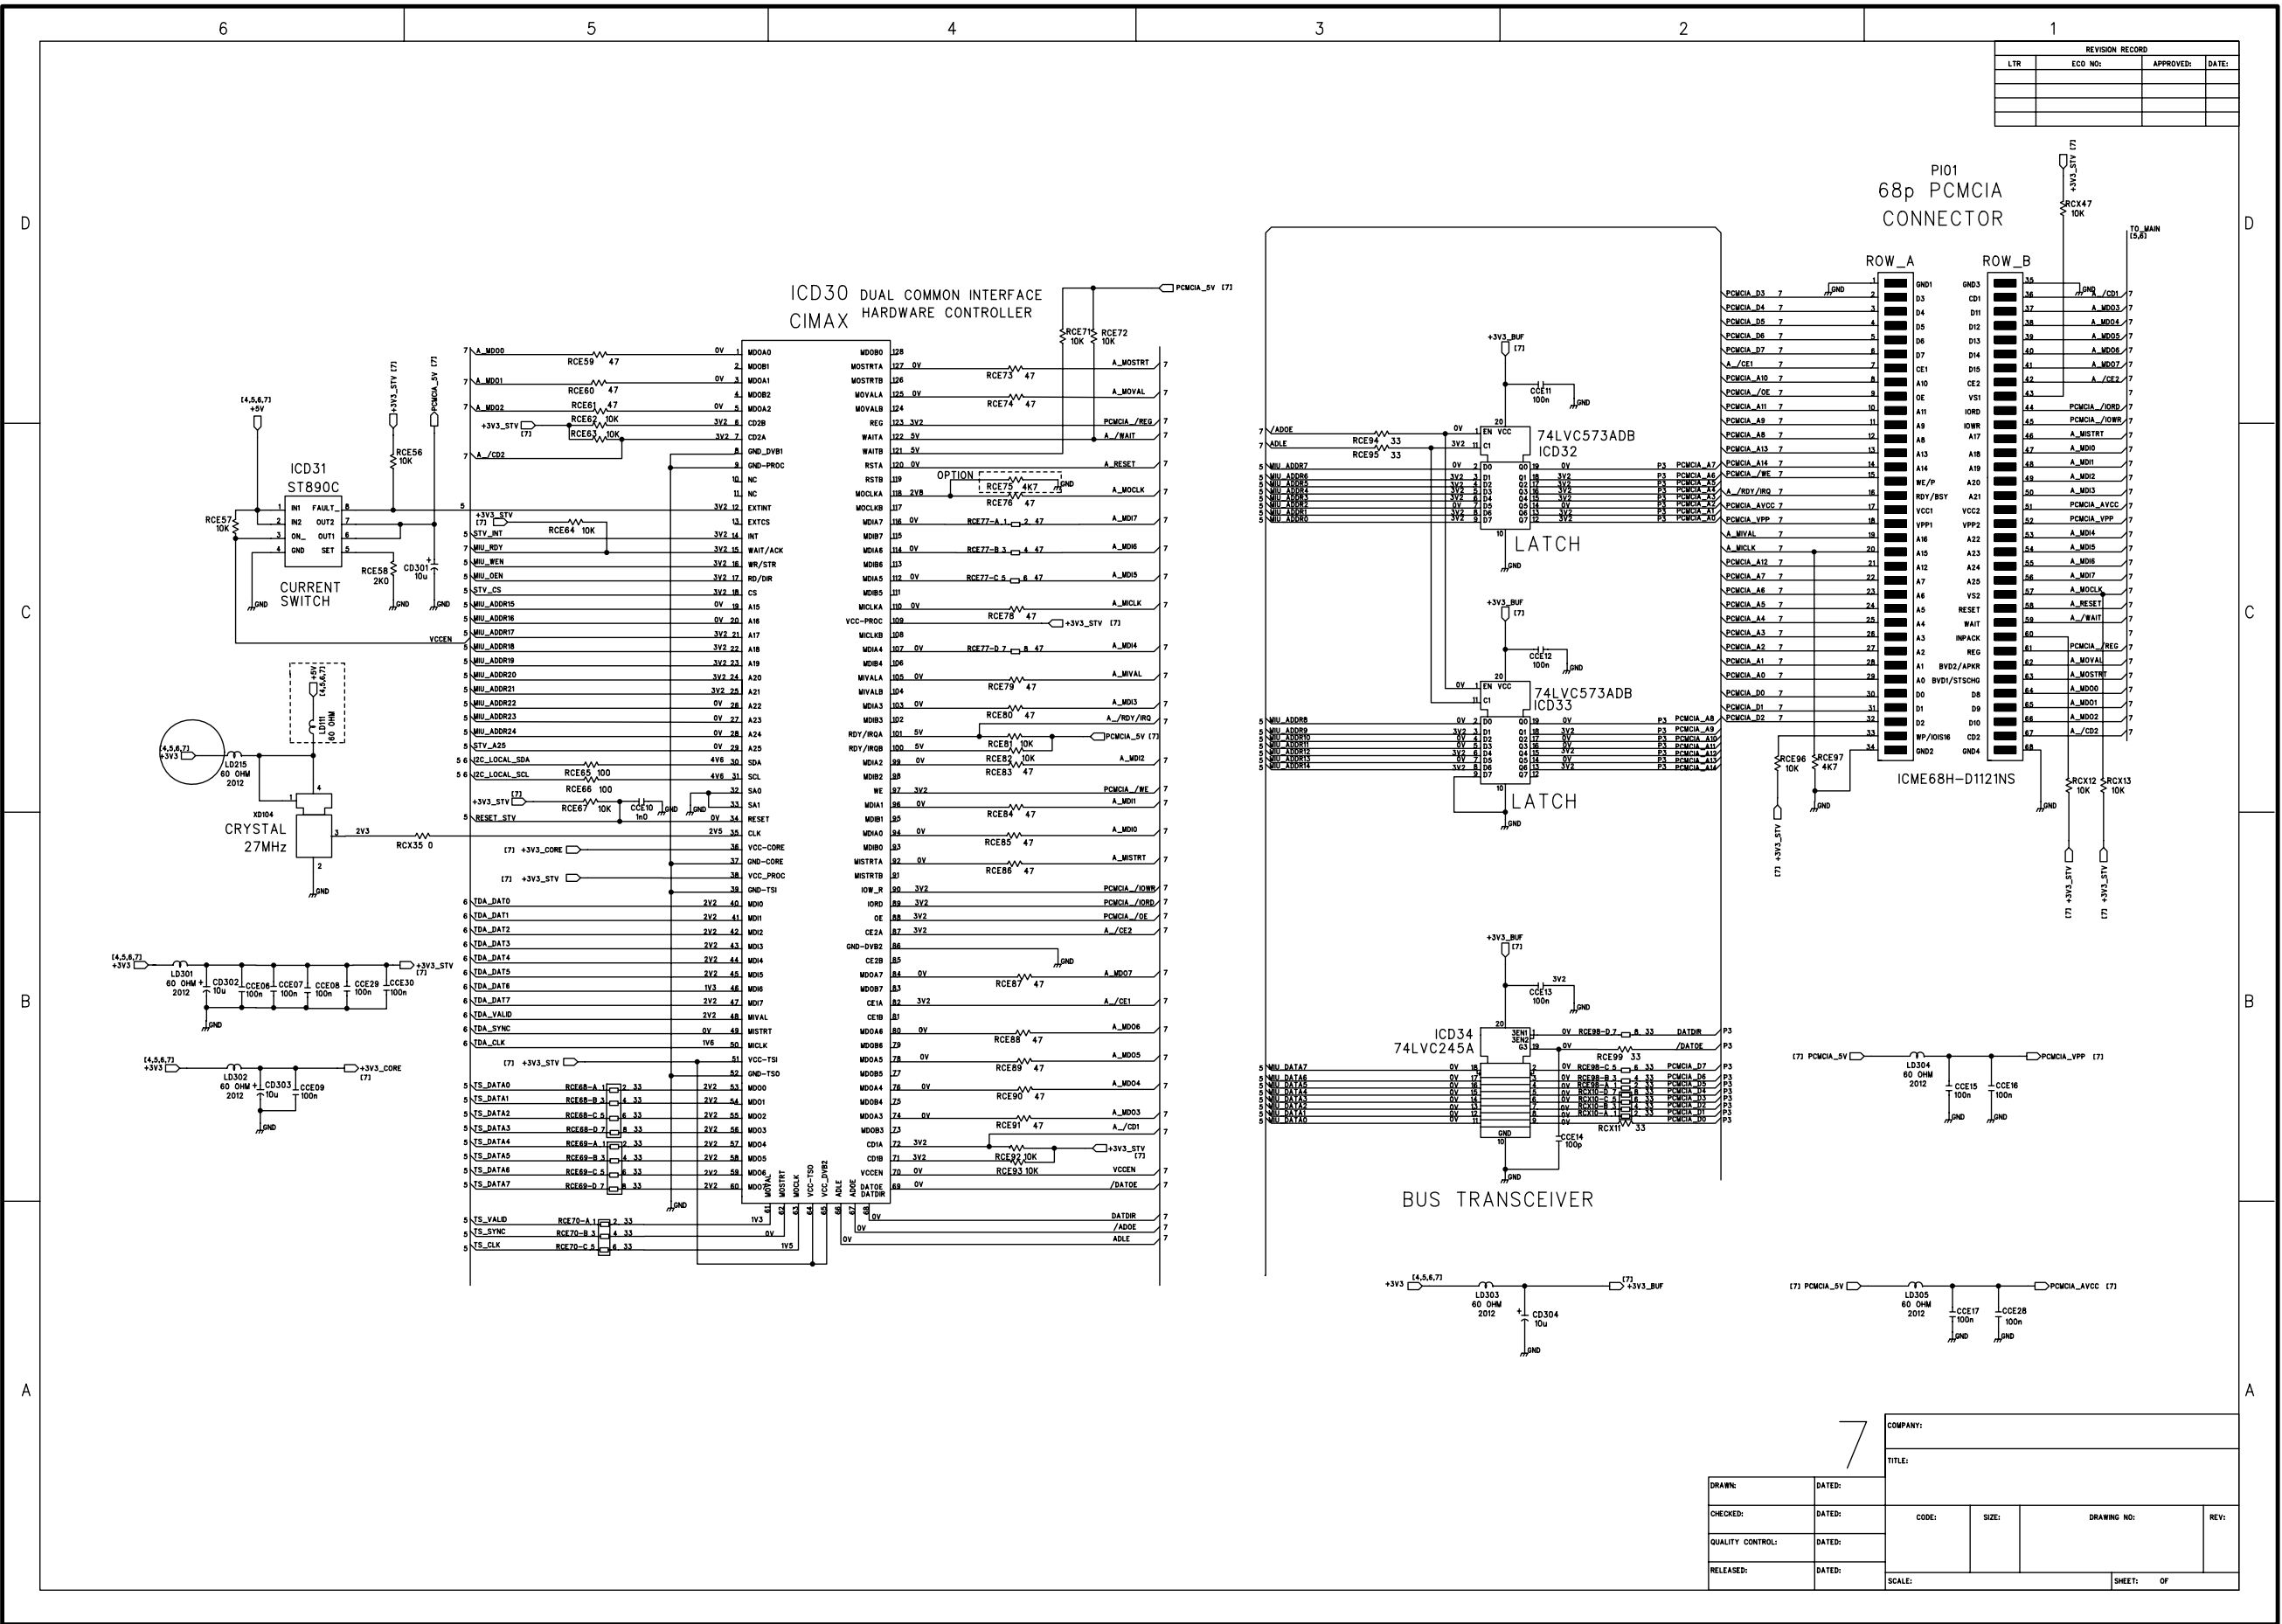

Circuit Diagram

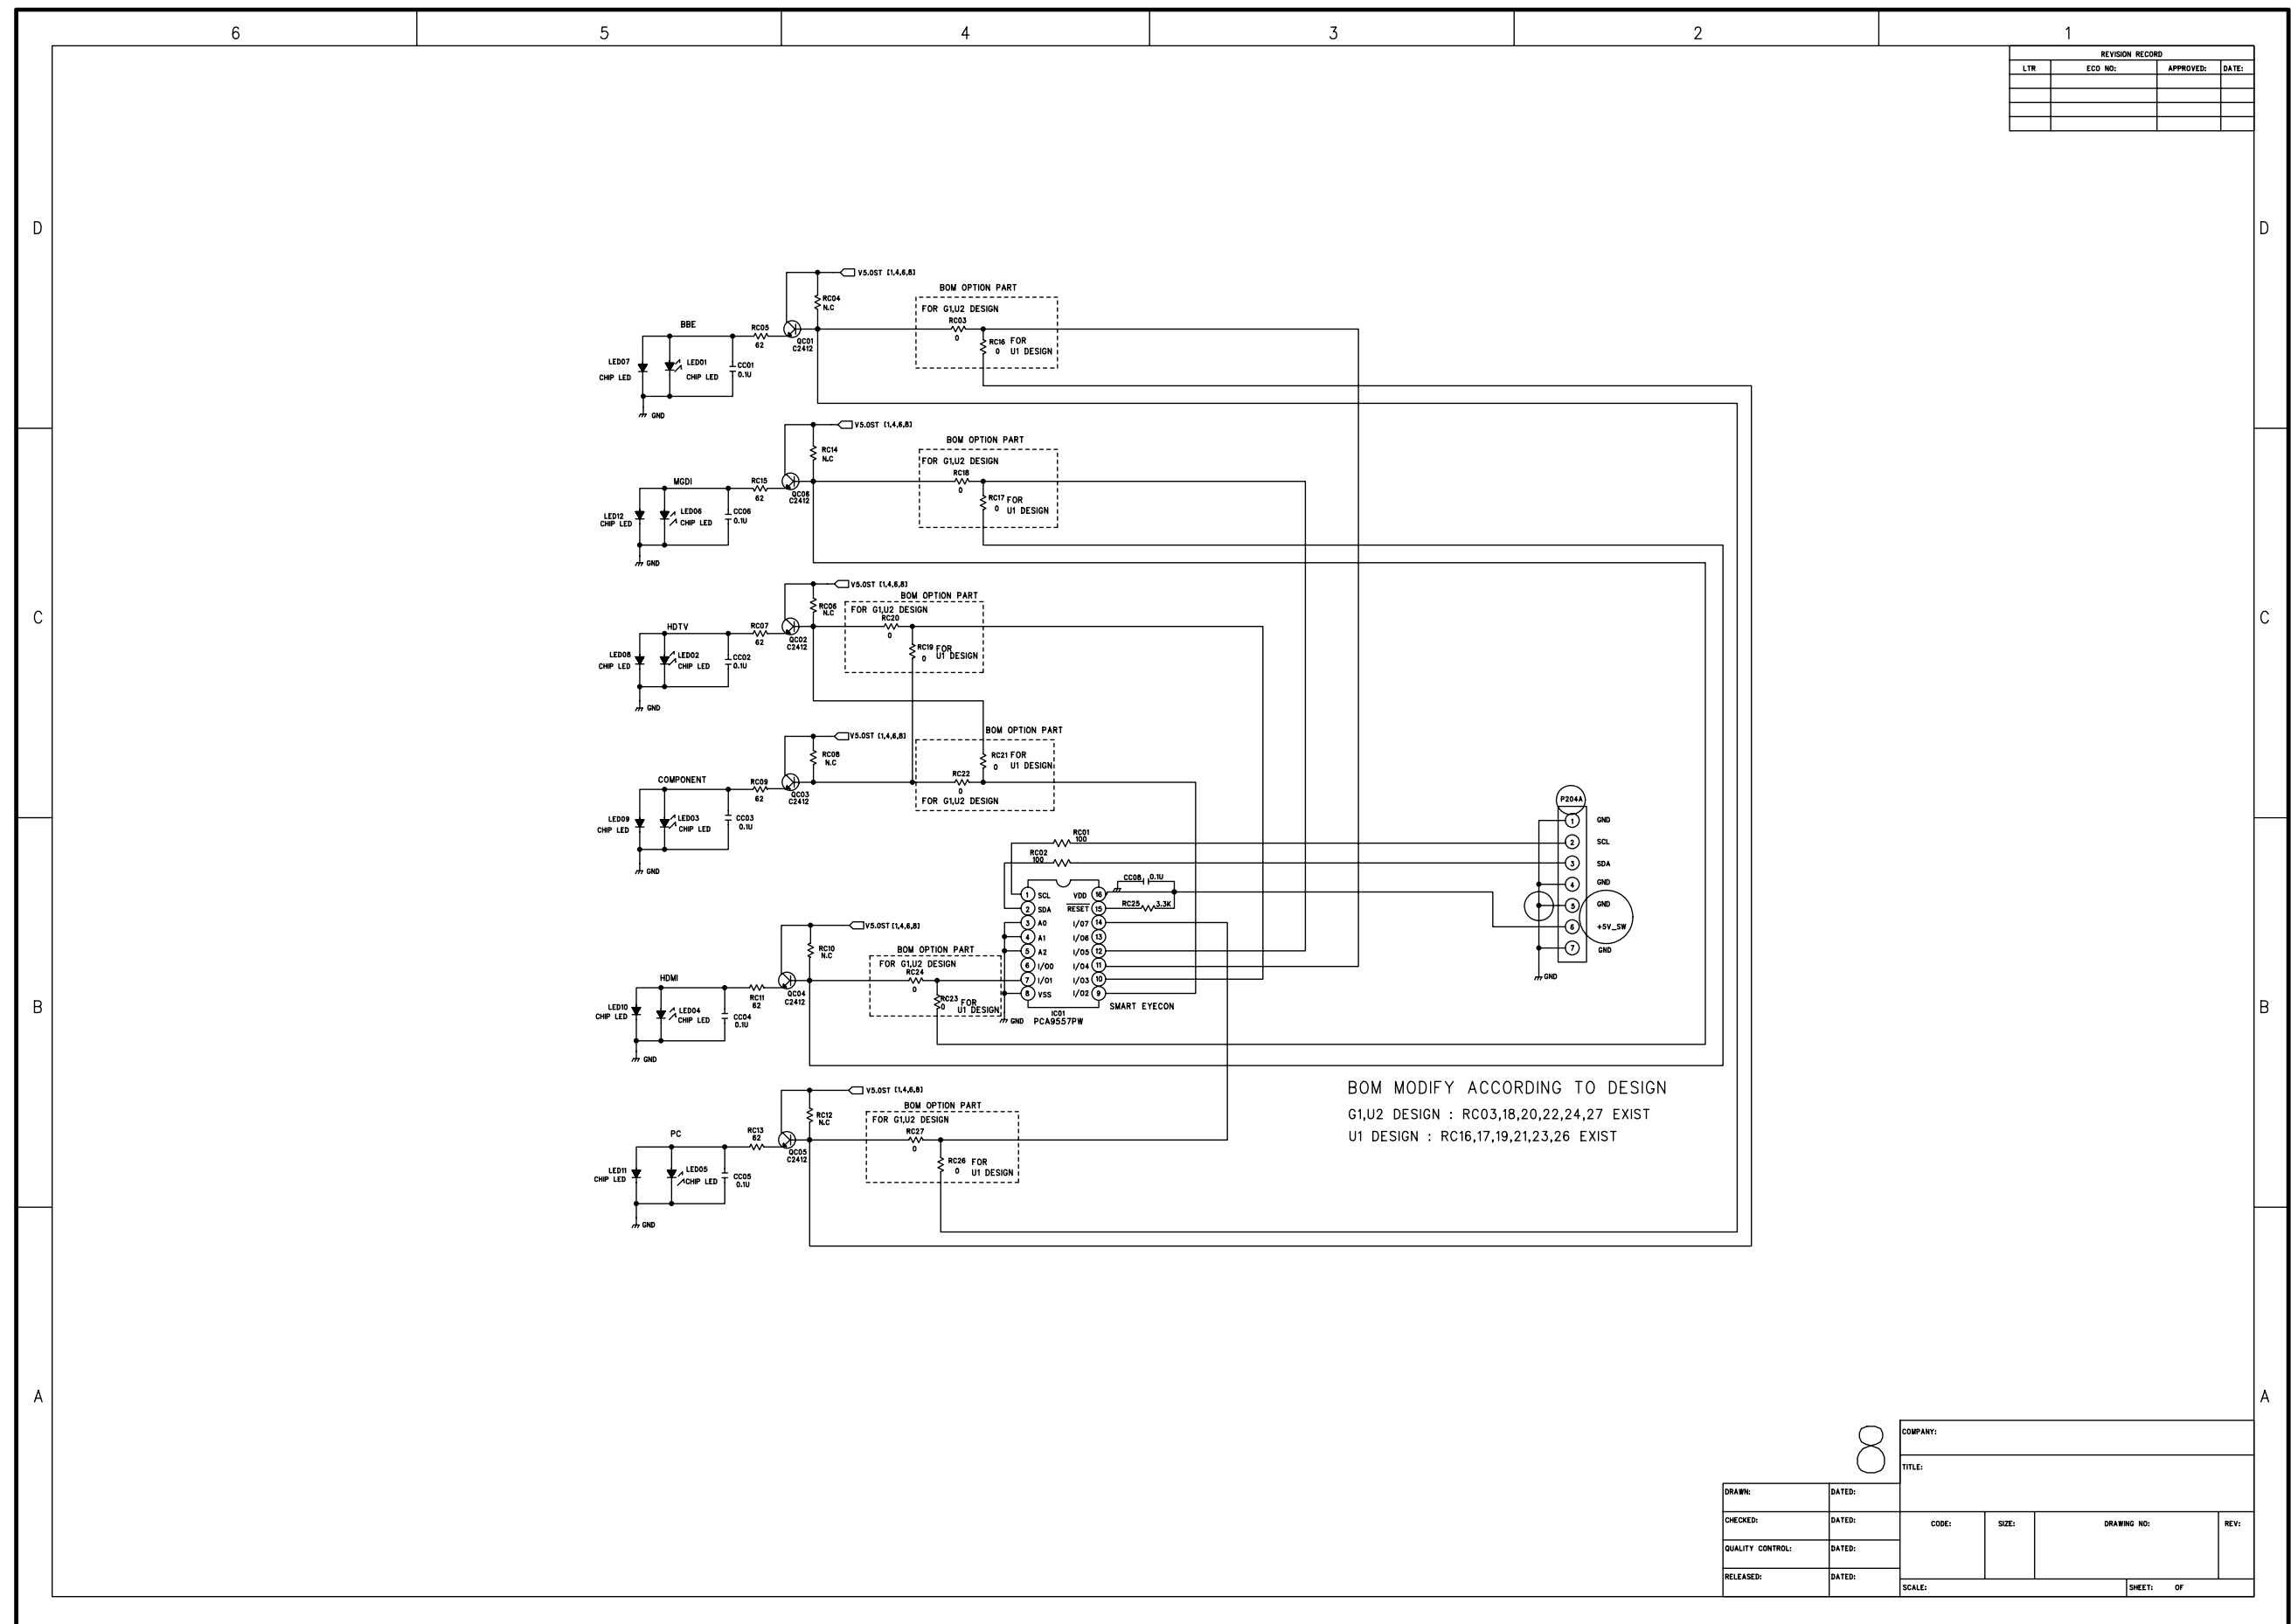



DAEWOO ELECTRONICS CORP.

686, AHYEON-DONG, MAPO-GU,
SEOUL, KOREA.

C.P.O. BOX 8003 SEOUL KOREA

PRINTED DATE : NOV. 2007