

Service Manual

AUTOMOTIVE ELECTRONICS



mitsubishi CQ-EB6360L

AM/FM MPX ELECTRONIC TUNING
RADIO with 6-Disc CD Changer

MITSUBISHI PART No. : MR587252

ID CODE : P103

VEHICLE : ECLIPSE

DESTINATION : North America

PRODUCED AFTER : Mar., 2003

Specifications*

General

Power Supply	DC 12V (11V - 16V), Test Voltage 13.2V, Negative Ground
Current Consumption	Less than 3.0A

AM Radio

Frequency Range	530 - 1,710kHz
Usable Sensitivity	26dB/μV (S/N 20dB)

FM Stereo Radio

Frequency Range	87.75 - 107.9MHz
Usable Sensitivity	7dB/μV (S/N 30dB)

CD Player

Signal to Noise Ratio	More than 66dB
Total Harmonic Distortion	Less than 0.4%
Channel Separation	More than 55dB
Dimension** (W×H×D)	178 × 100 × 177.5mm
Weight**	1.5kg

* Specifications and the design are subject to possible modification without notice due to improvements.

** Dimensions and Weight shown are approximate.

CONTENTS

	Page		Page
1 FEATUERS	2	9 REPLACEMENT PARTS LIST	13
2 LASER PRODUCTS	2	10 EXPLODED VIEW (Unit)	19
3 FRONT VIEW AND FUNCTIONS	3	11 CD CHANGER PARTS LIST	20
4 REAR VIEW AND CONNECTORS	4	12 EXPLODED VIEW (CD Deck)	23
5 WIRING CONNECTION	5	13 WIRING DIAGRAM	26
6 BLOCK DIAGRAM	6	14 SCHEMATIC DIAGRAM (1)	32
7 TERMINALS DESCRIPTION	8	15 SCHEMATIC DIAGRAM (2)	33
8 PACKAGE AND IC BLOCK DIAGRAM	10		

1 FEATUERS

- PLL (Phase Locked Loop) synthesized tuning.
- 18-station preset (12-FM, 6-AM)
- FM One-tuner diversity.
- 6-Disc CD changer (in dash board)
- Electronic control of power and sound.
- Emergency ejecting function
- Anti-shock memory
- CD random, repeat function.
- MD-CH control.
- Apply for CD-R/RW.

2 LASER PRODUCTS

Do not take apart this unit or attempt to make any changes yourself.

This unit is very intricate that uses a laser pickup to retrieve information from the surface of compact discs. The laser is carefully shielded so that its rays remain inside the cabinet. Therefore, never try to disassemble the player or alter any of its parts since you may be exposed to laser rays and dangerous voltages.


Laser products :

Wave length	780nm
Laser power	No hazardous radiation is emitted with safety protection.

Caution


This product utilizes a laser. Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

3 FRONT VIEW AND FUNCTIONS

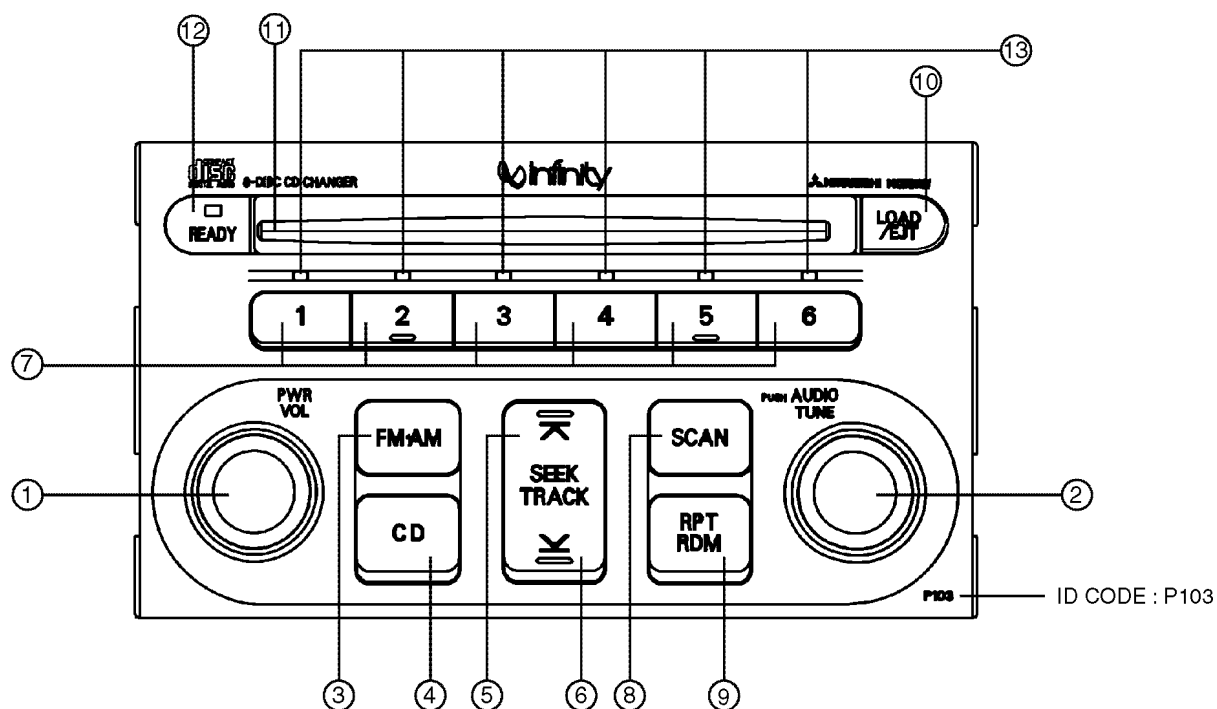


- | | | | | | |
|---|---------|------------------------------------|---|---------|--------------------------------|
| ① | POW | : Power ON/OFF. | ⑦ | 1~6 | : Radio frequency preset/call. |
| | VOL | : Increase/Decrease/ of volume. | | | : CD.CH disc selection. |
| ② | TUNE | : Radio manual tuning. | ⑧ | SCAN | : Radio scan tuning. |
| | AUDIO | : Audio adjustment mode selection. | ⑨ | RPT | : CD repeat play. |
| ③ | FM/AM | : Radio band selection. | | RDM | : CD random play. |
| ④ | CD | : CD mode selection. | ⑩ | LOAD | : CD disc loading. |
| ⑤ | SEEK ^ | : Upward seeking. | | EJT | : CD eject. |
| | TRACK ^ | : CD mode selection. | ⑪ | CD slot | |
| ⑥ | SEEK v | : Upward seeking. | ⑫ | READY | : Ready display. |
| | TRACK v | : CD mode selection. | ⑬ | | : Disc indicator. |

4 REAR VIEW AND CONNECTORS

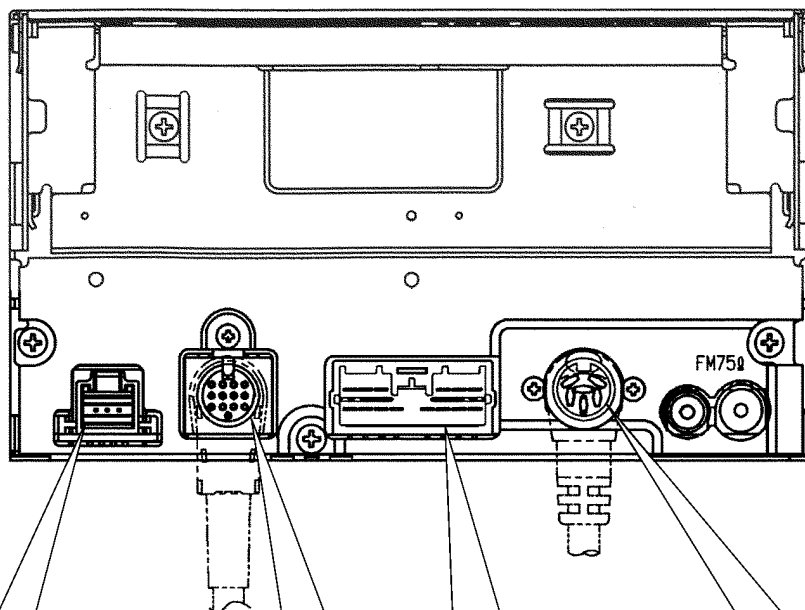


CJ602 8P CONNECTOR




1. Remocon Out
2. Telephone Mute
3. M-SCK
4. M-Data
5. Ground
6. N.C
7. Shield Earth(M-BUS)
8. M-Busy

CJ401 13P DIN CONNECTOR




1. Signal Ground
2. CD-CH Lch
3. N.C
4. CD-CH Rch
5. N.C
6. N.C
7. Accessory(+)
FM Detect +ACC(+)
8. N.C
9. Power Supply, +B
10. Illumi. 10.5V
11. M-Busy
12. M-SCK
13. M-Data

CP703 14P CONNECTOR




1. N.C
2. N.C
3. Illumi. (+)
4. Motor Antenna
5. N.C
6. N.C
7. N.C
8. N.C
9. Illumi. (-)
10. Power Supply, +B
11. Power Supply, ACC
12. N.C
13. N.C
14. N.C

CJ704 6P DIN CONNECTOR



1. Power On
2. Signal (-)
3. Signal FL(+)
4. Signal FR(+)
5. Signal RL(+)
6. Signal RR(+)


5 WIRING CONNECTION

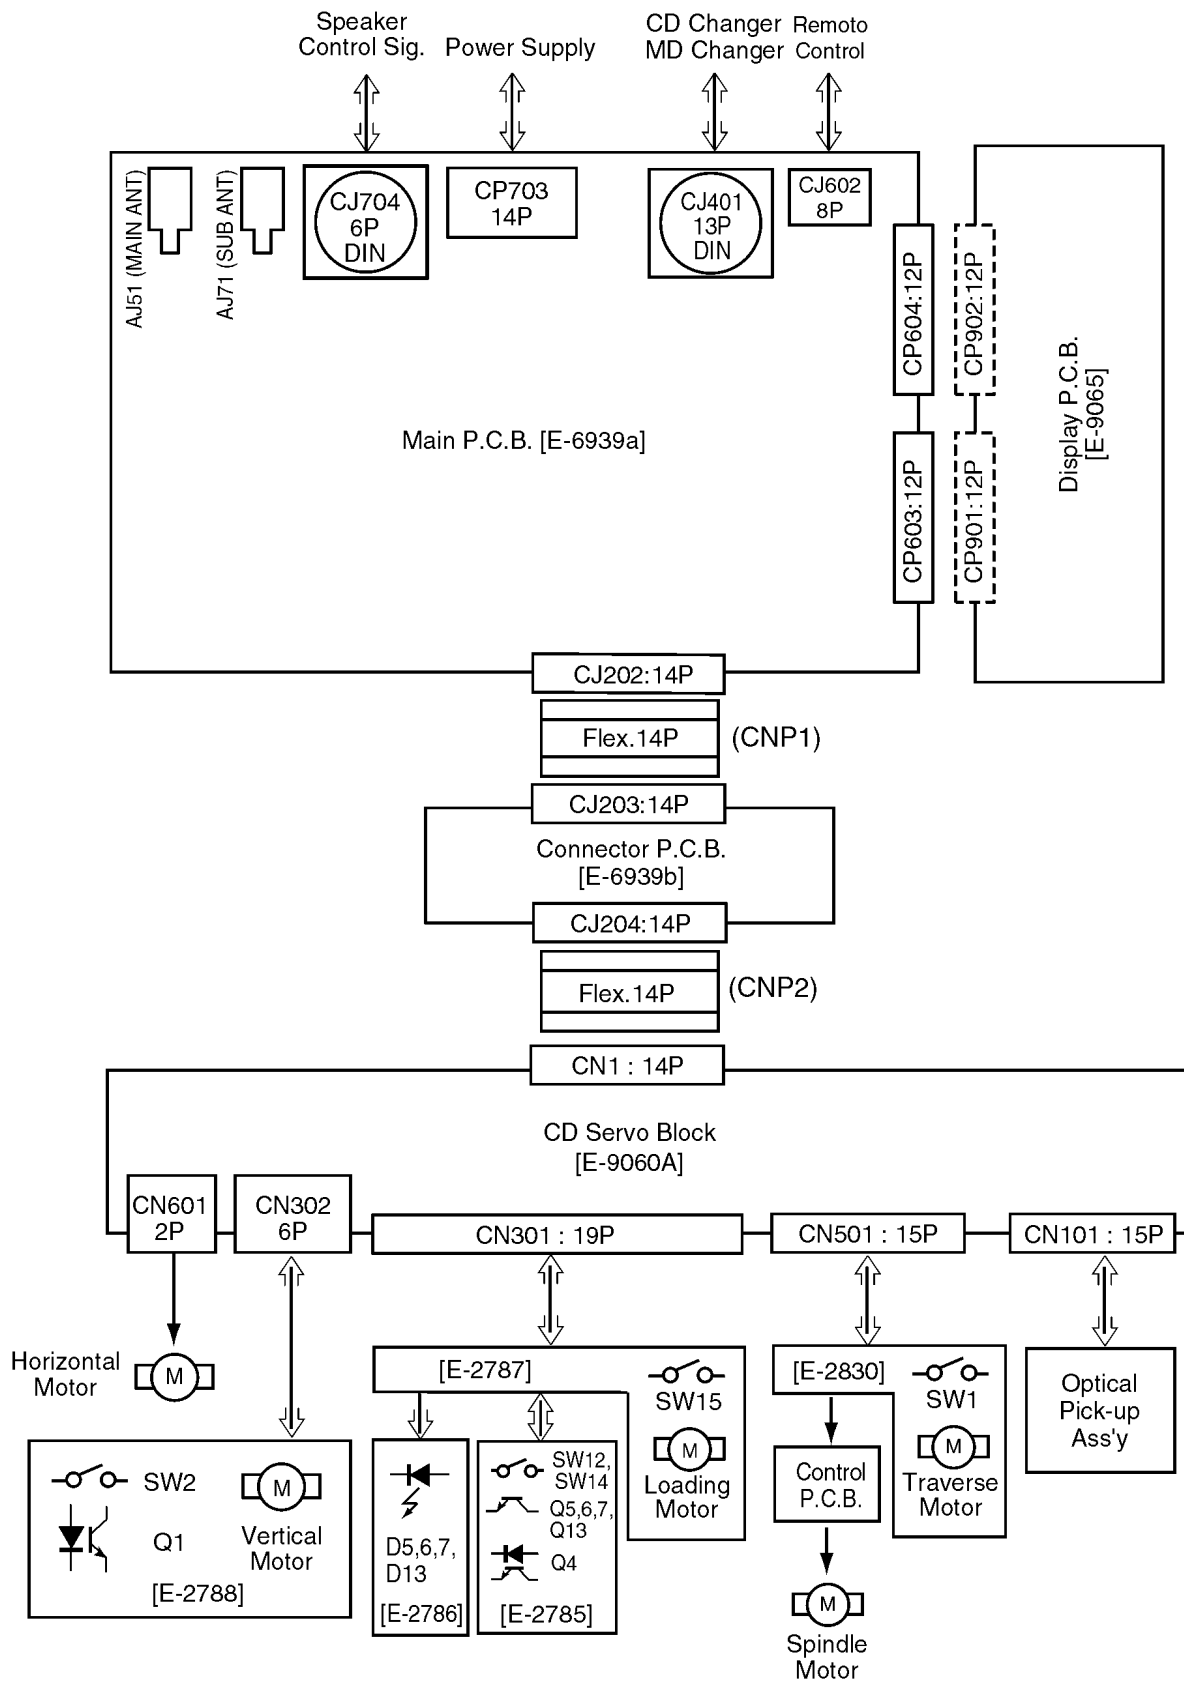

<Note> :

.....This mark shows a Ref. No. of connector

.....This mark shows a mounting position of connector.

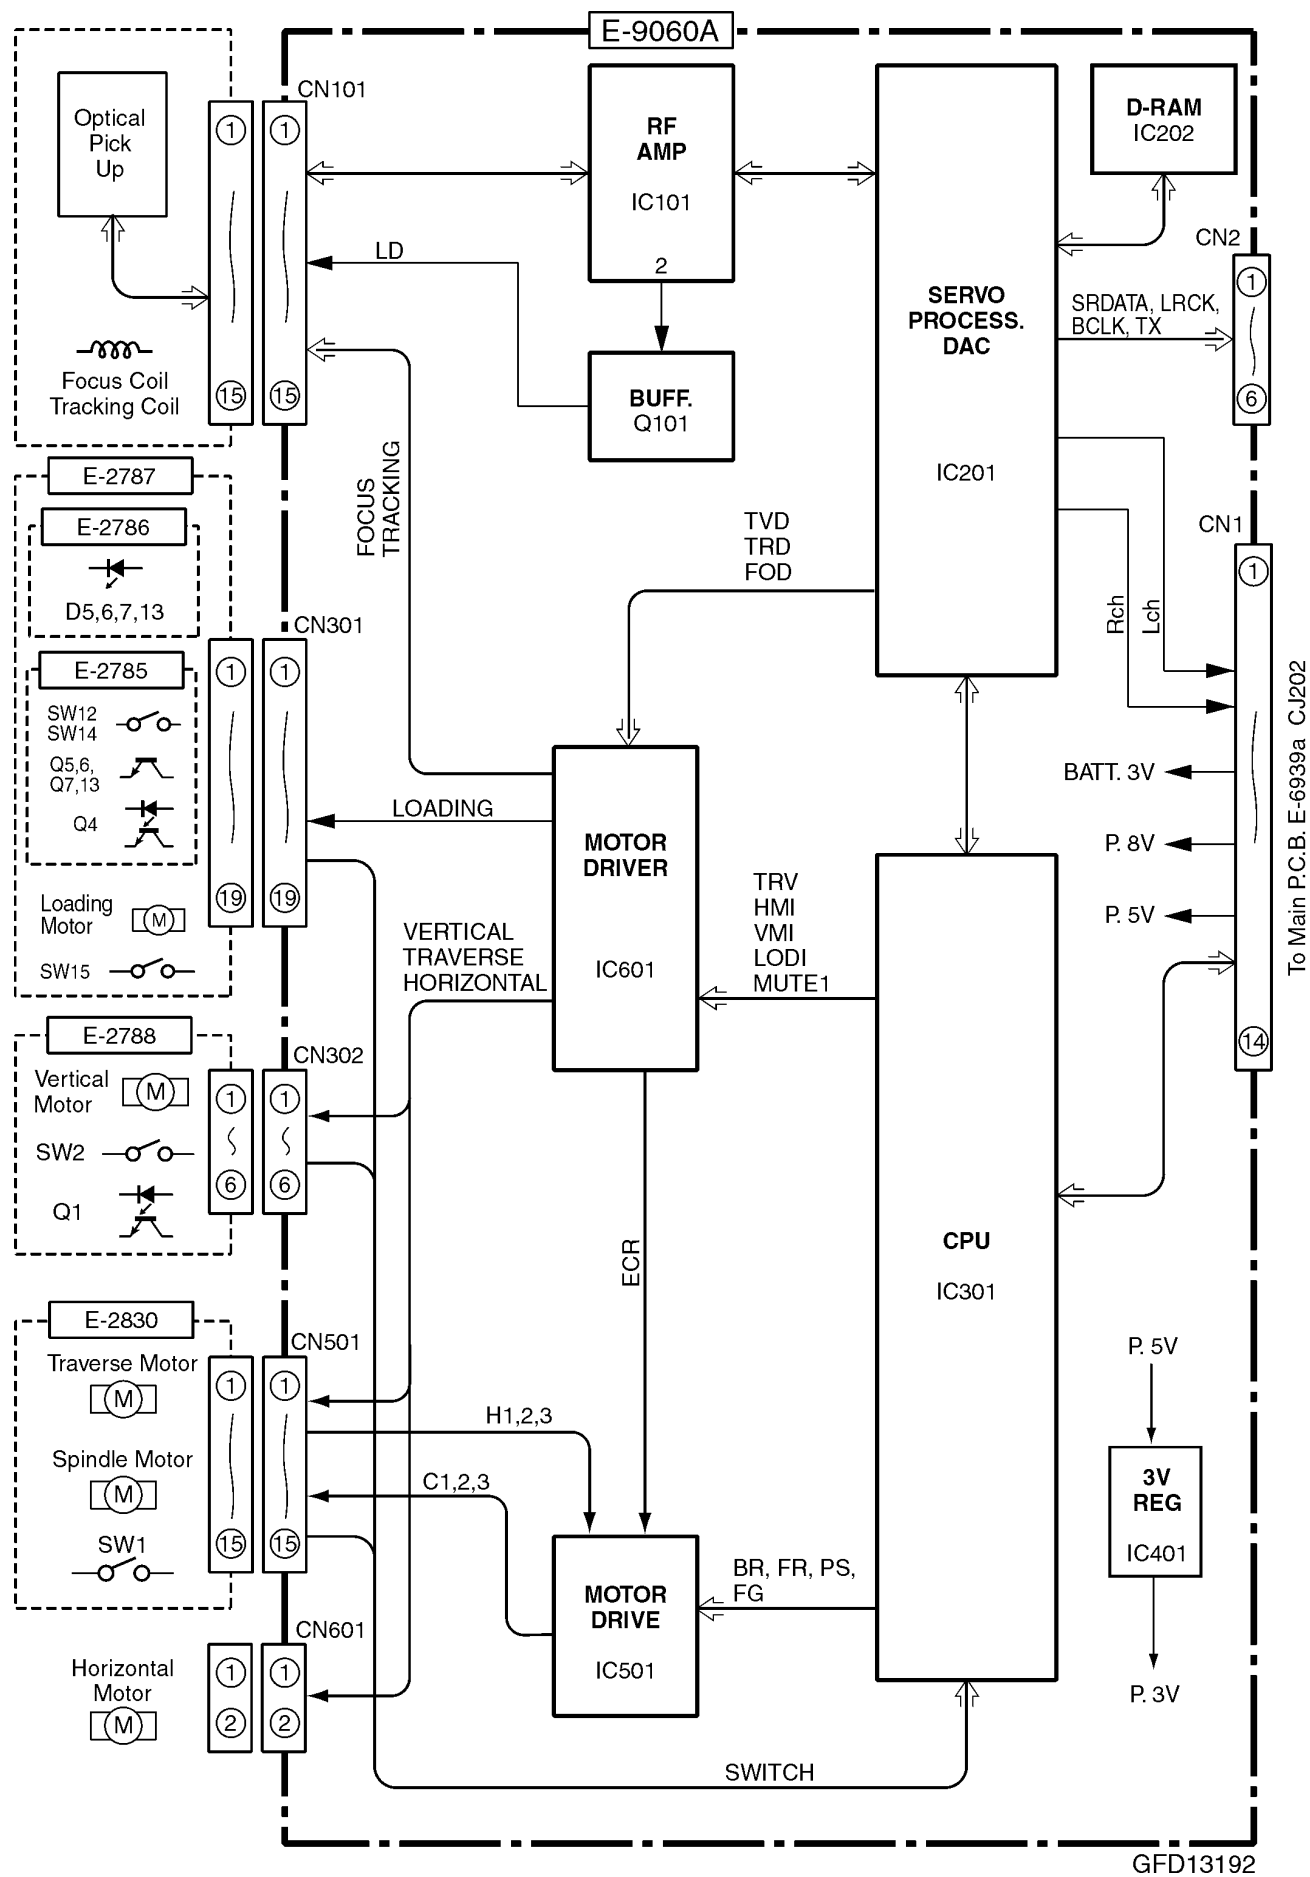

7 TERMINALS DESCRIPTION

7.1. Main Block

IC601 : C2BBGF000290

Pin No.	Port	Descriptions	I/O	Vol. (V)
1	KR2	Key Data	I	0
2	KR1	Key Data	I	5.1
3	KR0	Key Data	I	0
4	AVSS	Ground	-	0
5	KS0	Key strobe	0	0
6	KS1	Key strobe	0	0
7	AVREF	+5V power supply	-	5.1
8	KS2	Key strobe	0	0
9	KS3	Key strobe	0	0
10	LOAD LED	LED Load	0	0
11	CD DI	CD data output	0	2.4
12	CD DO	CD data input	I	1.4
13	CD CLK	Shift clock for CD data	0	4.9
14	PLL DI	PLL data input	I	5.0
15	MBUSY OUT	M-BUS busy	0	0
16	MBUSY IN	M-BUS busy	I	0
17	MDATA	M-BUS data	I/O	4.9
18	MCLK	M-BUS clock	0	4.9
19	PLLD0	PLL data output	0	0
20	PLLSTB	PLL strobe	0	0
21	PLLCLK	PLL clock	0	0
22	MUTE A	Mute signal	0	0
23	VOL STB	Electric volume strobe	0	0
24	VOL CLK	Electric volume clock	0	0
25	VOL DATA	Electric volume data	0	0
26	AMP CONT	Power amp. stand-by	0	4.9
27	P.ON	Power switch	0	4.9
28	START/STOP	CD Deck start stop	0	4.9
29	P.5V ON	P.5V Power switch	0	0
30	DIV SW	Diversity switch	I	4.8
31	TUNE 2	Tuner switch signal	I	4.7
32	TUNE 1	Tuner switch signal	I	0.5
33	GND	Ground	-	0
34	VOL 2	Volume switch signal	I	0
35	VOL@1	Volume switch signal	I	0
36	CD RESET	CD controller reset	0	0
37	MAIN	Main antenna selection	0	4.9
38	SUB	Sub. antenna selection	0	8.3
39	-	-	-	-
40	SEC DI	Security data input	I	0
41	-	-	-	-
42	-	-	-	-
43	-	-	-	-
44	FreqOUT	Tone/Burst frequency	0	0
45	TONE/TRG	Tone/Triger control	0	0
46	BUZZER	Buzzer output	0	0
47	Ga INPUT	GALA signal input	I	5.0
48	ST	FM stereo detection	I	0.3
49	LED-ENABLE	LED enable	0	4.8
50	LED-LATCH	LED latch	0	0
51	LED-CLOCK	LED clock	0	0
52	LED-DATA	LED data	0	0
53	SET S0	System function setting	0	0
54	-	-	-	-
55	SET R0	System function setting	I	0
56	SET R1	System function setting	I	0
57	TEL MUTE	Telephone mute	I	1.6
58	REMOTE-D	-	-	0
59	P.CONT	System power control	0	0
60	RESET	Reset input	I	4.8
61	M-DATA IN	M-BUS data	I	4.9
62	EJECT SW	CD eject SW	I	4.8
63	BATDROP	Battery level Drop	I	5.0
64	ACCDROP	ACC level Drop	I	0
65	-	-	-	-
66	ANT	Motor antenna power on/off	0	0
67	VSS	Ground	-	0

Pin No.	Port	Descriptions	I/O	Vol. (V)
68	VDD	+5V power supply	-	4.9
69	X2	Crystal oscillator	-	0
70	X1	Crystal oscillator	-	2.6
71	GND	Ground	-	0
72	XT2	Crystal oscillator	-	2.7
73	XT1	Crystal oscillator	-	2.5
74	AVDD	+5V power supply	-	4.9
75	AV REF0	+5V power supply	-	5.0
76	VAM/FM	AM/FM vcont	I	0
77	REMOTE_A	Remote control	0	5.0
78	BIBIRI.A	(Ground pull-down)	-	0
79	SENCE-CAR	-	0	5.0
80	KR3	Key Data	I	0

Note 1 : Voltage measuerments are with respect to ground, with a voltmeter (internal resistance : 10M ohms).

7.2. CD Servo Block

IC201 : MN662785TBUC

Pin No.	Port	Descriptions	I/O	Vol (V)
1	DVDD3	+5V power supply	-	3.6
2	D0	D-RAM data	I/O	2.0
3	D1	D-RAM data	I/O	2.0
4	NWE	D-RAM data write	0	3.0
5	NRAS	D-RAM row address strobe	0	3.2
6	D2	D-RAM data	I/O	2.1
7	D3	D-RAM data	I/O	1.9
8	NCAS0	D-RAM column address strobe	0	2.8
9	NCAS1	D-RAM column address strobe	0	1.4
10	A8	D-RAM address	0	1.0
11-14	A7-4	D-RAM address	0	1.1
15	A9	D-RAM address	0	1.1
16-18	A0-A2	D-RAM address	0	1.1
19	A3	D-RAM address	0	1.1
20	DVSS2	Ground	-	0
21	DVDD2	+5V power supply	-	3.6
22	SPOUT	Not used	-	1.5
23	TRVP	Traverse motor control	0	1.9
24	TRVM	Traverse motor control	0	1.9
25	TRP	Tracking coil drive	0	1.9
26	TRM	Tracking coil drive	0	1.9
27	FDP	Focus coil drive	0	2.0
28	FDM	Focus coil drive	0	2.0
29	FBAL	Focus balance	0	1.9
30	TBAL	Tracking balance	0	1.9
31	CSEL	(Connecting to VDD)	-	3.6
32	FE	Focus error	I	2.0
33	TE	Tracking error	I	1.9
34	RFENV	RF envelope	I	1.9
35	OFT	Off track signal	I	0
36	NRFDET	RF detecting signal	I	0
37	BDO	Drop-out signal	I	0
38	LDON	Laser on signal	0	3.6
39	ARF	RF signal	I	1.9
40	IREF	Reference current input	I	1.2
41	ADPVCC	(Connecting to ground)	-	0
42	DSLIF	Loop filter for DSL	-	2.0
43	DRF	Loop filter for DSL	-	2.2
44	PLLIF	Loop filter for PLL	-	1.3
45	VCOF	VCO filter	-	1.3
46	AVDD2	+5V power supply	-	3.6
47	AVSS2	Ground	-	0
48	OUTL	L channel output	0	1.8
49	AVSS1	Ground	-	0
50	OUTR	R channel output	0	1.8
51	AVDD1	+5V power supply	-	3.5
52	FSEL	(Connecting to P3V)	-	3.7
53,54	-	(Connecting to ground)	-	0
55	FLAG	Flag output	0	0
56	CLVS	Servo status signal	0	3.6
57-60	-	Not used	-	-
61	MCLK	Clock for I/F command	I	2.4
62	MDATA	Data for I/F command	I	1.9
63	MLD	I/F command load	I	3.5
64	BLKCK	Subcode block clock	0	0
65	SQCK	Ext. clock for sub code-Q	I	3.5
66	SUBQ	Code for sub. code-Q	0	1.1
67	DMUTE	Mute input	I	0
68	STAT	Status signal	0	1.1
69	NRST	Reset input	I	3.6
70	SPPOL	Not used	-	-
71	PMCK	Clock output	0	2.0
72	SMCK	Clock output	0	1.9
73	SDATA	Serial data	0	0
74	LRCK	LR clock	0	0
75	BCLK	Bit clock	0	0
76	/TEST	(Connecting to VDD)	-	1.5
77	X1	Crystal oscillator	-	1.8
78	X2	Crystal oscillator	-	1.8



Pin No.	Port	Descriptions	I/O	Vol (V)
79	DVDD1	+5V power supply	-	3.6
80	DVSS1	Ground	-	0






IC301 : C2BBGF000364

Pin No.	Port	Descriptions	I/O	Vol (V)
1	PS	Motor power save	0	3.5
2	BR	Brake mode selection	0	0
3	GCTL	Motor G-control	0	1.6
4	SPCCTL	Motor speed control	0	3.5
5	-	Not used	-	-
6	MCLK	Clock for I/F command	0	2.9
7	MDATA	Data for I/F command	0	1.9
8	MLD	I/F command load	0	3.5
9	VSS0	Ground	-	0
10	VDD0	+3V power supply	-	3.5
11	STAT	Status signal	I	1.2
12	FLOCK	Focus servo lock	0	0
13	TLOCK	Tracking servo lock	0	0
14	SENS	Servo status	0	0
15	SIM	CD changer serial data	I	3.1
16	SOM	CD changer serial data	0	2.2
17	SCKM	Serial data shift clock	I	3.2
18	SUBQ	Code for sub. code-Q	I	1.7
19	-	Not used	-	-
20	SQCK	Ext. clock for sub. code-Q	0	3.6
21	NRST	Reset output	0	3.6
22	DMUTE	Mute output	0	0
23	MUTE	Mute output	0	0
24	VDD1	+3V power supply	-	3.5
25	AVSS1	Ground	-	0
26	SW15	Feeder SW	I	3.6
27	SW3	Tray H SW	I	3.5
28	SW4	Disc push SW	I	0.5
29	SW5	Disc SW	I	0
30	SW6	Disc load SW	I	0
31	SW7	Eject SW	I	0
32	SW13	Eject2 SW	I	0
33	CLVS	Servo status	0	3.6
34	AVREF	+3V power supply	-	3.6
35	-	Not used	-	-
36	/RESET	Reset	I	3.6
37	XT2	Not used	-	-
38	XT1	(VDD pull-up)	-	3.6
39	IC(VPP)	(Connecting to ground)	-	0
40	X2	Crystal Oscillator	-	2.1
41	X1	Crystal Oscillator	-	1.8
42	VSS1	Ground	-	0
43	CDON	CD changer start/stop	I	3.1
44	BLKCK	Sub. code block clock	I	0
45	FG	Flag signal	I	1.9
46	BD0	Drop-out signal	I	0
47	FR	Revolution detection	I	0
48	TRV	Forced traverse control	0	1.9
49	PWM	Not used	-	-
50	VMI+	Horizontal motor control	0	0
51	VMI-	Horizontal motor control	0	0
52	MUTE1	Mute output	0	3.6
53	LODI+	Loading motor control	0	0
54	LODI-	Loading motor control	0	0
55	HMI+	Vertical motor control	0	0
56	HMI-	Vertical motor control	0	0
57	SW1	Inner SW	I	3.6
58	SW2	TrayG SW	I	0
59	SW8	Play SW	I	0
60	SW9	Clump SW	I	3.6
61	SW10	Shutter SW	I	3.6
62	SW11	Horizontal origin SW	I	3.6
63	SW12	Outer2 SW	I	3.7
64	SW14	Outer SW	I	3.6



8 PACKAGE AND IC BLOCK DIAGRAM


8.1. Main Block

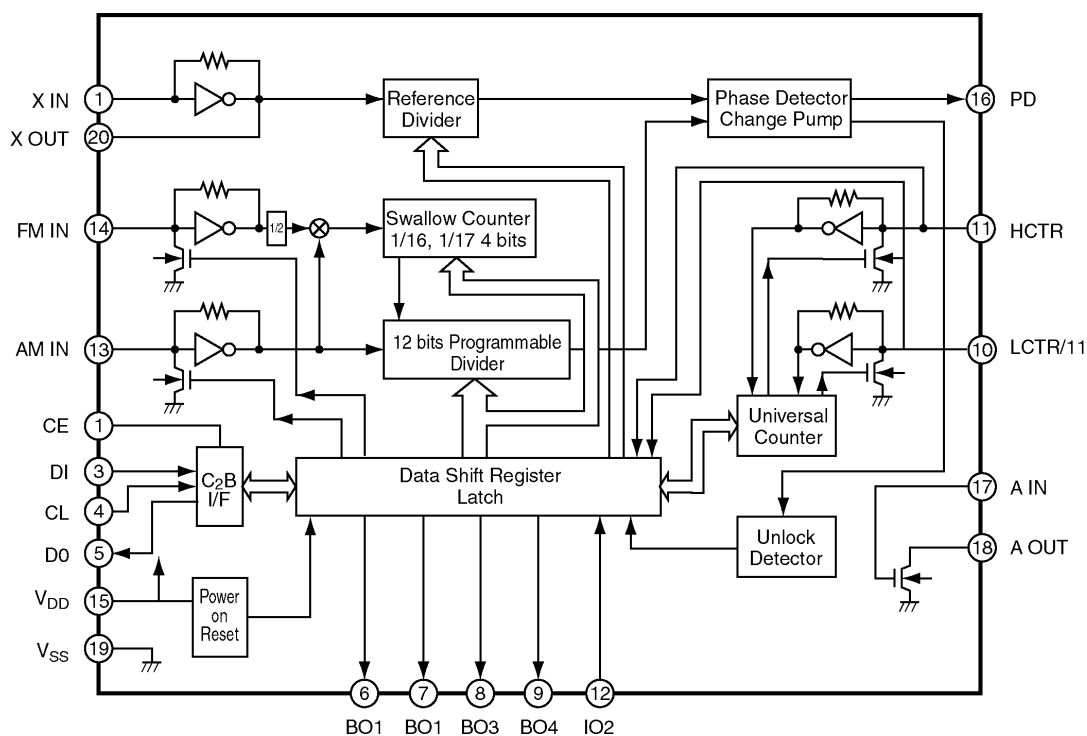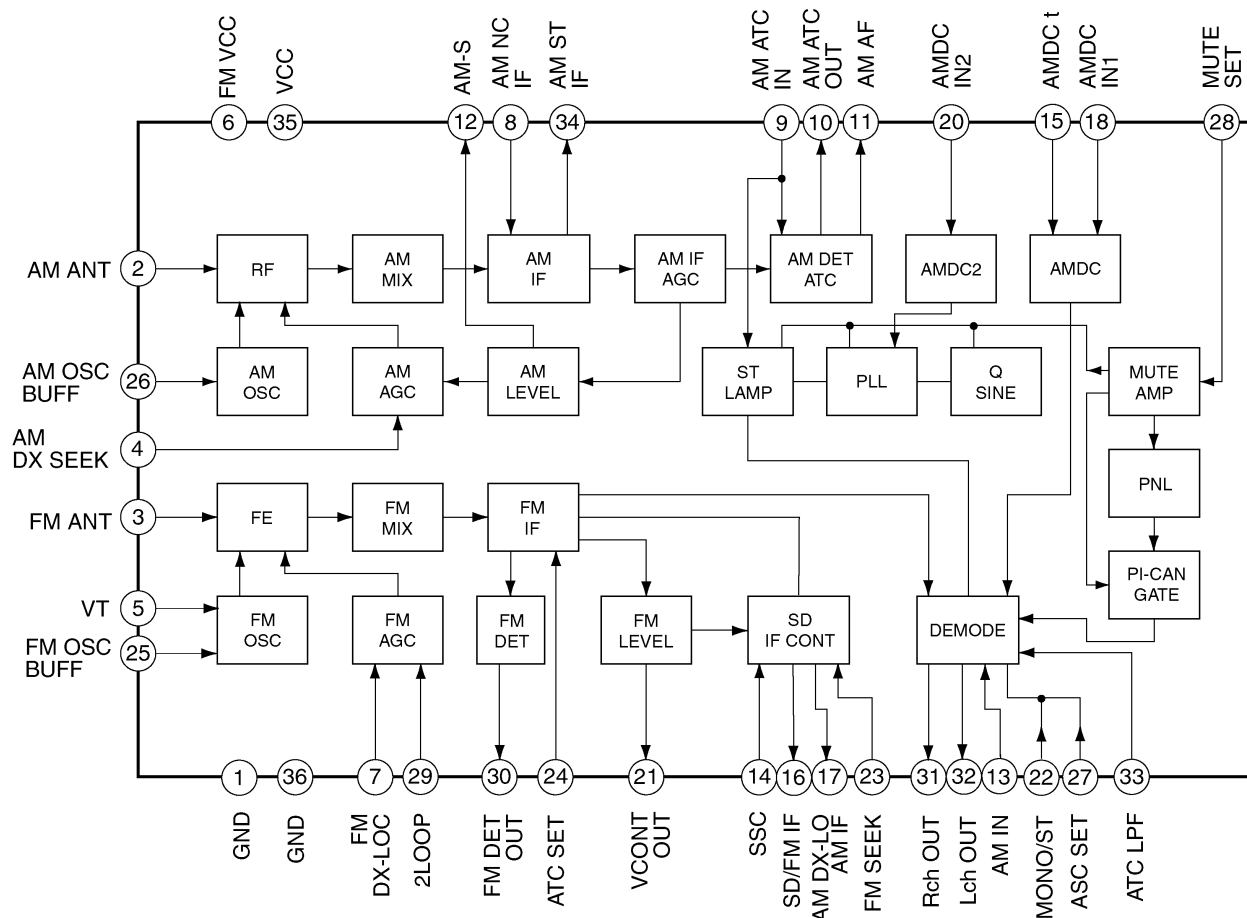

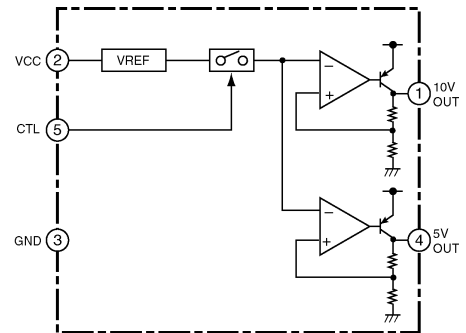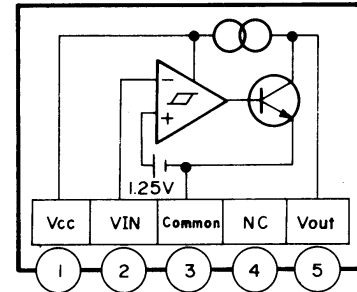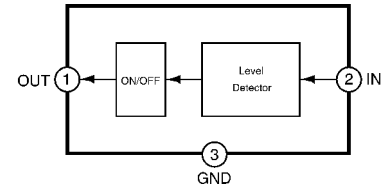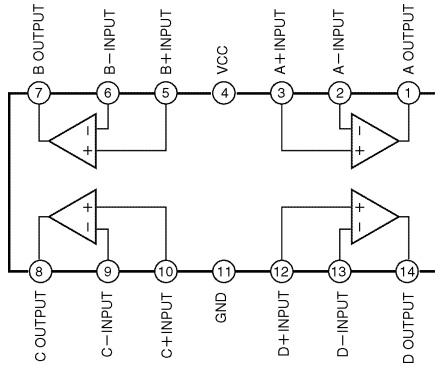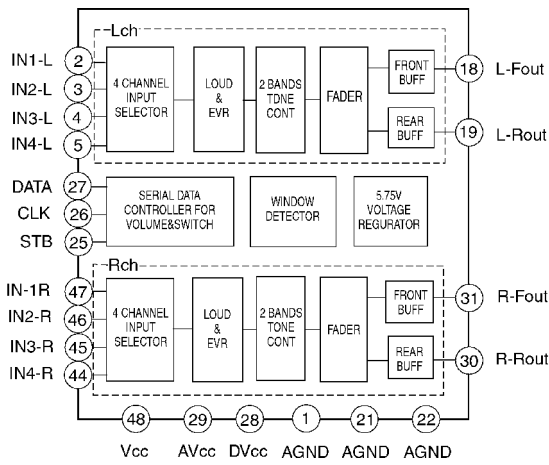


8.2. CD Servo Block

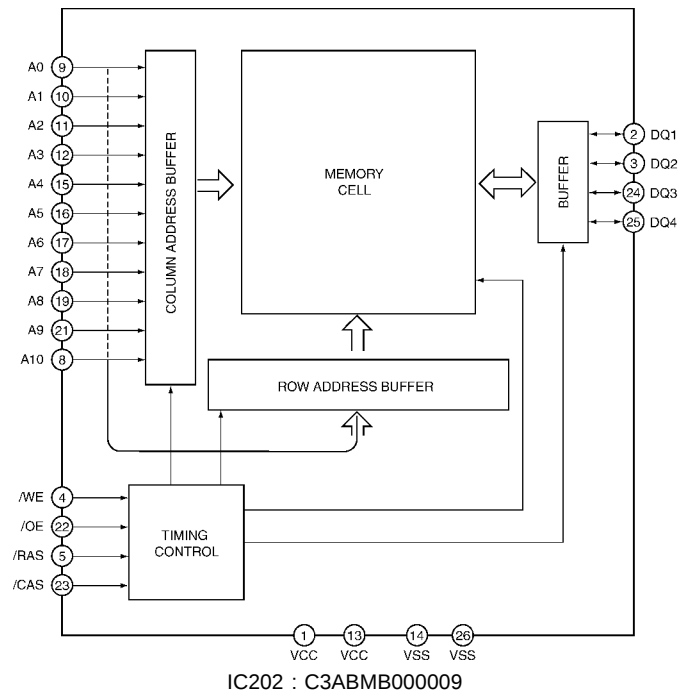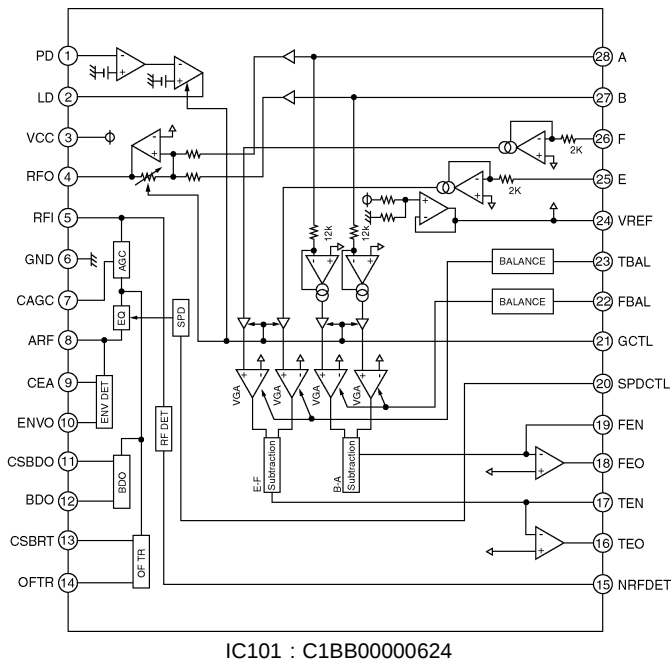

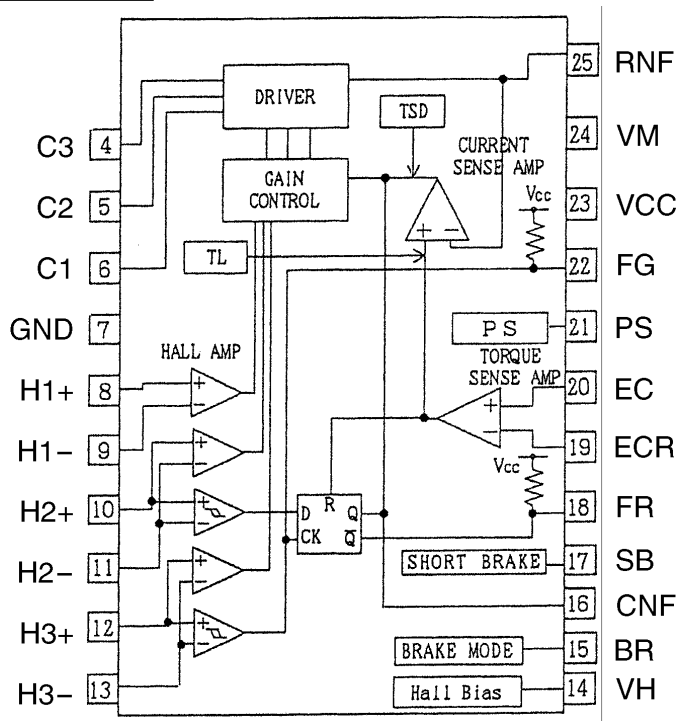

IC501 : C0GBH0000006

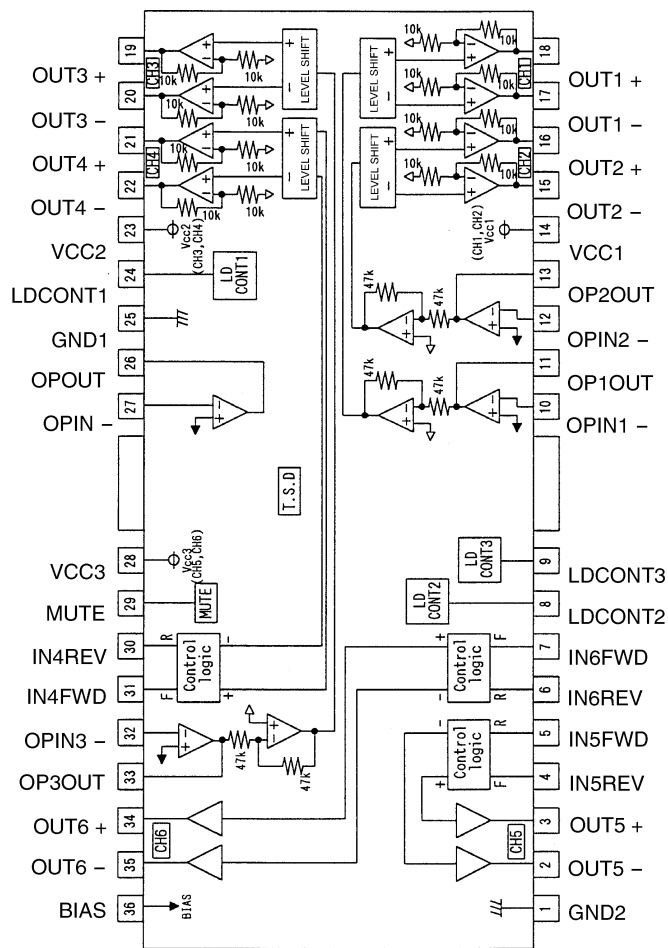

IC601 : C0GBY0000014

9 REPLACEMENT PARTS LIST

Notes :

1. Be sure to make your orders of replacement parts according to this list.
2. Important safety notice: Components, identified by Δ mark have special characteristics important for safety. When replacing any of these components, use only manufacturer's specified parts.
3. Location keys in the remarks column indicates the general location of the parts shown in the exploded drawing, as in a road map.
4. The marking (RTL) indicates that Retention Time is limited for this item. After the discontinuation of assembly in production, the item will continue to be available for a specific period of time. The retention period of availability is dependent on the type of assembly, and in accordance with the laws governing part and product retention. After the end of this period, the assembly will no longer be available.

Ref. No.	Part No.	Part Name & Description	Remarks
[E6939] Main & Connector Block			
IC's and TRANSISTORS			
IC20	YEAMLC72135C	IC	
IC201	YEAMSN761026	IC	
IC203	C0ABBB000179	IC	
IC204	C0ABBB000179	IC	
IC208	C0ABCB000015	IC	
IC210	C0ABBB000179	IC	
IC304	C0ABBB000179	IC	
IC601	C2BBGF000290	IC	
IC602	MN1382KTX	IC	
IC603	C0JBAM000048	IC	
IC701	YEAMM945BFT2	IC	
IC703	MN1382QTX	IC	
IC704	YEAMA61W12ST	IC	
IC705	C0DBFG000001	IC	
IC706	YEAMT7ST32UL	IC	
PA51	YEP0PTA514B0	Electronic Tuner	
Q251	B1GBHBEA0004	Transistor	
Q252	YEANA114TK	Transistor	
Q281	B1GBHBEA0004	Transistor	
Q282	YEANA114TK	Transistor	
Q351	B1GBHBEA0004	Transistor	
Q352	YEANA114TK	Transistor	
Q381	B1GBHBEA0004	Transistor	
Q382	YEANA114TK	Transistor	
Q383	YEANC114YKX	Transistor	
Q384	YEANC114YKX	Transistor	
Q401	B1GDCFJN0004	Transistor	
Q402	B1GBCFGG0001	Transistor	
Q403	B1ABCF000044	Transistor	
Q404	B1ABCF000042	Transistor	
Q405	B1ABCF000044	Transistor	
Q406	B1ABCF000044	Transistor	
Q407	B1ABCF000042	Transistor	
Q408	B1ABCF000044	Transistor	
Q641	2SD0601AHR	Transistor	
Q642	YEANC114YKX	Transistor	
Q701	YEANC114YKX	Transistor	
Q702	B1GDCFLL0010	Transistor	
Q711	B1GDCFLL0010	Transistor	
Q712	YEANC114YKX	Transistor	
Q720	YEANBP1F3PT	Transistor	
Q721	2SD245300L	Transistor	
Q722	2SB1398QTA	Transistor	
Q723	2SB1398QTA	Transistor	

Ref. No.	Part No.	Part Name & Description	Remarks
Q724	B1GDJEGJ0002	Transistor	
Q725	YEANBP1F3PT	Transistor	
Q731	B1ABCF000044	Transistor	
Q732	YEANC114YKX	Transistor	
Q741	B1BBAC000007	Transistor	
Q761	YEAND1760QRT	Transistor	
Q762	YEANC114WKTX	Transistor	
Q765	B1BBCD000001	Transistor	
Q772	2SD0601AHR	Transistor	
Q773	YEAN2SD1856	Transistor	
Q774	B1BDCG000008	Transistor	
Q775	2SD0601AHR	Transistor	
DIODES			
D51	MA3X55500L	Diode	
D71	MA551TX	Diode	
D250	MA153TX	Diode	
D280	MA153TX	Diode	
D350	MA153TX	Diode	
D380	MA153TX	Diode	
D401	MA152WKTX	Diode	
D402	MAZ32700ML	Diode	
D403	MAZ32700ML	Diode	
D404	MAZ32700ML	Diode	
D549	MAZ32700ML	Diode	
D550	MA153TX	Diode	
D601	B0ACCK000005	Diode	
D610	MA152WKTX	Diode	
D621	MA741TX	Diode	
D643	MA158TX	Diode	
D644	MA3X152K0L	Diode	
D645	MA3X152K0L	Diode	
D646	MA3X152K0L	Diode	
D647	MA3X152K0L	Diode	
D701	B0JCPD000002	Diode	
D710	B0BA03300012	Diode	
D711	YEADRD91M1T2	Diode	
D712	MA3X152K0L	Diode	
D731	YEADRD75M2T1	Diode	
D732	MA741TX	Diode	
D733	B0BC5R700005	Diode	
D750	B0BC8R700005	Diode	
D751	MA152WKTX	Diode	
D771	YEADDSA3A2B	Diode	
D772	B0EANM000002	Diode	
D773	B0BC01100025	Diode	
D774	B0EANM000002	Diode	
D775	B0EANM000002	Diode	
D776	B0EANM000002	Diode	
D780	MA3X152K0L	Diode	
D790	B0EANM000002	Diode	
D791	B0EANM000002	Diode	
D792	B0EANM000002	Diode	
CAPACITORS			
C25	F1J1H180A034	Ceramic, 18PF 50WV	
C26	YECUS1H150JM	Ceramic, 15PF 50WV	
C51	YECUZ1H221JC	Ceramic, 220PF 50WV	
C53	ECA1AM221I	Electrolytic, 220μF 10WV	
C54	F1J1H103A513	Ceramic, 0.01μF 50WV	
C55	YECUS1E223KX	Ceramic, 0.022μF 25WV	
C56	YECUS1E223KX	Ceramic, 0.022μF 25WV	
C58	YECUZ1H102KX	Ceramic, 1000PF 50WV	
C59	F1J1H1020024	Ceramic, 1000PF 50WV	
C60	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C71	YECUZ1H221JC	Ceramic, 220PF 50WV	
C101	YECUS1C154KX	Ceramic, 0.15μF 16WV	
C102	YECUS1H153KX	Ceramic, 0.015μF 50WV	
C103	YECUS1C154KX	Ceramic, 0.15μF 16WV	
C105	YECUZ1H020CC	Ceramic, 2PF 50WV	
C106	F1H1H101A231	Ceramic, 100PF 50WV	

Ref. No.	Part No.	Part Name & Description	Remarks
C107	F1J1H272A675	Ceramic, 2700PF 50WV	
C162	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C163	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C166	F1J1H103A513	Ceramic, 0.01μF 50WV	
C201	ECA1AM221I	Electrolytic, 220μF 10WV	
C202	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C203	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C204	YECUZ1H390JC	Ceramic, 39PF 50WV	
C205	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C206	YECUS1H390JM	Ceramic, 39PF 50WV	
C207	YECUZ1H221JC	Ceramic, 220PF 50WV	
C208	YECUZ1H221JC	Ceramic, 220PF 50WV	
C209	YECUS1E393KX	Ceramic, 0.039μF 25WV	
C210	ECA1HM010I	Electrolytic, 1μF 50WV	
C212	ECEA1ASN100I	Electrolytic, 10μF 10WV	
C213	YECUS1E223KX	Ceramic, 0.022μF 25WV	
C214	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C215	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C216	F1J1H152A675	Ceramic, 1500PF 50WV	
C217	F1J1H682A675	Ceramic, 6800PF 50WV	
C218	F1J1H821A672	Ceramic, 820PF 50WV	
C219	ECEA1ASN100I	Electrolytic, 10μF 10WV	
C220	YECUS1C683KX	Ceramic, 0.068μF 16WV	
C221	ECEA1VSN2R2	Electrolytic, 2.2μF 35WV	
C222	F1J1H101A672	Ceramic, 100PF 50WV	
C223	ECEA1ASN100I	Electrolytic, 10μF 10WV	
C224	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C230	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C231	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C232	F1H1H470A231	Ceramic, 47PF 50WV	
C250	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C253	F1H1H470A231	Ceramic, 47PF 50WV	
C254	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C255	F1J1H101A672	Ceramic, 100PF 50WV	
C256	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C257	F1J1H1020024	Ceramic, 1000PF 50WV	
C260	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C261	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C262	F1H1H470A231	Ceramic, 47PF 50WV	
C280	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C283	F1H1H470A231	Ceramic, 47PF 50WV	
C284	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C285	F1J1H101A672	Ceramic, 100PF 50WV	
C286	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C287	F1J1H1020024	Ceramic, 1000PF 50WV	
C302	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C303	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C304	YECUZ1H390JC	Ceramic, 39PF 50WV	
C305	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C306	YECUS1H390JM	Ceramic, 39PF 50WV	
C307	YECUZ1H221JC	Ceramic, 220PF 50WV	
C308	YECUZ1H221JC	Ceramic, 220PF 50WV	
C309	YECUS1E393KX	Ceramic, 0.039μF 25WV	
C310	ECA1HM010I	Electrolytic, 1μF 50WV	
C312	ECEA1ASN100I	Electrolytic, 10μF 10WV	
C313	YECUS1E223KX	Ceramic, 0.022μF 25WV	
C314	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C315	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C316	F1J1H152A675	Ceramic, 1500PF 50WV	
C317	F1J1H682A675	Ceramic, 6800PF 50WV	
C318	F1J1H821A672	Ceramic, 820PF 50WV	
C319	ECEA1ASN100I	Electrolytic, 10μF 10WV	
C320	YECUS1C683KX	Ceramic, 0.068μF 16WV	
C321	ECEA1VSN2R2	Electrolytic, 2.2μF 35WV	
C322	F1J1H101A672	Ceramic, 100PF 50WV	
C323	ECEA1ASN100I	Electrolytic, 10μF 10WV	
C324	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C330	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C331	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C332	F1H1H470A231	Ceramic, 47PF 50WV	
C350	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C353	F1H1H470A231	Ceramic, 47PF 50WV	
C354	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	

Ref. No.	Part No.	Part Name & Description	Remarks
C355	F1J1H101A672	Ceramic, 100PF 50WV	
C356	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C357	F1J1H1020024	Ceramic, 1000PF 50WV	
C360	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C361	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C362	F1H1H470A231	Ceramic, 47PF 50WV	
C380	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C383	F1H1H470A231	Ceramic, 47PF 50WV	
C384	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C385	F1J1H101A672	Ceramic, 100PF 50WV	
C386	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C387	F1J1H1020024	Ceramic, 1000PF 50WV	
C401	F1H1H100A226	Ceramic, 10PF 50WV	
C402	F1H1H100A226	Ceramic, 10PF 50WV	
C500	ECA1CM100I	Electrolytic, 10μF 16WV	
C502	F1J1H151A672	Ceramic, 150PF 50WV	
C503	F1J1H471A672	Ceramic, 470PF 50WV	
C504	YECUS1H153KX	Ceramic, 0.015μF 50WV	
C505	YECUS1H153KX	Ceramic, 0.015μF 50WV	
C506	F1J1H103A513	Ceramic, 0.01μF 50WV	
C507	YECUS1H153KX	Ceramic, 0.015μF 50WV	
C508	YECUS1H153KX	Ceramic, 0.015μF 50WV	
C600	F1J1H103A513	Ceramic, 0.01μF 50WV	
C601	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C602	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C603	ECA0JM331I	Electrolytic, 330μF 6.3WV	
C605	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C606	ECA0JM101I	Electrolytic, 100μF 6.3WV	
C607	ECEA1ESN4R7	Electrolytic, 4.7μF 25WV	
C608	F1J1H103A513	Ceramic, 0.01μF 50WV	
C609	YECUZ1C104KX	Ceramic, 0.1μF 16WV	
C610	YECUZ1H472KX	Ceramic, 4700PF 50WV	
C611	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C612	F1H1H821A190	Ceramic, 820PF 50WV	
C613	ECA1AM221I	Electrolytic, 220μF 10WV	
C614	YECUS1C224KX	Ceramic, 0.22μF 16WV	
C615	EECS0HD473H	Electrolytic, 0.047F 5.5WV	
C616	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C620	YECUZ1H220JC	Ceramic, 22PF 50WV	
C621	YECUZ1H220JC	Ceramic, 22PF 50WV	
C622	YECUS1H390JM	Ceramic, 39PF 50WV	
C623	YECUS1H220JM	Ceramic, 22PF 50WV	
C630	F1H1H101A231	Ceramic, 100PF 50WV	
C631	F1H1H101A231	Ceramic, 100PF 50WV	
C632	F1H1H101A231	Ceramic, 100PF 50WV	
C633	F1H1H101A231	Ceramic, 100PF 50WV	
C636	F1J1H101A672	Ceramic, 100PF 50WV	
C637	F1J1H101A672	Ceramic, 100PF 50WV	
C638	F1J1H101A672	Ceramic, 100PF 50WV	
C639	F1J1H101A672	Ceramic, 100PF 50WV	
C640	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C641	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C642	ECEA1CKS100I	Electrolytic, 10μF 16WV	
C643	EEAFC1A820H	Electrolytic, 82μF 10WV	
C646	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C701	ECA1HM3R3I	Electrolytic, 3.3μF 50WV	
C702	F1J1H103A513	Ceramic, 0.01μF 50WV	
C703	YECUZ1C104KX	Ceramic, 0.1μF 16WV	
C707	F1J1H472A675	Ceramic, 4700PF 50WV	
C711	ECA1AM101I	Electrolytic, 100μF 10WV	
C715	ECA1CM100I	Electrolytic, 10μF 16WV	
C716	YECUS1E473KX	Ceramic, 0.047μF 25WV	
C718	ECA1AM221I	Electrolytic, 220μF 10WV	
C720	F1J1H103A513	Ceramic, 0.01μF 50WV	
C723	ECA0JM331I	Electrolytic, 330μF 6.3WV	
C725	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C726	ECA1AM101I	Electrolytic, 100μF 10WV	
C727	ECA1AM101I	Electrolytic, 100μF 10WV	
C728	ECA1AM101I	Electrolytic, 100μF 10WV	
C729	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C730	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C731	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C733	ECA1CM330I	Electrolytic, 33μF 16WV	

Ref. No.	Part No.	Part Name & Description	Remarks
C734	ECA1CM220I	Electrolytic, 22μF 16WV	
C735	YECUS1C224KX	Ceramic, 0.22μF 16WV	
C741	ECA1HM2R2I	Electrolytic, 2.2μF 50WV	
C742	F1J1H103A513	Ceramic, 0.01μF 50WV	
C744	ECA1HM4R7B	Electrolytic, 4.7μF 50WV	
C747	EEAFC1A820H	Electrolytic, 82μF 10WV	
C751	ECA1AM221I	Electrolytic, 220μF 10WV	
C752	YECUS1E223KX	Ceramic, 0.022μF 25WV	
C754	YECUZ1C104KX	Ceramic, 0.1μF 16WV	
C758	ECA0JM101I	Electrolytic, 100μF 6.3WV	
C759	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C760	ECA1CM102B	Electrolytic, 1000μF 16WV	
C761	F1J1H101A672	Ceramic, 100PF 50WV	
C764	F1J1H103A513	Ceramic, 0.01μF 50WV	
C780	YECUS1C104KX	Ceramic, 0.1μF 16WV	
C782	ECA1AM221I	Electrolytic, 220μF 10WV	
C783	YECUZ1H103KX	Ceramic, 0.01μF 50WV	
C784	YECUS1C224KX	Ceramic, 0.22μF 16WV	
C785	ECA1CM220I	Electrolytic, 22μF 16WV	
C786	YECUS1C334KX	Ceramic, 0.33μF 16WV	
C787	YECUS1C334KX	Ceramic, 0.33μF 16WV	
C788	YECUS1C224KX	Ceramic, 0.22μF 16WV	
C790	EEAFC1A820H	Electrolytic, 82μF 10WV	
C792	F1J1H103A513	Ceramic, 0.01μF 50WV	
C793	ECA1CM221	Electrolytic, 220μF 16WV	
C794	ECA1CM471B	Electrolytic, 470μF 16WV	
C796	YECUV2A103KX	Ceramic, 0.01μF 100WV	
C797	ECA1HM100I	Electrolytic, 10μF 50WV	
C798	YECUV2A103KX	Ceramic, 0.01μF 100WV	
RESISTORS			
D793	ERDS2TC0	0Ω 1/4W	
R34	ERJ6GEYJ473	Chip, 47kΩ 1/10W	
R35	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R51	ERJ3GEYJ564V	Chip, 560kΩ 1/16W	
R52	ERJ3GEYJ564V	Chip, 560kΩ 1/16W	
R55	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R56	ERJ6GEYJ563	Chip, 56kΩ 1/10W	
R57	ERJ3GEYJ101V	Chip, 100Ω 1/16W	
R58	ERJ6GEYJ272	Chip, 2.7kΩ 1/10W	
R59	ERJ6GEYJ562	Chip, 5.6kΩ 1/10W	
R101	ERJ6GEYJ472	Chip, 4.7kΩ 1/10W	
R102	ERJ6GEYJ153	Chip, 15kΩ 1/10W	
R104	ERJ6GEYJ153	Chip, 15kΩ 1/10W	
R105	ERJ6GEYJ101	Chip, 100Ω 1/10W	
R161	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R162	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R164	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R165	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R167	ERJ6GEYJ473	Chip, 47kΩ 1/10W	
R201	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R202	ERJ3GEYJ273V	Chip, 27kΩ 1/16W	
R203	ERJ6GEYJ122	Chip, 1.2kΩ 1/10W	
R204	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R205	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R207	ERJ6GEYJ273	Chip, 27kΩ 1/10W	
R208	ERJ6GEYJ121	Chip, 120Ω 1/10W	
R209	ERJ3GEYJ152V	Chip, 1.5kΩ 1/16W	
R210	ERJ3GEYJ152V	Chip, 1.5kΩ 1/16W	
R211	ERJ3GEYJ101V	Chip, 100Ω 1/16W	
R212	ERJ3GEYJ101V	Chip, 100Ω 1/16W	
R215	ERJ3GEYJ562V	Chip, 5.6kΩ 1/16W	
R216	ERJ3GEYJ682V	Chip, 6.8kΩ 1/16W	
R217	ERJ3GEYJ183V	Chip, 18kΩ 1/16W	
R231	ERJ3GEYJ683V	Chip, 68kΩ 1/16W	
R232	ERJ3GEYJ274V	Chip, 270kΩ 1/16W	
R249	ERJ6GEYJ181	Chip, 180Ω 1/10W	
R250	ERJ3GEYJ152V	Chip, 1.5kΩ 1/16W	
R252	ERJ6GEYJ272	Chip, 2.7kΩ 1/10W	
R253	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R258	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R259	ERJ6GEYJ393	Chip, 39kΩ 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R261	ERJ3GEYJ683V	Chip, 68kΩ 1/16W	
R262	ERJ3GEYJ274V	Chip, 270kΩ 1/16W	
R269	ERJ6GEYJ224	Chip, 220kΩ 1/10W	
R279	ERJ6GEYJ181	Chip, 180Ω 1/10W	
R280	ERJ3GEYJ152V	Chip, 1.5kΩ 1/16W	
R282	ERJ6GEYJ272	Chip, 2.7kΩ 1/10W	
R283	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R288	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R289	ERJ6GEYJ393	Chip, 39kΩ 1/10W	
R299	ERJ6GEYJ224	Chip, 220kΩ 1/10W	
R301	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R302	ERJ3GEYJ273V	Chip, 27kΩ 1/16W	
R303	ERJ6GEYJ102	Chip, 1kΩ 1/10W	
R304	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R305	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R307	ERJ6GEYJ273	Chip, 27kΩ 1/10W	
R308	ERJ6GEYJ121	Chip, 120Ω 1/10W	
R309	ERJ3GEYJ152V	Chip, 1.5kΩ 1/16W	
R310	ERJ3GEYJ152V	Chip, 1.5kΩ 1/16W	
R311	ERJ3GEYJ101V	Chip, 100Ω 1/16W	
R312	ERJ3GEYJ101V	Chip, 100Ω 1/16W	
R315	ERJ3GEYJ562V	Chip, 5.6kΩ 1/16W	
R316	ERJ3GEYJ682V	Chip, 6.8kΩ 1/16W	
R317	ERJ3GEYJ183V	Chip, 18kΩ 1/16W	
R331	ERJ3GEYJ683V	Chip, 68kΩ 1/16W	
R332	ERJ3GEYJ274V	Chip, 270kΩ 1/16W	
R349	ERJ6GEYJ181	Chip, 180Ω 1/10W	
R350	ERJ3GEYJ152V	Chip, 1.5kΩ 1/16W	
R352	ERJ6GEYJ272	Chip, 2.7kΩ 1/10W	
R353	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R354	ERJ6GEYJ474	Chip, 470kΩ 1/10W	
R355	ERJ6GEYJ474	Chip, 470kΩ 1/10W	
R356	ERJ6GEYJ472	Chip, 4.7kΩ 1/10W	
R357	ERJ3GEYJ182V	Chip, 1.8kΩ 1/16W	
R358	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R359	ERJ6GEYJ393	Chip, 39kΩ 1/10W	
R361	ERJ3GEYJ683V	Chip, 68kΩ 1/16W	
R362	ERJ3GEYJ274V	Chip, 270kΩ 1/16W	
R369	ERJ6GEYJ224	Chip, 220kΩ 1/10W	
R379	ERJ6GEYJ181	Chip, 180Ω 1/10W	
R380	ERJ3GEYJ152V	Chip, 1.5kΩ 1/16W	
R382	ERJ6GEYJ272	Chip, 2.7kΩ 1/10W	
R383	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R385	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R388	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R389	ERJ6GEYJ393	Chip, 39kΩ 1/10W	
R399	ERJ6GEYJ224	Chip, 220kΩ 1/10W	
R401	ERJ3GEYJ472V	Chip, 4.7kΩ 1/16W	
R402	ERJ3GEYJ562V	Chip, 5.6kΩ 1/16W	
R403	ERJ3GEYJ272V	Chip, 2.7kΩ 1/16W	
R404	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R405	ERJ3GEYJ392V	Chip, 3.9kΩ 1/16W	
R406	ERJ6GEYJ122	Chip, 1.2kΩ 1/10W	
R407	ERJ3GEYJ561V	Chip, 560Ω 1/16W	
R409	ERJ3GEY0R00V	Chip, 0Ω 1/16W	
R410	ERJ3GEYJ272V	Chip, 2.7kΩ 1/16W	
R411	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R412	ERJ3GEYJ392V	Chip, 3.9kΩ 1/16W	
R413	ERJ3GEYJ122V	Chip, 1.2kΩ 1/16W	
R414	ERJ3GEYJ561V	Chip, 560Ω 1/16W	
R416	EXR1SJ2R2E	Metal Film, 2.2Ω 1W	
R501	ERJ6GEYJ822	Chip, 8.2kΩ 1/10W	
R502	ERJ6GEYJ823	Chip, 82kΩ 1/10W	
R503	ERJ6GEYJ104	Chip, 100kΩ 1/10W	
R504	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R505	ERJ6GEYJ124	Chip, 120kΩ 1/10W	
R506	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R507	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
R508	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
R509	ERJ6GEYJ101	Chip, 100Ω 1/10W	
R510	ERJ6GEYJ560	Chip, 56Ω 1/10W	
R601	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R602	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
R603	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R604	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
R605	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
R606	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
R607	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
R609	ERJ3GEYJ222V	Chip, 2.2kΩ 1/16W	
R611	ERJ6GEYJ473	Chip, 47kΩ 1/10W	
R612	ERJ6GEYJ473	Chip, 47kΩ 1/10W	
R613	ERJ3GEYJ104V	Chip, 100kΩ 1/16W	
R614	ERJ3GEY0R00V	Chip, 0Ω 1/16W	
R615	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R616	ERJ3GEYJ104V	Chip, 100kΩ 1/16W	
R617	ERJ3GEYJ564V	Chip, 560kΩ 1/16W	
R619	ERJ6GEYJ221V	Chip, 220Ω 1/10W	
R620	ERJ3GEYJ220V	Chip, 22Ω 1/16W	
R621	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R622	ERJ3GEYJ105V	Chip, 1MΩ 1/16W	
R623	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R624	ERJ3GEYJ105V	Chip, 1MΩ 1/16W	
R625	ERJ3GEYJ272V	Chip, 2.7kΩ 1/16W	
R626	ERJ6GEYJ473	Chip, 47kΩ 1/10W	
R627	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
R628	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R631	ERJ3GEYJ183V	Chip, 18kΩ 1/16W	
R632	ERJ3GEYJ432V	Chip, 4.3kΩ 1/16W	
R633	ERJ6GEYJ152	Chip, 1.5kΩ 1/10W	
R634	ERJ6GEYJ151	Chip, 150Ω 1/10W	
R635	ERJ6GEYJ152	Chip, 1.5kΩ 1/10W	
R636	ERJ6GEYJ152	Chip, 1.5kΩ 1/10W	
R637	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R639	ERJ6GEYJ181	Chip, 180Ω 1/10W	
R641	ERJ3GEYJ222V	Chip, 2.2kΩ 1/16W	
R642	ERJ3GEYJ472V	Chip, 4.7kΩ 1/16W	
R644	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R646	ERJ6GEYJ822	Chip, 8.2kΩ 1/10W	
R649	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
R650	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
R651	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R653	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R654	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R661	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R664	ERJ3GEYJ472V	Chip, 4.7kΩ 1/16W	
R665	ERJ3GEYJ472V	Chip, 4.7kΩ 1/16W	
R667	ERJ3GEYJ472V	Chip, 4.7kΩ 1/16W	
R668	ERJ3GEYJ472V	Chip, 4.7kΩ 1/16W	
R669	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R670	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R671	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R672	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R673	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R674	ERJ6GEYJ473	Chip, 47kΩ 1/10W	
R675	ERJ3GEYJ222V	Chip, 2.2kΩ 1/16W	
R676	ERJ3GEYJ222V	Chip, 2.2kΩ 1/16W	
R677	ERJ3GEYJ222V	Chip, 2.2kΩ 1/16W	
R678	ERJ3GEYJ222V	Chip, 2.2kΩ 1/16W	
R680	ERJ3GEYJ222V	Chip, 2.2kΩ 1/16W	
R681	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R689	ERJ6GEYJ680	Chip, 68Ω 1/10W	
R701	ERX12SJR22E	Metal Film, 0.22Ω 1/2W	
R702	ERX12SJR22E	Metal Film, 0.22Ω 1/2W	
R703	ERJ6GEYJ472	Chip, 4.7kΩ 1/10W	
R704	ERJ6GEYJ563	Chip, 56kΩ 1/10W	
R705	ERJ3GEY0R00V	Chip, 0Ω 1/16W	
R706	ERJ3GEY0R00V	Chip, 0Ω 1/16W	
R707	ERJ3GEY0R00V	Chip, 0Ω 1/16W	
R708	ERJ6GEYJ123	Chip, 12kΩ 1/10W	
R709	ERJ6GEYJ123	Chip, 12kΩ 1/10W	
R710	ERJ6GEYJ102	Chip, 1kΩ 1/10W	
R715	ERX12SJR22E	Metal Film, 0.22Ω 1/2W	
R716	ERJ6GEYJ223	Chip, 22kΩ 1/10W	
R718	ERJ3GEYJ222V	Chip, 2.2kΩ 1/16W	
R719	ERJ3GEYJ222V	Chip, 2.2kΩ 1/16W	
R721	ERJ6GEYJ391	Chip, 390Ω 1/10W	

Ref. No.	Part No.	Part Name & Description	Remarks
R722	ERJ6GEYJ1R0	Chip, 1.0Ω 1/10W	
R724	ERJ6GEYJ333	Chip, 33kΩ 1/10W	
R725	ERJ6GEYJ102	Chip, 1kΩ 1/10W	
R726	ERJ6GEYJ122	Chip, 1.2kΩ 1/10W	
R727	ERJ6GEYJ220	Chip, 22Ω 1/10W	
R728	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
R729	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
R730	ERJ6GEYJ272	Chip, 2.7kΩ 1/10W	
R731	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R734	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R735	ERJ3GEYJ334V	Chip, 330kΩ 1/16W	
R736	ERJ6GEYJ683	Chip, 68kΩ 1/10W	
R737	ERJ6GEYJ333	Chip, 33kΩ 1/10W	
R738	ERJ6GEYJ333	Chip, 33kΩ 1/10W	
R740	ERJ3GEYJ273V	Chip, 27kΩ 1/16W	
R741	ERJ6GEYJ2R2	Chip, 2.2Ω 1/10W	
R742	ERJ6GEYJ333	Chip, 33kΩ 1/10W	
R743	ERJ6GEYJ333	Chip, 33kΩ 1/10W	
R744	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R745	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R746	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R747	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R748	ERJ6GEYJ123	Chip, 12kΩ 1/10W	
R749	ERJ6GEYJ103	Chip, 10kΩ 1/10W	
R750	ERJ6GEYJ123	Chip, 12kΩ 1/10W	
R751	ERJ6GEYJ102	Chip, 1kΩ 1/10W	
R752	ERJ6GEYJ102	Chip, 1kΩ 1/10W	
R753	ERJ3GEYJ682V	Chip, 6.8kΩ 1/16W	
R754	ERJ6GEYJ102	Chip, 1kΩ 1/10W	
R755	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R756	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R757	ERG1SJ331E	Metal Oxid, 330Ω 1W	
R759	ERJ6GEYJ272	Chip, 2.7kΩ 1/10W	
R760	ERJ6GEYJ272	Chip, 2.7kΩ 1/10W	
R761	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R762	ERJ3GEYJ682V	Chip, 6.8kΩ 1/16W	
R763	ERJ3GEYJ101V	Chip, 100Ω 1/16W	
R767	ERJ6GEYJ272	Chip, 2.7kΩ 1/10W	
R768	ERX1SJ2R2E	Metal Film, 2.2Ω 1W	
R771	ERJ6GEYJ391	Chip, 390Ω 1/10W	
R772	ERJ6GEYJ122	Chip, 1.2kΩ 1/10W	
R773	ERJ3GEYJ242V	Chip, 2.4kΩ 1/16W	
R774	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R775	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R777	ERJ6GEYJ2R2	Chip, 2.2Ω 1/10W	
R780	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R781	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
R782	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R783	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R784	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
R785	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
R786	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
R787	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
R790	ERG1SJ180E	Metal Oxid, 18Ω 1W	
R791	ERG1SJ180E	Metal Oxid, 18Ω 1W	
R794	ERJ6GEYJ222	Chip, 2.2kΩ 1/10W	
CONNECTORS			
CJ202	K1MN14A00053	Connector, 14P	
CJ203	K1MN14A00053	Connector, 14P	
CJ204	K1MN14B00093	Connector, 14P	
CJ401	YEA012081A	Connector, 13P	
CJ602	YEA012581	Connector, 8P	
CJ704	K1CB106B0030	Connector, 6P	
CP603	K1KA12B00105	Connector, 12P	
CP604	K1KA12B00105	Connector, 12P	
CP703	YEA014SDLYL	Connector, 14P	
SWITCHES			
SW1	YEA08042	Switch	


Ref. No.	Part No.	Part Name & Description	Remarks
COILS			
L51	YELT02M1R8KT	Coil	
L52	G1C3R3K00003	Coil	
L71	G1C3R3K00003	Coil	
L101	YELT02MR82KT	Coil	
L163	G1C3R3K00003	Coil	
L501	G1C3R3K00003	Coil	
L502	G1C3R3K00003	Coil	
L601	YELT03N5R6KT	Coil	
L602	G1C3R3K00003	Coil	
L603	G1C3R3K00003	Coil	
L604	G1C3R3K00003	Coil	
L605	G1C3R3K00003	Coil	
L701	G0A201E00001	Coil	
L702	G0A201E00001	Coil	
L751	J0JCC0000012	Coil	
CRYSTALS			
XL20	H0D720400003	Crystal	
XL601	YEXL49U0419S	Crystal	
XL602	YEXLMC60327	Crystal	
NEON TUBES			
Z51	J0LE00000002	Neon Tube	
Z71	J0LE00000002	Neon Tube	
NETWORK RESISTORS			
RA600	EXBV8V471JV	Network Resistor	
RA602	EXBV8V222JV	Network Resistor	
RA603	EXBV8V222JV	Network Resistor	
RA604	EXBV8V222JV	Network Resistor	
RA605	EXBV8V222JV	Network Resistor	
RA606	EXBV8V222JV	Network Resistor	
RA608	EXBV8V222JV	Network Resistor	
RA609	EXBV8V222JV	Network Resistor	
RA612	EXBV8V222JV	Network Resistor	
RA613	EXBV8V222JV	Network Resistor	
RA614	EXBV8V222JV	Network Resistor	
RA615	EXBV8V104JV	Network Resistor	
THERMISTER			
R415	D4ZZ00000015	Thermister	
R739	D4ZZ00000015	Thermister	
[E9065] Display Block			
IC's and TRANSISTORS			
IC901	C0JBAQ000073	IC	
DIODES			
D901	B3ABA0000433	Diode	
D902	B3ADA0000097	Diode	
D903	B3ABA0000433	Diode	
D904	B3ADA0000097	Diode	
D905	B3ABA0000433	Diode	
D906	B3ADA0000097	Diode	
D907	B3ABA0000433	Diode	
D908	B3ADA0000097	Diode	
D909	B3ABA0000433	Diode	
D910	B3ADA0000097	Diode	
D911	B3ABA0000433	Diode	
D912	B3ADA0000097	Diode	
D913	B3ABA0000448	Diode	
D914	B3ABA0000448	Diode	

Ref. No.	Part No.	Part Name & Description	Remarks
CAPACITOR			
C704	YECUS1C104KX	Ceramic, 0.1μF 16WV	
RESISTORS			
J801	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J802	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J803	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J804	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J805	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J806	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J807	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J808	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J809	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J810	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J811	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J812	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J813	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J814	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J815	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J816	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J817	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J818	ERJ6GEY0R00V	Chip, 0Ω 1/10W	
J851	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J852	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J853	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J854	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J855	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J856	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J857	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J858	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J859	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J860	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J861	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J862	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J863	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J864	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J865	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J866	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J867	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J868	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J869	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J870	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J871	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J872	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J873	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J874	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J875	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J876	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J877	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J878	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J879	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J880	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J881	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J882	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J883	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J884	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J885	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J886	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J887	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J888	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J889	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J890	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J891	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J892	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J893	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J894	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J895	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J896	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J897	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J898	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J899	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J900	ERJ8GEY0R00V	Chip, 0Ω 1/8W	

Ref. No.	Part No.	Part Name & Description	Remarks
J901	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J902	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J903	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J904	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J905	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J906	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J907	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J908	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J909	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J910	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J911	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J912	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J913	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J914	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J915	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J916	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J917	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J918	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J919	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J920	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J921	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J922	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J923	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J924	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J925	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J926	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J927	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J928	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J929	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J930	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J931	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J932	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J933	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J934	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J935	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J936	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J937	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J938	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J939	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J940	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J941	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J942	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J943	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J944	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J945	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J946	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J947	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J948	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J949	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J950	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J951	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J952	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J953	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J954	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J955	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J956	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J957	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J958	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J959	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J960	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
J961	ERJ8GEY0R00V	Chip, 0Ω 1/8W	
R902	ERJ6GEYJ221V	Chip, 220Ω 1/10W	
R903	ERJ6GEYJ221V	Chip, 220Ω 1/10W	
R904	ERJ6GEYJ221V	Chip, 220Ω 1/10W	
R905	ERJ6GEYJ221V	Chip, 220Ω 1/10W	
R906	ERJ6GEYJ221V	Chip, 220Ω 1/10W	
R907	ERJ6GEYJ221V	Chip, 220Ω 1/10W	
R908	ERJ6GEYJ221V	Chip, 220Ω 1/10W	
R909	ERJ6GEYJ221V	Chip, 220Ω 1/10W	
CONNECTORS			
CP901	K1MQ12A00005	Connector, 12P	

Ref. No.	Part No.	Part Name & Description	Remarks
CP902	K1MQ12A00005	Connector, 12P	
SWITCHES			
SW901	K9AA009B0011	Switch	
SW902	K9AA015B0035	Switch	
SW903	EVQPVF05K	Switch	
SW904	EVQPVF05K	Switch	
SW905	EVQPVF05K	Switch	
SW906	EVQPVF05K	Switch	
SW907	EVQPVF05K	Switch	
SW908	EVQPVF05K	Switch	
SW909	EVQPVF05K	Switch	
SW910	EVQPVF05K	Switch	
SW911	EVQPVF05K	Switch	
SW912	EVQPVF05K	Switch	
SW913	EVQPVF05K	Switch	
SW914	EVQPVF05K	Switch	
SW915	EVQPVF05K	Switch	
LAMPS			
PL901	YEALHSI0006	Pilot Lamp	
PL902	YEALHSI0006	Pilot Lamp	
PL903	YEALHSI0006	Pilot Lamp	
PL904	YEALHSI0006	Pilot Lamp	
PL905	YEALHSI0006	Pilot Lamp	
PL906	YEALHSI0006	Pilot Lamp	
PL907	YEALHSI0006	Pilot Lamp	
Mechanical Parts			
MISCELLANEOUS			
AJ51	YEA010066	Antenna Receplacle	
AJ71	YEA010074A	Antenna Receplacle	
AT1	YEFX0213797	Bracket	
AT2	YEFX0213797	Bracket	
AT5	YEAT03346A	Terminal	
CNP1	K9ZZ00000384	Connector, 14P	
CNP2	K9ZZ00000970	Connector, 15P	
1	YEFA031794	Upper Cover	
2	YEFA09732	Side Plate,(L)	
3	YEFA07575	Front Plate	
4	YEFX0215991	Bracket, CD Deck	
5	YEFX0215792	Bracket, Rear	
6	YEFX0213919	Bracket, GND	
7	YEP0PT9065A0	PCB w/Component, Display	RTL
8	YEF0C027367B	Escucheon Ass'y	
9	YEFE02409	Volume Knob	
10	YEFX0214200	Bracket, AJ51,AJ71	
11	YEFV03733	Magnetic Shield, PA51	
12	YEP0PT6939A0	PCB w/Component, Main/Connector	RTL
13	YEFA05819	Bottom Cover	
15	YEFA09733A	Side Plate,(R)	
17	YEFX0213232B	Bracket, AJ71	
18	YEFX0213488	Bracket, CJ401	
19	YEFX0214493	Bracket, CJ602	
20	YEFX0214202	Bracket, IC704	
21	YEFX0212830	Bracket, Q773	
31	YEJS06052	Screw	
32	YEJS06219A	Screw	
33	YEJS06254	Small Screw	
34	YEJT01103	Tapping Screw	
35	YEJT03009	Tapping Screw, 3 * 8mm	
36	YEJT03131	Tapping Screw, 2.6 * 5mm	
37	XTB2+6GFX	Tapping Screw, 2 * 6mm	
38	XTB3+6FFX	Tapping Screw, 3 * 6mm	
39	XTB3+5FFX	Tapping Screw, 3 * 5mm	

10 EXPLODED VIEW (Unit)

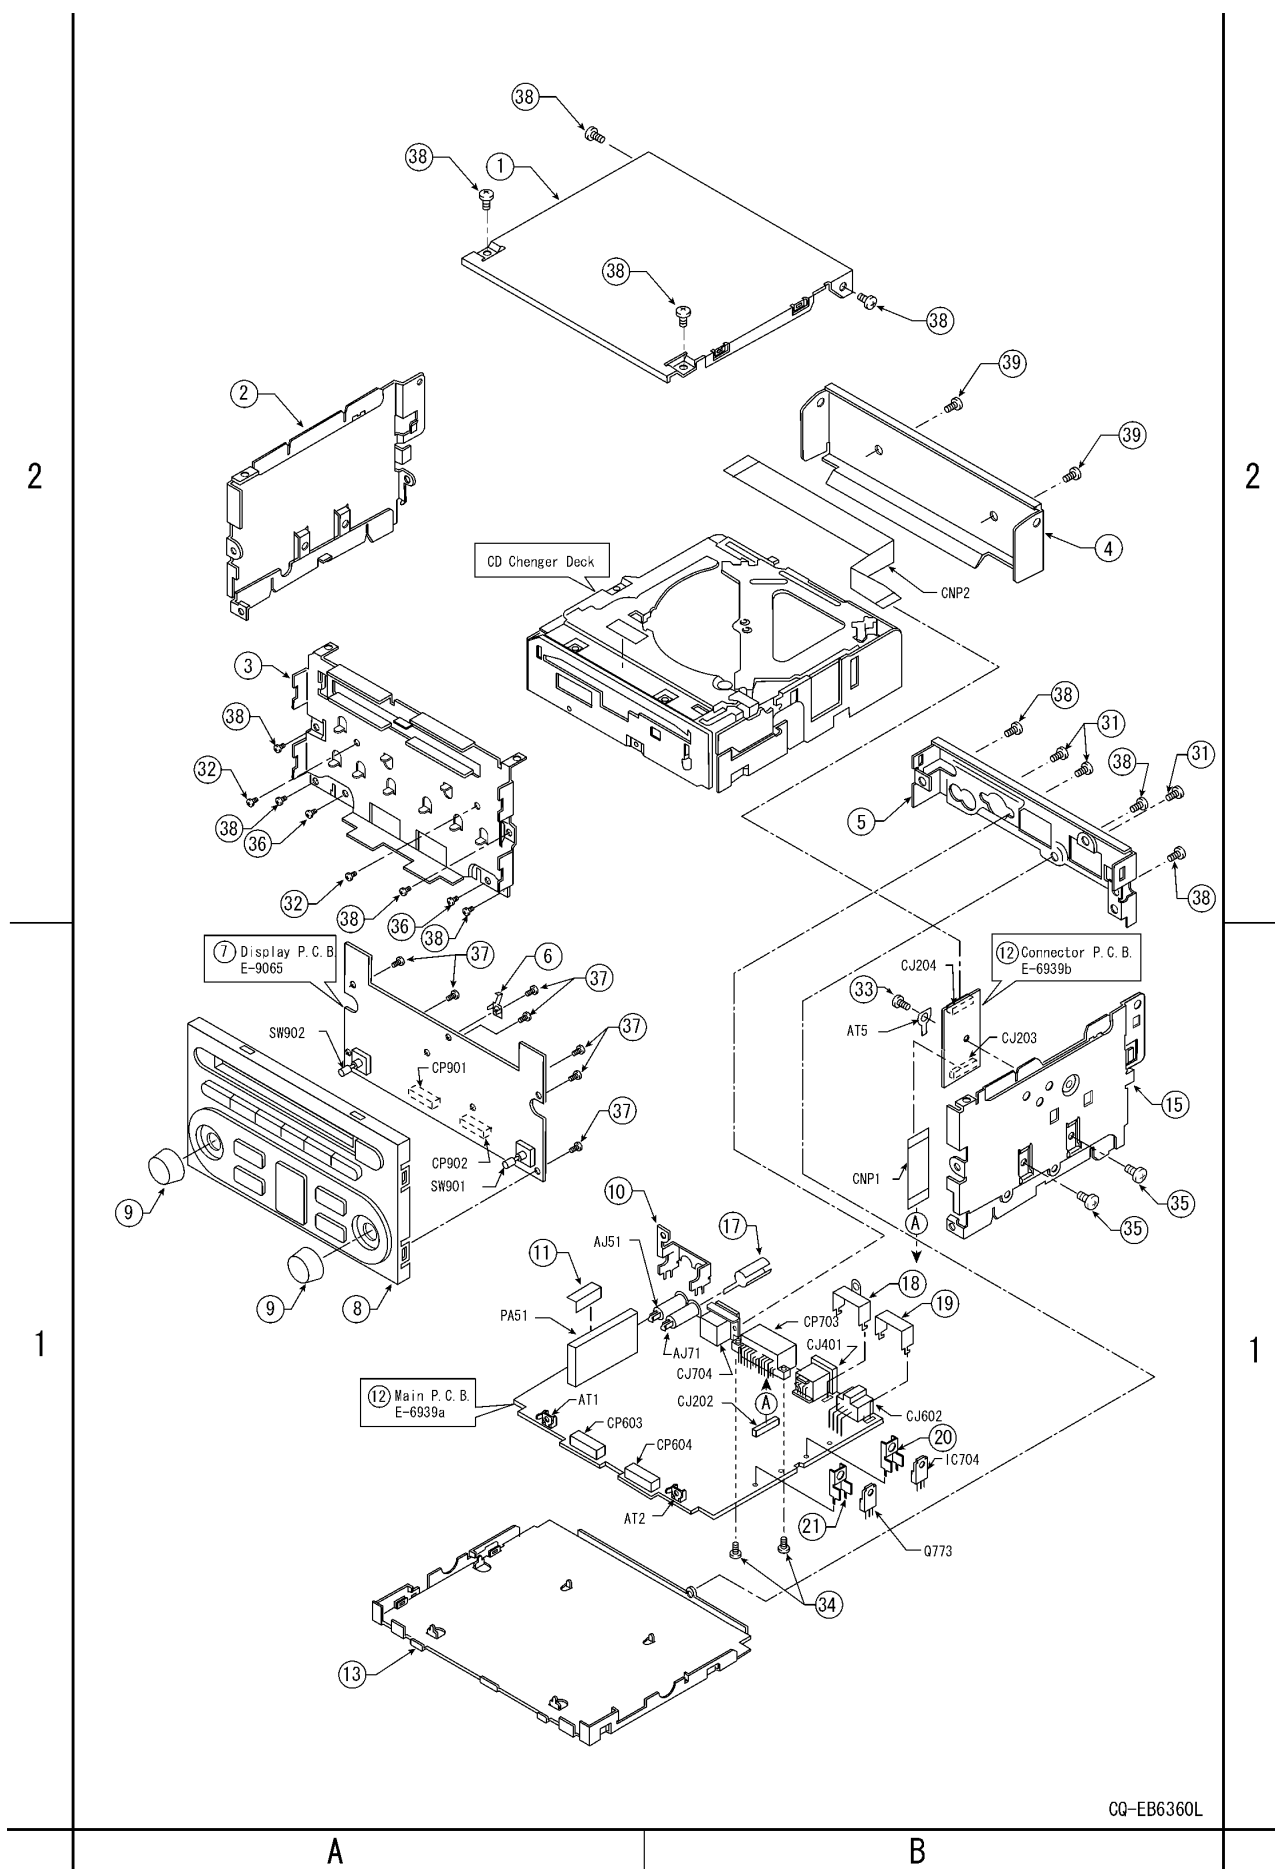

CQ-EB6360L

11 CD CHANGER PARTS LIST

Ref. No.	Part No.	Part Name & Description	Remarks
[E9060A] CD Servo Block			
IC's and TRANSISTORS			
IC101	C1BB00000624	IC	
IC201	MN662785TBUC	IC	
IC202	C3ABMB000009	IC	
IC301	C2BBGF000364	IC	
IC401	C0DBZGE00002	IC	
IC501	C0GBH0000006	IC	
IC601	C0GBY0000014	IC	
Q101	2SB766ATX	Transistor	
DIODE			
D301	MA152WKTX	Diode	
CAPACITORS			
C1	EEVFC0J102P	Electrolytic, 1000µF 6.3WV	
C101	F1H1C104A005	Ceramic, 0.1µF 16WV	
C102	F1H1C104A005	Ceramic, 0.1µF 16WV	
C103	F3H0J1070005	Tantalum, 100µF 6.3WV	
C104	F1H1C104A005	Ceramic, 0.1µF 16WV	
C105	F1H1C104A005	Ceramic, 0.1µF 16WV	
C106	F1H1H8210002	Ceramic, 820PF 50WV	
C107	F1H1C104A005	Ceramic, 0.1µF 16WV	
C108	F1H1H682A190	Ceramic, 6800PF 50WV	
C109	F1H1H222A190	Ceramic, 2200PF 50WV	
C110	F1K0J1060015	Ceramic, 10 µF 6.3WV	
C111	F1H1H1010005	Ceramic, 100PF 50WV	
C112	F1H1E103A011	Ceramic, 0.01µF 25WV	
C113	F1H1E103A011	Ceramic, 0.01µF 25WV	
C114	F1H1H2710006	Ceramic, 270PF 50WV	
C115	F1H1H6810005	Ceramic, 680PF 50WV	
C116	F1H1C104A005	Ceramic, 0.1µF 16WV	
C117	F1K0J1060015	Ceramic, 10 µF 6.3WV	
C201	F1H1C104A005	Ceramic, 0.1µF 16WV	
C202	F1H1E123A011	Ceramic, 0.012µF 25WV	
C203	YECUZ1A224KX	Ceramic, 0.22µF 10WV	
C205	F1H1A4740004	Ceramic, 0.47µF 10WV	
C206	F1K0J1060015	Ceramic, 10 µF 6.3WV	
C208	EEVFC0J102P	Electrolytic, 1000µF 6.3WV	
C209	F1K0J1060015	Ceramic, 10 µF 6.3WV	
C210	F1H0J1050010	Ceramic, 1µF 6.3WV	
C211	F1H0J1050010	Ceramic, 1µF 6.3WV	
C301	F1K0J1060015	Ceramic, 10 µF 6.3WV	
C302	F1H1E103A011	Ceramic, 0.01µF 25WV	
C312	F1H1C104A005	Ceramic, 0.1µF 16WV	
C313	F1H1C104A005	Ceramic, 0.1µF 16WV	
C315	F1H1C104A005	Ceramic, 0.1µF 16WV	
C401	F1H0J1050010	Ceramic, 1µF 6.3WV	
C402	F1K0J1060015	Ceramic, 10 µF 6.3WV	
C501	F1H1C104A005	Ceramic, 0.1µF 16WV	
C502	F1H1C104A005	Ceramic, 0.1µF 16WV	
C503	F1H1C104A005	Ceramic, 0.1µF 16WV	
C504	YECUZ1C104KX	Ceramic, 0.1µF 16WV	
C601	F1H1H8210002	Ceramic, 820PF 50WV	
C602	F1H1H8210002	Ceramic, 820PF 50WV	
C603	F1H0J1050010	Ceramic, 1µF 6.3WV	
C604	YECUZ1C333KX	Ceramic, 0.033µF 16WV	
C605	F1H1C104A005	Ceramic, 0.1µF 16WV	
C606	F1H1C104A005	Ceramic, 0.1µF 16WV	
C607	ECEV1CA470SP	Electrolytic, 47µF 16WV	
C608	F1K0J1060015	Ceramic, 10 µF 6.3WV	
RESISTORS			
R1	ERJ3GEYJ334V	Chip, 330kΩ 1/16W	
R2	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	


Ref. No.	Part No.	Part Name & Description	Remarks
R3	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R101	ERJ6GEYJ1R0V	Chip, 1.0Ω 1/10W	
R102	ERJ3GEY0R00V	Chip, 0Ω 1/16W	
R103	ERJ3GEY0R00V	Chip, 0Ω 1/16W	
R104	ERJ3GEYJ152V	Chip, 1.5kΩ 1/16W	
R105	ERJ3GEYJ152V	Chip, 1.5kΩ 1/16W	
R106	ERJ3GEYJ563V	Chip, 56kΩ 1/16W	
R107	ERJ3GEYJ223V	Chip, 22kΩ 1/16W	
R108	ERJ3GEYJ333V	Chip, 33kΩ 1/16W	
R109	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R110	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R111	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R201	ERJ3GEYJ823V	Chip, 82kΩ 1/16W	
R202	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R203	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R204	ERJ3GEYJ271V	Chip, 270Ω 1/16W	
R205	ERJ3GEYJ222V	Chip, 2.2kΩ 1/16W	
R206	ERJ3GEYJ330V	Chip, 33Ω 1/16W	
R207	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R208	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R209	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R210	ERJ3GEYJ102V	Chip, 1kΩ 1/16W	
R211	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R212	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R213	ERJ3GEYJ105V	Chip, 1MΩ 1/16W	
R214	ERJ3GEYJ151V	Chip, 150Ω 1/16W	
R301	ERJ3GEYJ563V	Chip, 56kΩ 1/16W	
R302	ERJ3GEYJ563V	Chip, 56kΩ 1/16W	
R303	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R304	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R305	ERJ3GEYJ563V	Chip, 56kΩ 1/16W	
R306	ERJ3GEYJ563V	Chip, 56kΩ 1/16W	
R307	ERJ3GEYJ683V	Chip, 68kΩ 1/16W	
R308	ERJ3GEYJ683V	Chip, 68kΩ 1/16W	
R309	ERJ3GEYJ683V	Chip, 68kΩ 1/16W	
R310	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R311	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R312	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R313	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R314	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R315	ERJ3GEYJ683V	Chip, 68kΩ 1/16W	
R316	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R317	ERJ3GEYJ221V	Chip, 220Ω 1/16W	
R318	ERJ3GEYJ221V	Chip, 220Ω 1/16W	
R319	ERJ3GEYJ221V	Chip, 220Ω 1/16W	
R320	ERJ3GEYJ221V	Chip, 220Ω 1/16W	
R321	ERJ3GEYJ221V	Chip, 220Ω 1/16W	
R322	ERJ3GEYJ221V	Chip, 220Ω 1/16W	
R323	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R324	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R325	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R326	ERJ3GEYJ473V	Chip, 47kΩ 1/16W	
R327	ERJ3GEY0R00V	Chip, 0Ω 1/16W	
R330	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R501	ERJ3GEYJ121V	Chip, 120Ω 1/16W	
R502	ERJ8GEYJ1R0V	Chip, 1.0Ω 1/8W	
R503	ERJ3GEYJ121V	Chip, 120Ω 1/16W	
R504	ERJ3GEYJ183V	Chip, 18kΩ 1/16W	
R505	ERJ3GEYJ563V	Chip, 56kΩ 1/16W	
R601	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R602	ERJ3GEYJ153V	Chip, 15kΩ 1/16W	
R603	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R604	ERJ3GEYJ153V	Chip, 15kΩ 1/16W	
R605	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R606	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R607	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R608	ERJ3GEYJ153V	Chip, 15kΩ 1/16W	
R609	ERJ3GEYJ153V	Chip, 15kΩ 1/16W	
R610	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R611	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R612	ERJ3GEYJ103V	Chip, 10kΩ 1/16W	
R613	ERJ3GEYJ332V	Chip, 3.3kΩ 1/16W	
R614	ERJ3GEYJ101V	Chip, 100Ω 1/16W	

Ref. No.	Part No.	Part Name & Description	Remarks
41	YGFA011977C	Swing Chassis Ass'y	
42	YGFX0461903	Guide Lever Ass'y B	
43	YGFX018595	Guide B	
44	YGFX0462172	Horizontal Rack	
45	YGFX234196	Horizontal Cam	
46	YGFX0031127B	Horizontal Cam Gear	
47	YGFX0031130	Horizontal Cam Gear	
48	YEFX003931	Horizontal Gear 5	
49	YEFX003899B	Horizontal Gear 4	
50	YGFX0031125	Horizontal Gear 3	
51	YGFX0031139	Gear	
52	YEFX003896	Horizontal Gear 1	
53	YEFX003884	Stocker Cam 3	
54	YEFX003883B	Stocker Cam 2	
55	YGFX0052595	Stocker Thrust Spring	
56	YEFX003875A	Elevator Gear 4	
57	YGFA011973	Suspension Chassis Ass'y	
58	YGP0FX4646	Spindle Motor Ass'y	
59	YGFS04745	Damper 2	
60	YGFX206156	Disc Guide S	
63	YGFX0052582A	Damper Spring R	
64	YEFX003872	Elevator Gear 1	
65	YGFA011963A	Swing Chassis	
66	YGFX0462183	Lever	
67	YGFX003873	Elevator Gear 2	
68	YEFX003874	Elevator Gear 3	
69	YEFX003882A	Stocker Cam 1	
70	YGFX0462173	Stocker Rack	
71	YEP0FX4382	Optical Pick-up Ass'y	
72	YGJT03301	Feed Screw Ass'y	
73	YGFX0052586	Thrust Adjustment Spring	
74	YEFW04161A	Feed Screw Housing	
75	YEFX0052557	Travers Guide	
76	YGP0FX4763	Traverse Motor Ass'y	
77	YGFX018682	Gear Bracket	
78	YGFX0031119	TR Gear 2	
79	YGFX0031120	TR Gear 3	
80	YGFA011974	Suspension Chassis Bottom Ass'y	
81	YGFS04746	Damper 1	
82	YGFX0052596	Stocker Spring	
83	YGFX0052587	Unclamp Spring	
84	YGFX0052583A	Damper Spring	
85	YGFX0052581A	Damper Spring F	
86	YEP0FX3660S	Elevator Motor Ass'y	
87	YGAP2788	Elevator Motor FPC	
88	YGFX018600	Elevator Motor Bracket	
89	YGFX0462174A	Suspension Lock Plate	
90	YGAP2830	Suspension FPC	
91	YGP0PT9060A0	PCB w/Component	RTL
93	YEFX233521	Disc Holder L	
94	YGFX0031007	Disc Hold Gear	
95	YGFA011976B	Main Chassis Ass'y	
96	YGFX0031128	Clamp Cam Gear	
97	YGFX0462166	SW Cover	
100	YGFX0462184	Guide Cam B Plate Ass'y	
101	YGFX219135	Guide B Base Ass'y	
102	YGFX206155A	Guide BL	
103	YEFX206136D	Guide BU	
104	YEFX0052272	Guide Spring B	
105	YGFX0462185	Avoidance Lever 1	
106	YGFX0031137	Pushout Cam Gear	
110	YGFA011978	Stocker Top Coner Ass'y	
111	YGFX233526	Stocker Tray Support	
112	YGFX0462163	Pushout Lever	
113	YGFX018691	Horizontal Motor Bracket Ass'y	
114	YGP0FX4760	Horizontal Motor Ass'y	
115	YGFX0031133	Pushout Gear 2	
116	YGFX0031131	Pushout Gear 1	
117	YEFX233506	Disc Holder U	
118	YGFX0052608	Push Lever Spring	
120	YGFX0052291B	Pushout Plate Spring	

Ref. No.	Part No.	Part Name & Description	Remarks
131	YGFX233527	Stocker Tray Housing L	
132	YGFX9992609	Stocker Tray	
150	XUC15V	Retaining Ring	
151	XUC2V	E-Ring	
152	YEJE01044	Retaining Ring	
154	XQN2+A2FX	Screw, M2x2mm	
155	XQN2+C2FX	Screw, M2x2mm	
156	XSB2+3FX	Bind Screw, M2x3mm	
157	XSB2+4FX	Bind Screw, M2x4mm	
158	XYN2+C4FX	Screw w/Washer, M2x4mm	
159	XYN2+C5FX	Screw w/Washer, M2x5mm	
160	XYN2+C6FX	Screw w/Washer, M2x6mm	
161	YEJS02037A	Tapping Screw	
162	YGJS05050	Thin Head Screw w/Washer	
163	YGJS05051	Thin Head Screw w/Washer	
164	YGJS05063	Screw w/Washer	
165	YEJS06097A	Screw	
166	YEJS06246	Super Thin Head Screw	
168	YEJT03129	Tapping Screw	


12 EXPLODED VIEW (CD Deck)

12.1. CD Deck-1

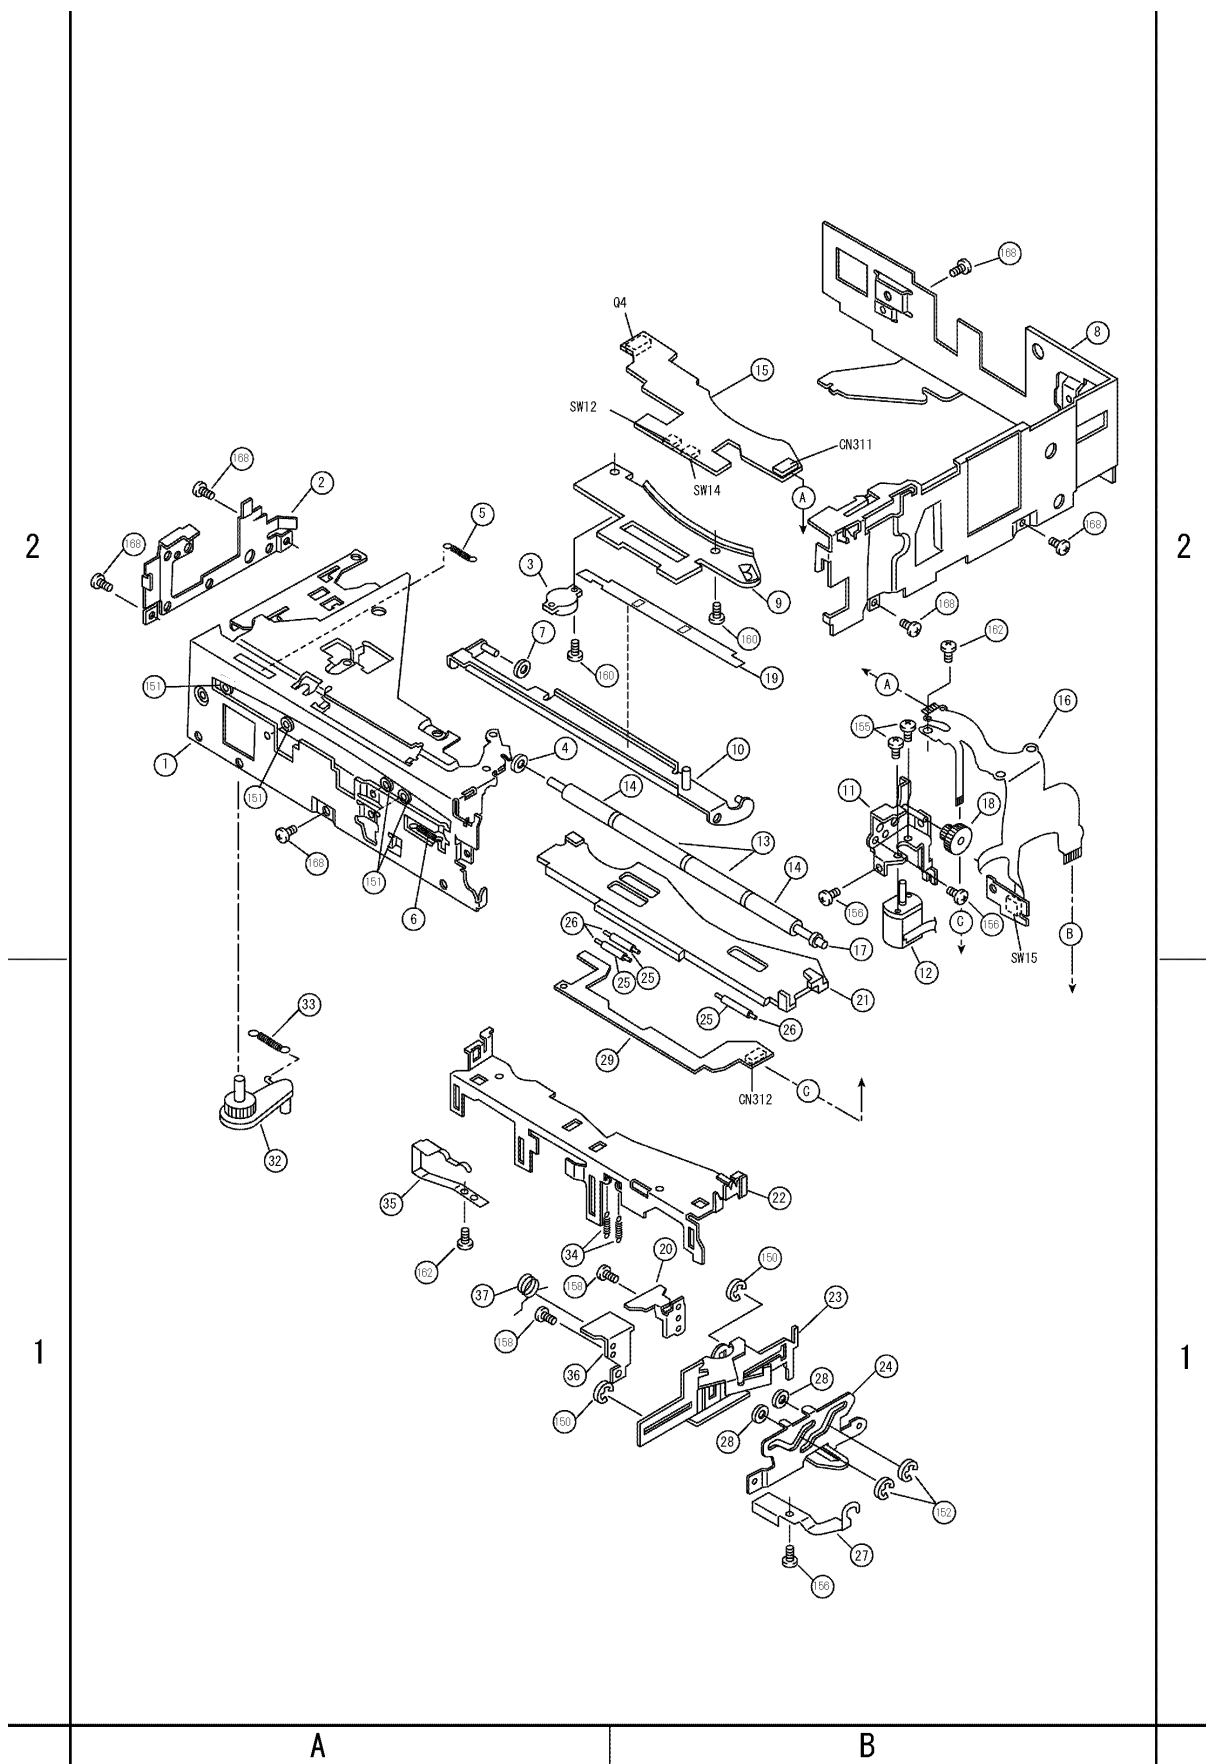




12.3. CD Deck-3

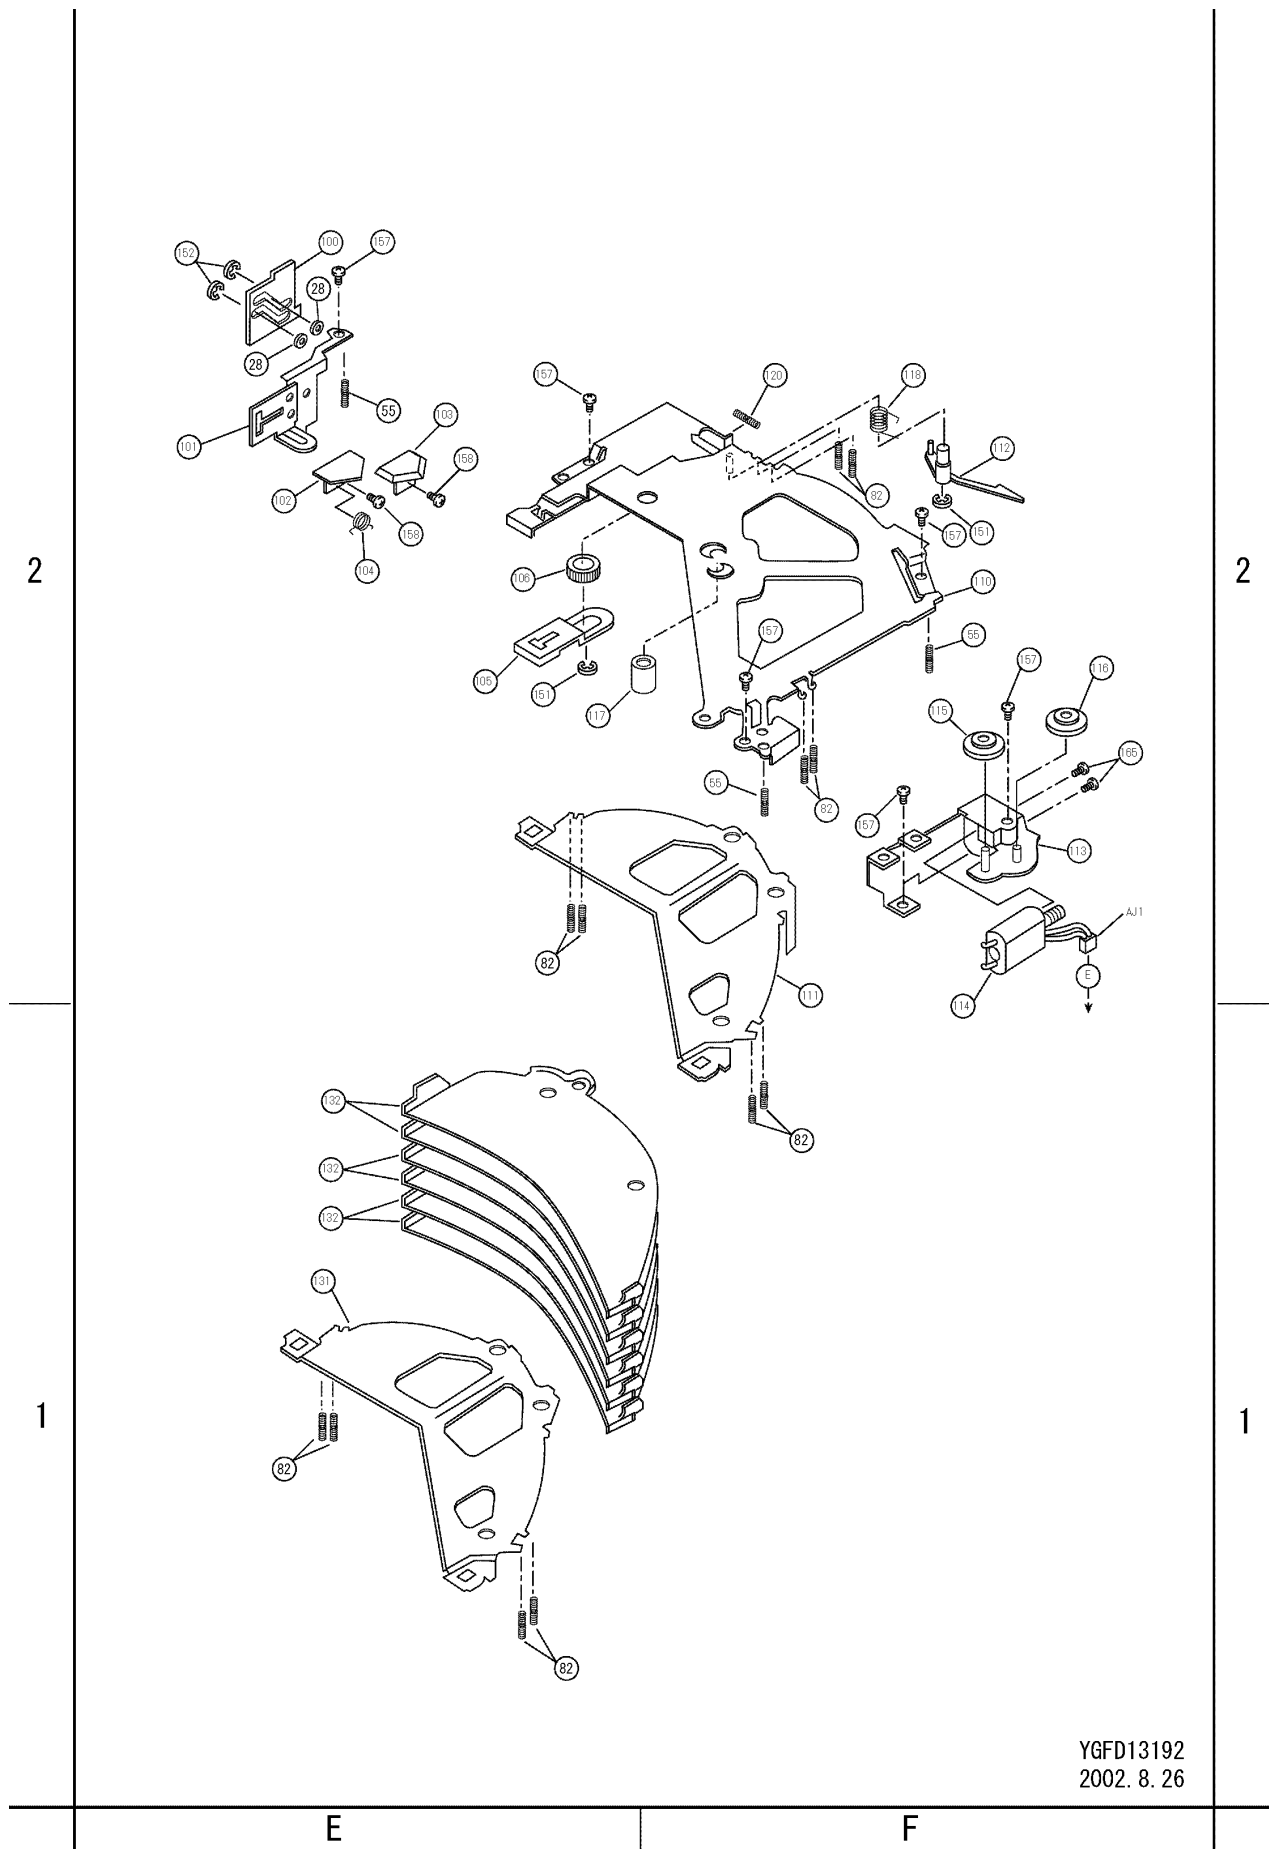


YGFD13192
2002. 8. 26

[E-6939a] [Top View]

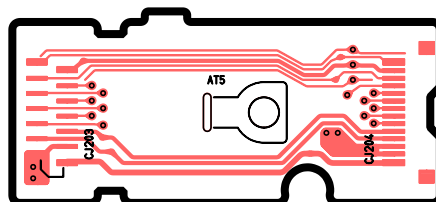


[E-6939b] [Top View]

13.2. Main & Connector Block (Bottom View)

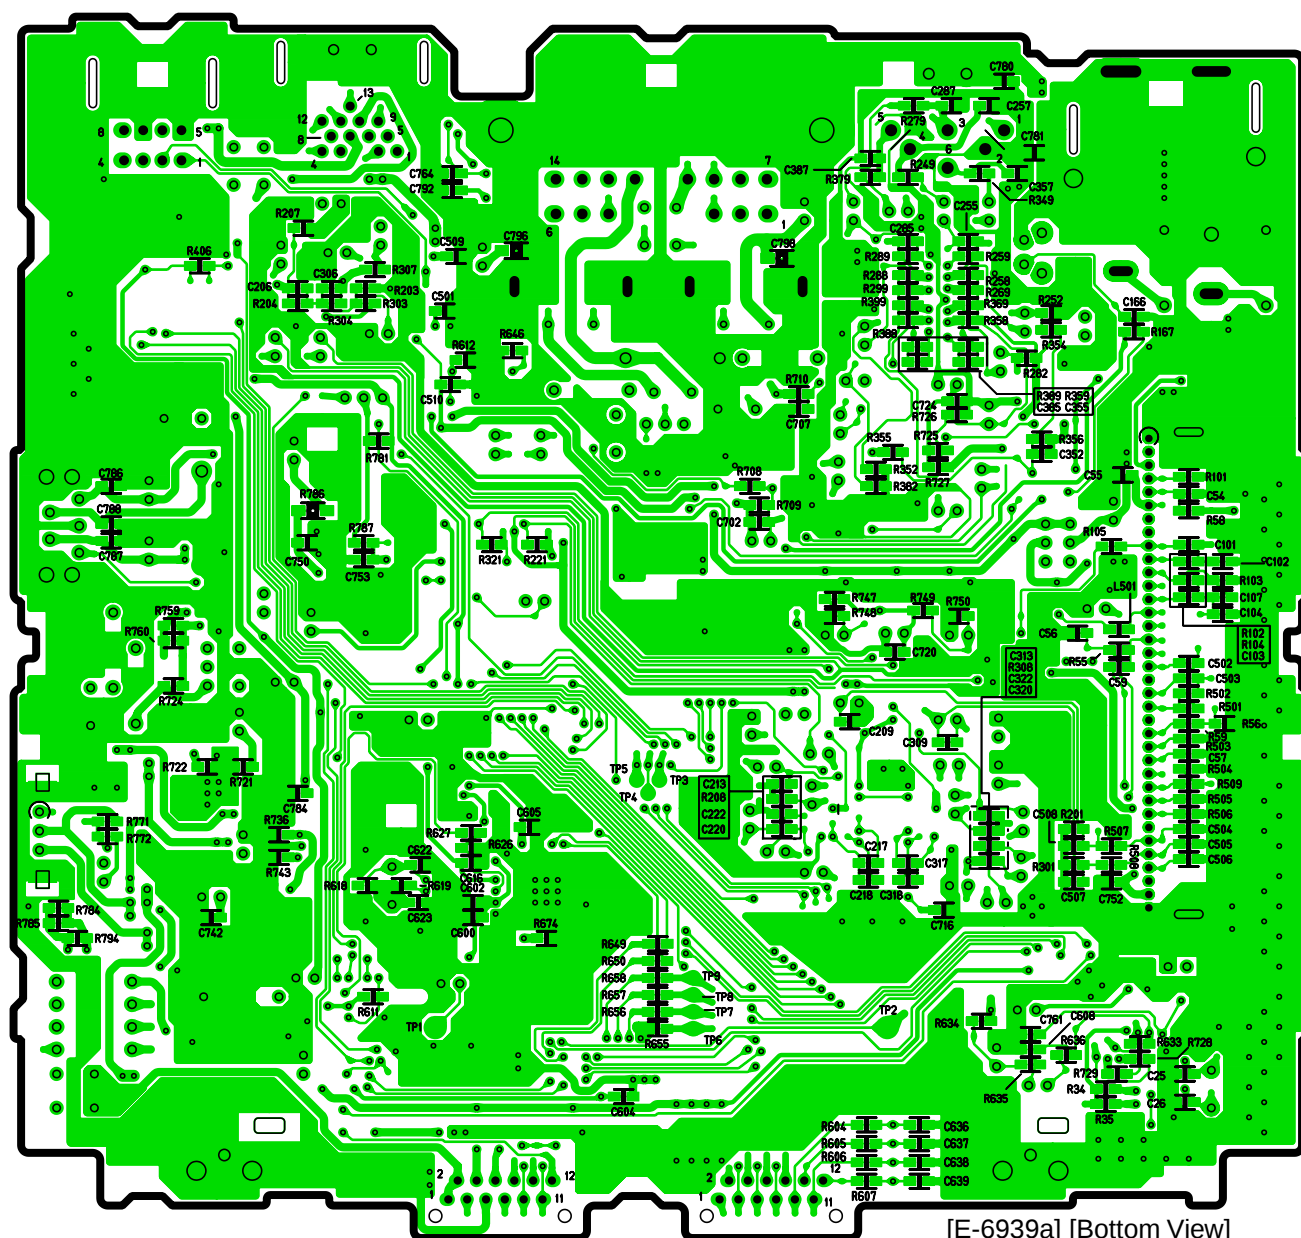


[E-6939a] [Bottom View]

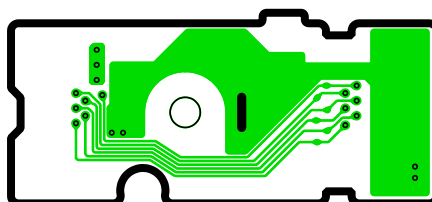

[E-6939b] [Bottom View]

CQ-EB6360L MAIN P.C.B


13.3. Display Block (Top View)

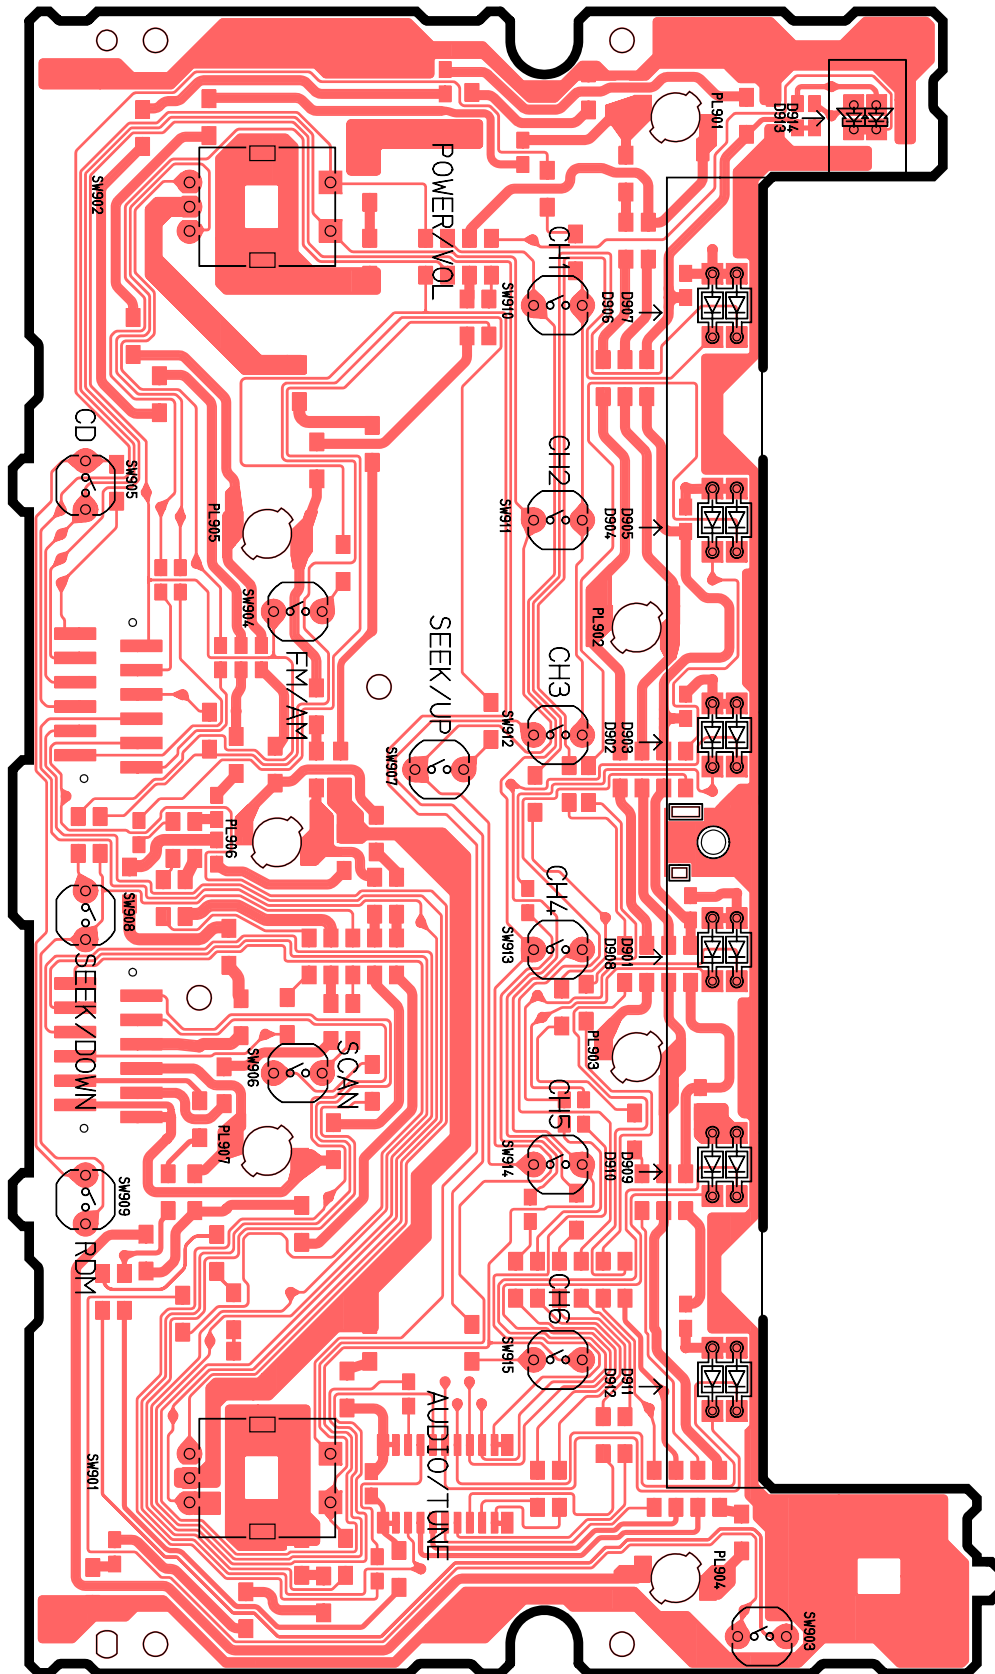

[E-9065][Top View]

CQ-EB6360L DISPLAY

13.4. Display Block (Bottom View)

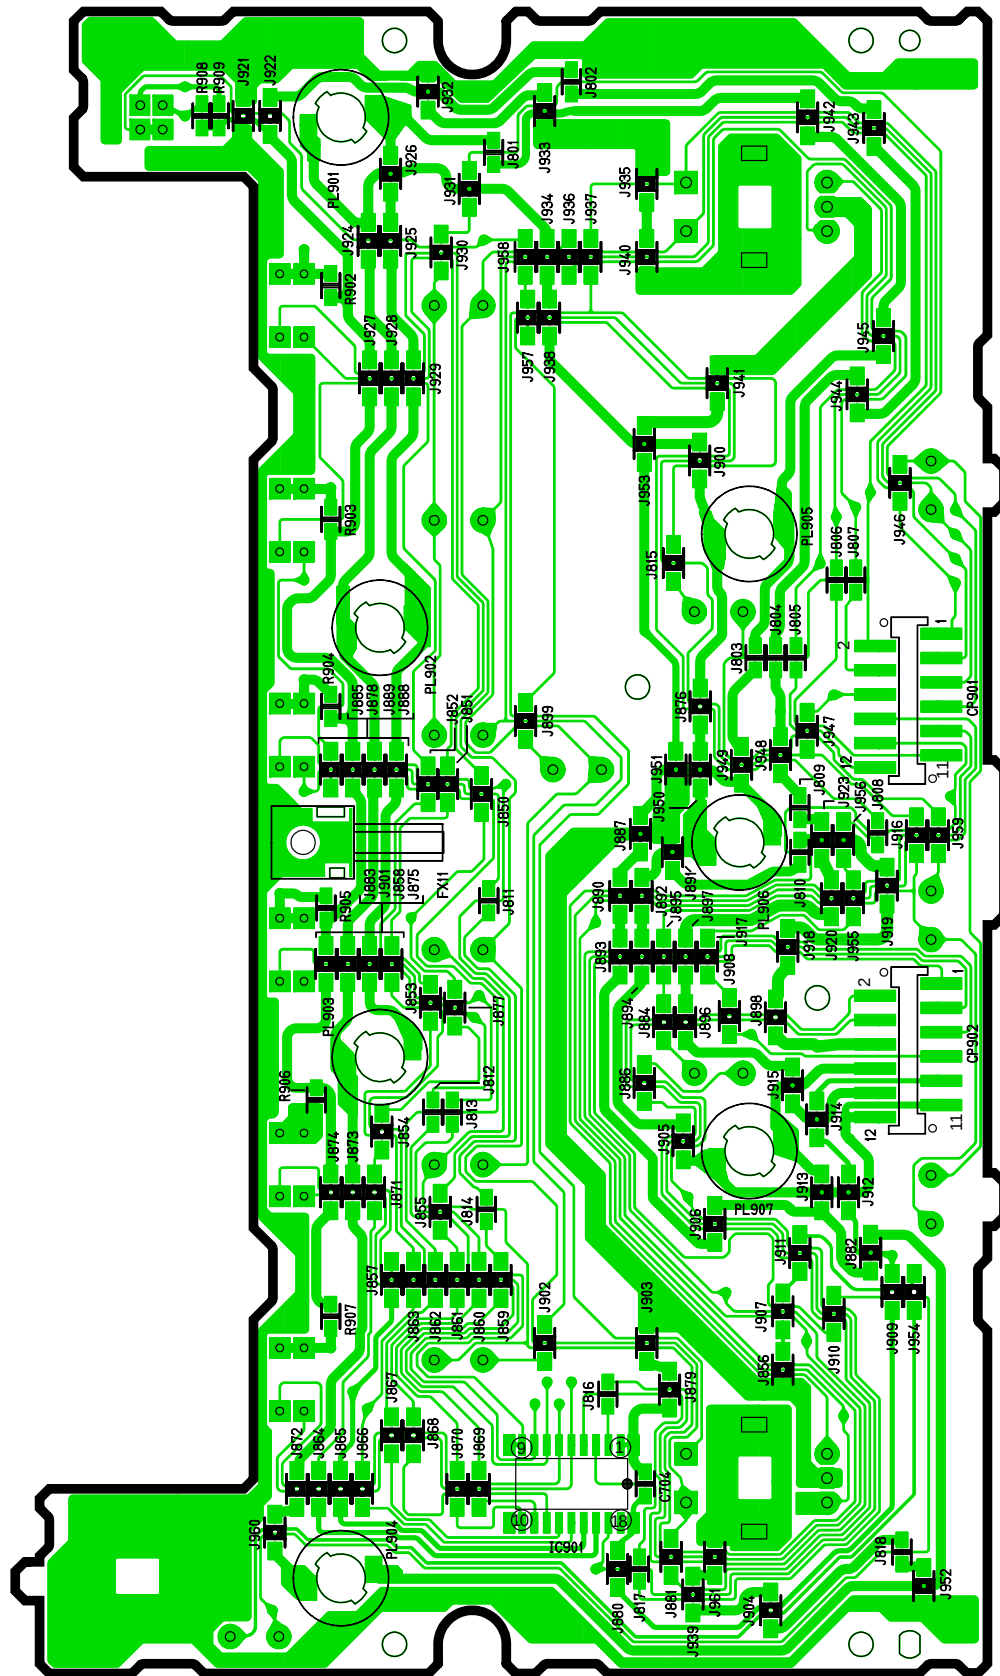


[E-9065][Bottom View]

CQ-EB6360L DISPLAY



30

13.6. CD Deck Block (Bottom View)

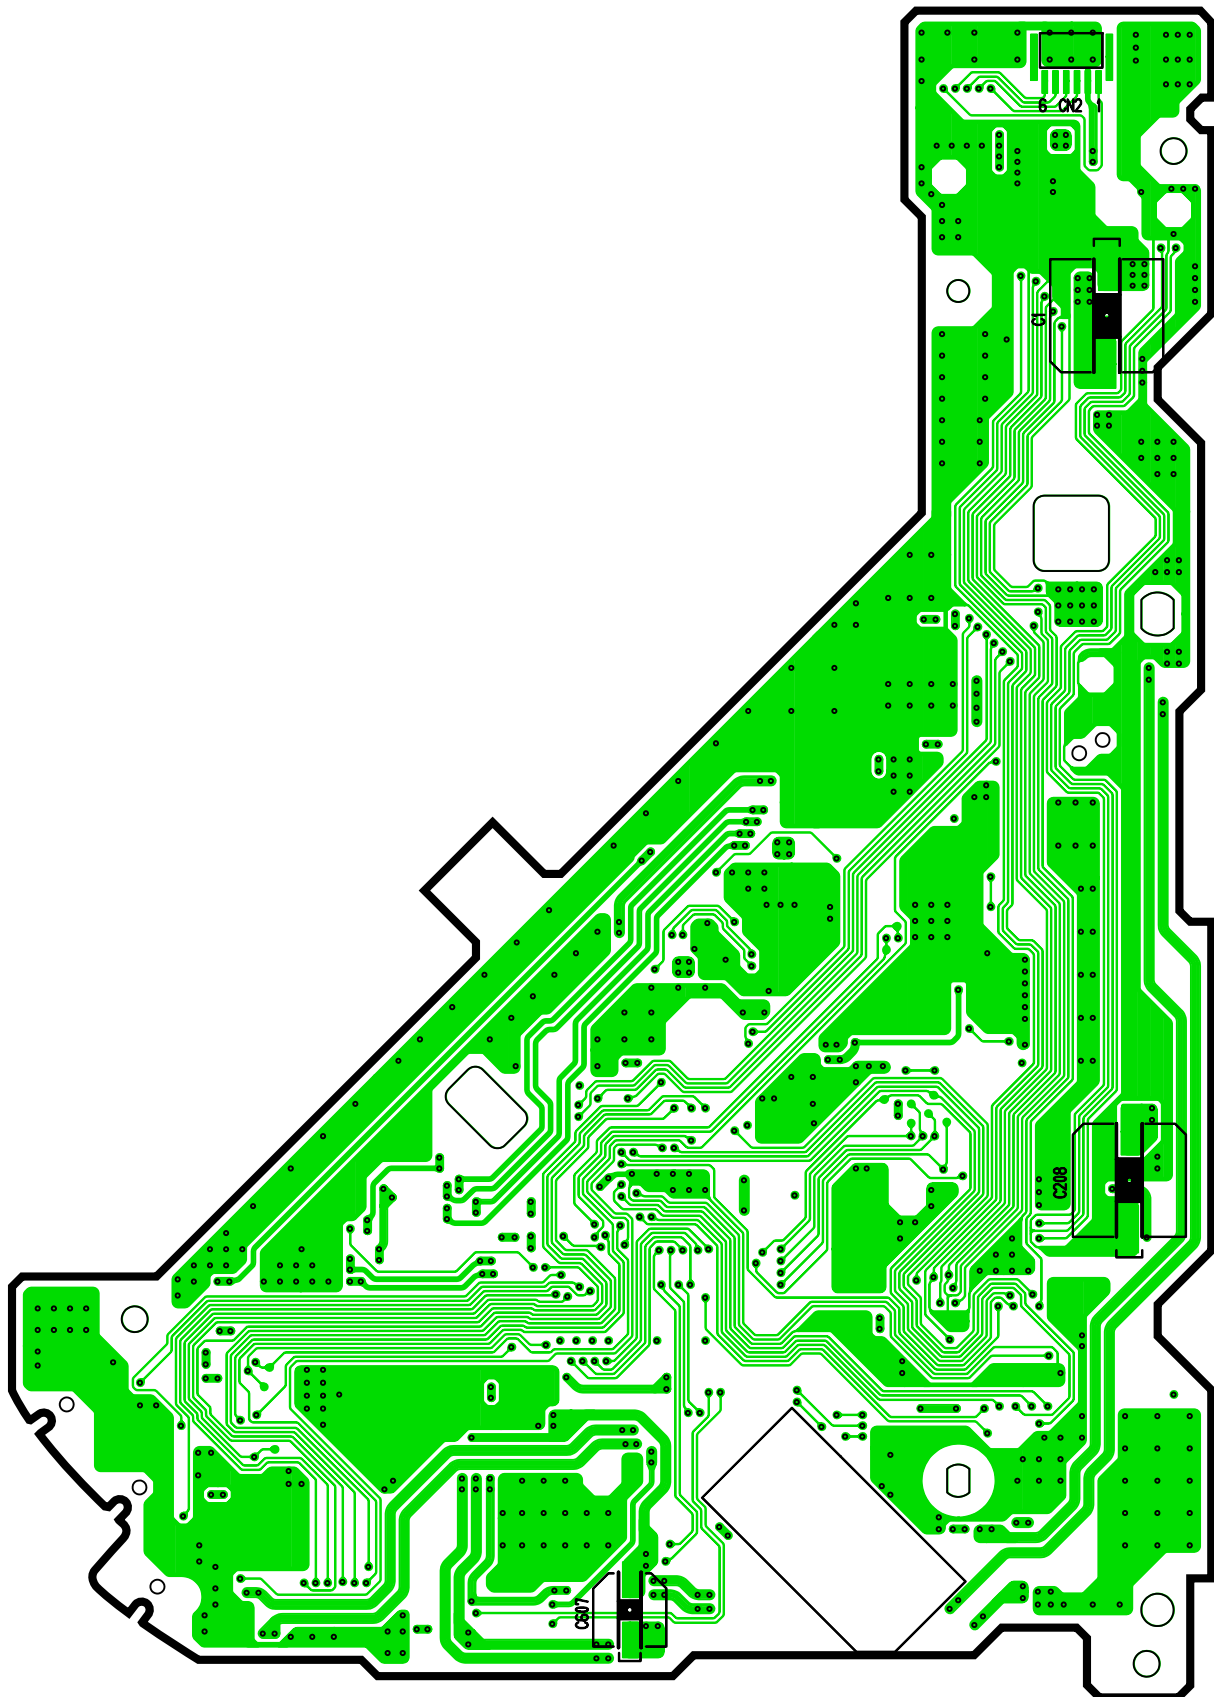

[E-9060A] [Bottom View]


YGFD13192 DECK P.C.B


14.1. Display Block



15 SCHEMATIC DIAGRAM (2)

15.1. Main Block

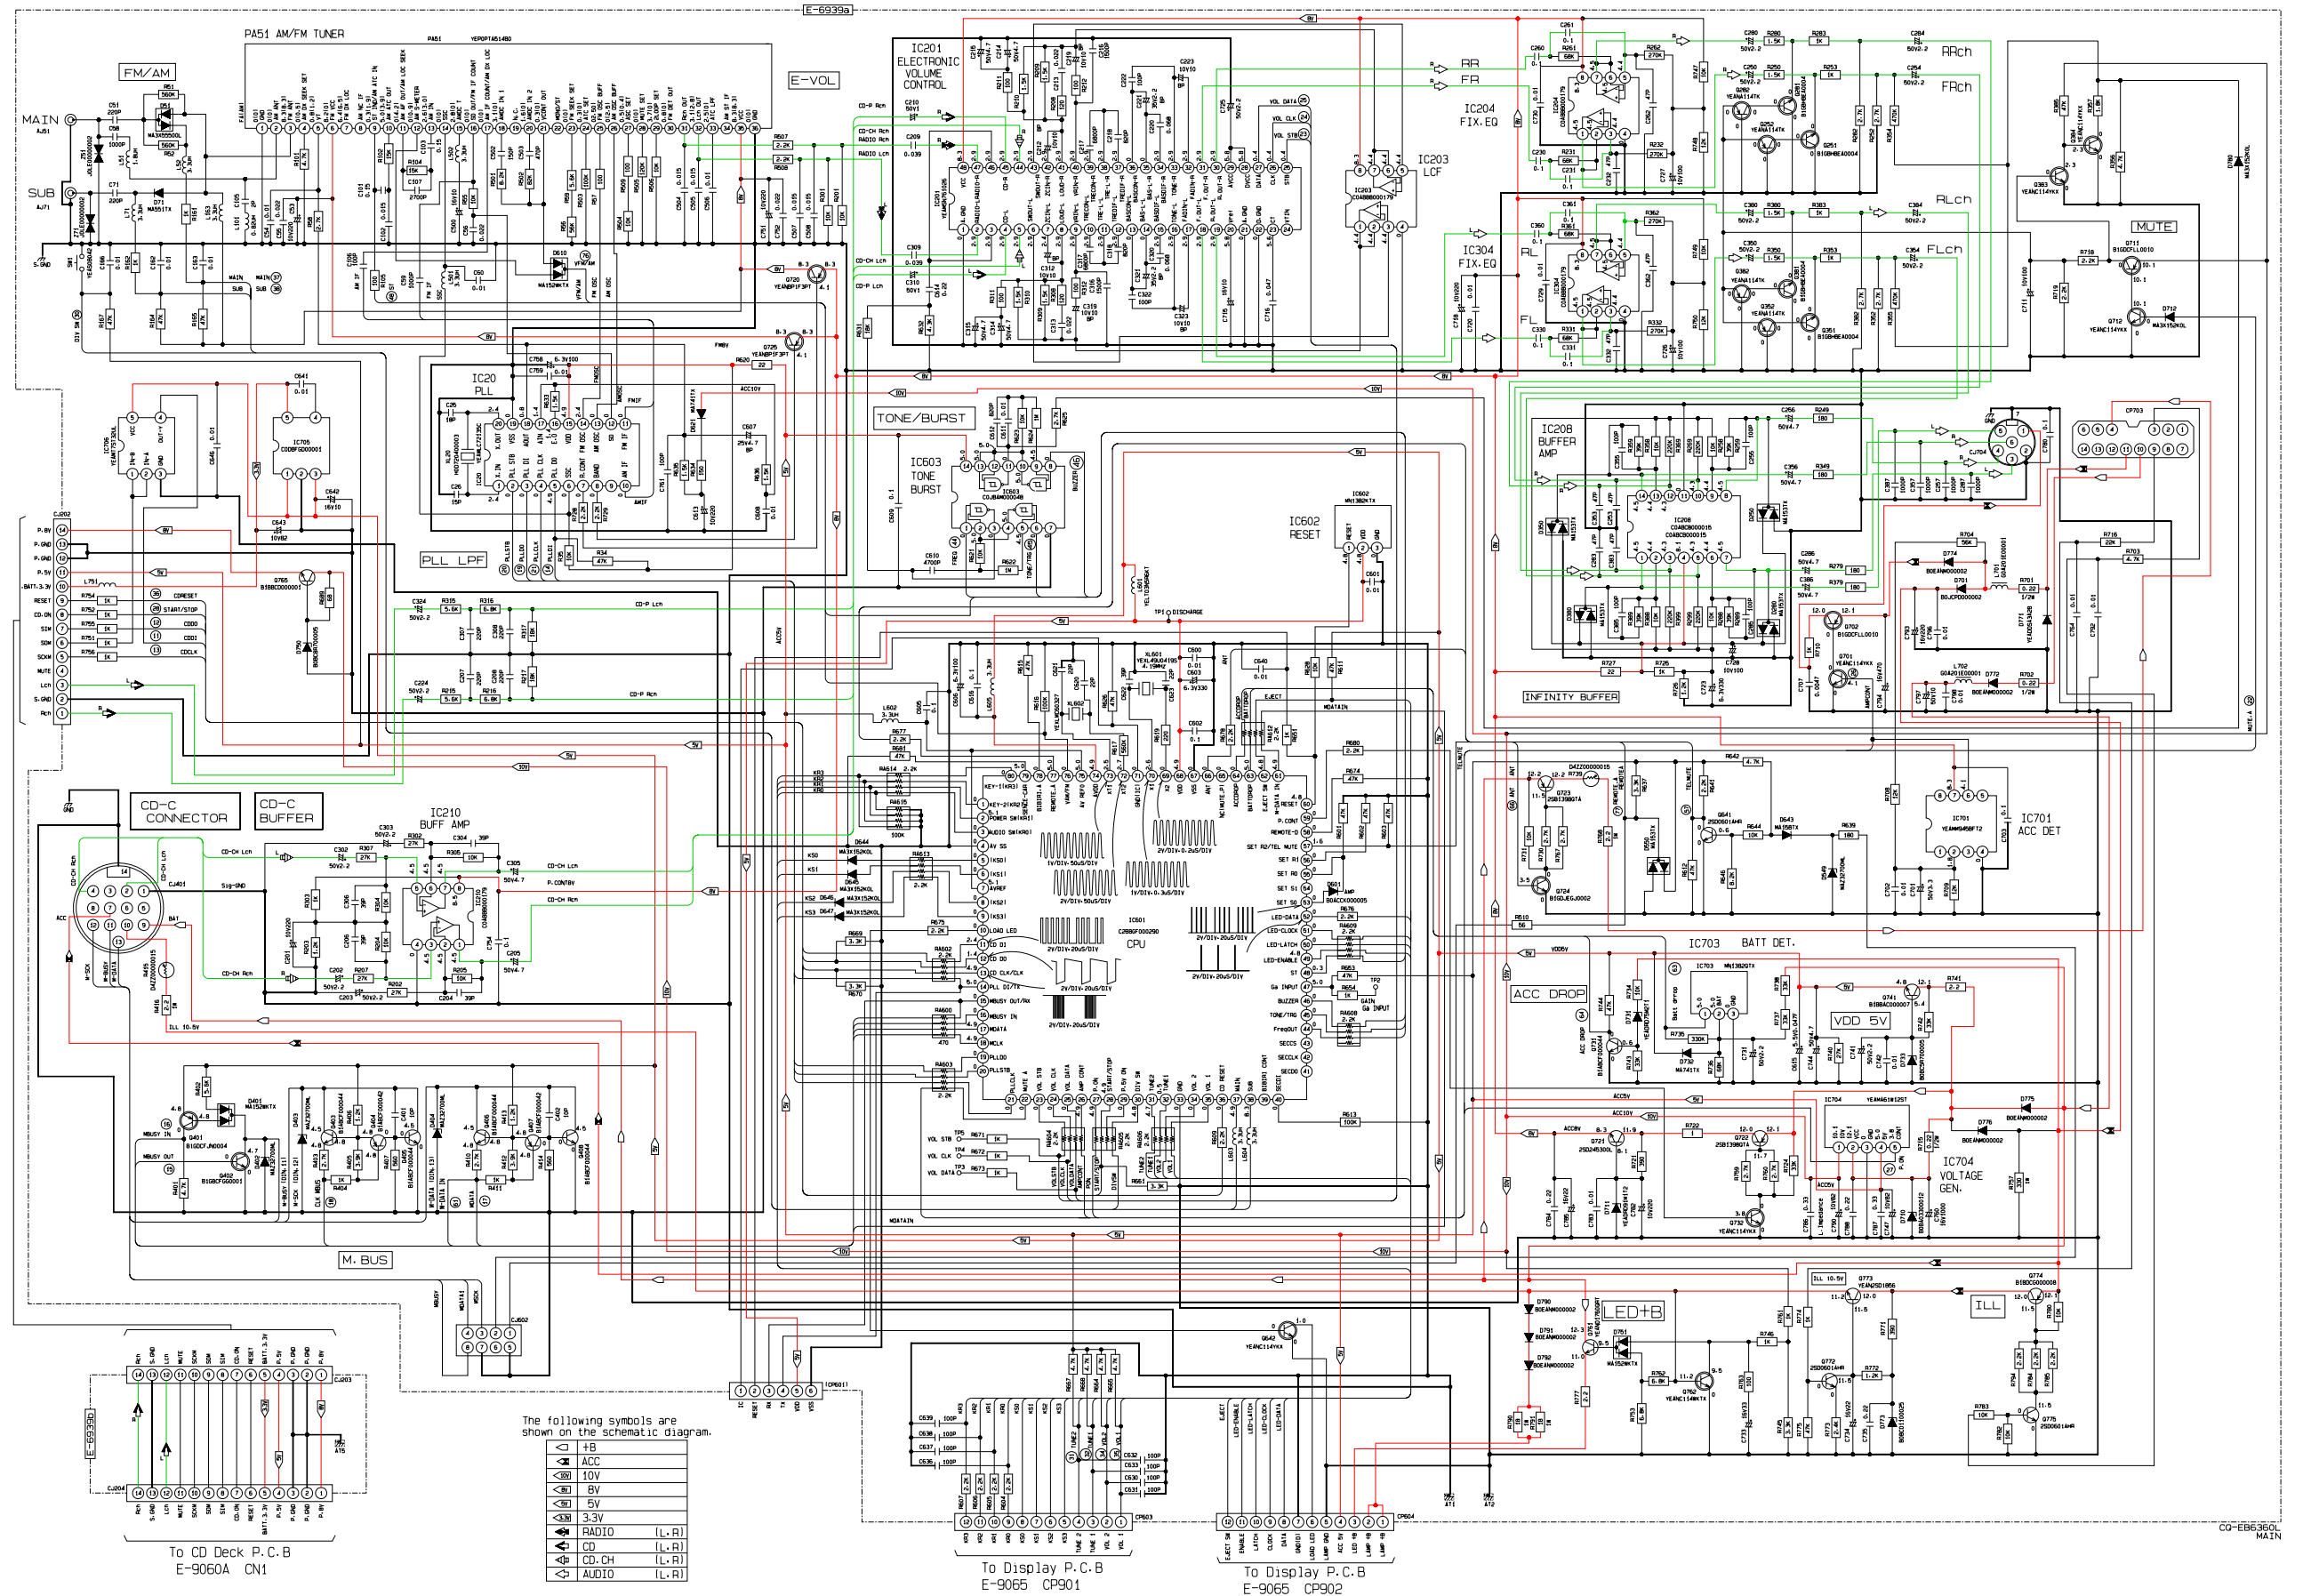



Printed in Japan (K) 2003. 5 (Recycled Paper)