

SERVICE MANUAL

STEREO AV RECEIVER

- Replace this Service manual with "Revision Publishing" when it is issued.

ELECTRICAL MAIN PARTS LIST - 1/8

NOTE: The characters in the suffix column indicate the part usage.

EZ	REF.NO	PARTS NO.	XX..... KANRI NO.	DESCRIPTION	A..... SUFFIX
C	131	87-010-072-040	0E	CAP,E 2.2-50 5L	AB.....
C	132	87-010-493-040	0E	CAP,E 0.47-50 GAS	AB.....
C	151	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	152	87-010-322-080	0E	C-CAP,S 100P-50 CH	AB.....
C	207	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	204	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	206	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	202	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	205	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	203	87-010-313-080	0E	CAP, CHIP 18P	AB.....
C	201	87-010-316-080	0E	C-CAP,S 33P-50 CH	AB.....
C	231	87-010-405-040	0E	CAP,E 10-50	AB.....
C	232	87-018-131-080	0E	CAP, CER 1000P-50V	AB.....
C	249	87-010-194-080	0E	CAP, CHIP 0.047	AB.....
C	247	87-010-194-080	0E	CAP, CHIP 0.047	AB.....
C	246	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	243	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB.....
C	242	87-010-248-040	0E	CAP,E 220-10 SME	AB.....
C	241	87-010-493-040	0E	CAP,E 0.47-50 GAS	AB.....
C	245	87-010-498-040	0E	CAP,E 10-16 GAS	AB.....
C	251	87-010-264-040	0E	CAP,E 100-10 5L	AB.....
C	250	87-018-205-080	0E	CAP, CERA-SOL 0.022	AB.....
C	338	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	339	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB.....
C	371	87-010-404-040	0E	CAP,E 4.7-50 SME	AB.....
C	372	87-010-404-040	0E	CAP,E 4.7-50 SME	AB.....
C	373	87-010-408-040	0E	CAP,E 47-50 SME	AB.....
CN	101	87-099-720-010	1B	CONN,30P TYK-B(P)	AB.....
CN	102	87-A61-088-010	0E	CONN,6P H GRY FMN-SSTK	AB.....
CNA	101	8A-CQ0-631-010	1D	CONN ASSY,11P ZR	AB.....
CNA	106	8A-CQ0-632-010	1E	CONN ASSY,13P ZR	AB.....
D	131	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	132	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	144	87-A40-786-080	1E	LED,SMLS1BE16WTP4 BLU/UMB	AB.....
D	148	87-A40-786-080	1E	LED,SMLS1BE16WTP4 BLU/UMB	AB.....
D	142	87-A40-786-080	1E	LED,SMLS1BE16WTP4 BLU/UMB	AB.....
D	147	87-A40-786-080	1E	LED,SMLS1BE16WTP4 BLU/UMB	AB.....
D	141	87-A40-786-080	1E	LED,SMLS1BE16WTP4 BLU/UMB	AB.....
D	146	87-A40-786-080	1E	LED,SMLS1BE16WTP4 BLU/UMB	AB.....
D	145	87-A40-786-080	1E	LED,SMLS1BE16WTP4 BLU/UMB	AB.....
D	143	87-A40-786-080	1E	LED,SMLS1BE16WTP4 BLU/UMB	AB.....
D	153	87-A40-248-080	0E	LED,SEL2210STP7 RED	AB.....
D	163	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	164	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	165	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	166	87-A40-788-080	1E	LED,SMLS7BE55WLF39 BLU/UMB	AB.....
D	167	87-A40-788-080	1E	LED,SMLS7BE55WLF39 BLU/UMB	AB.....
D	168	87-A40-788-080	1E	LED,SMLS7BE55WLF39 BLU/UMB	AB.....
D	176	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	246	87-070-274-080	0E	DIODE,1N4003 SEM	AB.....
D	245	87-A40-269-080	0E	C-DIODE,MC2836	AB.....
D	244	87-A40-270-080	0E	C-DIODE,MC2838	AB.....
D	242	87-A40-509-080	0E	ZENER,MTZJ6.8C	AB.....
D	373	87-020-465-080	0E	DIODE,1SS133 (110MA)	.B.....
D	374	87-020-465-080	0E	DIODE,1SS133 (110MA)	A.....
FL	101	8A-CQ0-607-010	2P	FL,14-ST-30GNK	AB.....
IC	151	87-070-289-040	1B	IC,BU 2092F	AB.....
IC	201	8A-CQ0-601-010	2A	C-IC,LC8765**-****	AB.....
IC	231	87-070-246-010	1D	IC,GP1U271X	AB.....
L	201	87-A50-333-010	0E	COIL,OSC 9.43MHZ	AB.....
Q	131	87-026-610-080	0E	TR,KTC3198GR	AB.....
Q	146	87-026-580-080	0E	C-TR,DTA123JK	AB.....
Q	141	87-026-580-080	0E	C-TR,DTA123JK	AB.....
Q	142	87-026-580-080	0E	C-TR,DTA123JK	AB.....
Q	147	87-026-580-080	0E	C-TR,DTA123JK	AB.....
Q	144	87-026-580-080	0E	C-TR,DTA123JK	AB.....
Q	143	87-026-580-080	0E	C-TR,DTA123JK	AB.....
Q	145	87-026-580-080	0E	C-TR,DTA123JK	AB.....
Q	148	87-026-580-080	0E	C-TR,DTA123JK	AB.....
Q	157	87-A30-073-080	0E	C-TR,RT1N 141C	AB.....
Q	158	87-A30-087-080	0E	C-FET,2SK2158	AB.....
Q	164	87-026-580-080	0E	C-TR,DTA123JK	AB.....
Q	163	87-026-580-080	0E	C-TR,DTA123JK	AB.....
Q	161	87-A30-075-080	0E	C-TR,2SA1235F	AB.....
Q	241	87-026-610-080	0E	TR,KTC3198GR	AB.....
Q	240	87-A30-087-080	0E	C-FET,2SK2158	AB.....
Q	306	87-026-609-080	0E	TR,KTA1266GR	AB.....
Q	305	87-026-609-080	0E	TR,KTA1266GR	AB.....
Q	302	87-026-609-080	0E	TR,KTA1266GR	AB.....
Q	301	87-026-609-080	0E	TR,KTA1266GR	AB.....
Q	307	87-026-610-080	0E	TR,KTC3198GR	AB.....

ELECTRICAL MAIN PARTS LIST - 2/8

Q	304	87-026-610-080	0E	TR,KTC3198GR	AB
Q	303	87-026-610-080	0E	TR,KTC3198GR	AB
Q	308	87-026-610-080	0E	TR,KTC3198GR	AB
Q	371	87-A30-076-080	0E	C-TR,2SC3052F	AB
R	317	87-022-355-080	0E	C-RES,S10K-1/10W F	AB
R	337	87-022-355-080	0E	C-RES,S10K-1/10W F	AB
S	101	87-A91-564-010	1F	SW,RTRY RDS-Y0003-02	AB
S	306	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	301	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	307	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	303	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	308	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	305	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	304	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	302	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	309	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	311	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	310	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	326	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	327	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	322	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	328	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	324	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	329	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	321	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	325	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	323	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	330	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
C	102	87-010-389-090	1A	CAP, E 2200-25 SME	AB
C	103	87-016-495-000	1B	CAP,E 3300-25 M SMG	AB
C	114	87-010-112-040	0E	CAP,E 100-16	AB
C	112	87-010-112-080	0E	CAP, ELECT 100-16V	AB
C	111	87-010-174-080	0E	CAP CHIP SL470P (K)	AB
C	116	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	117	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	115	87-010-235-040	0E	CAP,E 470-16 M 11L SME	AB
C	113	87-010-408-080	0E	CAP, ELECT 47-50V	AB
C	110	87-016-080-090	1B	CAP,E3300-16 SMG	AB
C	118	87-016-251-080	0E	CAP,E 220-16 M SMG	AB
C	119	87-016-251-080	0E	CAP,E 220-16 M SMG	AB
C	123	87-010-174-080	0E	CAP CHIP SL470P (K)	AB
C	128	87-010-178-080	0E	CHIP CAP 1000P	AB
C	120	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	124	87-010-235-080	0E	CAP,E 470-16 SME	AB
C	126	87-010-235-080	0E	CAP,E 470-16 SME	AB
C	125	87-010-805-080	0E	CAP, S 1-16	AB
C	129	87-010-805-080	0E	CAP, S 1-16	AB
C	132	87-010-178-080	0E	CHIP CAP 1000P	AB
C	135	87-010-178-080	0E	CHIP CAP 1000P	AB
C	133	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	131	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	136	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	130	87-010-248-080	0E	CAP, ELECT 220-10V	AB
C	134	87-010-248-080	0E	CAP, ELECT 220-10V	AB
C	137	87-010-248-080	0E	CAP, ELECT 220-10V	AB
C	138	87-010-380-080	0E	CAP, ELECT 47-16V	AB
C	141	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	144	87-010-235-080	0E	CAP,E 470-16 SME	AB
C	143	87-010-235-080	0E	CAP,E 470-16 SME	AB
C	146	87-010-374-080	0E	CAP, ELECT 47-10V	AB
C	142	87-010-380-080	0E	CAP, ELECT 47-16V	AB
C	147	87-010-381-040	0E	CAP,E 330-16 SME	AB
C	145	87-012-142-080	0E	CAP, S 0.33-16	AB
C	163	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	161	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C	162	87-010-403-080	0E	CAP, ELECT 3.3-50V	AB
C	175	87-010-247-080	0E	CAP, ELECT 100-50V	AB
C	171	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C	173	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C	174	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C	172	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C	176	87-010-263-080	0E	CAP, ELECT 100-10V	AB
C	183	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	184	87-010-236-080	0E	CAP,E 1000-10 SME	AB
CN	102	87-A60-619-010	0E	CONN,2P V 2MM JMT	AB
CNA	101	8A-CQ0-630-010	1B	CONN ASSY,9P VH 280MM	AB
D	108	87-070-178-090	0E	DIODE,1N5402-BD54	AB
D	109	87-070-178-090	0E	DIODE,1N5402-BD54	AB
D	118	87-017-932-080	0E	ZENER,MTJ6.2B	AB
D	114	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	111	87-070-178-090	0E	DIODE,1N5402-BD54	AB
D	110	87-070-178-090	0E	DIODE,1N5402-BD54	AB
D	113	87-070-274-080	0E	DIODE,1N4003 SEM	AB
D	112	87-070-274-080	0E	DIODE,1N4003 SEM	AB
D	115	87-A40-345-080	0E	ZENER,MTZJ10C	AB
D	119	87-A40-533-080	0E	ZENER,MTZJ8.2B	AB
D	117	87-A40-614-040	1A	C-DIODE,SFPB-72	AB

ELECTRICAL MAIN PARTS LIST - 3/8

D	120	87-A40-313-080	0E	C-DIODE,MC 2840	AB
D	155	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	154	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	153	87-A40-004-080	0E	ZENER,MTZJ16A	AB
D	152	87-A40-269-080	0E	C-DIODE,MC2836	AB
D	151	87-A40-270-080	0E	C-DIODE,MC2838	AB
D	158	87-A40-383-080	0E	ZENER,MTZJ30A	AB
D	173	87-070-274-080	0E	DIODE,1N4003 SEM	AB
D	174	87-070-274-080	0E	DIODE,1N4003 SEM	AB
D	171	87-070-274-080	0E	DIODE,1N4003 SEM	AB
D	172	87-070-274-080	0E	DIODE,1N4003 SEM	AB
D	175	87-A40-341-080	0E	ZENER,MTZJ 36 A	AB
D	183	87-A40-002-080	0E	ZENER,MTZJ5.1C	AB
IC	101	87-A21-469-010	1B	IC,SI-3090C	AB
IC	110	87-A20-602-040	1B	C-IC,M5291FP	AB
L	110	87-A50-517-080	0E	COIL,10UHK FLR88	AB
L	111	87-A50-517-080	0E	COIL,10UHK FLR88	AB
L	113	87-A50-549-010	1A	COIL,68UH RCH110	AB
L	141	87-A50-547-080	1A	COIL,100UH-8RHT2	AB
Q	103	87-026-610-080	0E	TR,KTC3198GR	AB
Q	106	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	105	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	104	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	107	87-A30-234-080	0E	TR,CSC4115BC	AB
Q	102	89-213-702-010	1A	TR,2SB1370 (1.8W)	AB
Q	101	89-213-702-010	1A	TR,2SB1370 (1.8W)	AB
Q	111	87-026-231-080	0E	CHIP-TRANSISTER,DTA124XK	AB
Q	110	87-026-237-080	0E	CHIP-TR,DTC124XK	AB
Q	116	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	112	87-A30-217-010	1A	TR,2SB1436(R)	AB
Q	115	87-A30-255-010	1A	TR,2SB1342	AB
Q	113	89-420-612-010	1A	TR,2SD2061 (2W)	AB
Q	114	89-420-612-010	1A	TR,2SD2061 (2W)	AB
Q	158	87-A30-074-080	0E	C-TR,RT1P 141C	AB
Q	154	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	152	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	155	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	151	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	153	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	157	87-A30-107-070	0E	C-TR,CMBT5401	AB
Q	156	87-A30-107-070	0E	C-TR,CMBT5401	AB
Q	172	87-026-609-080	0E	TR,KTA1266GR	AB
Q	171	87-026-609-080	0E	TR,KTA1266GR	AB
Q	183	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	182	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	181	89-213-702-010	1A	TR,2SB1370 (1.8W)	AB
R	113	87-A00-261-080	0E	RES,M/F 0.56-1W J	AB
WH	101	87-A90-510-010	0E	HLDR,WIRE 2.5-9P	AB
C	209	87-010-184-080	0E	CHIP CAPACITOR 3300P(K)	AB
C	201	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C	202	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C	206	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C	203	87-A10-946-080	0E	C-CAP,S 220P-100 J CH	AB
C	204	87-A10-946-080	0E	C-CAP,S 220P-100 J CH	AB
C	218	87-010-182-080	0E	C-CAP,S 2200P-50 B	AB
C	217	87-010-182-080	0E	C-CAP,S 2200P-50 B	AB
C	210	87-010-184-080	0E	CHIP CAPACITOR 3300P(K)	AB
C	214	87-010-195-080	0E	C-CAP,S 0.068-25 F	AB
C	213	87-010-195-080	0E	C-CAP,S 0.068-25 F	AB
C	215	87-010-544-080	0E	CAP, ELECT 0.1-50V	AB
C	216	87-010-544-080	0E	CAP, ELECT 0.1-50V	AB
C	219	87-012-368-080	0E	C-CAP,S 0.1-50 F	AB
C	211	87-012-368-080	0E	C-CAP,S 0.1-50 F	AB
C	212	87-012-368-080	0E	C-CAP,S 0.1-50 F	AB
C	221	87-010-186-080	0E	CAP,CHIP 4700P	AB
C	222	87-010-186-080	0E	CAP,CHIP 4700P	AB
C	224	87-010-403-080	0E	CAP, ELECT 3.3-50V	AB
C	223	87-010-403-080	0E	CAP, ELECT 3.3-50V	AB
C	220	87-012-368-080	0E	C-CAP,S 0.1-50 F	AB
C	261	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	262	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	267	87-010-380-080	0E	CAP, ELECT 47-16V	AB
C	266	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	265	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	277	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
D	201	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	202	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	208	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	207	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	204	87-A40-250-040	0E	C-DIODE,DAN217	AB
D	203	87-A40-250-040	0E	C-DIODE,DAN217	AB
D	205	87-A40-250-040	0E	C-DIODE,DAN217	AB
D	206	87-A40-250-040	0E	C-DIODE,DAN217	AB
D	209	87-A40-488-080	0E	DIODE,1SS244	AB
D	213	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	215	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	216	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB

ELECTRICAL MAIN PARTS LIST - 4/8

D	212	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	214	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	211	87-A40-270-080	0E	C-DIODE,MC2838	AB
D	210	87-A40-488-080	0E	DIODE,1SS244	AB
J	202	87-099-913-010	1B	JACK,PIN 3P BLK	AB
J	203	87-A60-238-010	1A	TERMINAL,SP 4P (MSC)	AB
J	201	87-A60-420-010	1A	JACK,3.5 ST (MSC)	AB
L	201	87-003-383-010	1A	COIL,1UH-S	AB
L	202	87-003-383-010	1A	COIL,1UH-S	AB
Q	201	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	202	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	203	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	204	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	206	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	205	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	207	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	208	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	209	87-A30-190-080	0E	TR,CC5551	AB
Q	217	87-A30-105-080	0E	C-TR,RT1P 441C	AB
Q	216	87-A30-106-070	0E	C-TR,CMBT5551	AB
Q	215	87-A30-106-070	0E	C-TR,CMBT5551	AB
Q	210	87-A30-190-080	0E	TR,CC5551	AB
Q	213	87-A30-255-010	1A	TR,2SB1342	AB
Q	214	87-A30-255-010	1A	TR,2SB1342	AB
Q	212	87-A30-256-010	1A	TR,2SD1933	AB
Q	211	87-A30-256-010	1A	TR,2SD1933	AB
Q	263	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	262	87-A30-257-080	0E	C-TR,2SD1306E	AB
Q	261	87-A30-257-080	0E	C-TR,2SD1306E	AB
R	215	87-A00-258-080	0E	RES,M/F 0.22-1W J	AB
R	218	87-A00-258-080	0E	RES,M/F 0.22-1W J	AB
R	217	87-A00-258-080	0E	RES,M/F 0.22-1W J	AB
R	216	87-A00-258-080	0E	RES,M/F 0.22-1W J	AB
R	219	87-A00-258-080	0E	RES,M/F 0.22-1W J	AB
R	220	87-A00-258-080	0E	RES,M/F 0.22-1W J	AB
TH	251	87-A91-042-080	0E	C-THMS,100K 55001	AB
TH	252	87-A91-042-080	0E	C-THMS,100K 55001	AB
C	502	87-010-234-040	0E	CAP,E 47-16 5L	AB
C	511	87-010-180-080	0E	C-CER 1500P	AB
C	512	87-010-180-080	0E	C-CER 1500P	AB
C	516	87-010-318-080	0E	C-CAP,S 47P-50 CH	AB
C	515	87-010-318-080	0E	C-CAP,S 47P-50 CH	AB
C	523	87-010-071-080	0E	CAP, ELECT 1-50 M 5L SRE	AB
C	528	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	527	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	524	87-010-401-080	0E	CAP, ELECT 1-50V	AB
C	521	87-010-956-080	0E	CHIP-CAP,S 0.068-25B	AB
C	526	87-016-081-080	0E	C-CAP,S 0.1-16 RK	AB
C	525	87-016-081-080	0E	C-CAP,S 0.1-16 RK	AB
C	522	87-016-369-080	0E	C-CAP,S 0.033-25 B K	AB
C	534	87-010-178-080	0E	CHIP CAP 1000P	AB
C	533	87-010-178-080	0E	CHIP CAP 1000P	AB
C	538	87-010-400-080	0E	CAP, ELECT 0.47-50V	AB
C	537	87-010-400-080	0E	CAP, ELECT 0.47-50V	AB
C	531	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB
C	532	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB
C	548	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	549	87-010-401-080	0E	CAP, ELECT 1-50V	AB
C	544	87-016-081-080	0E	C-CAP,S 0.1-16 RK	AB
C	541	87-016-081-080	0E	C-CAP,S 0.1-16 RK	AB
C	546	87-016-081-080	0E	C-CAP,S 0.1-16 RK	AB
C	545	87-016-081-080	0E	C-CAP,S 0.1-16 RK	AB
C	542	87-016-081-080	0E	C-CAP,S 0.1-16 RK	AB
C	543	87-016-081-080	0E	C-CAP,S 0.1-16 RK	AB
C	551	87-010-112-080	0E	CAP, ELECT 100-16V	AB
C	559	87-010-180-080	0E	C-CER 1500P	AB
C	552	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	554	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	555	87-010-234-080	0E	CAP 47-16	AB
C	550	87-010-401-040	0E	CAP,E 1-50 SME	AB
C	558	87-012-156-080	0E	C-CAP,S 220P-50 CH	AB
C	557	87-012-156-080	0E	C-CAP,S 220P-50 CH	AB
C	560	87-010-180-080	0E	C-CER 1500P	AB
C	569	87-010-186-080	0E	CAP,CHIP 4700P	AB
C	568	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	567	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	562	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	561	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	564	87-012-155-080	0E	C-CAP 180P-50CH	AB
C	563	87-012-155-080	0E	C-CAP 180P-50CH	AB
C	570	87-010-186-080	0E	CAP,CHIP 4700P	AB
C	576	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	578	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	579	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	577	87-010-234-040	0E	CAP,E 47-16 5L	AB
C	572	87-010-415-080	0E	CAP ELE SRE 10-50V	AB
C	571	87-010-415-080	0E	CAP ELE SRE 10-50V	AB

ELECTRICAL MAIN PARTS LIST - 5/8

C	575	87-012-158-080	0E	C-CAP,S 390P-50 CH	AB
C	595	87-010-400-080	0E	CAP, ELECT 0.47-50V	AB
CN	501	87-099-719-010	1B	CONN,30P TYK-B(X)	AB
CN	506	87-A60-130-010	0E	CONN,5P V FE	AB
CN	507	87-A60-130-010	0E	CONN,5P V FE	AB
CN	505	87-A60-624-010	0E	CONN,7P V 2MM JMT	AB
CN	504	87-A60-629-010	0E	CONN,12P V 2MM JMT	AB
CN	503	87-A61-171-010	0E	CONN,5P V GRY FMN-BTK	AB
CN	571	87-A60-136-010	0E	CONN,11P V FE	AB
D	504	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
D	505	87-070-136-080	0E	ZENER,MTZJ5.1B	AB
D	502	87-A40-437-080	0E	ZENER,MTZJ4.3B	AB
D	501	87-A40-437-080	0E	ZENER,MTZJ4.3B	AB
D	572	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB
IC	504	87-017-750-080	1B	IC,MM1041XM	AB
IC	502	87-017-888-080	1A	IC,NJM4558MD	AB
IC	501	87-A21-452-040	1H	C-IC,BD3876KS2	AB
IC	503	87-A21-463-040	1B	C-IC,BA7654F	AB
J	501	87-A60-354-010	1B	JACK,PIN 2P MSP -242V-05	AB
Q	591	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	592	87-A30-076-080	0E	C-TR,2SC3052F	AB
C	807	87-010-183-080	0E	C-CAP,S 2700P-50 B	AB
C	809	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	805	87-012-145-080	0E	CAP, CHIP S 270P CH	AB
C	806	87-012-145-080	0E	CAP, CHIP S 270P CH	AB
C	804	87-012-154-080	0E	C-CAP,S 150P-50 CH	AB
C	803	87-012-154-080	0E	C-CAP,S 150P-50 CH	AB
C	802	87-A10-060-080	0E	C-CAP,S 0.18-16 K B	AB
C	801	87-A10-060-080	0E	C-CAP,S 0.18-16 K B	AB
C	811	87-010-177-080	0E	C-CAP,S 820P-50 SL	AB
C	810	87-010-177-080	0E	C-CAP,S 820P-50 SL	AB
C	817	87-010-183-080	0E	C-CAP,S 2700P-50 B	AB
C	812	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	814	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	815	87-010-263-080	0E	CAP, ELECT 100-10V	AB
C	813	87-010-374-080	0E	CAP, ELECT 47-10V	AB
C	827	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	821	87-016-460-080	0E	C-CAP,S 0.22-16 B	AB
C	823	87-016-460-080	0E	C-CAP,S 0.22-16 B	AB
C	822	87-016-460-080	0E	C-CAP,S 0.22-16 B	AB
D	801	87-070-136-080	0E	ZENER,MTZJ5.1B	AB
IC	801	87-A20-561-040	2A	C-IC,M65847AFP	AB
C	707	87-010-180-080	0E	C-CER 1500P	AB
C	702	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	706	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	708	87-010-213-080	0E	C-CAP,S 0.015-50 B	AB
C	709	87-010-213-080	0E	C-CAP,S 0.015-50 B	AB
C	701	87-010-263-080	0E	CAP, ELECT 100-10V	AB
C	704	87-010-319-080	0E	C-CAP,S 56P-50 CH	AB
C	703	87-010-319-080	0E	C-CAP,S 56P-50 CH	AB
C	705	87-012-393-080	0E	C-CAP,S 0.22-16 R K	AB
C	711	87-010-181-080	0E	CAP,CHIP S 1800P	AB
C	717	87-010-183-080	0E	C-CAP,S 2700P-50 B	AB
C	718	87-010-183-080	0E	C-CAP,S 2700P-50 B	AB
C	712	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	710	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	714	87-010-374-040	0E	CAP,E 47-10	AB
C	713	87-010-544-080	0E	CAP, ELECT 0.1-50V	AB
C	735	87-010-178-080	0E	CHIP CAP 1000P	AB
C	733	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	736	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	732	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	738	87-010-318-080	0E	C-CAP,S 47P-50 CH	AB
C	731	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	734	87-012-156-080	0E	C-CAP,S 220P-50 CH	AB
C	741	87-010-178-080	0E	CHIP CAP 1000P	AB
C	742	87-010-183-080	0E	C-CAP,S 2700P-50 B	AB
C	743	87-010-194-080	0E	CAP, CHIP 0.047	AB
C	740	87-010-322-080	0E	C-CAP,S 100P-50 CH	AB
C	751	87-010-112-080	0E	CAP, ELECT 100-16V	AB
C	758	87-010-186-080	0E	CAP,CHIP 4700P	AB
C	759	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	752	87-010-320-080	0E	CHIP CAP 68P	AB
C	757	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	753	87-010-546-080	0E	CAP, ELECT 0.33-50V	AB
C	761	87-010-178-080	0E	CHIP CAP 1000P	AB
C	760	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
D	701	87-A40-234-080	0E	ZENER,MTZJ5.6A	AB
FB	751	87-A50-190-080	0E	C-COIL,S BLM21A102S	AB
FB	752	87-A50-190-080	0E	C-COIL,S BLM21A102S	AB
IC	701	87-A20-613-040	1H	C-IC,BU9262AFS	AB
J	751	87-009-549-010	0E	JACK,DIA3.5	AB
L	701	87-005-448-080	0E	COIL,220UH,K	AB
Q	732	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	731	87-A30-076-080	0E	C-TR,2SC3052F	AB
Q	752	87-A30-075-080	0E	C-TR,2SA1235F	AB
Q	754	87-A30-076-080	0E	C-TR,2SC3052F	AB

ELECTRICAL MAIN PARTS LIST - 6/8

Q	751	87-A30-076-080	OE	C-TR,2SC3052F	AB
Q	755	87-A30-087-080	OE	C-FET,2SK2158	AB
C	609	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	AB
C	604	87-010-402-080	OE	CAP, ELECT 2.2-50V	AB
C	603	87-010-402-080	OE	CAP, ELECT 2.2-50V	AB
C	607	87-010-405-080	OE	CAP, ELECT 10-50V	AB
C	608	87-010-405-080	OE	CAP, ELECT 10-50V	AB
C	605	87-010-408-080	OE	CAP, ELECT 47-50V	AB
C	611	87-010-197-080	OE	CAP, CHIP 0.01 DM	AB
C	612	87-010-197-080	OE	CAP, CHIP 0.01 DM	AB
C	610	87-010-384-080	OE	CAP, ELECT 100-25V	AB
IC	601	87-A21-103-040	1E	C-IC,MM1454XFBE	AB
C	402	87-010-263-080	OE	CAP, ELECT 100-10V	AB
C	403	87-010-380-080	OE	CAP, ELECT 47-16V	AB
C	401	87-010-401-080	OE	CAP, ELECT 1-50V	AB
C	410	87-010-260-080	OE	CAP, ELECT 47-25V	AB
D	401	87-020-465-080	OE	DIODE,1SS133 (110MA)	AB
D	402	87-020-465-080	OE	DIODE,1SS133 (110MA)	AB
Q	402	87-026-609-080	OE	TR,KTA1266GR	AB
Q	401	87-A30-076-080	OE	C-TR,2SC3052F	AB
C	819	87-010-197-080	OE	CAP, CHIP 0.01 DM	AB
C	813	87-010-197-080	OE	CAP, CHIP 0.01 DM	AB
C	814	87-012-286-080	OE	CAP, U 0.01-25	AB
C	812	87-012-286-080	OE	CAP, U 0.01-25	AB
C	829	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	AB
C	828	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	AB
C	820	87-010-260-080	OE	CAP, ELECT 47-25V	AB
C	822	87-012-286-080	OE	CAP, U 0.01-25	AB
C	823	87-012-286-080	OE	CAP, U 0.01-25	AB
C	821	87-012-286-080	OE	CAP, U 0.01-25	AB
C	959	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	AB
C	960	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	AB
C	961	87-012-170-080	OE	C-CAP,U 8P-50 CH	AB
CF	801	87-008-261-010	1A	FILTER, SFE10.7MA5-A	AB
CF	802	87-008-261-010	1A	FILTER, SFE10.7MA5-A	AB
FFE	801	A8-6ZA-192-030	2Y	6ZA-1 FEJNM	A
FFE	801	A8-8ZA-190-030		8ZA-1 FEUNM	B
J	801	87-A60-657-010	1A	TERMINAL,4P HSP-154V5-02	AB
L	832	87-005-847-080	OE	COIL,2.2UH(CECS)	AB
L	981	87-NF4-650-010	1D	COIL,AM PACK 4N(TOK)	AB
Q	806	87-A30-072-080	OE	C-TR,RT1P 144C	AB
Q	805	89-327-143-080	OE	TR,2SC2714 (0.1W)	AB
C	758	87-012-167-080	OE	C-CAP,U 5P-50 CH	AB
C	757	87-012-188-080	OE	C-CAP,U 47P-50 CH	AB
C	756	87-012-286-080	OE	CAP, U 0.01-25	AB
C	755	87-012-286-080	OE	CAP, U 0.01-25	AB
C	761	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	AB
C	769	87-010-260-080	OE	CAP, ELECT 47-25V	AB
C	763	87-010-829-080	OE	CAP, U 0.047-16	AB
C	765	87-012-286-080	OE	CAP, U 0.01-25	AB
C	766	87-012-286-080	OE	CAP, U 0.01-25	AB
C	764	87-012-337-080	OE	C-CAP,U 56P-50 CH	AB
C	773	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	AB
C	774	87-010-263-080	OE	CAP, ELECT 100-10V	AB
C	771	87-010-383-080	OE	CAP, ELECT 33-25V	AB
C	777	87-010-400-080	OE	CAP, ELECT 0.47-50V	AB
C	778	87-010-401-080	OE	CAP, ELECT 1-50V	AB
C	779	87-010-401-080	OE	CAP, ELECT 1-50V	AB
C	775	87-010-404-080	OE	CAP, ELECT 4.7-50V	AB
C	770	87-010-829-080	OE	CAP, U 0.047-16	AB
C	772	87-010-829-080	OE	CAP, U 0.047-16	AB
C	776	87-012-286-080	OE	CAP, U 0.01-25	AB
C	780	87-010-196-080	OE	CHIP CAPACITOR,0.1-25	AB
C	781	87-010-405-080	OE	CAP, ELECT 10-50V	AB
C	782	87-010-405-080	OE	CAP, ELECT 10-50V	AB
C	786	87-010-805-080	OE	CAP, S 1-16	AB
C	785	87-010-805-080	OE	CAP, S 1-16	AB
C	789	87-012-275-080	OE	C-CAP,U 1200P-50 B	AB
C	788	87-012-280-080	OE	CAP, U 3300P-50	AB
C	787	87-012-280-080	OE	CAP, U 3300P-50	AB
C	783	87-012-286-080	OE	CAP, U 0.01-25	AB
C	784	87-012-286-080	OE	CAP, U 0.01-25	AB
C	796	87-010-403-080	OE	CAP, ELECT 3.3-50V	AB
C	791	87-010-405-080	OE	CAP, ELECT 10-50V	AB
C	794	87-010-406-080	OE	CAP, ELECT 22-50	AB
C	795	87-010-593-080	OE	CHIP S, 0.027-16V RK	B
C	799	87-010-829-080	OE	CAP, U 0.047-16	AB
C	793	87-012-273-080	OE	C-CAP,U 820P-50 B	AB
C	790	87-012-275-080	OE	C-CAP,U 1200P-50 B	AB
C	797	87-012-276-080	OE	CAP, CHIP SS 1500 PBK	A
C	798	87-012-276-080	OE	CAP, CHIP SS 1500 PBK	A
C	798	87-012-278-080	OE	C-CAP,U 2200P-50 B	B
C	797	87-012-278-080	OE	C-CAP,U 2200P-50 B	B
CN	601	87-099-028-010	OE	CONN,11P 6216 H	AB
D	746	87-020-465-080	OE	DIODE,1SS133 (110MA)	A
D	773	87-020-465-080	OE	DIODE,1SS133 (110MA)	AB
D	771	87-020-465-080	OE	DIODE,1SS133 (110MA)	A

ELECTRICAL MAIN PARTS LIST - 7/8

IC	771	87-A20-913-010	1D	IC,LA1837NL	AB
L	771	87-A50-266-010	1A	COIL,FM DET-2N(TOK)	AB
L	772	87-A90-053-010	1C	FLTR,PCFMT-060(TOK)	A
L	772	87-A90-733-010	1A	FLTR,PCFAZH-450(TOK)	.B
L	781	87-005-847-080	0E	COIL,2.2UH(CECS)	AB
L	792	87-A50-027-010	1A	COIL,1 POLE MPX(TOK)	A
L	791	87-A50-027-010	1A	COIL,1 POLE MPX(TOK)	A
L	791	87-A50-209-010	1A	COIL,1POLE MPX(MIT)	.B
L	792	87-A50-209-010	1A	COIL,1POLE MPX(MIT)	.B
C	701	87-010-260-080	0E	CAP, ELECT 47-25V	AB
C	702	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB
C	709	87-012-195-080	0E	C-CAP,U 100P-50CH	AB
C	704	87-012-286-080	0E	CAP, U 0.01-25	AB
C	703	87-012-286-080	0E	CAP, U 0.01-25	AB
C	712	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	711	87-010-263-080	0E	CAP, ELECT 100-10V	AB
C	714	87-012-286-080	0E	CAP, U 0.01-25	AB
C	719	87-012-286-080	0E	CAP, U 0.01-25	AB
C	717	87-012-286-080	0E	CAP, U 0.01-25	AB
C	713	87-012-286-080	0E	CAP, U 0.01-25	AB
C	727	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	728	87-010-248-080	0E	CAP, ELECT 220-10V	AB
C	722	87-012-176-080	0E	CAP 15P	AB
C	721	87-012-176-080	0E	CAP 15P	AB
C	723	87-012-274-080	0E	CHIP CAP,U 1000P-50B	AB
C	725	87-012-274-080	0E	CHIP CAP,U 1000P-50B	AB
D	721	87-A40-234-080	0E	ZENER,MTZJ5.6A	AB
IC	721	87-070-127-110	1C	IC,LC72131 D	AB
Q	711	87-A30-196-080	0E	TR,2SC4115SRs	AB
X	721	87-A70-061-010	1A	VIB,XTAL 4.500MHZ CSA-309	AB
C	734	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	A
C	732	87-010-400-080	0E	CAP, ELECT 0.47-50V	A
C	733	87-010-404-080	0E	CAP, ELECT 4.7-50V	A
C	738	87-012-278-080	0E	C-CAP,U 2200P-50 B	A
C	737	87-012-278-080	0E	C-CAP,U 2200P-50 B	A
C	749	87-010-101-080	0E	CAP, ELECT 220-16	A
C	744	87-010-260-080	0E	CAP, ELECT 47-25V	A
C	743	87-010-404-080	0E	CAP, ELECT 4.7-50V	A
C	741	87-010-545-080	0E	CAP, ELECT 0.22-50V	A
C	745	87-010-545-080	0E	CAP, ELECT 0.22-50V	A
C	746	87-010-545-080	0E	CAP, ELECT 0.22-50V	A
C	748	87-010-787-080	0E	CAP, U 0.022-25	A
C	742	87-012-172-080	0E	CAPACITOR CHIP U 10P CH	A
C	747	87-012-286-080	0E	CAP, U 0.01-25	A
IC	740	87-070-060-040	1F	IC,TA2040AF	A
Q	733	87-026-226-080	0E	CHIP-TR,DTA143EK	A
X	750	87-030-394-010	1B	VIB,CER CSA3.6MGF228	A
C	401	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	407	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	408	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	409	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	410	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	413	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	412	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	411	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
CN	403	87-A60-676-010	0E	CONN,12P H 2MM JMT	AB
CN	402	87-A61-088-010	0E	CONN,6P H GRY FMN-SSTK	AB
CN	401	87-A61-164-010	1B	CONN,30P H 52089-3020	AB
IC	401	87-A21-462-040	1F	C-IC,M62353FP	AB
S	403	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	402	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	401	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
S	404	87-A91-024-180	0E	SW,TACT KSH0611BT	AB
CN	1	87-A61-177-010	1A	CONN,11P V B11B-ZR-3.4	AB
CN	2	87-A61-178-010	1A	CONN,13P V B13B-ZR-3.4	AB
		84-ZG1-245-210	0E	CAP,OPTICAL	AB
C	21	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	22	87-010-382-080	0E	CAP, ELECT 22-25V	AB
C	303	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	306	87-010-263-080	0E	CAP, ELECT 100-10V	AB
C	308	87-010-263-080	0E	CAP, ELECT 100-10V	AB
C	302	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB
C	304	87-010-404-080	0E	CAP, ELECT 4.7-50V	AB
C	301	87-010-405-080	0E	CAP, ELECT 10-50V	AB
C	307	87-010-406-080	0E	CAP, ELECT 22-50	AB
C	305	87-010-406-080	0E	CAP, ELECT 22-50	AB
C	313	87-010-196-080	0E	CHIP CAPACITOR,0.1-25	AB
C	312	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	311	87-010-197-080	0E	CAP, CHIP 0.01 DM	AB
C	324	87-010-263-080	0E	CAP, ELECT 100-10V	AB
CN	303	87-A60-130-010	0E	CONN,5P V FE	AB
CN	302	87-A61-063-010	0E	CONN,7P H FMN-SSTK	AB
CN	301	87-A61-179-010	0E	CONN,11P H GRY FMN-SSTK	AB
FB	303	87-005-786-080	0E	F-BEAD,BL03RN2	AB
FB	302	87-005-786-080	0E	F-BEAD,BL03RN2	AB
FB	301	87-005-786-080	0E	F-BEAD,BL03RN2	AB
FB	304	87-005-786-080	0E	F-BEAD,BL03RN2	AB

ELECTRICAL MAIN PARTS LIST - 8/8

IC	301	87-017-453-080	1D	IC,NJM2267M	AB.....
IC	302	87-017-750-080	1B	IC,MM1041XM	AB.....
IC	303	87-017-825-010	1E	IC,GP1F32T	AB.....
J	301	87-A60-127-010	1B	JACK,Y/CYKF51.5504	AB.....
J	302	87-A60-414-010	1A	JACK,PIN 1P YLW YKC21-3527	AB.....
L	301	87-005-436-080	0E	COIL,22UH FLR50,K	AB.....
Q	302	87-026-211-080	0E	TR,DTA144EK	AB.....
Q	301	89-324-123-080	0E	C-TR,2SC2412K S	AB.....
CN	501	87-A60-130-010	0E	CONN,5P V FE	AB.....
J	501	87-A60-606-010	1B	JACK,PIN 3P R/W/Y W/O SW H	AB.....
C	404	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C	402	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C	401	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
C	405	87-010-263-080	0E	CAP, ELECT 100-10V	AB.....
M	401	87-A90-346-010		MOT,RF-500TB 12560	AB.....
M	402	87-A90-346-010		MOT,RF-500TB 12560	AB.....
S	201	87-036-110-010	1A	PUSH SWITCH	AB.....
S	202	87-036-110-010	1A	PUSH SWITCH	AB.....
S	205	87-A91-568-010	0E	SW,MICRO SPVF11	AB.....
S	204	87-A91-568-010	0E	SW,MICRO SPVF11	AB.....
S	203	87-A91-568-010	0E	SW,MICRO SPVF11	AB.....
C	1	87-010-387-080	1A	CAP,E 470-25 SME	AB.....
C	5	87-010-403-080	0E	CAP, ELECT 3.3-50V	AB.....
C	7	87-A10-479-080	0E	CAP,CER 2200P-250 M E KH	AB.....
CN	1	87-A60-851-010	0E	CONN,9P V VH	AB.....
D	9	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	5	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	2	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	4	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	3	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	1	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
D	10	87-020-465-080	0E	DIODE,1SS133 (110MA)	AB.....
F	1	87-A91-276-080	1B	FUSE,125MA 125V F 251	AB.....
PR	1	87-A90-069-080	1A	FUSE,2A 125V 251	AB.....
PR	4	87-A90-069-080	1A	FUSE,2A 125V 251	AB.....
PR	2	87-A90-210-080	1A	FUSE,7A 125V 251	AB.....
PR	3	87-A90-210-080	1A	FUSE,7A 125V 251	AB.....
PT	2	8Z-NF8-660-110	1C	PT,SUB ZNF-8 (D)	A.....
PT	2	8Z-NF8-661-010	1D	PT,SUB ZNF-8 (U)	.B.....
Q	1	87-026-245-080	0E	TR,DTC114ES	AB.....
Q	2	87-A30-198-080	0E	TR,KTC3199GR	AB.....
RY	2	87-A90-976-010	1B	RELAY,AC12V SDT-S-112LMR	AB.....
T	1	87-A60-317-010	0E	TERMINAL, 1P MSC	AB.....
T	2	87-A60-317-010	0E	TERMINAL, 1P MSC	AB.....

ELECTRICAL MAIN PARTS LIST - 1/2 (AZA-8 EZM)

NOTE: The characters in the suffix column indicate the part usage.

EZM	REF.NO	PARTS NO.	XX KANRI NO.	DESCRIPTION	B SUFFIX
	C	701	87-010-260-080	CAP, ELECT 47-25V	ABC.....
	C	702	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
	C	709	87-012-195-080	C-CAP,U 100P-50CH	ABC.....
	C	703	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	704	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	712	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
	C	711	87-010-263-080	CAP, ELECT 100-10V	ABC.....
	C	715	87-012-195-080	C-CAP,U 100P-50CH	.B.....
	C	717	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	714	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	713	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	719	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	727	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
	C	728	87-010-248-080	CAP, ELECT 220-10V	ABC.....
	C	721	87-012-176-080	CAP 15P	ABC.....
	C	722	87-012-176-080	CAP 15P	ABC.....
	C	720	87-012-195-080	C-CAP,U 100P-50CH	.B.....
	C	725	87-012-274-080	CHIP CAP,U 1000P-50B	ABC.....
	C	723	87-012-274-080	CHIP CAP,U 1000P-50B	ABC.....
	D	721	87-017-148-080	ZENER,HZS6A1L	ABC.....
	D	774	87-A40-269-080	C-DIODE,MC2836	.B.....
	D	774	87-A40-270-080	C-DIODE,MC2838	A.C.....
	IC	721	87-070-127-110	IC,LC72131 D	ABC.....
	Q	711	87-A30-196-080	TR,2SC4115SRS	ABC.....
	X	721	87-A70-061-010	VIB,XTAL 4.500MHZ CSA-309	ABC.....
	C	758	87-012-167-080	C-CAP,U 5P-50 CH	ABC.....
	C	757	87-012-188-080	C-CAP,U 47P-50 CH	ABC.....
	C	753	87-012-195-080	C-CAP,U 100P-50CH	.B.....
	C	756	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	755	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	761	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
	C	769	87-010-260-080	CAP, ELECT 47-25V	ABC.....
	C	763	87-010-829-080	CAP, U 0.047-16	ABC.....
	C	766	87-012-286-080	CAP, U 0.01-25	.B.....
	C	765	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	762	87-012-286-080	CAP, U 0.01-25	.B.....
	C	768	87-012-286-080	CAP, U 0.01-25	.B.....
	C	764	87-012-337-080	C-CAP,U 56P-50 CH	A.C.....
	C	773	87-010-196-080	CHIP CAPACITOR,0.1-25	A.C.....
	C	774	87-010-263-080	CAP, ELECT 100-10V	ABC.....
	C	771	87-010-383-080	CAP, ELECT 33-25V	ABC.....
	C	777	87-010-400-080	CAP, ELECT 0.47-50V	ABC.....
	C	779	87-010-401-080	CAP, ELECT 1-50V	ABC.....
	C	778	87-010-401-080	CAP, ELECT 1-50V	ABC.....
	C	775	87-010-404-080	CAP, ELECT 4.7-50V	ABC.....
	C	772	87-010-829-080	CAP, U 0.047-16	ABC.....
	C	770	87-010-829-080	CAP, U 0.047-16	ABC.....
	C	776	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	773	87-015-785-080	CHIP CAPACITOR, 0.1FZ-25Z	.B.....
	C	780	87-010-196-080	CHIP CAPACITOR,0.1-25	ABC.....
	C	781	87-010-405-080	CAP, ELECT 10-50V	ABC.....
	C	782	87-010-405-080	CAP, ELECT 10-50V	ABC.....
	C	785	87-010-805-080	CAP, S 1-16	ABC.....
	C	786	87-010-805-080	CAP, S 1-16	ABC.....
	C	789	87-012-275-080	C-CAP,U 1200P-50 B	ABC.....
	C	788	87-012-280-080	CAP, U 3300P-50	ABC.....
	C	787	87-012-280-080	CAP, U 3300P-50	ABC.....
	C	784	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	783	87-012-286-080	CAP, U 0.01-25	ABC.....
	C	795	87-010-194-080	CAP, CHIP 0.047	A.C.....
	C	796	87-010-403-080	CAP, ELECT 3.3-50V	ABC.....
	C	791	87-010-405-080	CAP, ELECT 10-50V	ABC.....
	C	794	87-010-406-080	CAP, ELECT 22-50	ABC.....
	C	795	87-010-829-080	CAP, U 0.047-16	.B.....
	C	799	87-010-829-080	CAP, U 0.047-16	ABC.....
	C	793	87-012-273-080	C-CAP,U 820P-50 B	A.C.....
	C	793	87-012-274-080	CHIP CAP,U 1000P-50B	.B.....
	C	790	87-012-275-080	C-CAP,U 1200P-50 B	ABC.....
	C	797	87-012-276-080	CAP, CHIP SS 1500 PBK	.BC.....
	C	798	87-012-276-080	CAP, CHIP SS 1500 PBK	.BC.....
	C	797	87-012-278-080	C-CAP,U 2200P-50 B	A.....
	C	798	87-012-278-080	C-CAP,U 2200P-50 B	A.....
	CN	601	87-099-029-010	CONN,12P 6216H	ABC.....
	D	771	87-020-465-080	DIODE,1SS133 (110MA)	.B.....
	D	773	87-020-465-080	DIODE,1SS133 (110MA)	ABC.....
	IC	771	87-A20-913-010	IC,LA1837NL	ABC.....
	L	771	87-A50-266-010	COIL,FM DET-2N(TOK)	ABC.....
	L	772	87-A90-733-010	FLTR,PCFAZH-450 (TOK)	ABC.....
	L	781	87-005-847-080	COIL,2.2UH(CECS)	ABC.....
	L	792	87-A50-027-010	COIL,1 POLE MPX(TOK)	.BC.....
	L	791	87-A50-027-010	COIL,1 POLE MPX(TOK)	.BC.....

ELECTRICAL MAIN PARTS LIST - 2/2 (AZA-8 EZM)

L	792	87-A50-209-010	COIL, 1POLE MPX (MIT)	A.....
L	791	87-A50-209-010	COIL, 1POLE MPX (MIT)	A.....
C	859	87-012-286-080	CAP, U 0.01-25	.B.....
C	865	87-010-196-080	CHIP CAPACITOR, 0.1-25	.B.....
C	864	87-010-405-080	CAP, ELECT 10-50V	.B.....
C	866	87-010-405-080	CAP, ELECT 10-50V	.B.....
C	869	87-012-180-080	C-CAP, U 22P-50 CH	.B.....
C	868	87-012-184-080	C-CAP, U 33P-50 CH	.B.....
C	862	87-012-199-080	CAP 220P	.B.....
C	861	87-012-199-080	CAP 220P	.B.....
C	863	87-012-270-080	CAP, U 470P-50	.B.....
C	867	87-012-286-080	CAP, U 0.01-25	.B.....
CN	602	87-099-211-010	CONN, 4P 6216V	.B.....
IC	851	87-A20-440-040	C-IC, BU1920FS	.B.....
Q	853	87-A30-076-080	C-TR, 2SC3052F	.B.....
X	851	87-A70-091-010	VIB, XTAL 4.332MHZ CSA-309	.B.....
C	818	87-010-196-080	CHIP CAPACITOR, 0.1-25	.B.....
C	819	87-010-197-080	CAP, CHIP 0.01 DM	A.C.....
C	813	87-010-197-080	CAP, CHIP 0.01 DM	A.C.....
C	814	87-012-286-080	CAP, U 0.01-25	ABC.....
C	812	87-012-286-080	CAP, U 0.01-25	ABC.....
C	828	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABC.....
C	829	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABC.....
C	820	87-010-260-080	CAP, ELECT 47-25V	ABC.....
C	822	87-012-286-080	CAP, U 0.01-25	ABC.....
C	823	87-012-286-080	CAP, U 0.01-25	ABC.....
C	821	87-012-286-080	CAP, U 0.01-25	ABC.....
C	942	87-012-172-080	CAPACITOR CHIP U 10P CH	.B.....
C	940	87-012-286-080	CAP, U 0.01-25	.B.....
C	947	87-012-286-080	CAP, U 0.01-25	.B.....
C	949	87-A10-039-080	C-CAP, U 470P-50 J CH	.B.....
C	959	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABC.....
C	958	87-012-286-080	CAP, U 0.01-25	.B.....
C	952	87-012-286-080	CAP, U 0.01-25	.B.....
C	960	87-010-196-080	CHIP CAPACITOR, 0.1-25	ABC.....
C	962	87-010-401-080	CAP, ELECT 1-50V	.B.....
C	961	87-012-170-080	C-CAP, U 8P-50 CH	A.C.....
CF	802	82-785-747-010	CF MS2 GHY R	.B.....
CF	801	87-008-261-010	FILTER, SFE10.7MA5-A	A.C.....
CF	802	87-008-261-010	FILTER, SFE10.7MA5-A	A.C.....
CF	801	87-008-423-010	CERAMIC FILTER, SFE10.7	.B.....
D	944	87-020-465-080	DIODE, 1SS133 (110MA)	.B.....
D	942	87-A40-270-080	C-DIODE, MC2838	.B.....
FFE	801	A8-6ZA-191-130	6ZA-1 FEENM	.B.....
FFE	801	A8-8ZA-190-030	8ZA-1 FEUNM	A.C.....
J	802	87-033-241-010	TERMINAL, ANT AJ-2039	.B.....
J	801	87-A60-657-010	TERMINAL, 4P HSP-154V5-02	A.C.....
L	832	87-005-847-080	COIL, 2.2UH (CECS)	ABC.....
L	942	87-A50-019-010	COIL, OSC LW (COI)	.B.....
L	941	87-A50-020-010	COIL, ANT LW (COI)	.B.....
L	981	87-NF4-650-010	COIL, AM PACK 4N (TOK)	A.C.....
L	981	87-NF4-651-110	COIL, AM PACK 2N (TOM)	.B.....
Q	806	87-A30-072-080	C-TR, RT1P 144C	ABC.....
Q	805	89-327-143-080	TR, 2SC2714 (0.1W)	ABC.....
Q	948	87-A30-086-070	C-TR, CSD1306E	.B.....
Q	947	89-503-602-080	C-FET, 2SK360E	.B.....
Q	951	87-A30-074-080	C-TR, RT1P 141C	.B.....
Q	952	87-A30-086-070	C-TR, CSD1306E	.B.....
TC	942	87-A91-658-010	TRIMMER, 30P 4.0X4.5 ECRL	.B.....

MECHANICAL PARTS LIST - 1/2

NOTE: The characters in the suffix column indicate the part usage.

EZ		XX		A
		KANRI		
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	8A-CQ0-005-010	2A	PANEL, SIDE L	A
	8A-CQ0-006-010	2A	PANEL, SIDE R	A
	8A-CQ0-007-010	1E	LID, DISC	AB
	8A-CQ0-009-010	1F	PANEL, REAR S	A
	8A-CQ0-011-010	1F	PANEL, REAR US	.B
	8A-CQ0-015-010	2A	PANEL, SIDE L U	.B
	8A-CQ0-016-010	2A	PANEL, SIDE R U	.B
	8A-CQ0-032-010	1C	PANEL, TOP	AB
	8A-CQ0-033-010	1C	PANEL, FUNCTION	AB
	8A-CQ0-034-010	1B	PANEL, MECHA	AB
	8A-CQ0-038-010	1A	FOOT, DIA49 H9	AB
	8Z-HU1-033-010	1D	BADGE, DVD	AB
*	8A-CQ0-001-010	2M	CABI, FR	A
*	8A-CQ0-002-010	2M	CABI, TOP	A
*	8A-CQ0-003-010	2A	CABI, MONITOR A	A
*	8A-CQ0-004-010	1H	CABI, MONITOR B	A
*	8A-CQ0-010-010	2M	CABI, FR U	.B
*	8A-CQ0-012-010	2M	CABI, TOP U	.B
*	8A-CQ0-013-010	2A	CABI, MONI A U	.B
*	8A-CQ0-014-010	1H	CABI, MONI B U	.B
	8A-CQ0-020-010		KNOB, RTRY JOG	AB
	8A-CQ0-021-010		KEY, Q SURROUND	AB
	8A-CQ0-022-010		KEY, POWER	AB
	8A-CQ0-023-010		KEY, OPEN MONITOR	AB
	8A-CQ0-024-010		KEY, PLAY	AB
	8A-CQ0-025-010	1C	KEY, RING	AB
	8A-CQ0-026-010	1B	KEY, ENTER	AB
	8A-CQ0-027-010	1B	KEY, FUNCTION	AB
	8A-CQ0-028-010	1C	KEY, MONITOR	AB
	8A-CQ0-029-010	1B	KEY, UP DOWN	AB
	8A-CQ0-030-010	1B	KEY, OPEN DISC	AB
	8A-CQ0-008-010	1D	WINDOW, DISPLAY	AB
	8A-CQ0-031-010	0E	LENS, SENSOR	AB
	8A-CQ0-035-010	1A	REFLECTOR, JOG	AB
	8A-CQ0-036-010	1A	REFLECTOR, FUNCTION	AB
	8A-CQ0-037-010	0E	REFLECTOR, POWER	AB
	81-669-025-010	0E	FOOT, H11	AB
	87-NF4-221-010	0E	HLDR, CABLE	AB
	88-AR1-203-010	0E	HLDR, TU	AB
	8A-CQ0-216-010	0E	GEAR, MONI A	AB
	8A-CQ0-217-010	0E	GEAR, MONI B	AB
	8A-CQ0-218-010	0E	GEAR, MONI C	AB
	8A-CQ0-219-010	0E	GEAR, MONI D	AB
	8A-CQ0-220-010	0E	GEAR, MONI WORM	AB
	8A-CQ0-221-010	0E	GEAR, DISC A	AB
	8A-CQ0-222-010	0E	GEAR, DISC B	AB
	8A-CQ0-223-010	0E	GEAR, DISC C	AB
	8A-CQ0-232-010	2A	SHAFT ASSY, HINGE	AB
	8A-CQ0-233-010	1A	HLDR, CABI	AB
	8A-CQ0-234-010	0E	HLDR, WORM	AB
	8A-CQ0-235-010	0E	SPR-P, WORM	AB
	8A-ZG3-206-010	1C	RING, HLDR	AB
	8A-ZG3-210-010	0E	W-L, 3.2-16-0.23 BLK W/ADH	AB
*	8A-CQ0-206-010	1B	HLDR, FAN	AB
*	8A-CQ0-207-010	0E	HLDR, TFT	AB
*	8A-CQ0-208-010	1A	HLDR, GEAR MONI A	AB
*	8A-CQ0-209-010	1A	HLDR, GEAR MONI B	AB
*	8A-CQ0-210-010	1B	HLDR, GEAR DISC A	AB
*	8A-CQ0-211-010	1A	HLDR, GEAR DISC B	AB
*	8A-CQ0-212-010	0E	HLDR, MONITOR	AB
*	8A-CQ0-213-010	0E	HLDR, CLAMP	AB
*	8A-CQ0-214-010	0E	HLDR, PIN JACK	AB
*	8A-CQ0-230-010	1A	HLDR, PWB SW	AB
*	8A-ZG3-203-010	1C	HLDR, DISC A	AB
*	8A-ZG3-207-010	0E	PLATE, MAGNET	AB
	87-067-579-010	0E	TAPPING SCREW, BVT2+3-8	AB
	87-067-584-010	0E	TAPPING SCREW, BVT2+3-6	AB
	87-067-703-010	0E	TAPPING SCREW, BVT2+3-10	AB
	87-067-761-010	0E	TAPPING SCREW, BVT2+3-10	AB
	87-067-975-010	0E	S-SCREW, IT+4-8	AB
	87-261-071-410	0E	V+2.6-4	AB
	87-591-095-410	0E	TAPPING SCREW, QIT+3-8 (GLD)	AB
	87-721-096-410	0E	QT2+3-10 GLD	AB
	87-751-034-410	0E	SCREW VT2+2-5	AB
	87-751-036-410	0E	VT2+2-8 W/O SLOT	AB
	87-B10-294-010	0E	BVT2+2.6-8	AB
*	87-067-822-010	0E	BVT2+3-20 W/O SLOT	AB
*	8A-ZG1-201-010	0E	S-SCREW, MECH 880	AB
	8A-CQ0-215-010	1A	GUIDE, FL	AB
	8A-CQ0-228-010	0E	GUIDE, LED	AB
	87-067-703-010	0E	TAPPING SCREW, BVT2+3-10	AB

MECHANICAL PARTS LIST - 2/2


		87-085-184-010	0E	BUSHING, AC CORD (D)	A.....
		87-085-189-010	0E	BUSHING, CORD (U)	.B.....
		87-A90-796-010	2A	FAN,F614R-12MC-15-300MM	AB.....
		87-A91-582-010		LCD,TFD58W21MW-01	AB.....
		88-904-161-110	0E	FF-CABLE, 4P 1.25 160MM	AB.....
		88-905-081-110	0E	FF-CABLE, 5P 1.25	AB.....
		88-905-101-110	0E	FF-CABLE, 5P 1.25	AB.....
		88-911-151-110	1A	FF-CABLE, 11P 1.25 150MM	AB.....
		8A-CQ0-633-010	1E	CONN ASSY,12P PH 220MM	AB.....
		8A-CQ0-634-010	1C	CONN ASSY,7P PH 100MM	AB.....
		8A-CQ0-635-010	0E	FF-CABLE,5P 1.0 100MM	AB.....
		8A-CQ0-636-010	0E	FF-CABLE,6P 1.0 160MM	AB.....
		8A-CQ0-637-010	0E	FF-CABLE,6P 1.0 140MM	AB.....
		8A-CQ0-638-010	1B	FF-CABLE,7P 1.0 300MM	AB.....
		8A-CQ0-639-010	1B	FF-CABLE,11P 1.0 300MM	AB.....
		8A-CQ0-640-010	1B	FF-CABLE,30P 1.0 140MM	AB.....
		8A-CQ0-641-010	0E	FF-CABLE,21P 1.0 80MM	AB.....
		8A-CQ0-642-010	1B	CONN ASSY,6P PH 50MM	AB.....
M	301	87-A90-346-010		MOT,RF-500TB 12560	AB.....
M	302	87-A90-346-010		MOT,RF-500TB 12560	AB.....
PT	1	8A-CQ0-608-010	2M	PT,U	.B.....
PT	1	8A-CQ0-609-010	2B	PT,D	A.....
W	1	87-050-098-010	1B	AC CODE ASSY,D	A.....
W	1	87-A80-110-010	1B	AC CORD ASSY,U SPT-2W	.B.....
WH	101	87-A90-510-010	0E	HLDR,WIRE 2.5-9P	AB.....
		84-ZG1-245-210	0E	CAP,OPTICAL	AB.....

ACCESSORIES / PACKAGE LIST - 1/1

NOTE: The characters in the suffix column indicate the part usage.

EZ	XX	A		
	KANRI			
REF.NO	PARTS NO.	NO.	DESCRIPTION	SUFFIX
	8A-CQ0-903-010	2M	IB,U(ESF) I	.B
	8A-CQ0-908-010	1E	IB,D(J) I	A
	87-006-225-010	1D	AM LOOP ANT NC2	AB
	87-A90-064-010	1A	FEEDER-ANT, FM (SHS)	AB
	8A-CQ0-701-010	2A	RC UNIT, RC-AAT01	AB


SCHEMATIC DIAGRAM – 1 (MAIN 1/2)

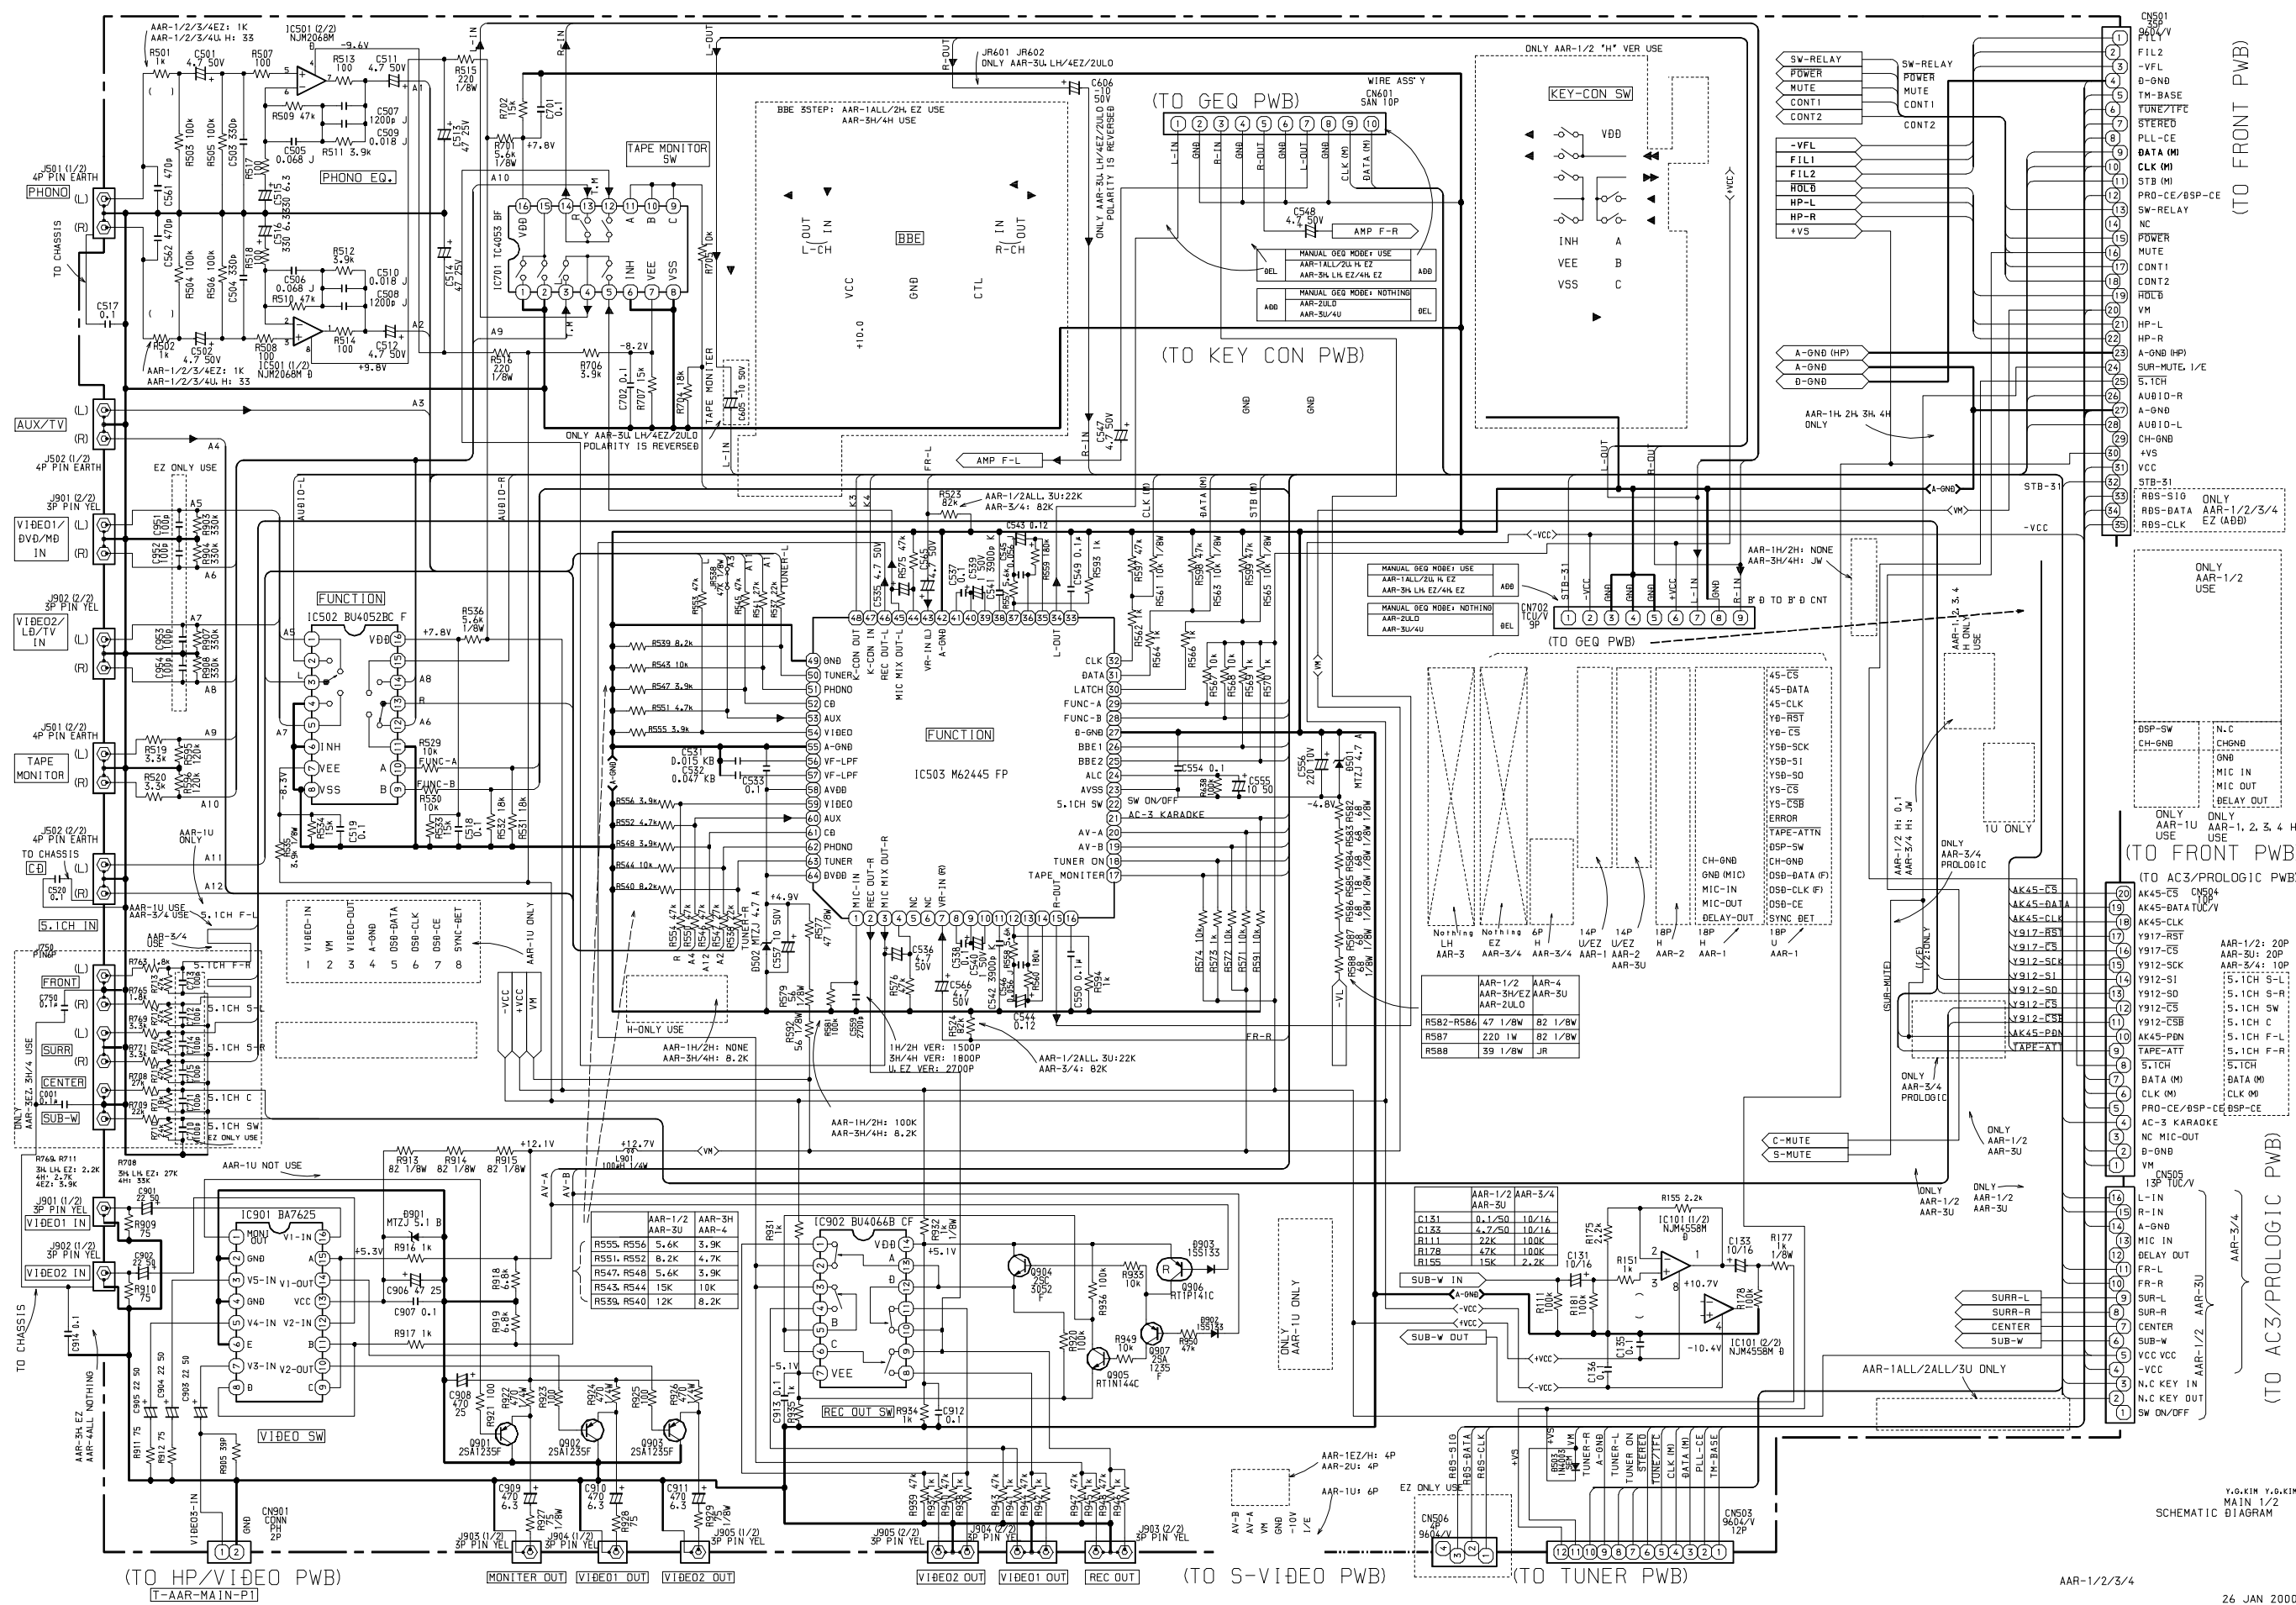


AAR-1/2/3/4

26 JAN 2000


SCHEMATIC DIAGRAM – 2 (MAIN 2/2)

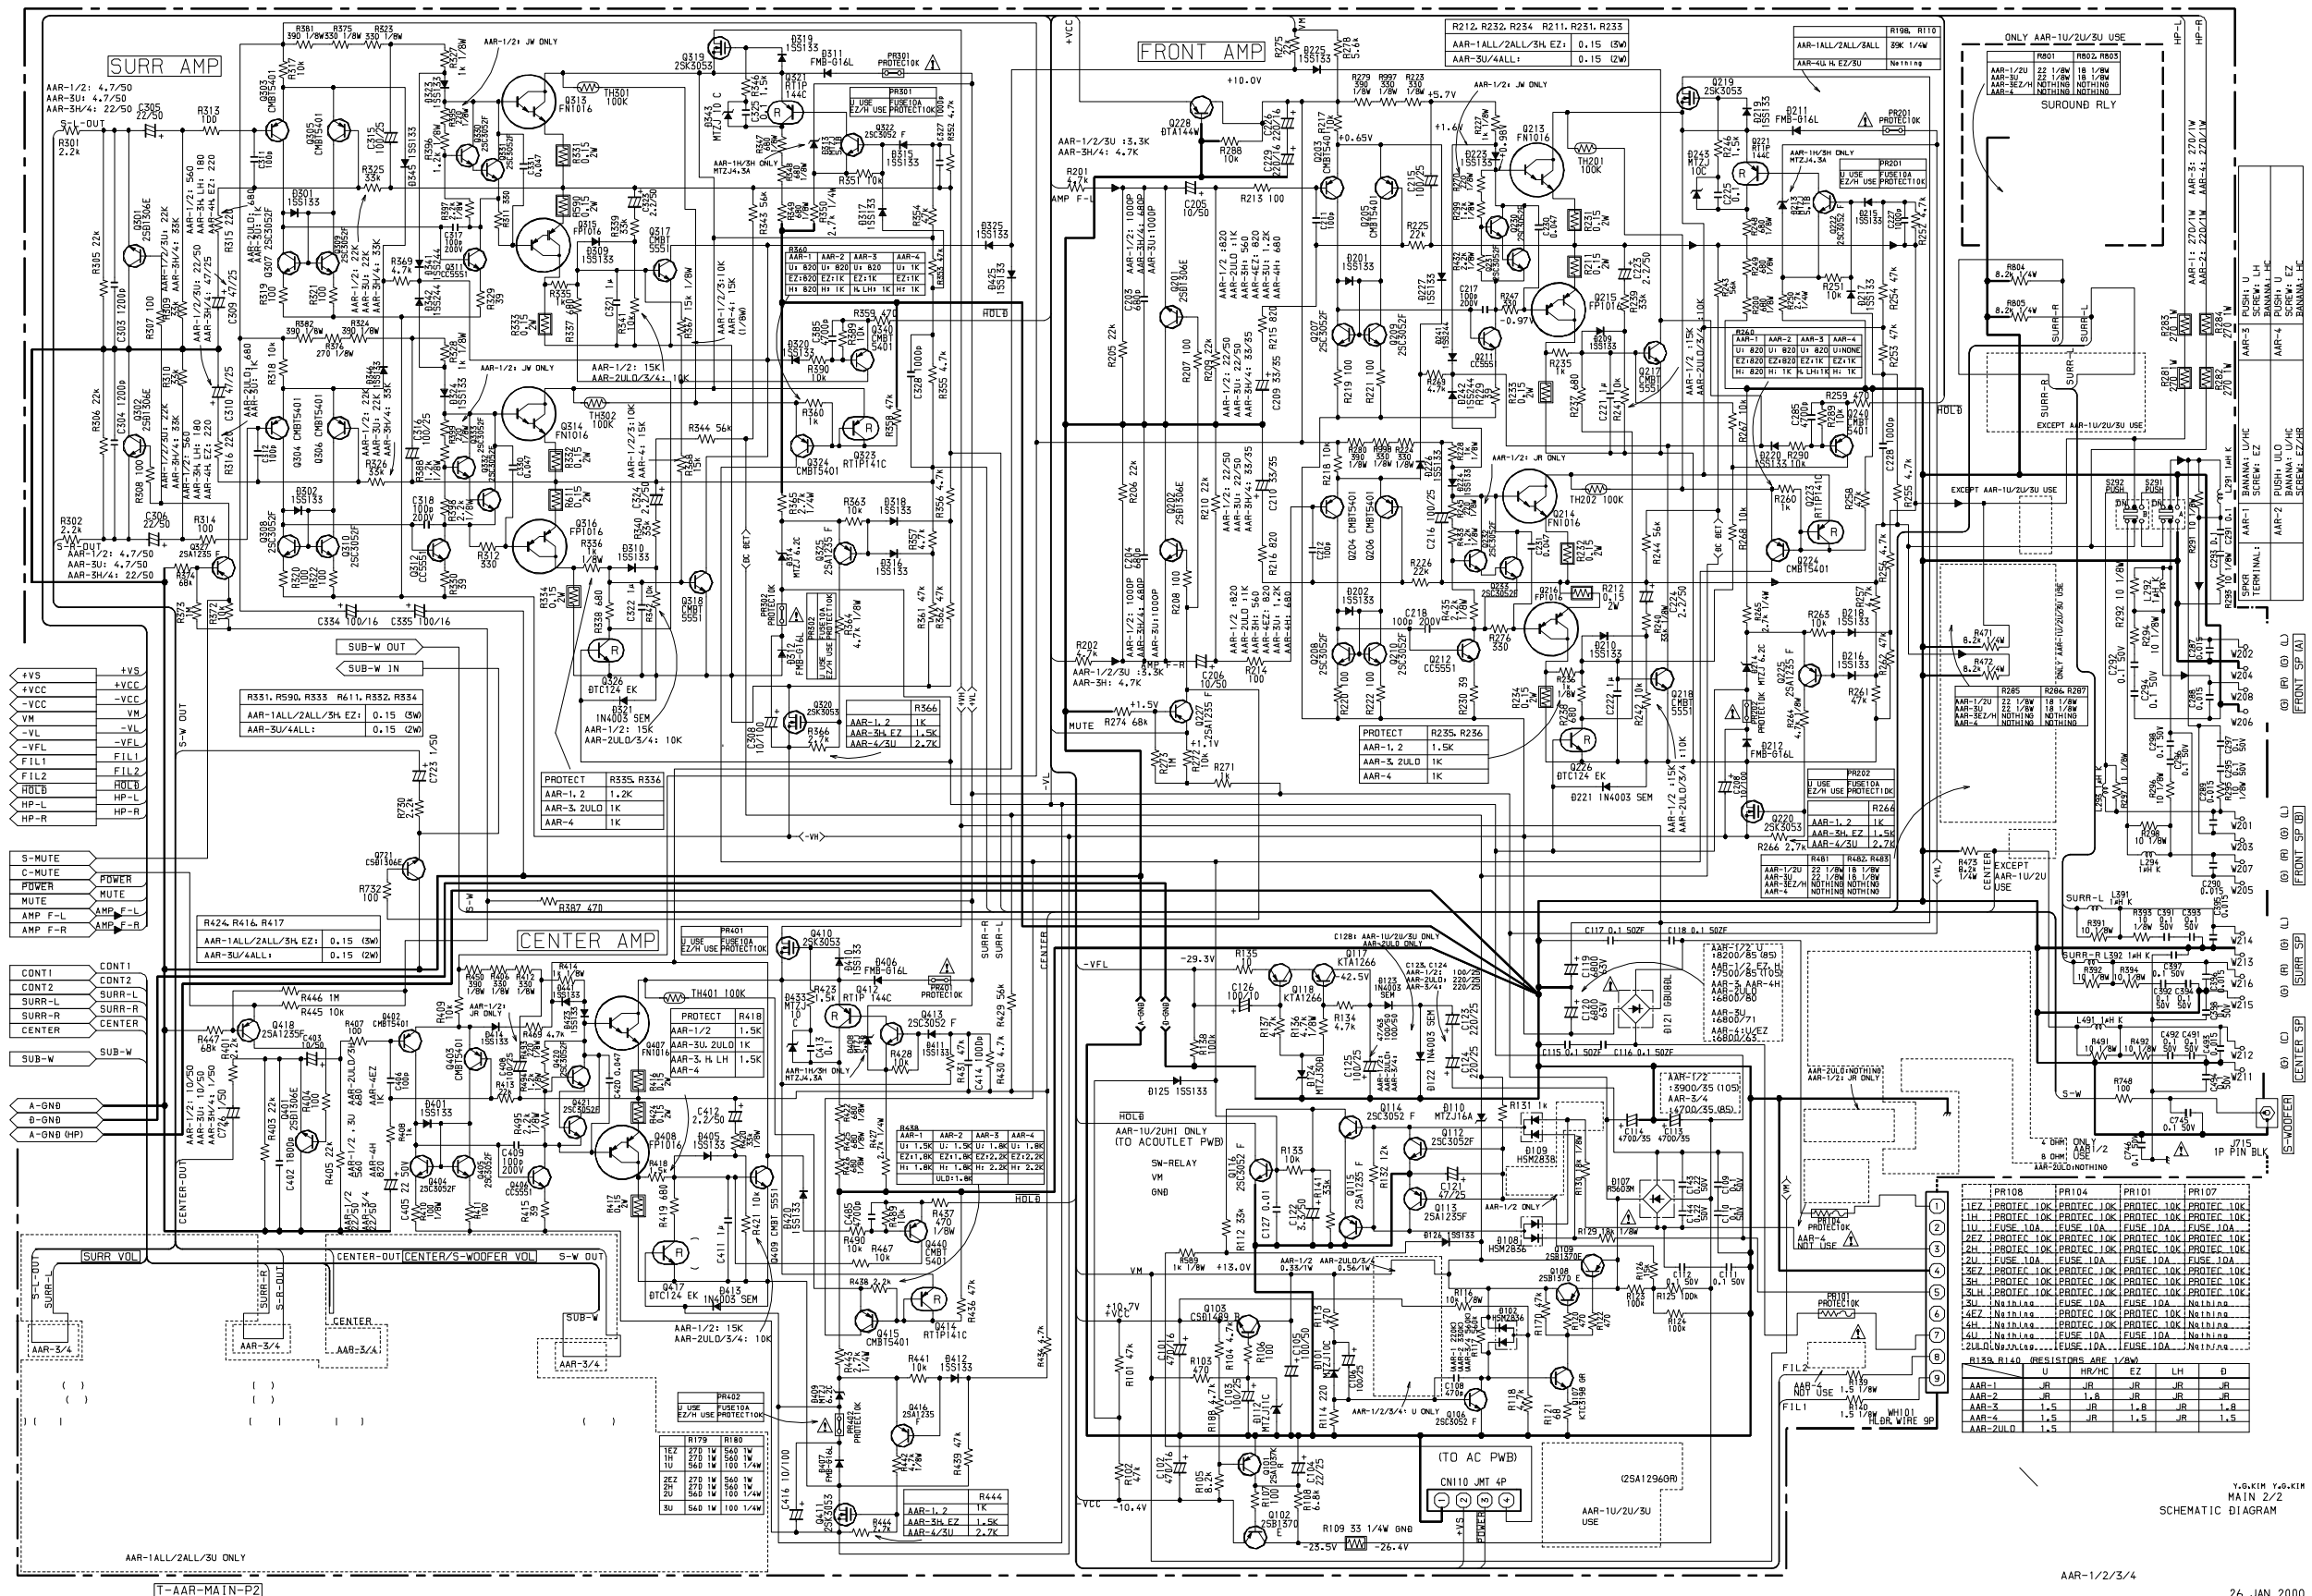


SCHEMATIC DIAGRAM – 3 (FRONT)

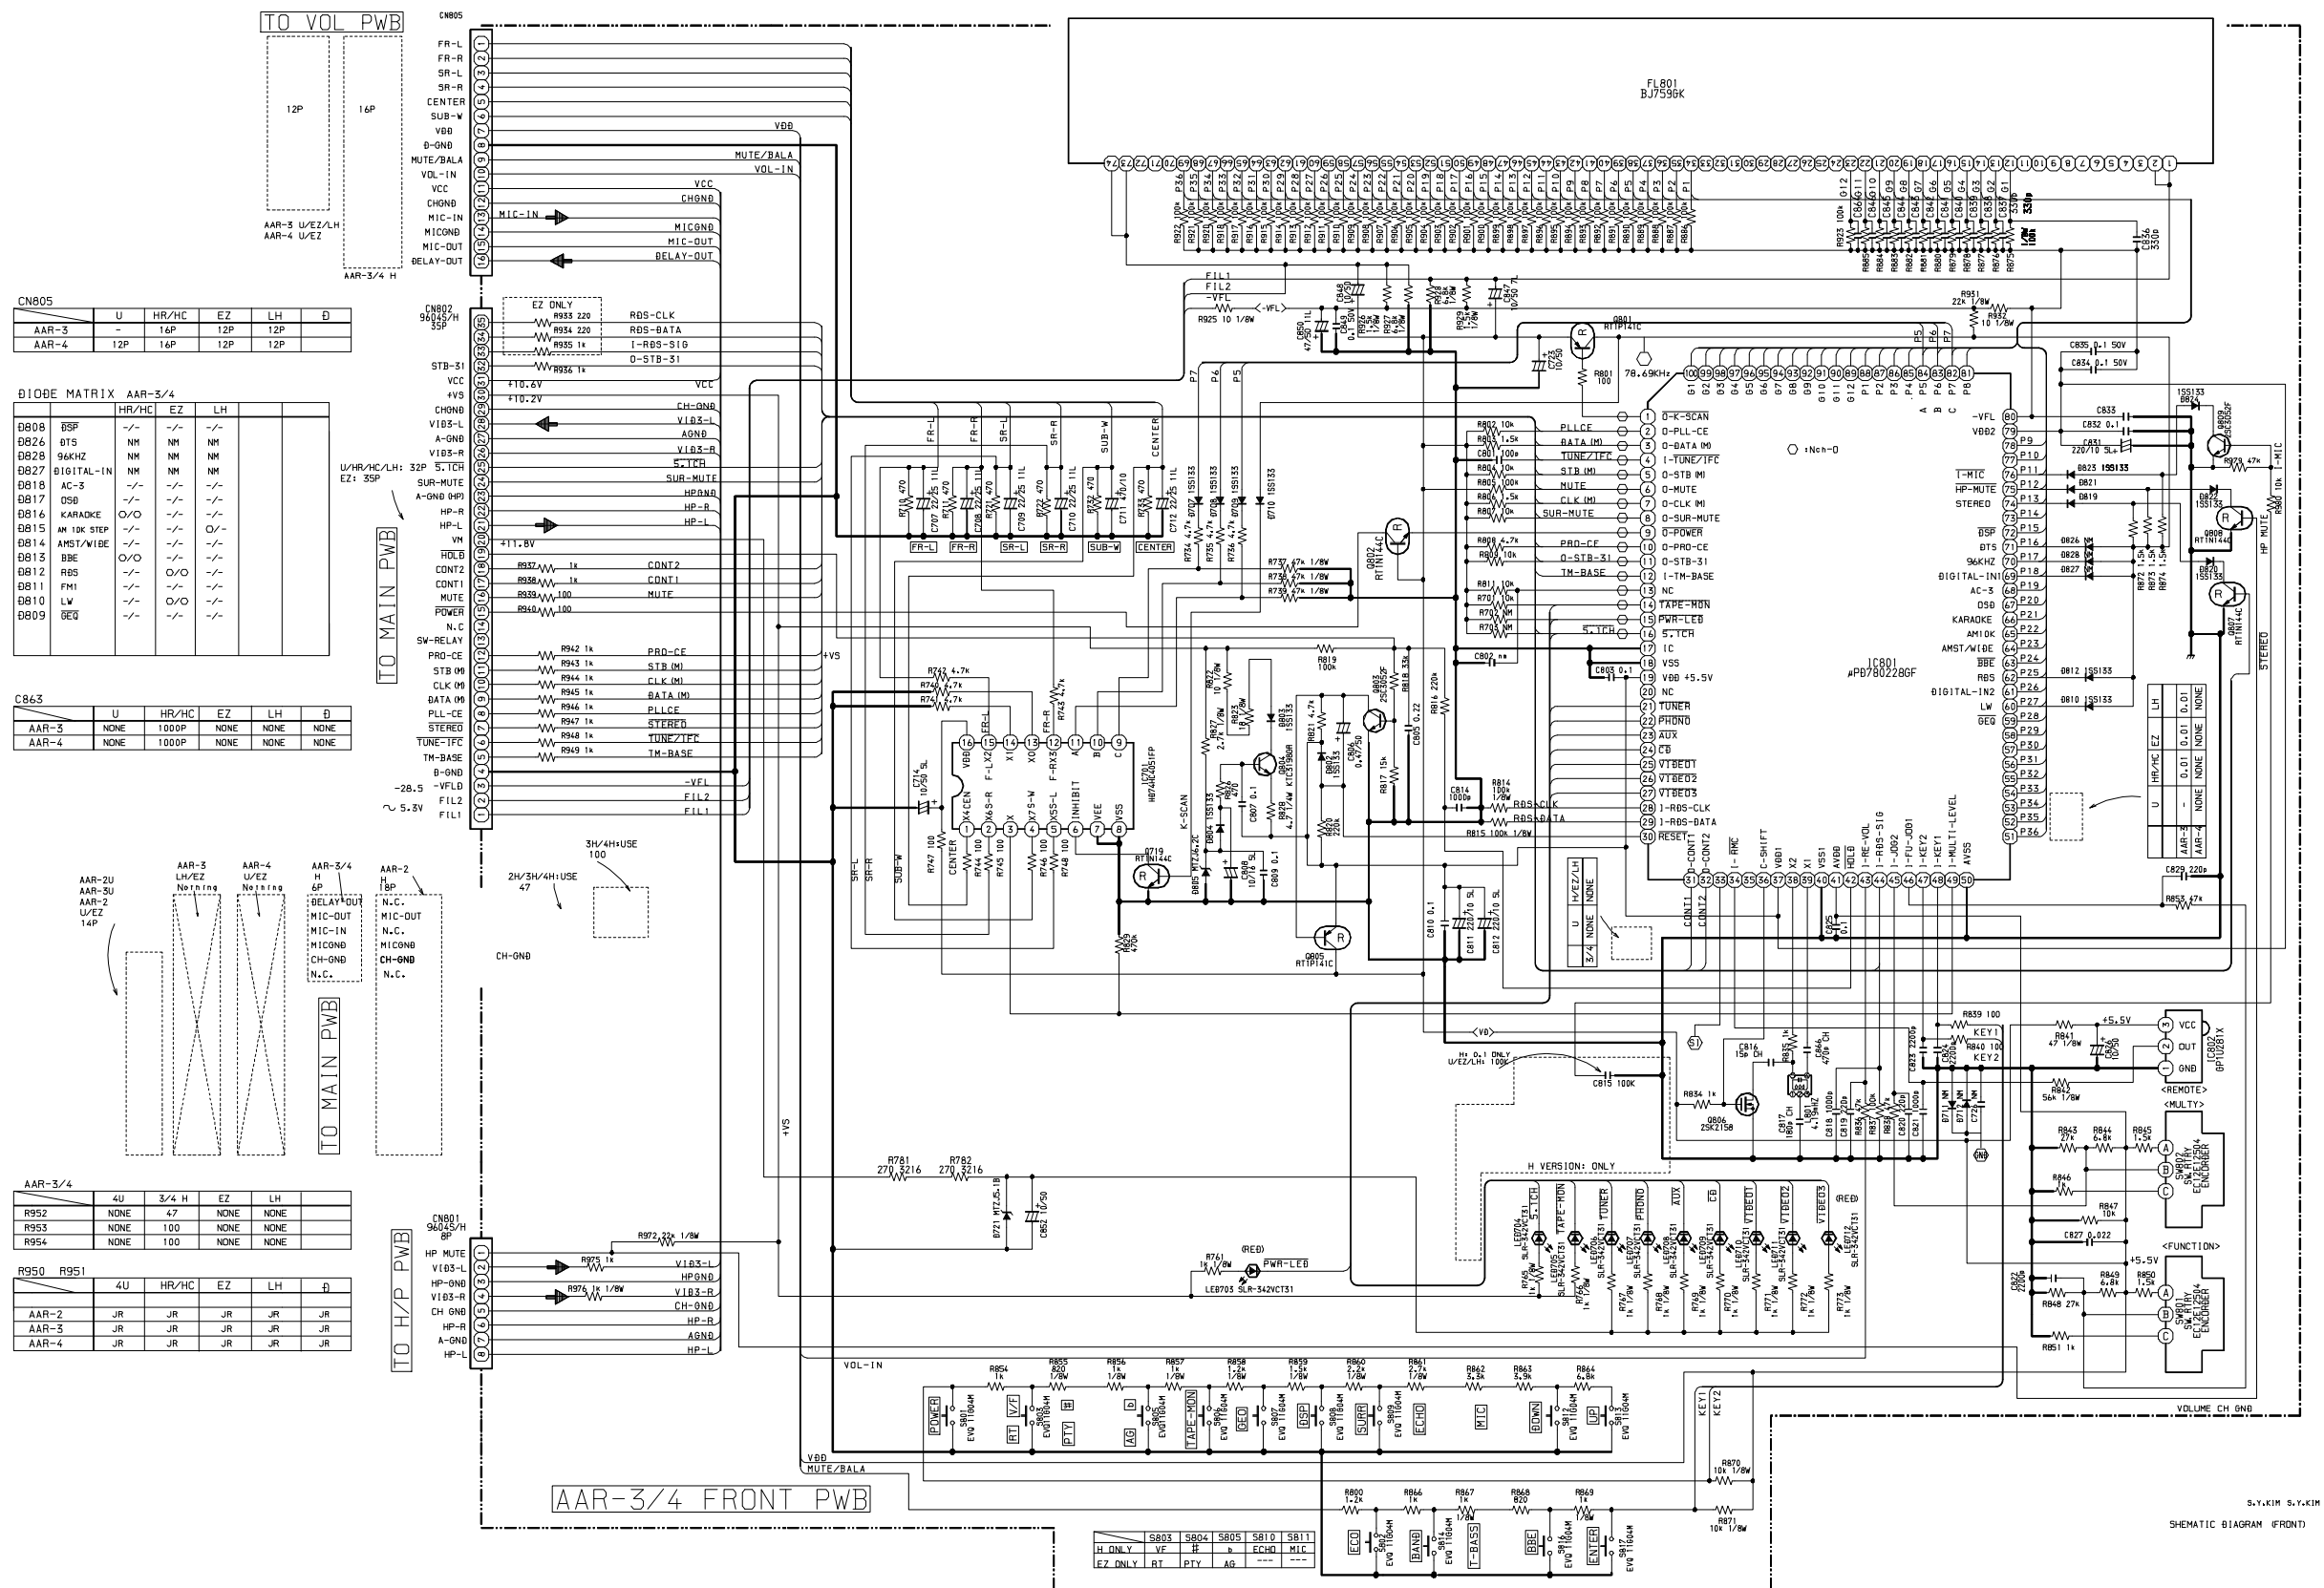

SCHEMATIC DIAGRAM – 4 (TUNER)

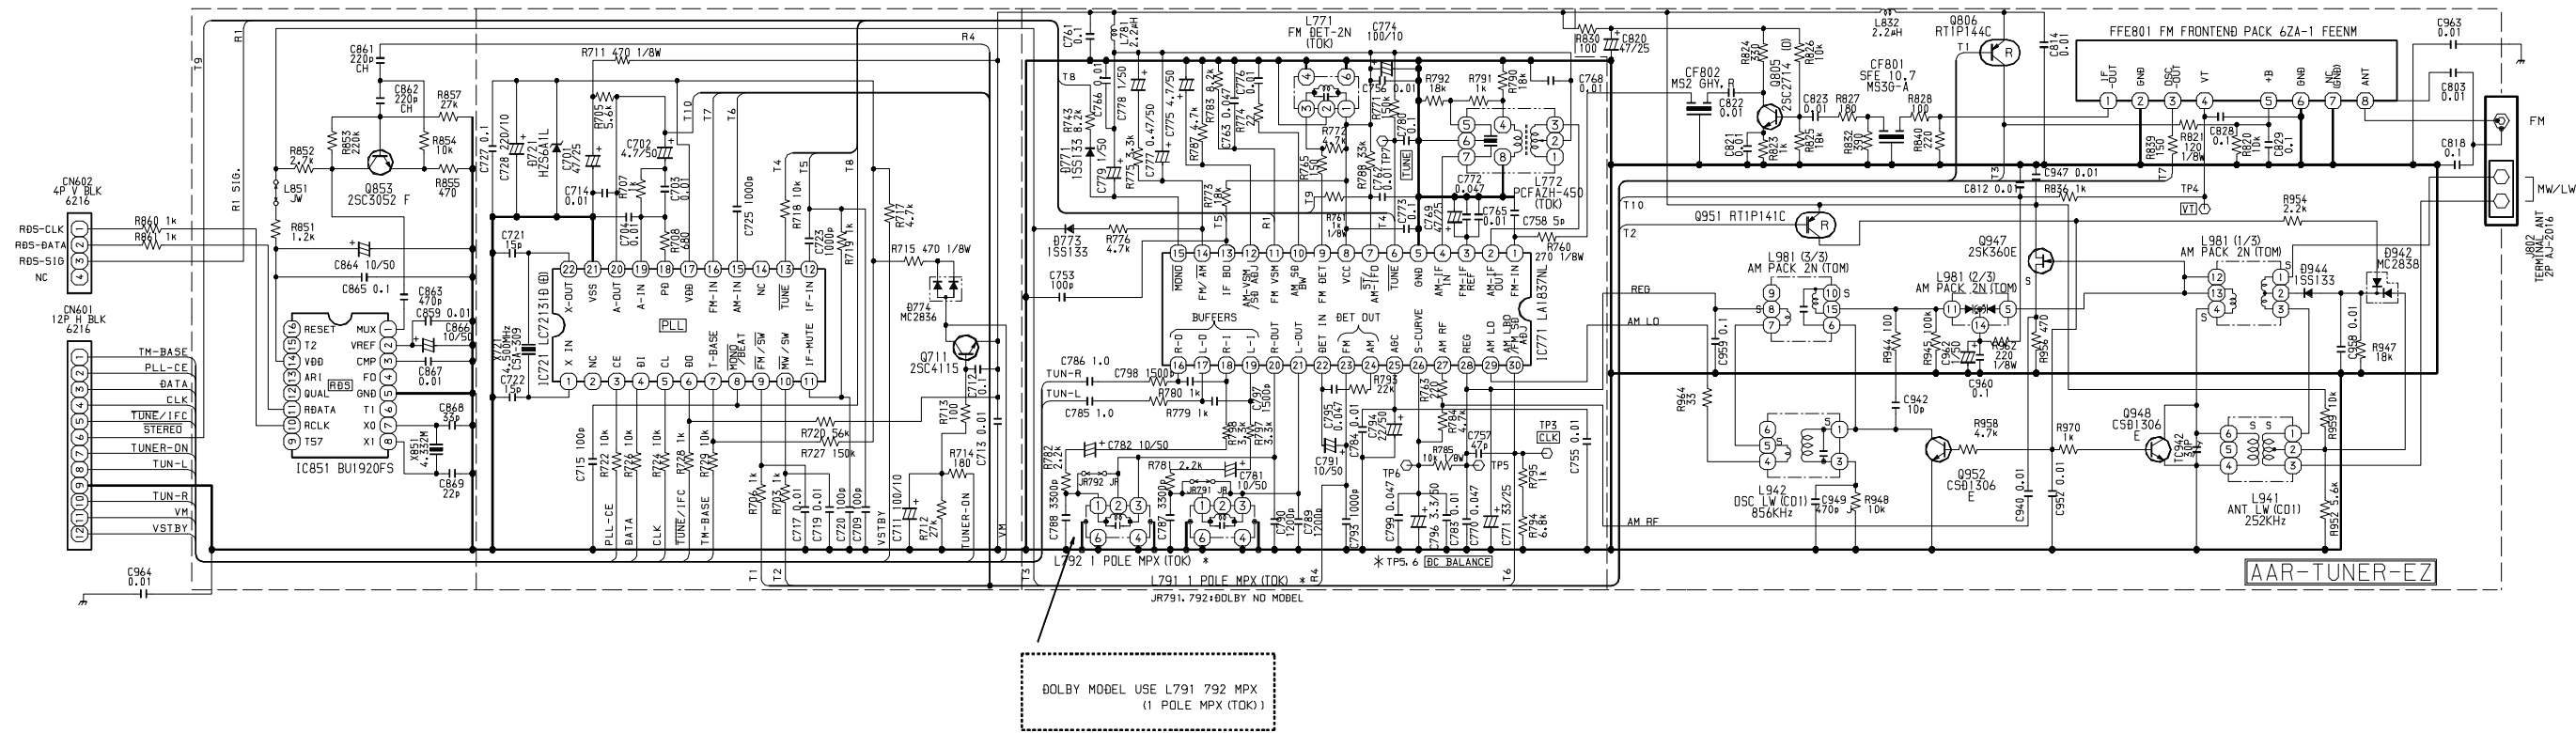

SCHEMATIC DIAGRAM – 5 (HP VIDEO / GEQ / VOL)

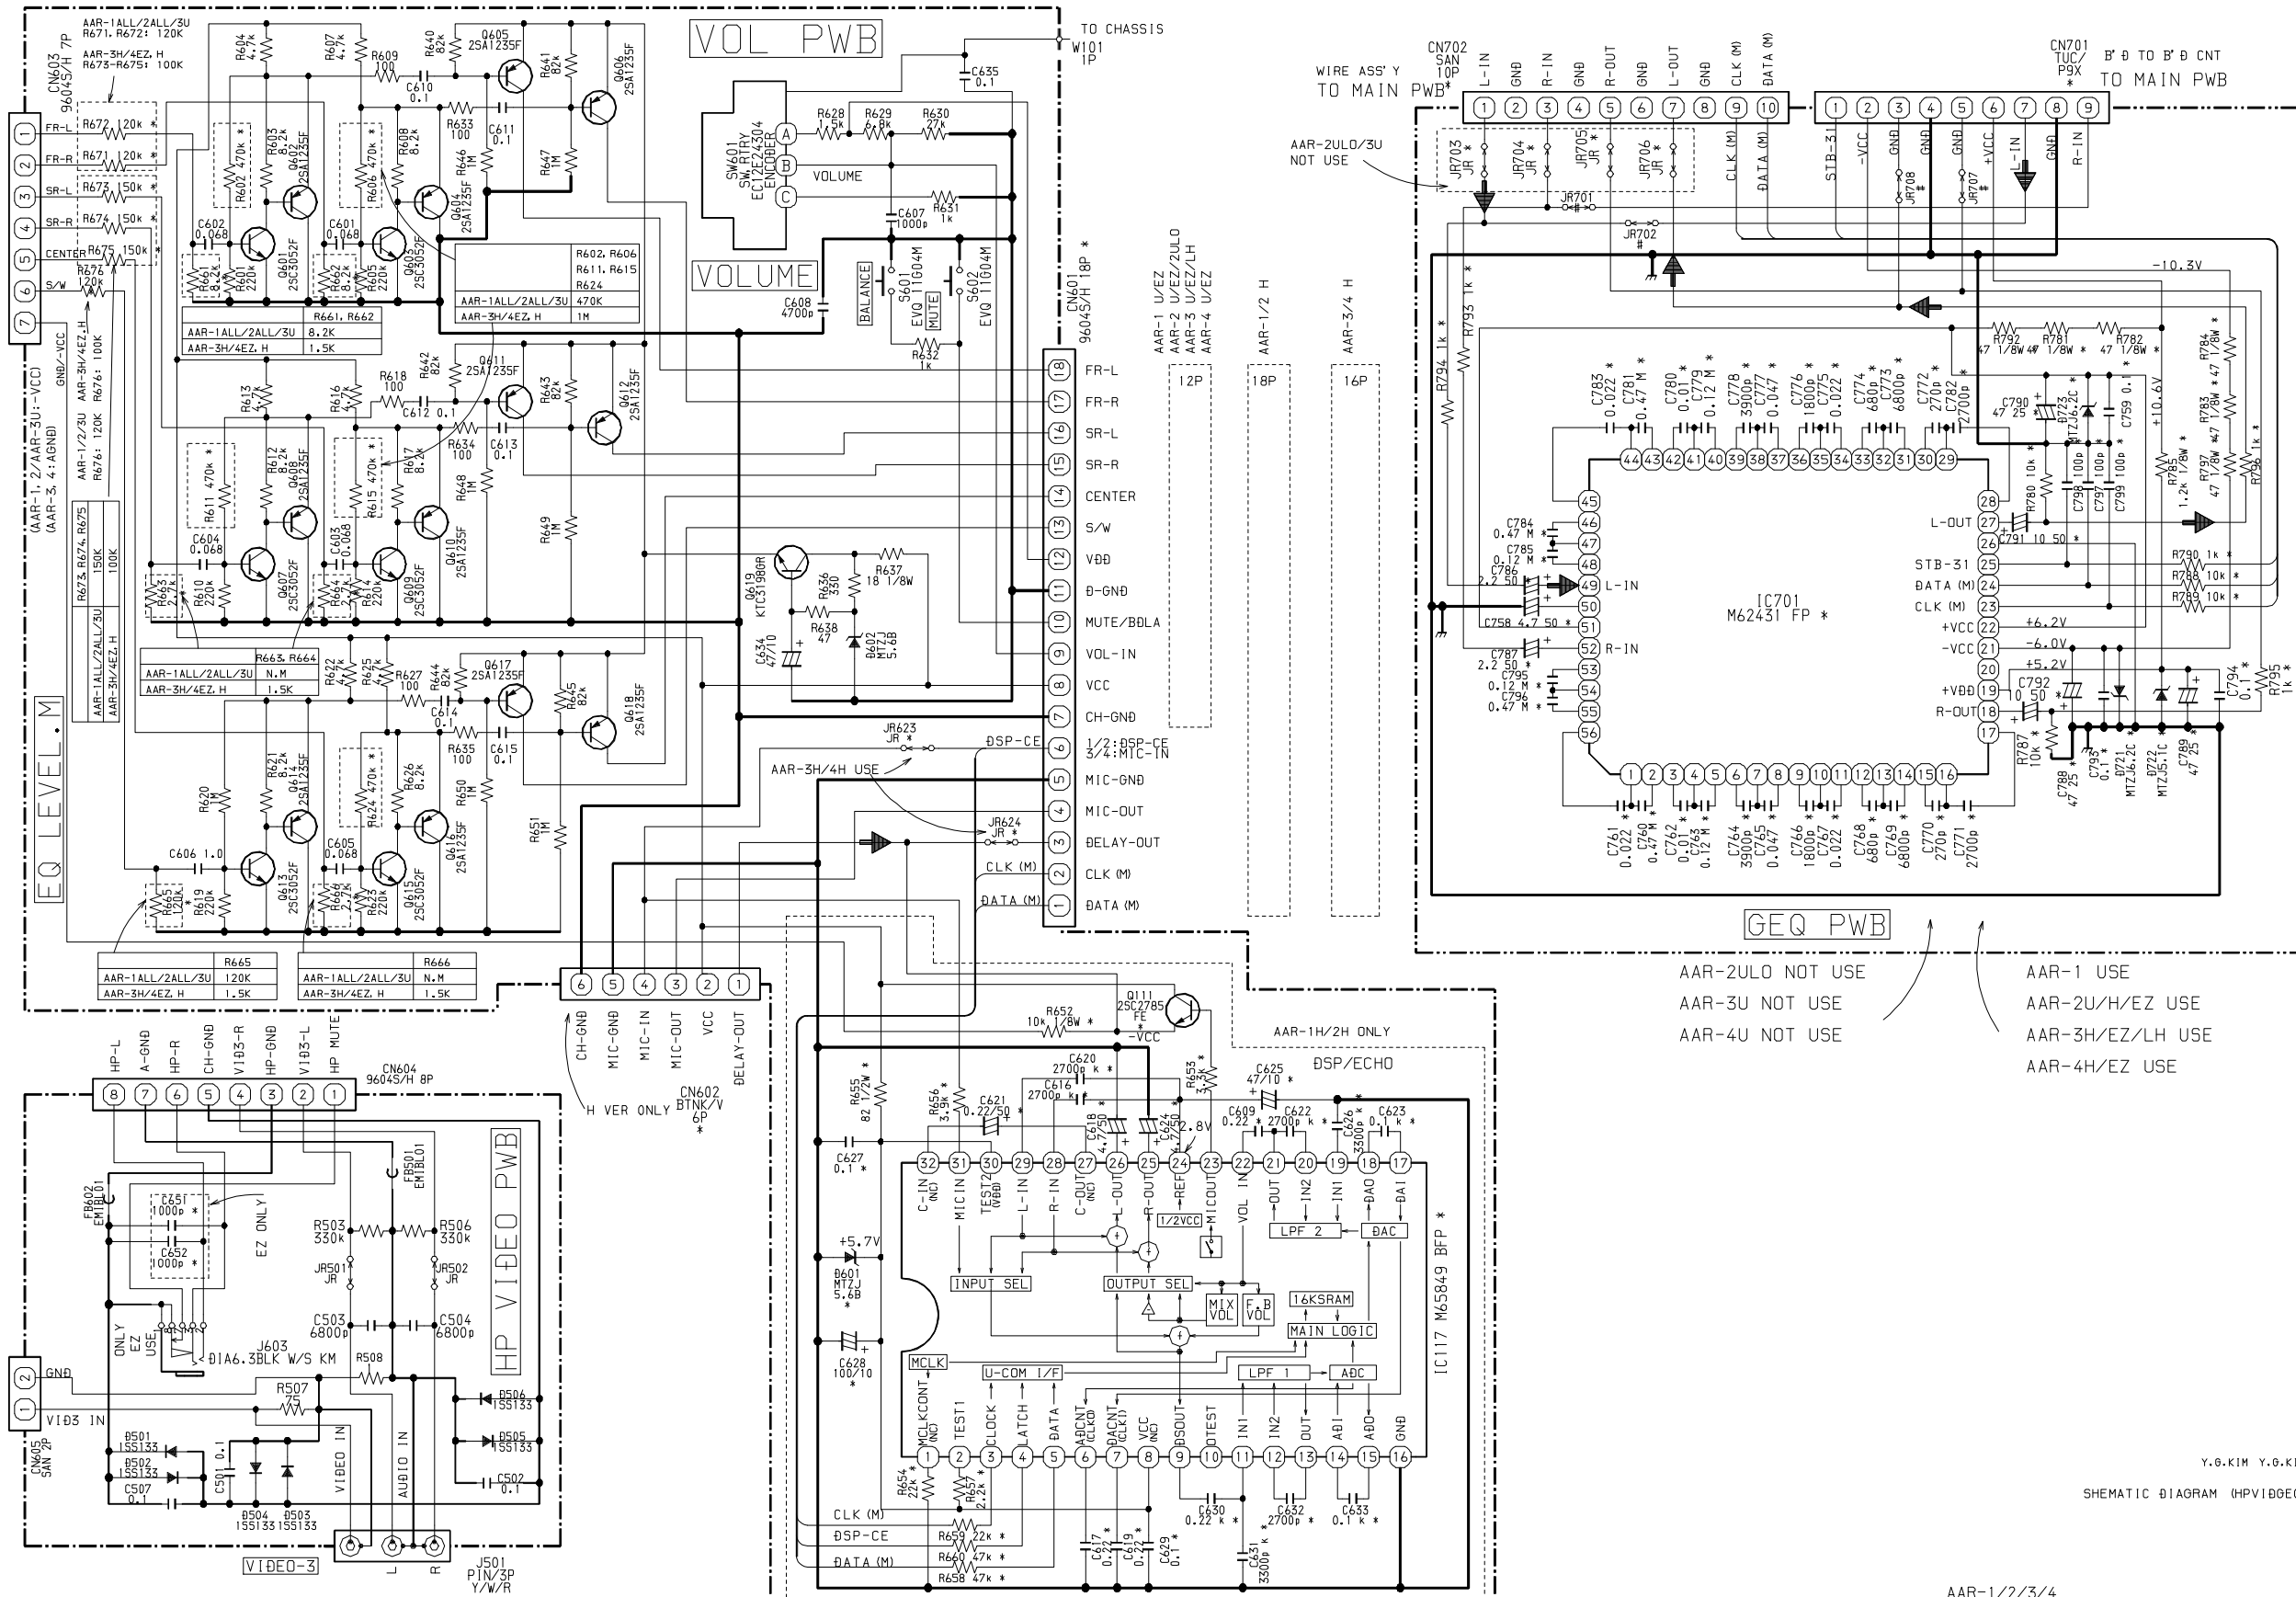


Y.G.KIM Y.G.KIM

SHEMATIC DIAGRAM (HPVIDGEQ)

AAR-1/2/3/4

26 JAN 2000

SCHEMATIC DIAGRAM – 6 (PROLOGIC)

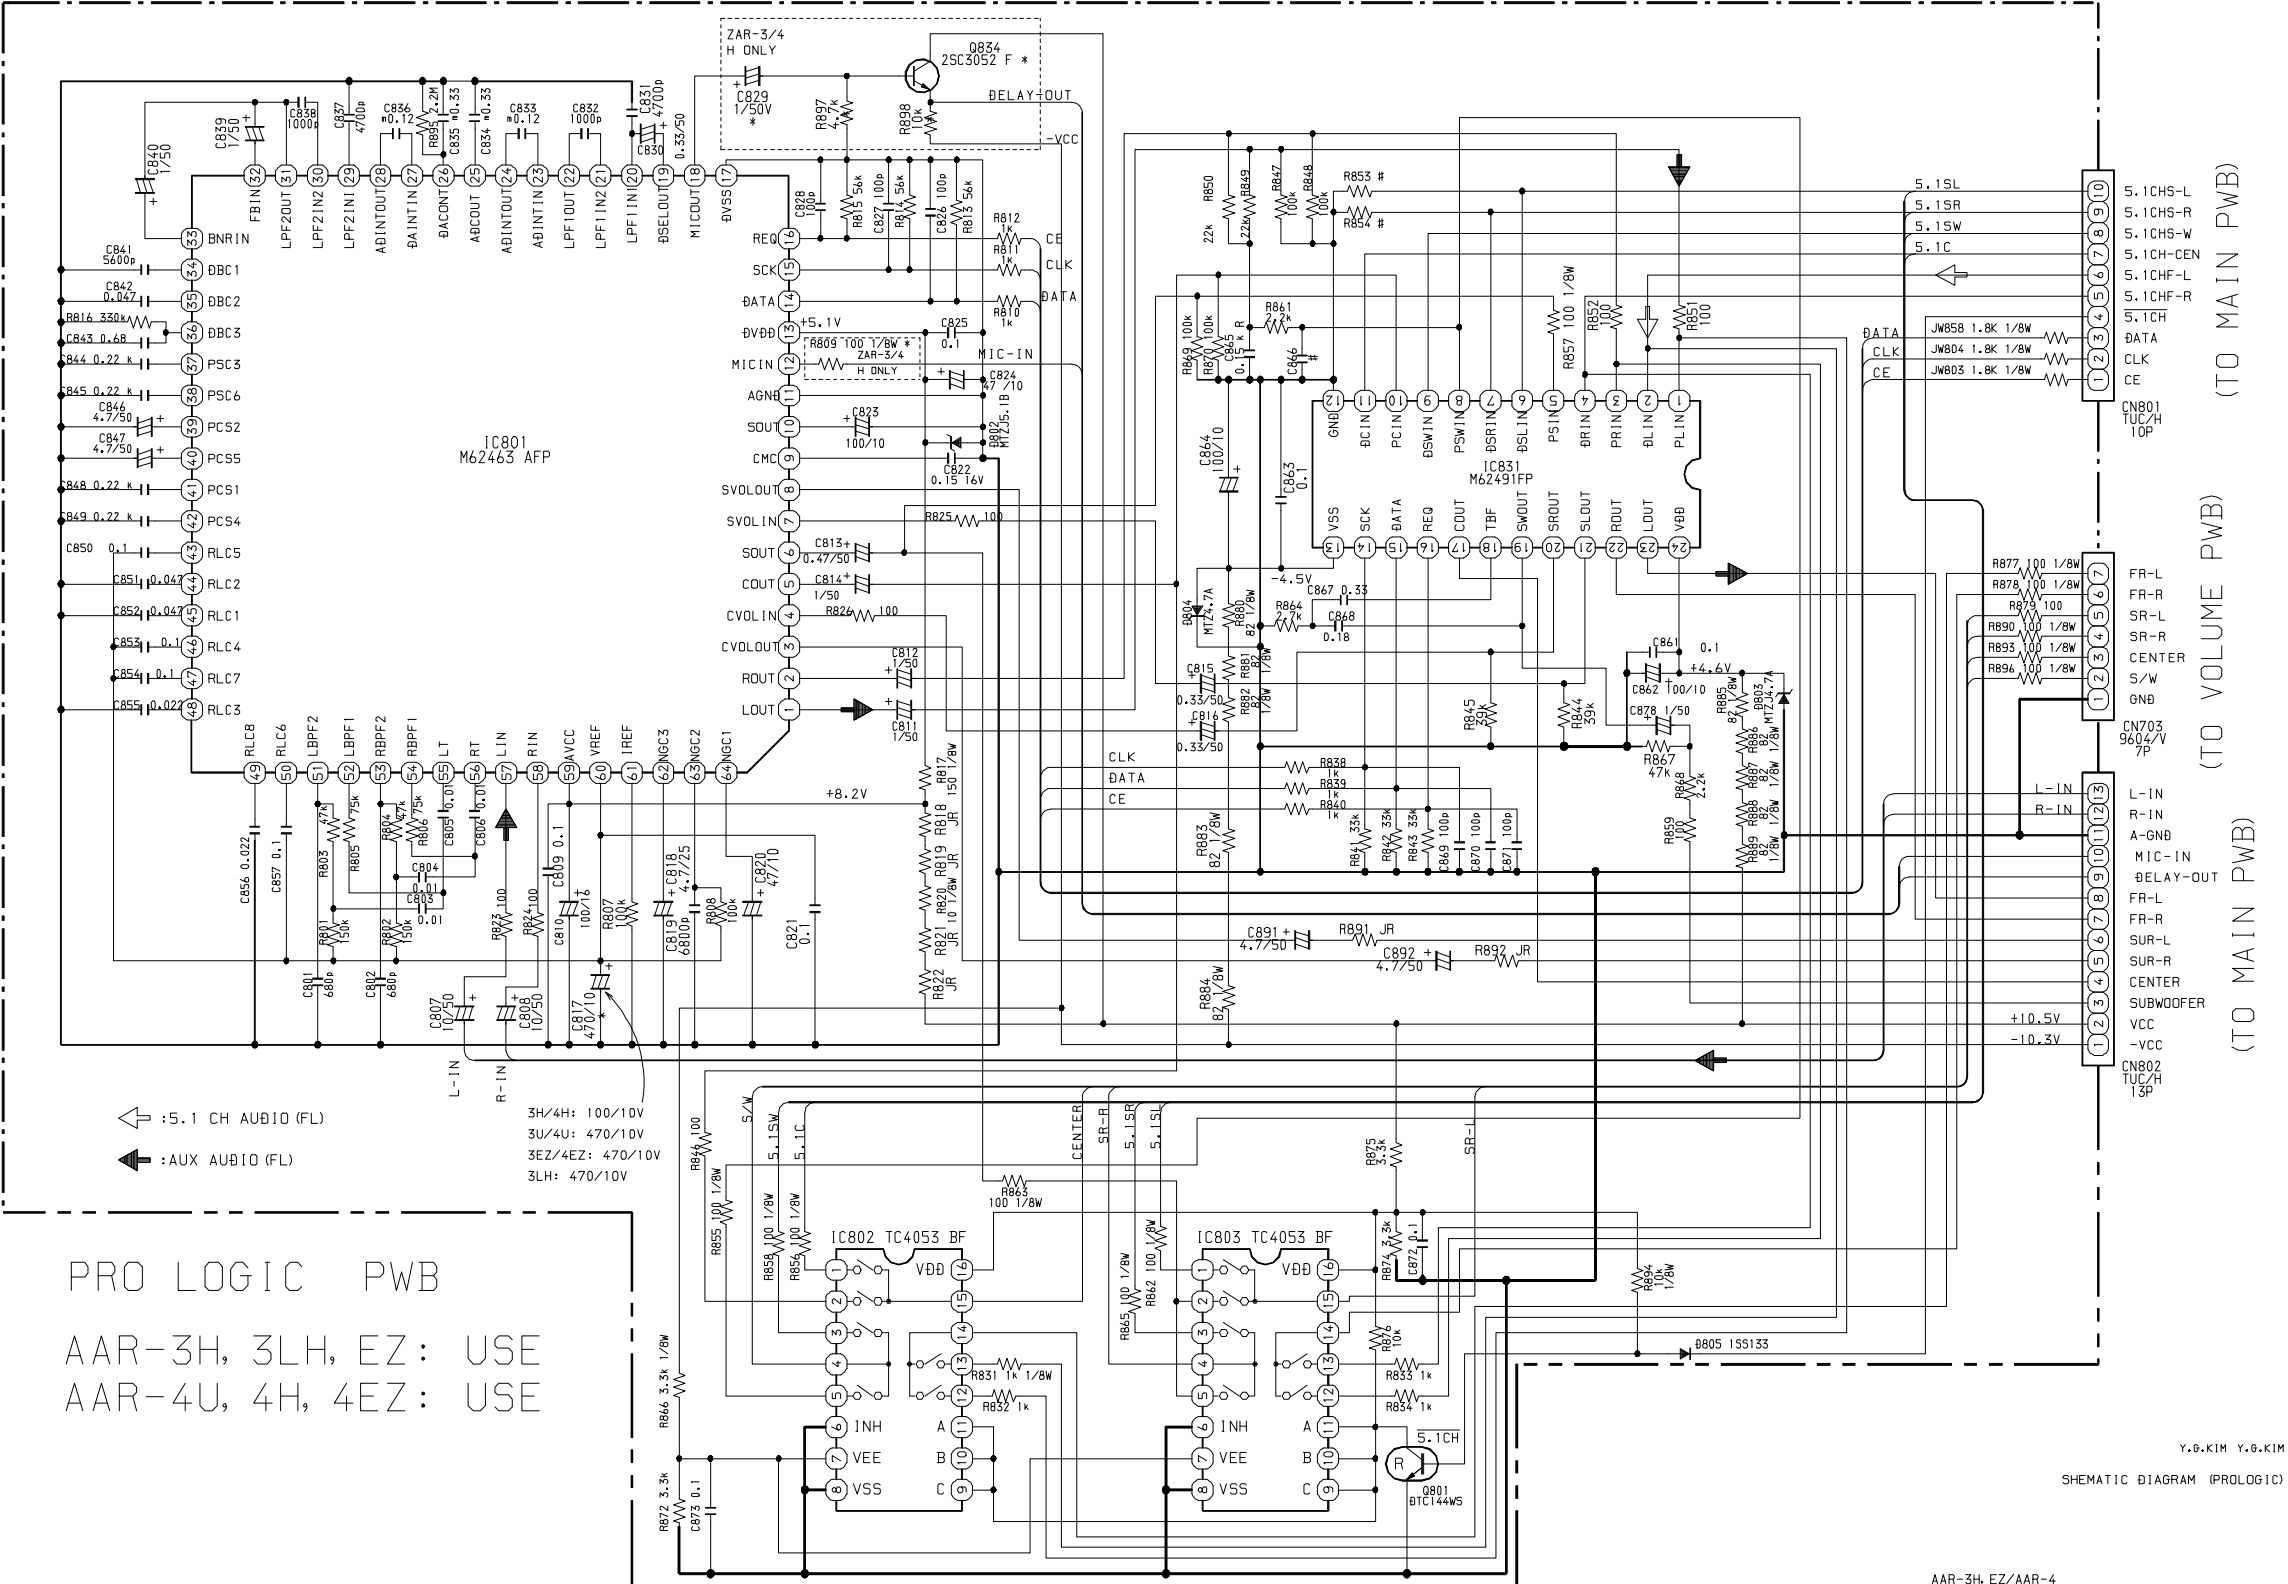

PRO LOGIC PWB
AAR-3H, 3LH, EZ: USE
AAR-4U, 4H, 4EZ: USE

T-AAR-PROLOGIC


Y.G.KIM Y.G.KIM
SCHEMATIC DIAGRAM (PROLOGIC)

AAR-3H, EZ/AAR-4

23 JAN 2000


C817	(7) 3EZ	(8) 3H	(9) 3LH	(11) 4EZ	(12) 4H	(13) 4U
C829	470/10	100/10	470/10	470/10	100/10	470/10
Q834	#	25C3052 F	#	#	25C3052 F	#
R809	#	100 1/8W	#	#	100 1/8W	#
R897	#	4.7k	#	#	4.7k	#
R898	#	10k	#	#	10k	#

SCHEMATIC DIAGRAM – 7 (SPEAKER)

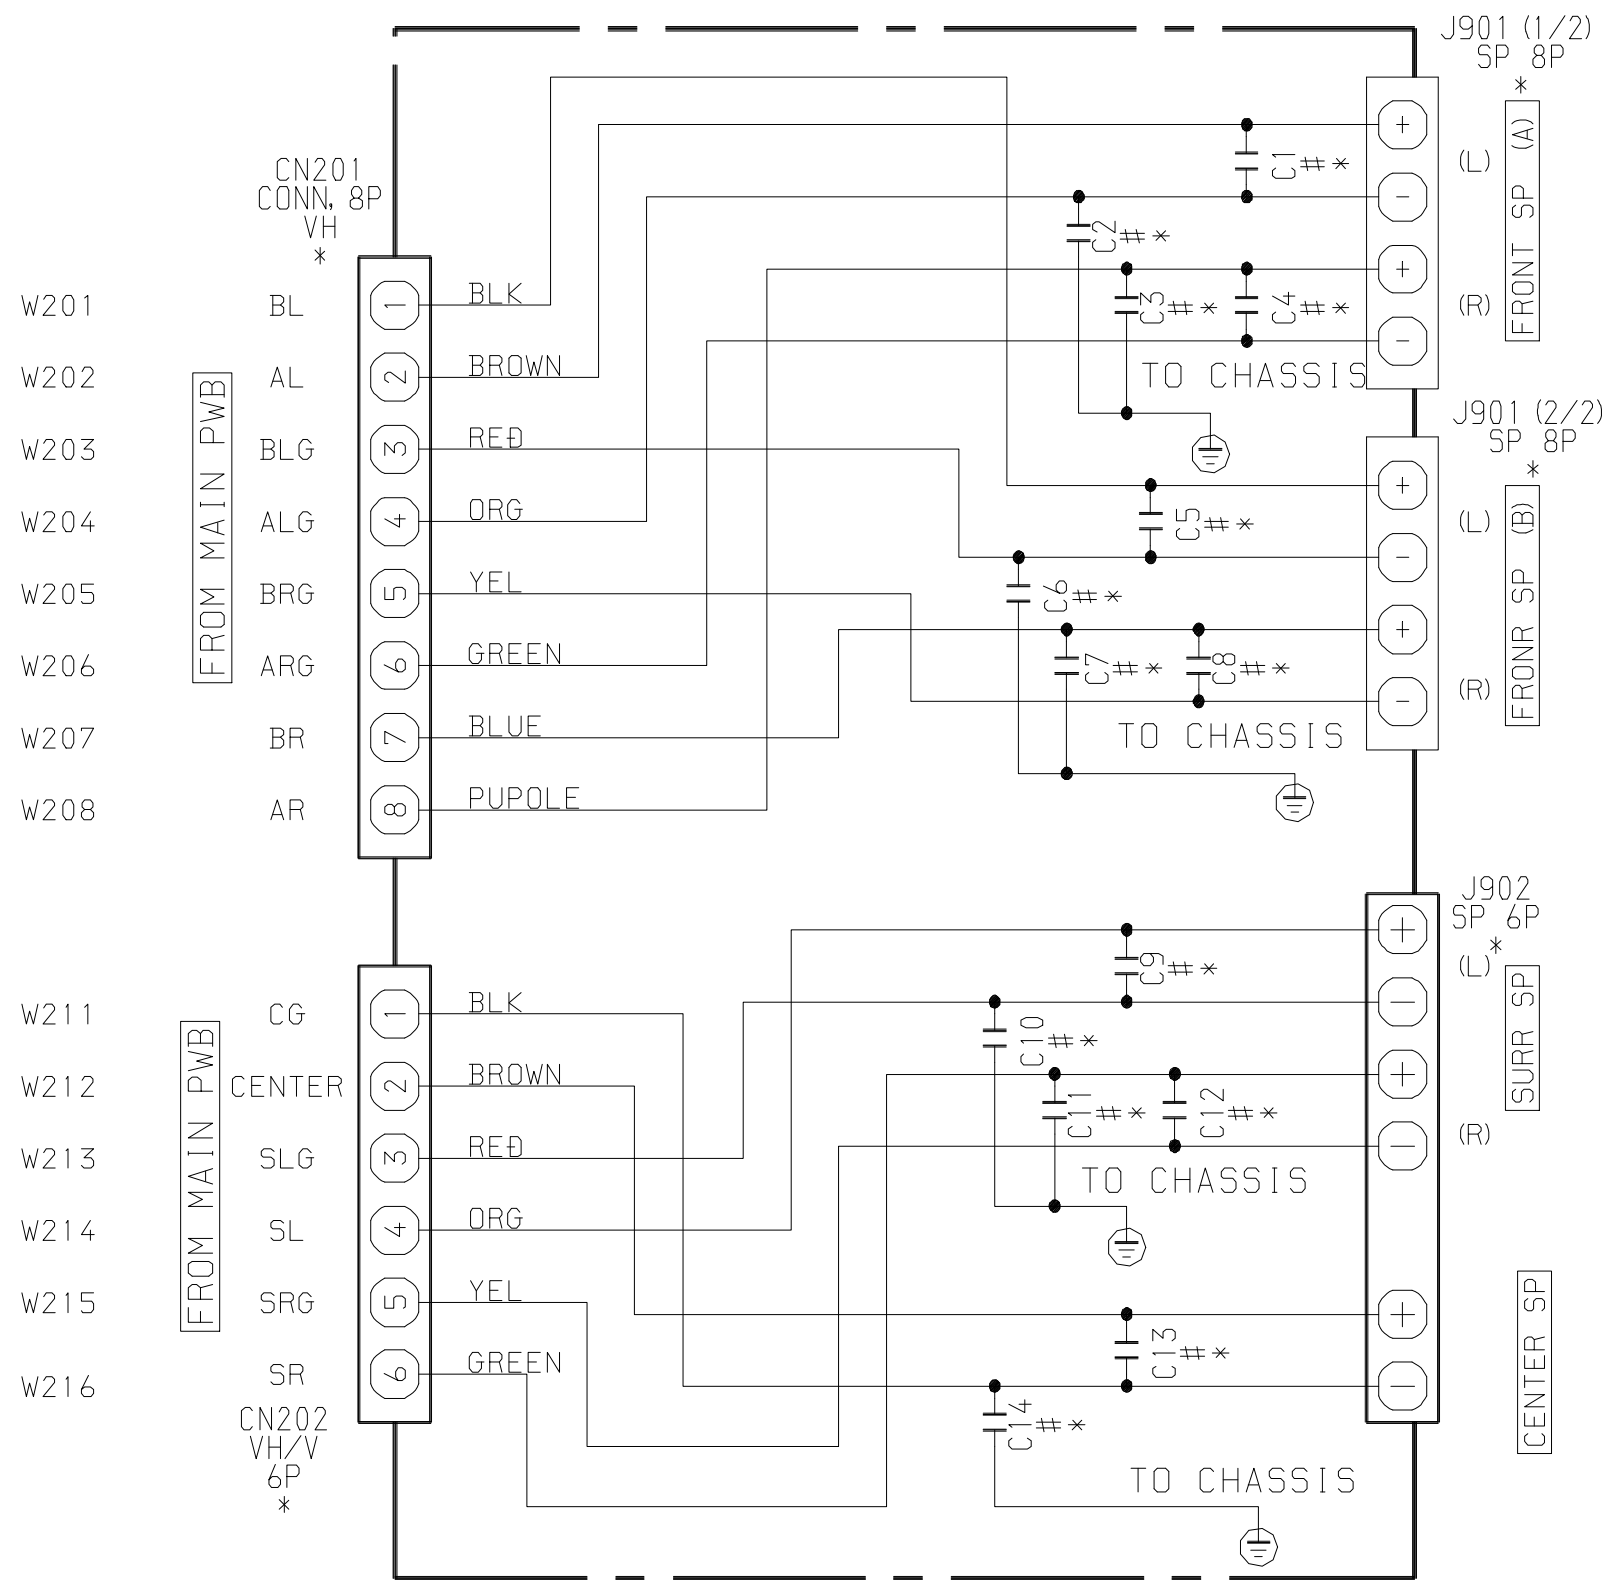

SPKR TERMINAL:	AAR-1	BANANA: U/HC SCREW: EZ	AAR-3	PUSH: U SCREW: LH BANANA: HC
	AAR-2	PUSH: ULO BANANA: U/HC SCREW: EZ/HR	AAR-4	PUSH: U SCREW: EZ BANANA: HC

SCHEMATIC DIAGRAM – 8 (AC)

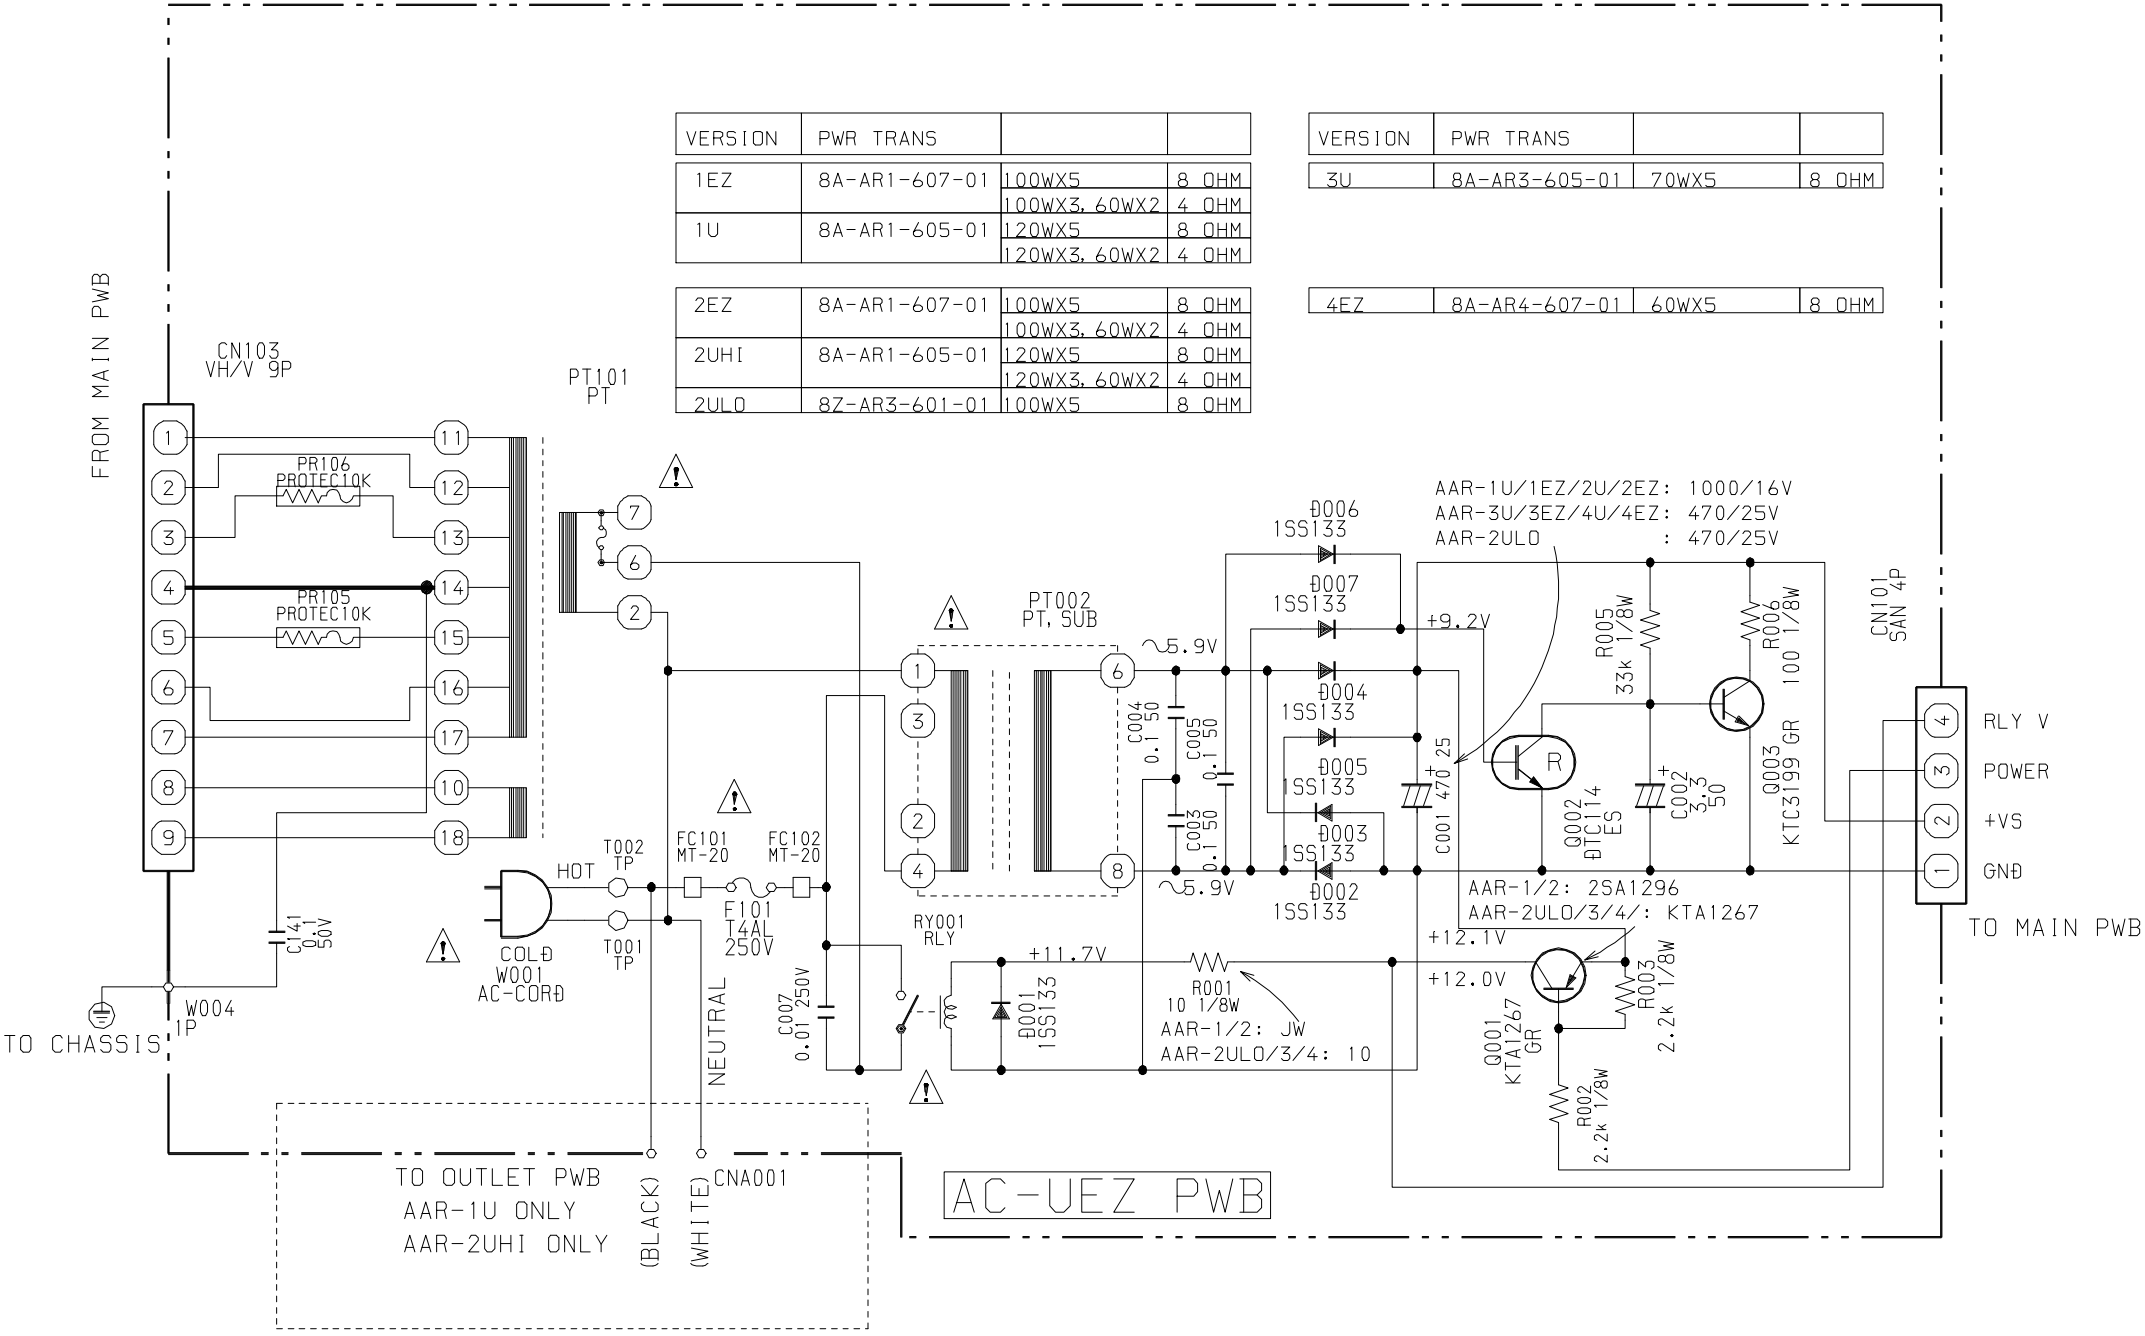

VERSION	PWR TRANS		
1EZ	8A-AR1-607-01	100WX5	8 OHM
		100WX3, 60WX2	4 OHM
1U	8A-AR1-605-01	120WX5	8 OHM
		120WX3, 60WX2	4 OHM
2EZ	8A-AR1-607-01	100WX5	8 OHM
		100WX3, 60WX2	4 OHM
2UHI	8A-AR1-605-01	120WX5	8 OHM
		120WX3, 60WX2	4 OHM
2ULO	8Z-AR3-601-01	100WX5	8 OHM

VERSION	PWR TRANS		
3U	8A-AR3-605-01	70WX5	8 OHM
4EZ	8A-AR4-607-01	60WX5	8 OHM

	PR105, PR106	PR115, PR116	F101
1EZ	PROTEC 7K	PROTEC 7K	J6.3AL/250V
1U	FUSE 7A	FUSE 7A	10A/125V
2EZ	PROTEC 7K	PROTEC 7K	J6.3AL/250V
2UHI	FUSE 7A	FUSE 7A	10A/125V
2ULO	FUSE 10A	Nothing	10A/125V
3EZ	PROTEC 10K	Nothing	J5AL/250V
3U	FUSE 10A	Nothing	10A/125V
4EZ	PROTEC 10K	Nothing	J4AL/250V
4U	FUSE 10A	Nothing	8A/125V

SUB TRANS	
U	661-01
EZ	662-01

Y.G.KIM Y.G.KIM
SCHEMATIC DIAGRAM (AC1UEZ)

AAR-1/2/3/4

23 JAN 2000