


# SHARP SERVICE MANUAL

S84Y7DV-HR300



## DVD VIDEO RECORDER

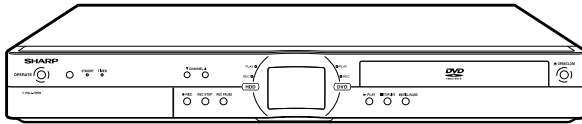

• The region number for this recorder is **2**



• The region number for this recorder is **3**



• The region number for this recorder is **4**



• The region number for this recorder is **5**

## DV-HR300(A)/ (B)/(M) DV-HR300RU DV-HR350H MODELS DV-HR350X

In the interests of user-safety (Required by safety regulations in some countries) the set should be restored to its original condition and only parts identical to those specified be used.

In this Service Manual, only the differences from DV-HR300S/H/X/DV-HR350S (S24O7DV-HR300) are described.  
Therefore, refer to the service manual of DV-HR300S/H/X/DV-HR350S (S24O7DV-HR300) for the contents, etc. not specified in this manual.

## CONTENTS

	Page
1. IMPORTANT SERVICE NOTES .....	2
2. FEATURES .....	3
3. SPECIFICATIONS .....	4
4. PART NAMES .....	6
6. OPERATION FLOWCHART AND TROUBLE SHOOTING .....	8
8. SCHEMATIC DIAGRAMS .....	10
9. PRINTED WIRING BOARD ASSEMBLIES .....	14
10. REPLACEMENT PARTS LIST / EXPLODED VIEWS .....	18
11. PACKING OF THE SET .....	39

## 1. IMPORTANT SERVICE NOTES

### Note:

For DV-HR300(A)/(B)/(M)/RU

This Recorder can be used only where the power supply is AC 110V-240V, 50/60Hz. It cannot be used elsewhere.

For DV-HR350H

This Recorder can be used only where the power supply is AC 220V-240V, 50Hz. It cannot be used elsewhere.

For DV-HR350X

This Recorder can be used only where the power supply is AC 230V-240V, 50Hz. It cannot be used elsewhere.

### CAUTION:

**USE OF CONTROLS OR ADJUSTMENTS OR PERFORMANCE OF PROCEDURES OTHER THAN THOSE SPECIFIED HEREIN MAY RESULT IN HAZARDOUS RADIATION EXPOSURE.**

**AS THE LASER BEAM USED IN THIS RECORDER IS HARMFUL TO THE EYES, DO NOT ATTEMPT TO DISASSEMBLE THE CABINET. REFER SERVICING TO QUALIFIED PERSONNEL ONLY.**

### WARNING:

**TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS EQUIPMENT TO RAIN OR MOISTURE.**

**TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, AND ANNOYING INTERFERENCE, USE THE RECOMMENDED ACCESSORIES ONLY.**

### Laser Diode Properties

Material: DVD: AlGaInP

CD: GaAlAs

Wave length: DVD: 658nm

CD: 784nm

Emission Duration: Pulse


Laser output: Max. DVD: 100mW

CD: 255mW

### Power Cord Protection

To avoid any malfunctions of the Recorder, and to protect against electric shock, fire or personal injury, please observe the following.

- Hold the plug firmly when connecting or disconnecting the AC power cord.
- Keep the AC power cord away from heating appliances.
- Never put any heavy object on the AC power cord.
- Do not attempt to repair or reconstruct the AC power cord in any way.
- This Recorder is classified as a CLASS 1 LASER product.
- The CLASS 1 LASER PRODUCT label is located on the rear cover.
- This product contains a low power laser device. To ensure continued safety do not remove any cover or attempt to gain access to the inside of the product. Refer all servicing to qualified personnel.

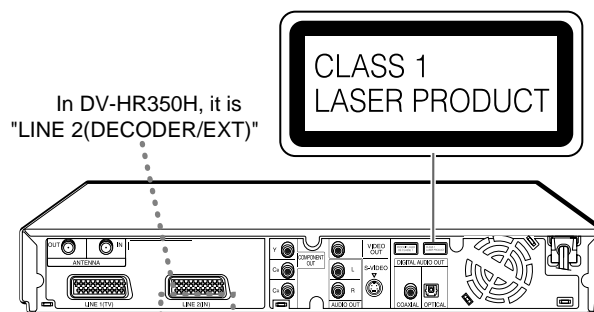

SA027WJ



DANGER: VISIBLE AND INVISIBLE LASER RADIATION WHEN OPEN. AVOID DIRECT EXPOSURE TO BEAM.

GEFAHR: SICHTBARE UND UNSICHTBARE LASERSTRAHLUNG, WENN ABDECKUNG GEÖFFNET, NICHT DEM DIREKTEN STRAHL AUSSETZEN.

DANGER: RAYONNEMENT LASER VISIBLE ET INVISIBLE EN CAS D'OUVERTURE EXPOSITION DIRECTE AU FAISCEAU DANGEREUSE.


FARA: SYNLIK OCH OSYNLIK LASERSTRÅLNING NÄR DENNA DEL ÄR ÖPPNAD. UTSÄTT DIG INTE DIREKT FÖR STRÅLEN.

VAARA: AVATTAESSA OLET ALTIINA NÄKYVÄLLE JA NÄKYMÄTTÖMÄLLE LASERSÄTEILYLLE. ÄLÄ KATSO SUORAAN SÄTEESEEN.

FARE: SYNLIK OG USYNLIK LASERSTRÅLING UTGÅR HVIS DENNE DELEN ÅPNES. UTSETT DEG IKKE FÖR DIREKTE STRÅLING.

FARE: SYNLIK OG USYNLIK LASERSTRÅLING VED ÅBNING. UNDGÅ DIREKTE UDSÆTTELSE FÖR STRÅLING.

注意:ここを開くと可視レーザー光及び不可視レーザー光が出ます。ビームを直接見たり触れたりしないこと。

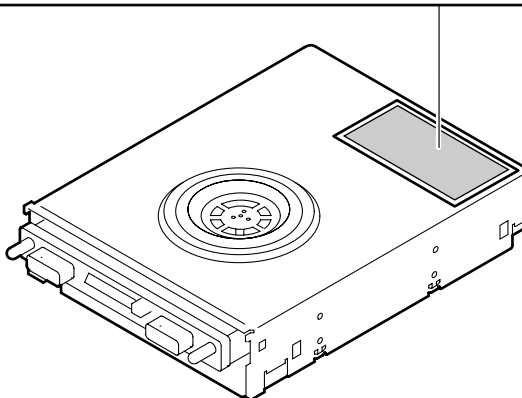

## 2. FEATURES

### 1 DVD-RW/-R recording/playback with outstanding compatibility

- This Recorder is compatible with digital recording on rewritable DVD-RW discs and one-time recordable DVD-R discs. It has two recording formats: "VR (Video Recording) mode" which has a wealth of editing functions, and "Video mode" which can be played back with existing DVD players. This lets you enjoy recording and dubbing to suit your purpose.

### 2 High picture quality design (Used in all hard disc and DVD modes)

- VBR (Variable Bit Rate) recording**  
Constantly maintains optimal high picture quality by varying the bit rate (amount of video data) for each scene depending on the video content (e.g. whether movement is fast or slow).

### 3 A variety of hard disc ↔ DVD dubbing functions

- High speed dubbing<sup>\*1</sup>**  
Enables high speed dubbing from hard disc to DVD so you can enjoy creating your own video library.  
<sup>\*1</sup> For high speed dubbing, use discs conforming to DVDRW Ver. 1.1/2X or DVD-R Ver. 2.0/4X.
- Rate conversion dubbing**  
The mode can be selected from 32 levels just like recording mode. This enables recording at the optimal picture quality, given the remaining empty space on the disc.
- Exact dubbing**  
This automatically adjusts to the optimal record mode so that the material is dubbed exactly into the remaining area on the disc.  
The time normally required for a program of an hour on High Speed Dubbing to a double speed compatible disc

Recording Mode	Speed	Time Required
FINE	Approx. 2 X	Approx. 30 min
SP	Approx. 4 X	Approx. 15 min
LP	Approx. 8 X	Approx. 7.5 min
EP	Approx. 12 X	Approx. 5 min

### 4 "Time Shift Viewing", "Chasing Playback" and "Simultaneous Recording/Playback" —functions you can only get with a hard disc

- Time shift viewing**  
While you are watching a program, the phone rings.... At times like this, you can pause the program being broadcast by pressing a button, and then watch the rest of the program at your leisure after you finish your phone call. You can also switch to the current broadcast scene just by pressing STOP/LIVE button.
- Chasing playback**  
You return home earlier than expected while timer recording is in progress.... At times like this, you don't have to wait for recording to end. You can immediately view the program from the beginning.

- Simultaneous recording/playback**  
Even while recording to the hard disc, you can enjoy playback of a DVD, or programs already recorded on hard disc. You don't have to wait for recording to finish.

### 5 Comprehensive editing functions

(Only titles recorded on the hard disc or in VR mode on DVD-RW can be edited.)

- Play list edit**  
This lets you gather only the needed parts (i.e. a "Play List") from a recorded original video (title).  
You can rearrange scenes and combine them with other scenes, or rearrange titles. This is convenient when you want to dub and save only the necessary scenes and titles.
- Chapter edit**  
This lets you divide a title into chapter units during recording/playback or using the edit screen. After dividing, a list of recordings (thumbnails) can be displayed in chapter units, so you can copy, erase or dub to the play list in chapter units.
- Erase Scene**  
This lets you erase unnecessary scenes. This is convenient when you want to cut out the commercials in a recorded program before dubbing.
- Batch erasing of titles/chapters**  
Titles and chapters which become unnecessary after editing can be batch erased by selecting them from the list of recordings (thumbnails).
- Edit undo function<sup>\*2</sup>**  
If you mistakenly erase data during editing, this function lets you restore it to its immediately preceding state, just like "Undo" on a PC, so you can edit worry-free.  
<sup>\*2</sup> Edit undo can only be used once. It only works when "UNDO" is assigned to a coloured button (green) displayed on the screen.

### 6 Simple operation and userfriendly design using a new remote control

- START MENU**  
Press START MENU button on the remote control, and display the list of main functions on the screen.  
After that, you can operate by using the Cursor buttons and SET/ENTER button on the remote control, so this Recorder can be used easily even by a person who is unfamiliar with operation.
- Coloured buttons**  
The remote control has coloured buttons with four different colours. Functions are displayed in four different colours on the screen, and the Recorder can be operated by directly designating these functions.
- Luminous buttons**  
Luminous buttons are used for key control buttons on the remote control so they are easy to see in the dark.

### 7 Digital connection (i.LINK) with a digital video/audio source equipment

- The DV IN terminal allows you to uptake, edit and store material from a digital camcorder equipped with a DV terminal.

**8 MP3 file playback**

- This Recorder allows you to playback MP3 files recorded on CD-RW/R.

**9 SHOW VIEW<sup>\*3</sup> System (DV-HR300RU)**

**G-CODE<sup>\*4</sup> System (DV-HR300(A)/(B)/(M)/HR350H)**

**G-CODE<sup>\*5</sup> System (DV-HR350X)**

**VIDEO Plus+<sup>\*6</sup> (DV-HR350H)**

- The SHOWVIEW / G-CODE/VIDEO Plus+ system allows you to programme your Recorder for timer recording simply by inputting the SHOWVIEW /G-CODE/VIDEO Plus+ programming number. The SHOWVIEW /G-CODE/VIDEO Plus+ numbers are listed in most newspapers, television guides, and local CATV listings. Simply by inputting this SHOWVIEW / G-CODE/VIDEO Plus+ number, you can programme your Recorder for timer recording, eliminating the need to input programme start time, stop time, channel,

date and other information which is necessary for ordinary timer programming.

<sup>\*3</sup> SHOWVIEW is a registered trademark of Gemstar Development Corporation. The SHOWVIEW system is manufactured under licence from Gemstar Development Corporation.

<sup>\*4</sup> G-CODE is at least a trademark of Gemstar Development Corporation. G-CODE is registered in at least the following countries: Australia, China, Hong Kong, Japan, New Zealand, South Korea, Taiwan and Singapore. The G-CODE system is manufactured under licence from Gemstar Development Corporation.

<sup>\*5</sup> G-CODE is a registered trademark of Gemstar Development Corporation. The G-CODE system is manufactured under licence from Gemstar Development Corporation.

<sup>\*6</sup> VIDEO Plus+ and PlusCocd are registered trademarks of Gemstar Development Corporation. The VIDEO Plus+ system is manufactured under licence from Gemstar Development Corporation.

## 3. SPECIFICATIONS

### General

HDD capacity:	120 GB (DV-HR350H/X) 80 GB (DV-HR300(A)/(B)/(M)/RU)
Power supply:	AC 110-240 V, 50/60 Hz (DV-HR300(A)/(B)/(M)/RU) AC 220-240 V, 50 Hz (DV-HR350H) AC 230-240 V, 50 Hz (DV-HR350X)
Power consumption (Normal):	36 W
Power consumption (Standby):	1 W
Dimensions:	Approx. 430 mm x 59 mm x 323 mm (W x H x D)
Weight:	Approx. 5.1 kg
Operating temperature	5°C to 35°C
Storage temperature:	–20°C to 55°C
Operating humidity:	10% to 80% (no condensation)
TV systems:	PAL system, 625 lines, 50 fields

### Recording

Recordable disc media:	DVD-RW, DVD-R
Recording system (HDD):	Video: MPEG Audio: MPEG (2ch)/Linear PCM (FINE/MN32 mode only)
Recording system (DVD-RW/R):	Video: DVD-Video Recording (VR mode) DVD-VIDEO (Video mode) Audio: MPEG (2ch)/Linear PCM (FINE/MN32 mode only)
Recording time (Hard disc):	FINE (High picture quality): Approx. 30 hours (DV-HR350H/X) Approx. 20 hours (DV-HR300(A)/(B)/(M)/RU) SP (Standard): Approx. 50 hours (DV-HR350H/X) Approx. 33 hours (DV-HR300(A)/(B)/(M)/RU) LP (2X): Approx. 100 hours (DV-HR350H/X) Approx. 67 hours (DV-HR300(A)/(B)/(M)/RU) EP (3X): Approx. 150 hours (DV-HR350H/X) Approx. 100 hours (DV-HR300(A)/(B)/(M)/RU) MN (Manual): 32 levels between FINE and EP (However, the maximum continuous recording time is 12 hours.)
Recording time (With 4.7GB DVD-RW/R):	FINE (High picture quality): Approx. 1 hour SP (Standard): Approx. 2 hours LP (2X): Approx. 4 hours EP (3X): Approx. 6 hours MN (Manual): 32 levels between FINE and EP

### Playback

Playable discs: DVD Video, DVD-R/RW, Audio CD (CD-DA), Video CD, CD-R/ RW (CD-DA, Video CD format, MP3 file format)

### Tuner

Channel coverage: DV-HR300(A)/(B)/(M)/RU/DV-HR350H:

VHF 1A-E12  
UHF E21-E69  
CATV S1-S41

DV-HR350X:

VHF AU0-13  
UHF AU28-69

### Timer

Programs: 16 programs/1 year

Clock: Quartz lock (24-hour digital display)

Memory backup: Approx. 1 hour

### Input/Output

VHF/UHF antenna input/

output terminal: 75 $\Omega$  (F-shape connector)

Video input: LINE1, LINE2 (rear), 3 (front)

Input level: 1 Vp-p (75 $\Omega$ )

SCARTs: 21pin

Jacks: RCA jack

Video output:

Output level: 1 Vp-p (75 $\Omega$ )

SCARTs: 21pin

Jacks: RCA jack

S-Video input: LINE1, LINE2 (rear), 3 (front)

Y-Input level: 1 Vp-p (75 $\Omega$ )

C-Input level: 0.3 Vp-p (75 $\Omega$ )

SCARTs: 21pin

Jacks: 4 pin mini DIN

S-Video output:

Y-Output level: 1 Vp-p (75 $\Omega$ )

C-Output level: 0.3 Vp-p (75 $\Omega$ )

SCARTs (Only LINE1): 21pin

Jacks: 4 pin mini DIN

Component video output:

Output level: Y: 1 Vp-p (75 $\Omega$ )

C<sub>B</sub>, C<sub>R</sub>: 0.7 Vp-p (75 $\Omega$ )

Jacks: RCA jack

Audio input: Input 1, 2 (rear), 3 (front) L/R

Input level: 2 V rms (Input impedance: more than 22 k $\Omega$ )

Jacks: RCA jack

Audio output: L/R

Input level: 2 V rms (Output impedance: less than 1.5 k $\Omega$ )

Jack: RCA jack

Digital audio optical output:

Terminal: Square Optical terminal

Digital audio coaxial output:

Jack: RCA jack

DV input:

Terminal: 4 pin (i.LINK/IEEE 1394 standard)

### LASER Specification

Wave length: DVD: 658 nm

CD: 784 nm


Laser power: DVD: 100 mW

CD: 225 mW

Specifications are subject to change without notice.


## 4. PART NAMES

### Main Unit (Front)

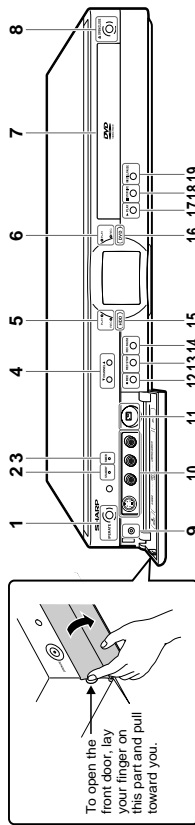


- 1 OPERATE
- 2 STANDBY indicator
- 3 TIMER indicator
- 4 CHANNEL  $\blacktriangledown/\blacktriangle$
- 5 PLAY/REC indicators (for HDD)
- 6 PLAY/REC indicators (for DVD)
- 7 Disc tray
- 8 OPEN/CLOSE
- 9 RESET
- 10 LINE IN 3
  - AUDIO Input jacks
  - VIDEO Input jack
  - S-VIDEO Input jack
- 11 DV IN terminal
- 12 ● REC
- 13 REC STOP
- 14 REC PAUSE
- 15 HDD
- 16 DVD
- 17 ► PLAY
- 18 ■ STOP/LIVE
- 19 ■ STILL/PAUSE

### Front Panel Display



- 1 PDC/VPS indicator
- 2 Disc Remaining Time indicator
- 3 Title indicator
- 4 Dubbing indicator
- 5 Recording Mode indicator
- 6 DVD indicator
- 7 Decoder indicator
- 8 Chapter indicator
- 9 Information Display
- 10 Tamper Proof indicator
- 11 Simple Recording Timer indicator

### Main Unit (Rear)

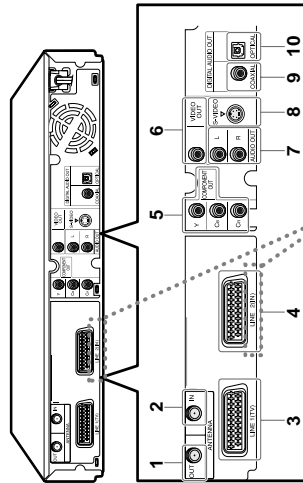


- 1 ANTENNA OUT jack
- 2 ANTENNA IN jack
- 3 21-pin Euro-SCART (LINE 1 (TV))
- 4 21-pin Euro-SCART (LINE 2 (IN))
- 5 COMPONENT Video Output jacks
- 6 VIDEO Output jack
- 7 AUDIO Output jacks
- 8 S-VIDEO Output jack
- 9 DIGITAL AUDIO Output COAXIAL jack
- 10 DIGITAL AUDIO Output OPTICAL terminal


In DV-HR350H, it is written as "LINE 2 (DECODER/EXT)"

### Remote Control Unit

In DV-HR300(A)/(B)/(M) /DV-HR350X, it is "G-CODE".  
In DV-HR350H, it is "VIDEO Plus+".

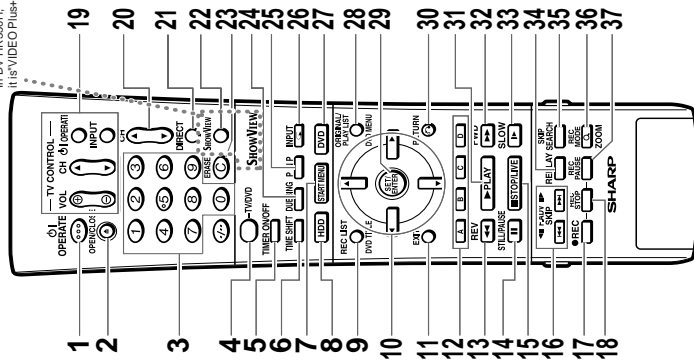

- 1 OPERATE
- 2 ▲ OPEN/CLOSE
- 3 Number buttons
- 4 TV/DVD
- 5 TIMER ON/OFF
- 6 TIME SHIFT
- 7\* START MENU
- 8\* HDD
- 9\* REC LIST/DVD TITLE
- 10\* Cursor buttons ( $\blacktriangle/\blacktriangledown/\blacktriangleleft/\blacktriangleright$ )
- 11\* EXIT
- 12 Blue (A), Red (B), Green (C), Yellow (D)
- 13\* ◀◀ REV
- 14\* ■ STILL/PAUSE
- 15\* ■ STOP/LIVE
- 16 ◀◀ FADV ■▶, ■◀◀ SKIP ▶▶
- 17 ● REC
- 18 REC STOP
- 19 TV CONTROL buttons
- 20 CH ▲/▼
- 21 DIRECT
- 22 SHOWVIEW
- 23 ERASE
- 24 DUBBING
- 25 P IN P
- 26 INPUT/↵ Repeat
- 27\* DVD
- 28\* ORIGINAL/PLAY LIST / DVD MENU
- 29\* SET/ENTER
- 30\* ⏮ RETURN
- 31\* ▶ PLAY
- 32\* ▶▶ FWD
- 33\* ◀ SLOW
- 34 REPLAY
- 35 SKIP SEARCH
- 36 REC MODE / Q ZOOM
- 37 REC PAUSE
- 38 ANGLE
- 39 FUNCTION
- 40 DIRECT REC TV
- 41 CHAPTER MARK / RGB OFF
- 42 AUDIO
- 43 SUBTITLE
- 44 DISPLAY / BACKLIGHT
- 45 ON SCREEN
- 46 TAMPER PROOF

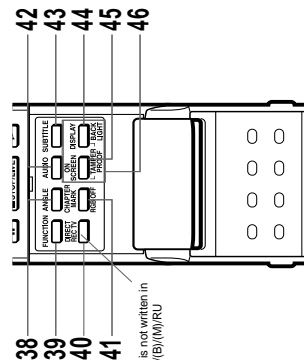


The character is not written in DV-HR300(A)/(B)/(M)/RU /DV-HR350X.




#### NOTE

- Buttons marked with \* are made of luminous rubber for easy visibility even in the dark. (The degree of brightness will decrease as time passes.)



## Loading the Batteries


- 1 While pressing  down, slide the battery cover in the direction of the arrow
- 2 Load the batteries.  
Load the two R-03 size batteries ("AAA" size, UM/SUM-4) supplied with the remote control unit. Make sure that the battery poles  $\oplus$  and  $\ominus$  are positioned as indicated.
- 3 Slide the battery cover in the direction of the arrow until it clicks.



### NOTE


- Do not subject the remote control unit to shock, water or excessive humidity.
- The remote control unit may not function if the Recorder's remote sensor is in direct sunlight or any other strong light.
- Incorrect use of batteries may cause them to leak or burst. Read the battery warnings and use the batteries properly.
- Do not mix old and new batteries, or mix different brands.
- Remove the batteries if you will not use the remote control unit for an extended period of time.

## Operating range of remote control


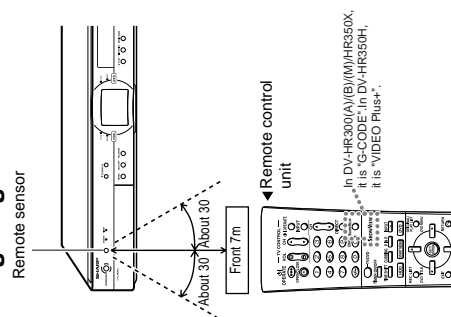


6. OPERATION FLOWCHART AND TROUBLE SHOOTING


FLOW CHART No.15

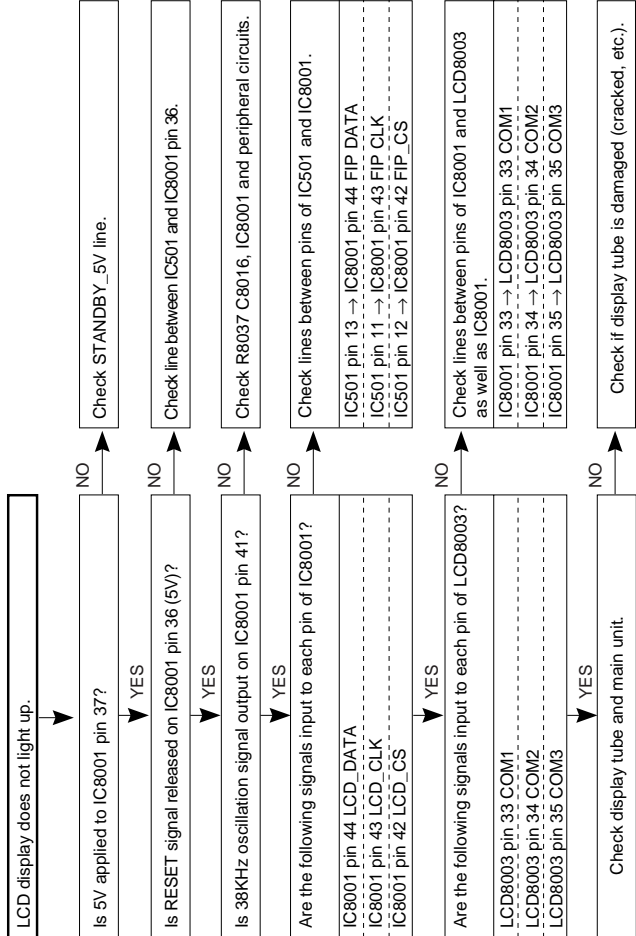


FLOW CHART No.16

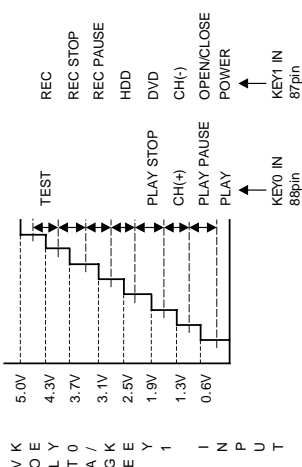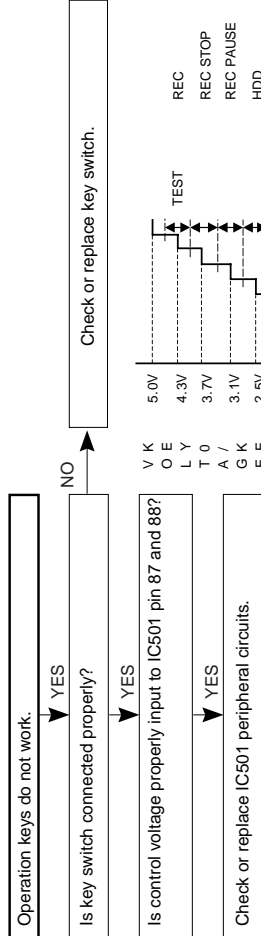


FLOW CHART No.17

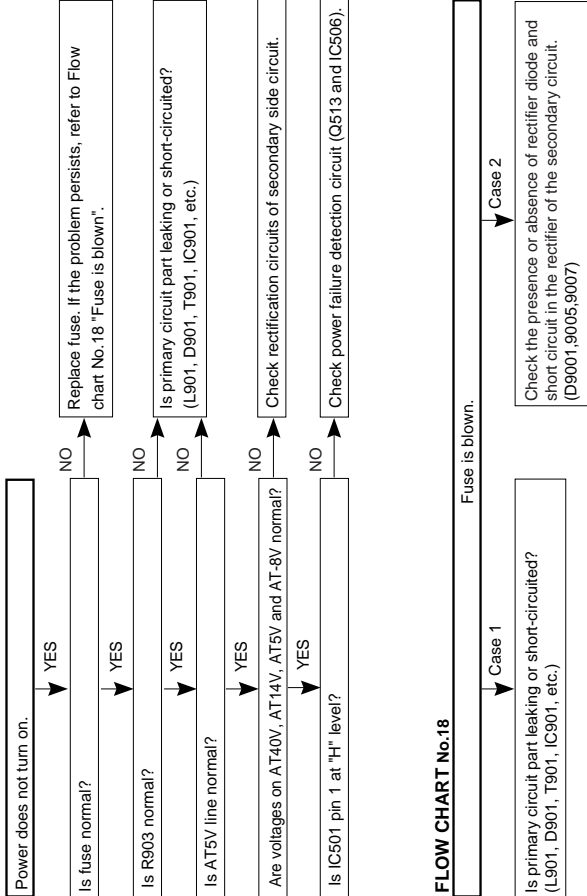

FLOW CHART No.18

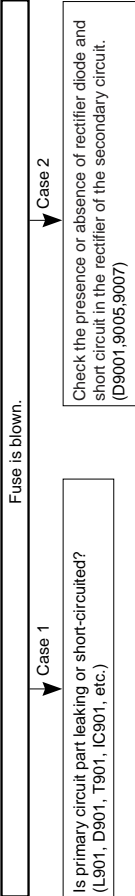

FLOW CHART No.19

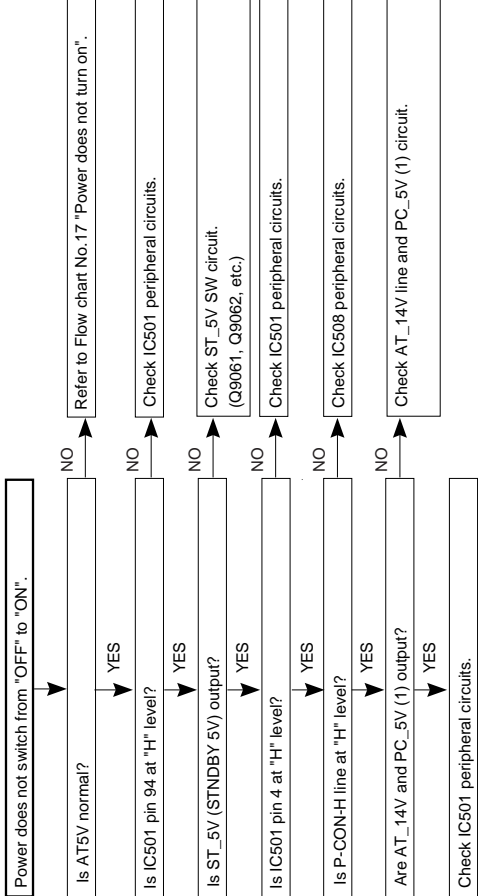




**ROM jumper setting for Micon RH-iXB119WJZZQ (DV-HR300(A)/(B)/(M)/RU/HR350X)  
RH-iXA841WJN2Q (DV-HR350H)**


Jumper Name	Jumper #	HR300 (A)/(B)/(M)	HR300RU	HR350X	HR350H
Colour 0	JP00:	1	1	1	0
Colour 1	JP01:	0	0	0	0
VPS/PDC	JP02:	1	1	1	1
OLD AV SWITCH	JP03:	0	0	0	0
Low Power	JP04:	1	1	0	1
HIGH SPEED	JP05:	0	0	0	0
System 0	JP06:	0	0	0	0
System 1	JP07:	1	1	0	0
Tuner 0	JP08:	0	0	1	1
Tuner 1	JP09:	1	1	0	1
Tuner 2	JP10:	1	1	0	0
RF_Out_Setting_off	JP11:	1	1	1	1
DUAL SCART	JP12:	1	1	1	1
Front_AV	JP13:	1	1	1	1
LP	JP14:	0	0	0	1
EP	JP15:	0	0	0	0
G-CODE 0	JP16:	0	1	1	1
G-CODE 1	JP17:	1	0	1	1
NICAM	JP18:	1	1	1	1
IGR	JP19:	1	1	1	1
SURROUND	JP20:	0	0	0	0
DECODER	JP21:	1	1	1	1
SORT (A_CLOCK)	JP22:	1	1	1	1
HiFi	JP23:	0	0	0	1
AV_LINK/16:9	JP24:	0	0	0	1
SAT_CTL	JP25:	0	0	0	0
POST_CODE	JP26:	0	0	0	1
DNR	JP27:	0	0	0	0
R/C 1-2	JP28:	1	1	1	1
POS184	JP29:	1	1	1	1
SAT_BUILT_IN	JP30:	0	0	1	1
GAMMA	JP31:	0	0	0	0
HEAD 0	JP32:	0	0	0	1
HEAD 1	JP33:	0	0	0	1
HEAD 2	JP34:	0	0	0	1
NTSC SKEW	JP35:	0	0	0	1
NTSC_PB	JP36:	0	0	0	1
SQPB	JP37:	0	0	0	1
Slow_Atr_Off	JP38:	0	0	0	1
AUDIO_INSERT	JP39:	0	0	0	1
Total Hex		59E3E60300	59E3D60300	5193E60700	41B7FE57FF

8. SCHEMATIC DIAGRAMS


8-13. TUNER CIRCUIT SCHEMATIC DIAGRAM (DV-HR300(A)/(B)/(M)/RU)

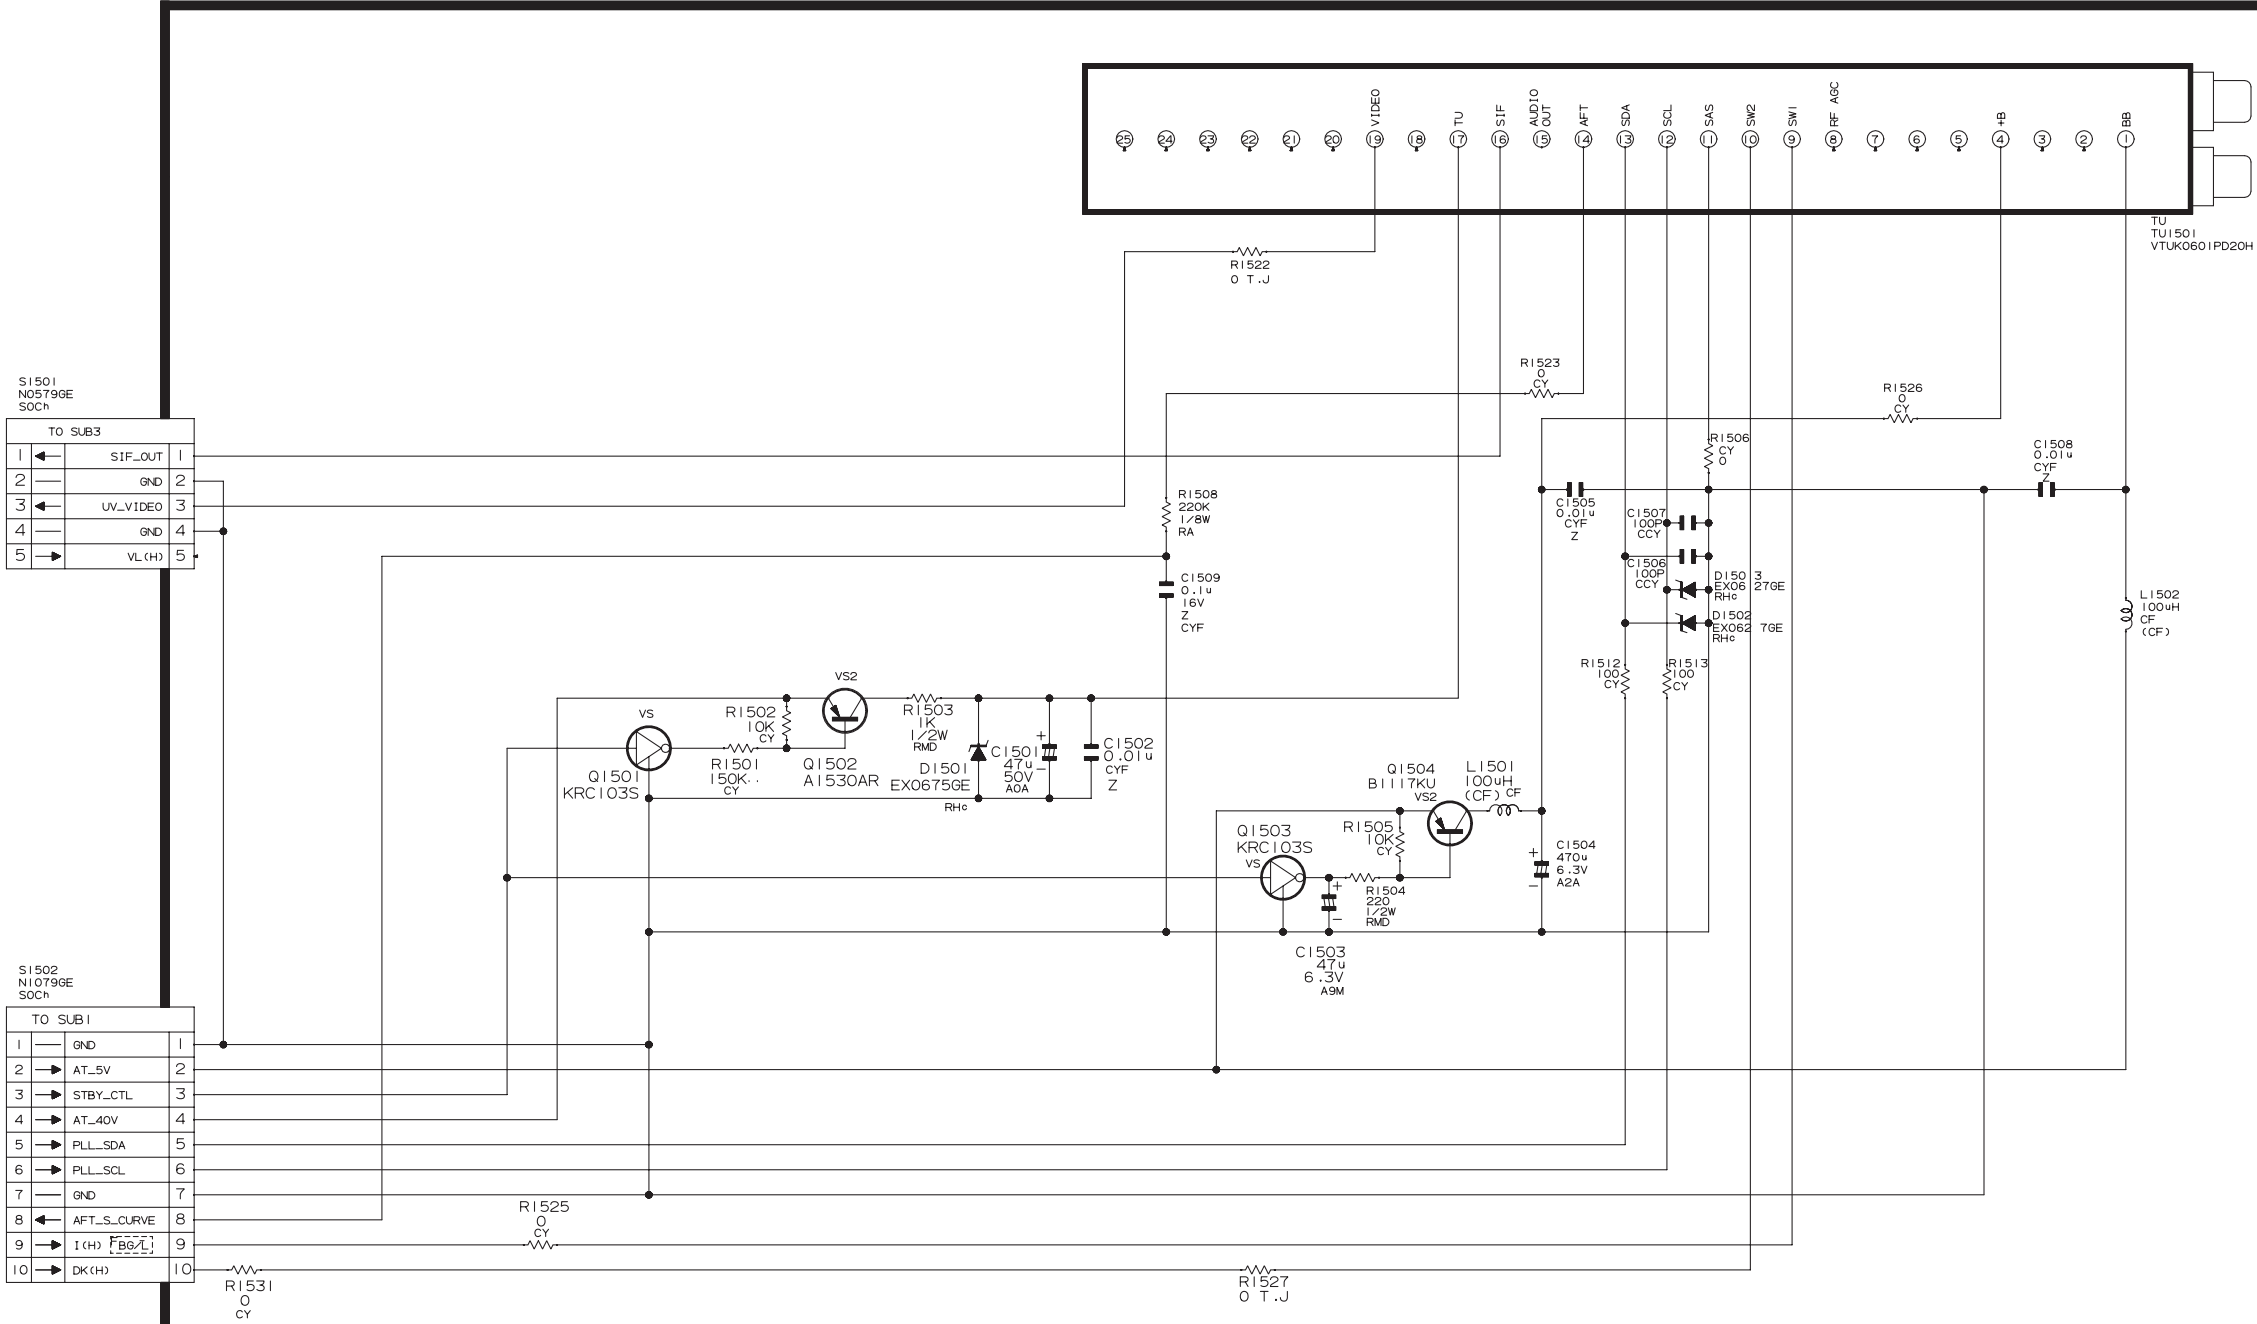

8-13. TUNER CIRCUIT SCHEMATIC DIAGRAM (DV-HR350H/X)

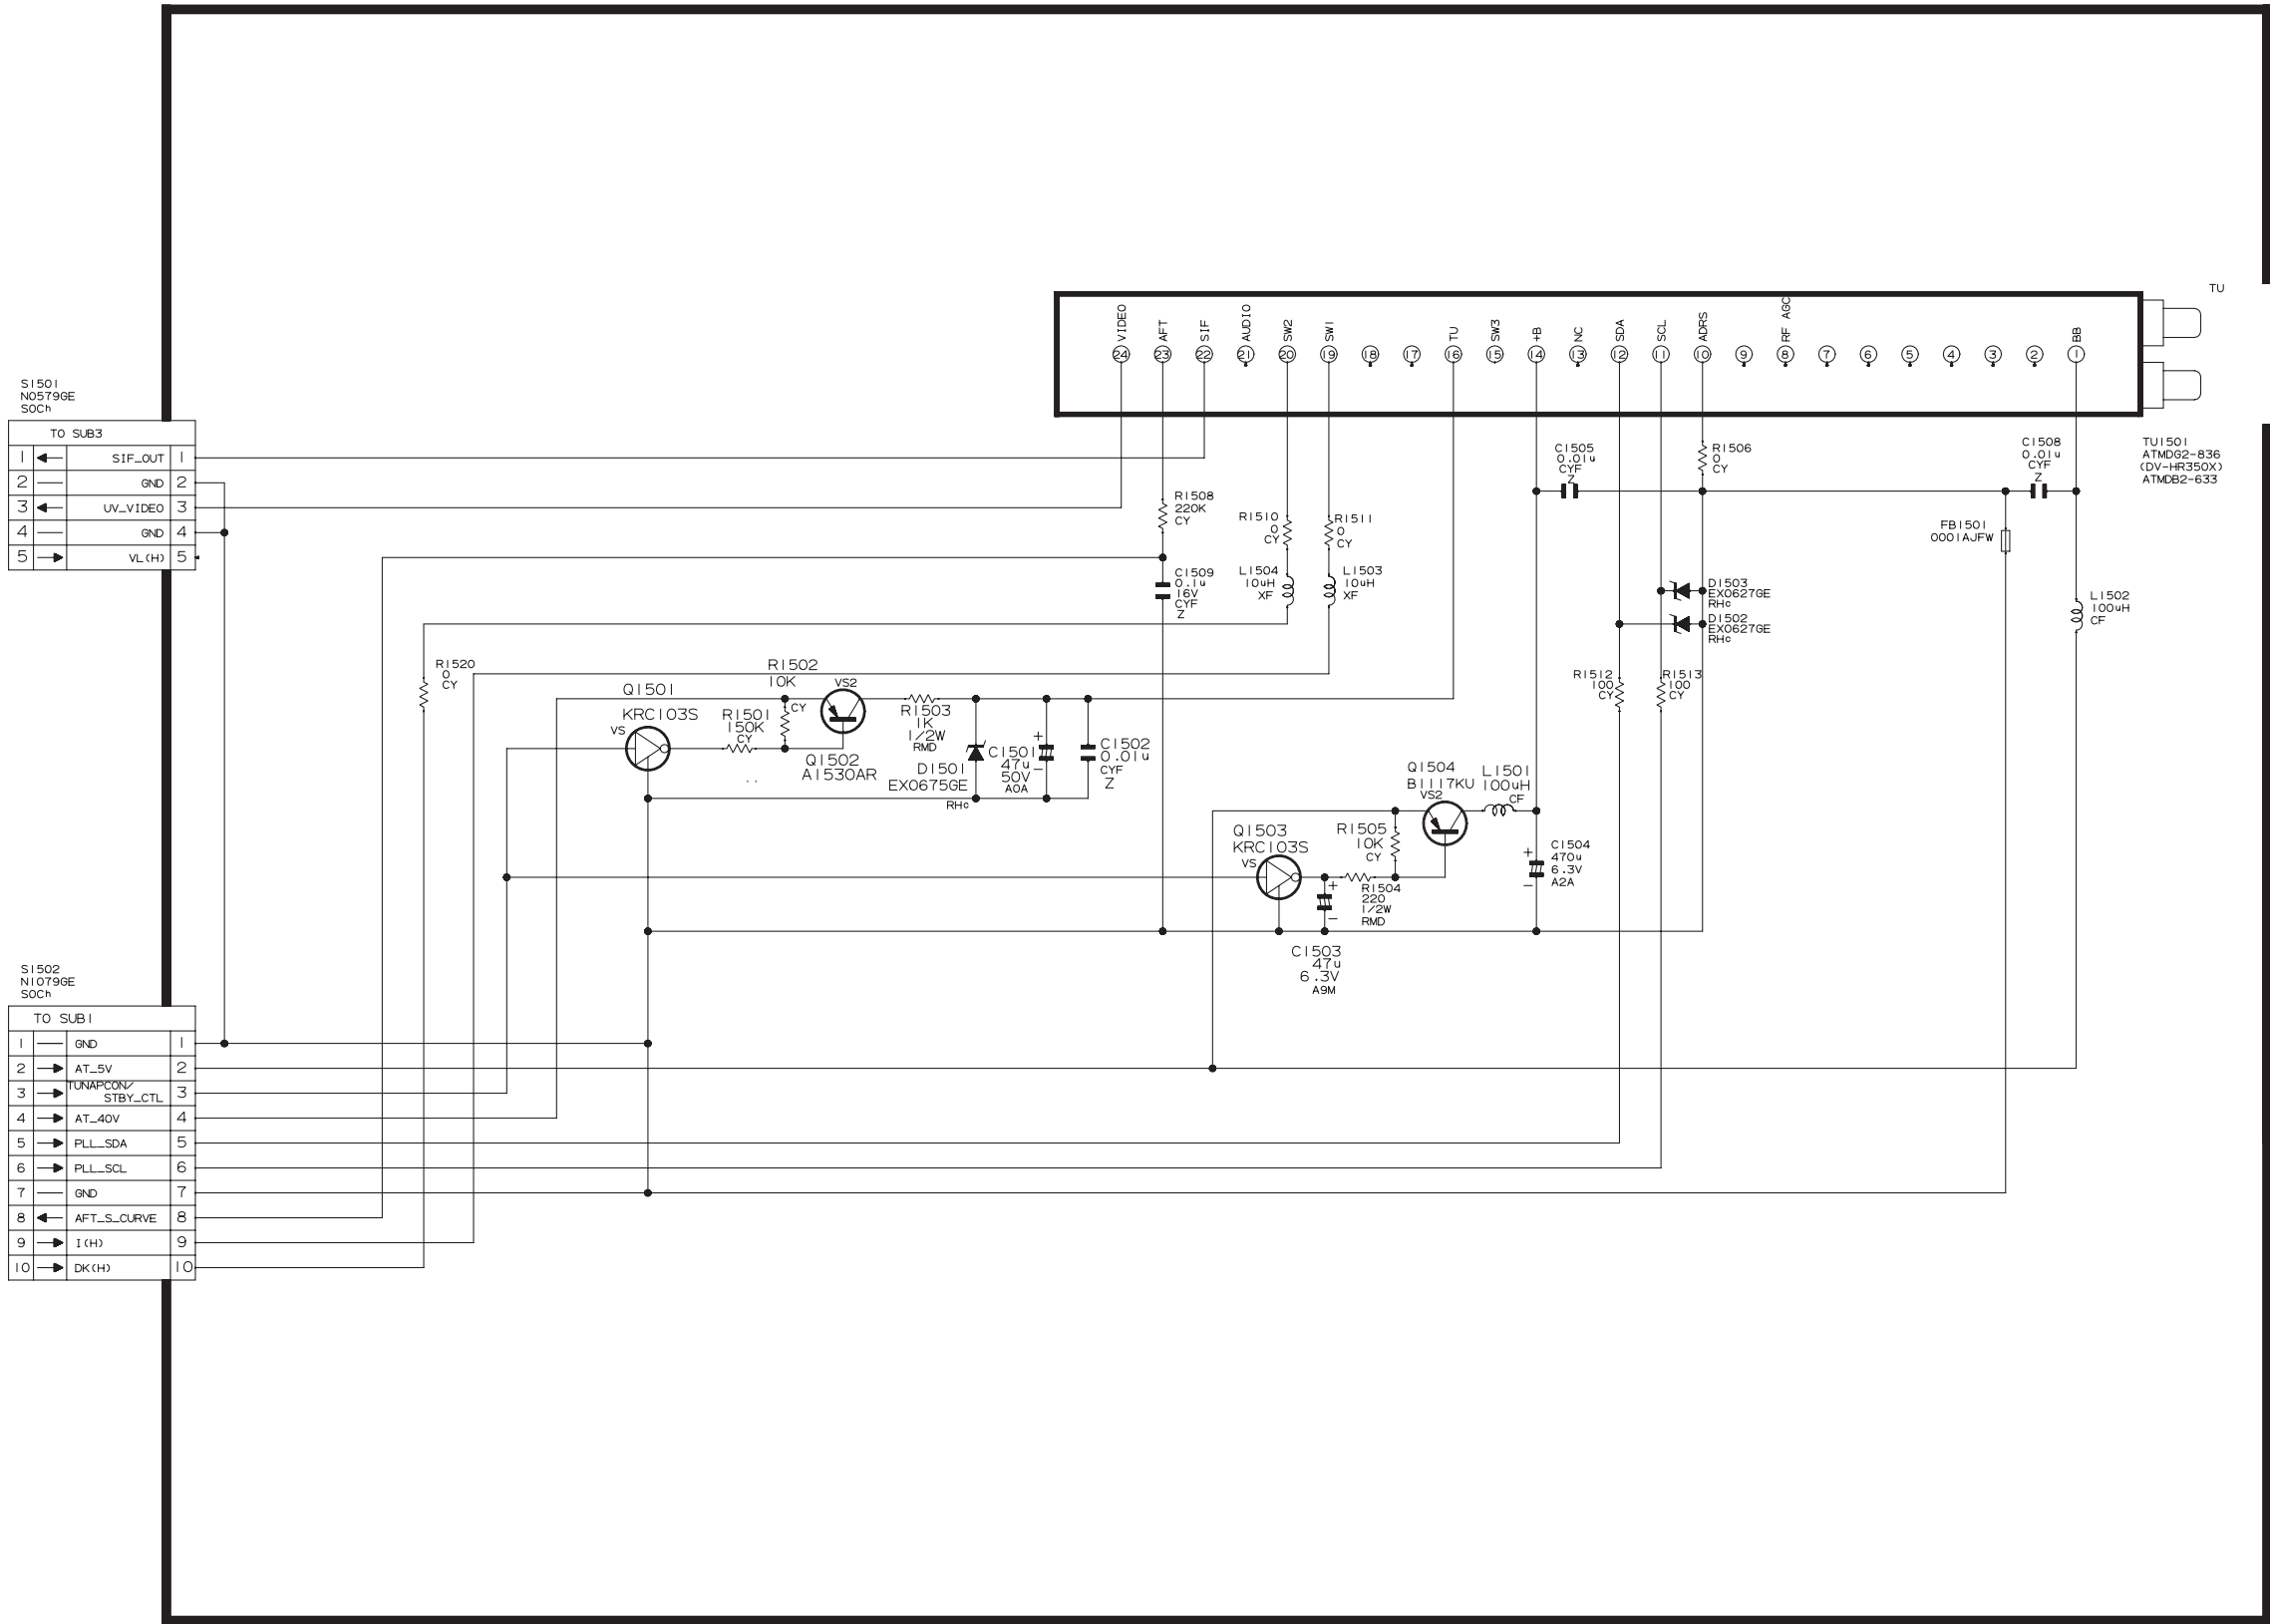


## SIDE A

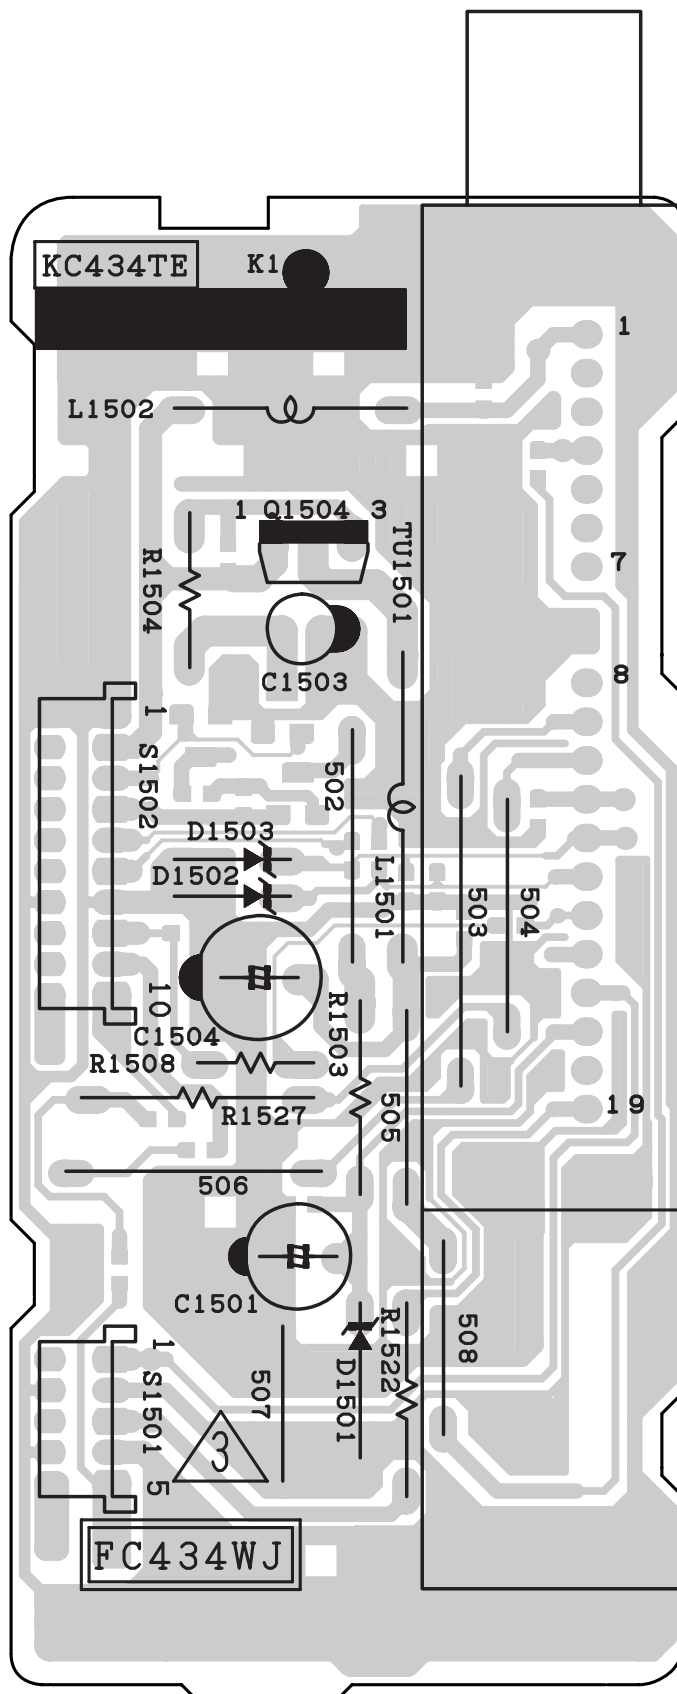




## TUNER PWB (DV-HR350H/X)

## SIDE A

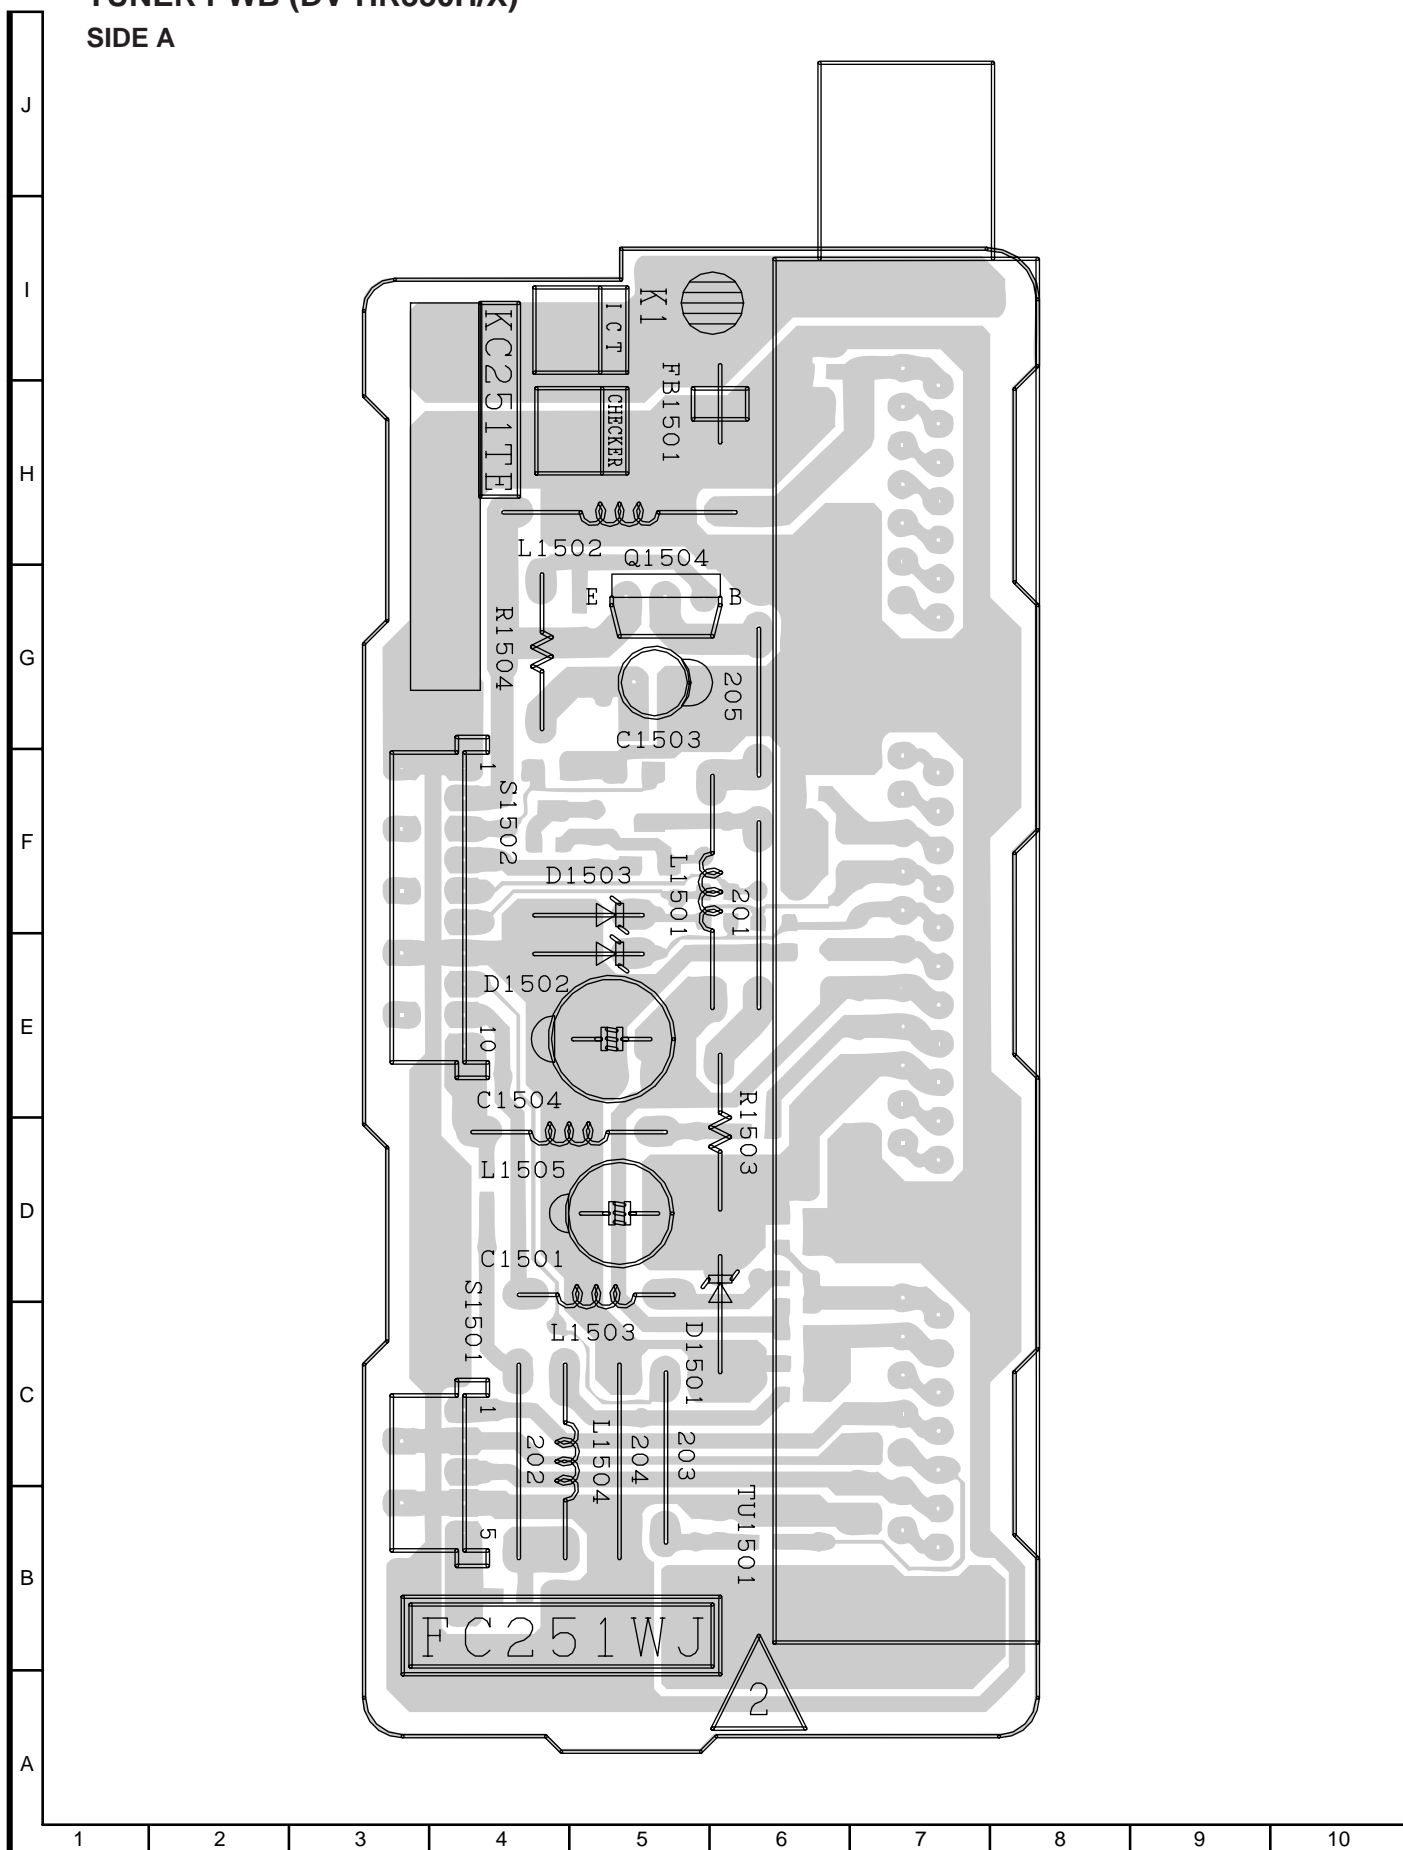



SIDE B

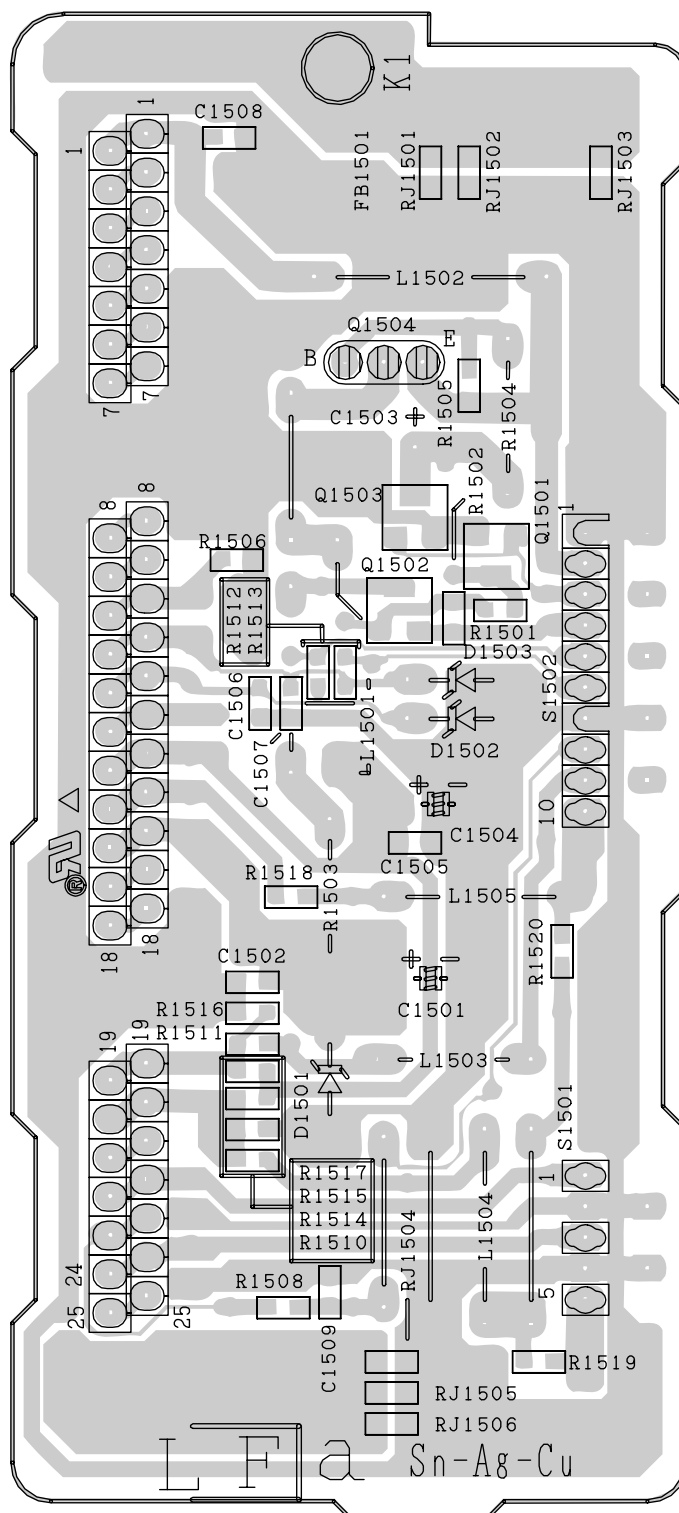

## 10. REPLACEMENT PARTS LIST/ EXPLODED VIEWS

Replacement parts which have these special safety characteristics identified in this manual: electrical components having such features are identified by "△" and shaded areas in the Replacement Parts Lists and Schematic Diagrams. The use of a substitute replacement part which does not have the same safety characteristics as the factory recommended replacement parts shown in this service manual may create shock, fire or other hazards.

### "HOW TO ORDER REPLACEMENT PARTS"

To have your order filled promptly and correctly, please furnish the following informations.

- |                 |                |
|-----------------|----------------|
| 1. MODEL NUMBER | 2. REF. NO.    |
| 3. PART NO.     | 4. DESCRIPTION |

★ MARK : SPARE PARTS-DELIVERY SECTION

Ref. No.	Part No.	★	Description	Code
<b>PRINTED WIRING BOARD ASSEMBLIES (NOT REPLACEMENT ITEM)</b>				
	DSETV0192TEVE	△	Main Unit (DV-HR350H)	—
	DSETV0192TEVW	△	Main Unit (DV-HR350X)	—
	DSETV0192TEVX	△	Main Unit (DV-HR300(A)/(B)/(M))	—
	DSETV0192TEW1	△	Main Unit (DV-HR300RU)	—
IDs for CPRM and IEEE1394 in this unit are already written. ID numbers vary by PWB. PWB with no ID written cannot be used.				
	DUNTKC042TE6K	-	Main Unit (DV-HR350H)	—
	DUNTKC042TE6T	-	Main Unit (DV-HR300(A)/(B)/(M))	—
	DUNTKC042TE6U	-	Main Unit (DV-HR350X)	—
	DUNTKC042TE6W	-	Main Unit (DV-HR300RU)	—
	DUNTKC050TE6C	-	LCD Unit (DV-HR350H)	—
	DUNTKC050TE6D	-	LCD Unit (DV-HR300(A)/(B)/(M)/RU/HR350X)	—
	DUNTKC246TE6B	-	Sub Unit (DV-HR350H)	—
	DUNTKC246TE6E	-	Sub Unit (DV-HR300(A)/(B)/(M)/RU)	—
	DUNTKC246TE6F	-	Sub Unit (DV-HR350X)	—
	DUNTKC247TEV5	-	Power Unit (DV-HR300(A)/(B)/(M)/RU)	—
	DUNTKC247TEV2	-	Power Unit (DV-HR350H)	—
	DUNTKC247TEV4	-	Power Unit (DV-HR350X)	—
	DUNTKC248TEV2	-	Operation (R) Unit (DV-HR350H)	—
	DUNTKC248TEV3	-	Operation (R) Unit (DV-HR300(A)/(B)/(M)/RU/HR350X)	—
	DUNTKC249TEV2	-	Operation (L) Unit (DV-HR350H)	—
	DUNTKC249TEV3	-	Operation (L) Unit (DV-HR300(A)/(B)/(M)/RU/HR350X)	—
	DUNTKC434TEV2	-	Tuner Unit (DV-HR300(A)/(B)/(M)/RU)	—
	DUNTKC251TEV2	-	Tuner Unit(DV-HR350H)	—
	DUNTKC251TEV3	-	Tuner Unit(DV-HR350X)	—
	DUNTKB766TEV1	J	Loading PWB Unit (Inside of the writer unit)	AF
	Ci-OHA007TEV2	J	Hard Disk Drive Unit (DV-HR300(A)/(B)/(M)/RU)	CG
	Ci-OHA006TEV2	J	Hard Disk Drive Unit (DV-HR350H/X)	CP

Ref. No.	Part No.	★	Description	Code
	DUNTKC042TE6K		(DV-HR350H)	
	DUNTKC042TE6T		(DV-HR300(A)/(B)/(M))	
	DUNTKC042TE6U		(DV-HR350X)	
	DUNTKC042TE6W		(DV-HR300RU)	
	MAIN PWB UNIT			

### INTEGRATED CIRCUITS

IC3001	VHiSN2G53CT-1Y	J	SN74AHC2G53HDC	AE
IC3002	VHiBU4053V/-1Y	J	BU4053BCFV-E2	AE
IC3003	VHiNJM4560M-1Y	J	NJM4560M	AG
IC3004	VHiLVC244T+-1Y	J	SN74LVC244APWR	AF
IC3005	VHiAK5381VT-1Y	J	AK5381VT	AR
IC3006	VHiLVC244T+-1Y	J	SN74LVC244APWR	AF
IC3007	VHiPLL1700+-1Y	J	PLL1700E/2K	AM
IC3008	VHiLVC157T+-1Y	J	SN74LVC157APWR	AF
IC3009	VHiAK4384VT-1Y	J	AK4384VT	AL
IC3010	VHiNJU7012F-1Y	J	NJU7012F	AE
IC3011	VHiSAHC125H-1Y	J	SN74AHC2G125HD	AE
IC3502	VHiPD64011+-1Q	J	UPD64011AGM8ED	BG
IC3503	RH-iXA771WJZZQ	J	GLT5160L16P7TC	AN
IC3504	VHiLM1117MJ-1Y	J	LM1117MPX-ADJ	AF
IC3505	VHiLVC245A/-1Y	J	SN74LVC245APW	AE
IC3506	VHiLVC244T+-1Y	J	SN74LVC244APWR	AF
IC3507	VHiLVC245A/-1Y	J	SN74LVC245APW	AE
IC3508	VHiLVC245A/-1Y	J	SN74LVC245APW	AE
IC3509	VHiSAHC125H-1Y	J	SN74AHC2G125HD	AE
IC3511	VHiSN1G125C-1Y	J	SN74AHC1G125DC	AD
IC4001	RH-iX1782GEZZQ	J	UPD72852GB-8EU	AS
IC4002	VHiPCM3008+-1Y	J	PCM3008T/2K	AN
IC4004	VHiPQ070XZ1-1Y	J	PQ070XZ01ZP	AF
IC4005	RH-iXA898WJZZQ	J	I.C.	BE
IC4006	VHiLVC244T+-1Y	J	SN74LVC244APWR	AF
IC4007	RH-iXA771WJZZQ	J	GLT5160L16P7TC	AN
IC4008	VHiLVC240T+-1Y	J	SN74LVC240APWR	AF
IC4010	VHiNJU7012F-1Y	J	NJU7012F	AE
IC4012	VHiSNLVU04+-1Y	J	SN74LVU04APWR	AD
IC4501	RH-iXA845WJZZQ	J	S1L50552F32K00	AS
IC4504	VHiSNAHC04H-1Y	J	SN74AHC1G04HDC	AE
IC7303	VHiPQ070XZ1-1Y	J	PQ070XZ01ZP	AF
IC7304	RH-iXA482WJZZQ	J	UPD61052GD-LML	BG
IC7306	RH-iXA770WJZZQ	J	GLT5640L16P7TC	AV
IC7307	RH-iXA770WJZZQ	J	GLT5640L16P7TC	AV
IC7502	CH-iXA740WJVB	J	M29W400DT55N6E (DV-HR350H)	AR
IC7502	CH-iXA740WJVR	J	M29W400DT55N6E (DV-HR300RU)	AR
IC7502	CH-iXA740WJVM	J	M29W400DT55N6E (DV-HR300(A)/(B)/(M))	AR
IC7502	CH-iXA740WJVN	J	M29W400DT55N6E (DV-HR350X)	AR
IC7503	VHiPQ070XZ1-1Y	J	PQ070XZ01ZP	AF
IC7504	VHiSNHC32T/-1Y	J	SN74HC32PW	AG
IC7507	IDs for CPRM and IEEE1394 must be written for use. Always replace the whole unit.			
IC7508	IDs for CPRM and IEEE1394 must be written for use. Always replace the whole unit.			
IC7506	RH-iXA737WJZZQ	J	ZR36750	BN
IC7509	CH-iXA881WJVM	J	K9F6408U0C (DV-HR350H)	AZ
IC7509	CH-iXA881WJWD	J	K9F6408U0C (DV-HR300RU)	AZ
IC7509	CH-iXA881WJW7	J	K9F6408U0C (DV-HR300(A)/(B)/(M))	AZ
IC7509	CH-iXA881WJW8	J	K9F6408U0C (DV-HR350X)	AZ
IC7510	RH-iXA738WJZZQ	J	MT48LC16M16A2T	BB
IC7511	RH-iXA738WJZZQ	J	MT48LC16M16A2T	BB
IC7512	VHiLV4053AT-1Y	J	SN74LV4053APWR	AE

### TRANSISTORS

IC4011	VSUMG1N++++-1Y	J	UMG1N++++	AC
Q3501	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q3502	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q3503	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q3504	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q3505	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q3507	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q3508	VS2SA1530ARS1Y	J	2SA1530ARS	AC

Ref. No.	Part No.	★	Description	Code
<b>DUNKC042TE6K (DV-HR350H)</b> <b>DUNKC042TE6T (DV-HR300(A)/(B)/(M))</b> <b>DUNKC042TE6U (DV-HR350X)</b> <b>DUNKC042TE6W (DV-HR300RU)</b> <b>MAIN PWB UNIT(Continued)</b>				
Q3509	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q4003	VSKRC103S/-1Y	J	KRC103S	AA
Q7501	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q7502	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q7503	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q7505	VSUMZ1N/-1Y	J	UMZ1N	AB
Q7506	VSUMZ1N/-1Y	J	UMZ1N	AB
Q7507	VSKRC104S/-1Y	J	KRC104S	AA
Q7508	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q7509	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q7510	VS2SA1530ARS1Y	J	2SA1530ARS	AC

#### DIODES AND LED'S

D4001	VHDHVC359TR-1Y	J	HVC359TR	AD
D4002	VHDHVC362/-1Y	J	HVC362	AD

#### PACKAGED CIRCUITS

X3001	RCRUAA020WJZZY	J	Crystal	AQ
X3502	RCRSC0160TAZZY	J	Crystal	AH
X4001	RCRSC0160TAZZY	J	Crystal	AH

#### COILS

FL7501	RFILZA008WJZZY	J	Filter	AK
L3502	VP-1M220J2R9NY	J	Peaking 22μH	AB
L3503	VP-1M220J2R9NY	J	Peaking 22μH	AB
L3504	VP-1M220J2R9NY	J	Peaking 22μH	AB
L3505	VP-NM470K2R0NY	J	Peaking 47μH	AB
L3506	VP-1M220J2R9NY	J	Peaking 22μH	AB
L3507	VP-1M220J2R9NY	J	Peaking 22μH	AB
L3508	VP-1M100J1R6NY	J	Peaking 10μH	AB
L3509	VP-1M100J1R6NY	J	Peaking 10μH	AB
L3510	VP-1M220J2R9NY	J	Peaking 22μH	AB
L3511	VP-1M220J2R9NY	J	Peaking 22μH	AB
L3512	VP-1M390J4R9NY	J	Peaking 39μH	AC
L3513	VP-1M150J2R2NY	J	Peaking 15μH	AC
L4001	RCILF0326GEZZY	J	Coil	AH
L4002	VP-1M100J2R6NY	J	Peaking 10μH	AB
L4004	VP-1M100J1R6NY	J	Peaking 10μH	AB
L7501	VP-NM470K2R0NY	J	Peaking 47μH	AB
L7502	VP-NM100KR42NY	J	Peaking 10μH	AB
L7503	VP-NM100KR42NY	J	Peaking 10μH	AB

#### CAPACITORS

C3001	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3002	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3003	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C3004	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3005	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3006	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C3007	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3008	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3009	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3010	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3011	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3012	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3013	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3014	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3015	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3016	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3017	VCEAPF1HW225MY	J	2.2 50V Electrolytic	AB
C3018	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3020	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3022	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3023	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3024	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3025	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3026	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3027	VCEAPF0JW107MY	J	100 6.3V Electrolytic	AC
C3028	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3029	VCEAPF0JW107MY	J	100 6.3V Electrolytic	AC
C3030	VCCCCY1HH101JY	J	100p 50V Ceramic	AA

Ref. No.	Part No.	★	Description	Code
C3031	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3032	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3034	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3035	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3036	VCEAPF0JW227MY	J	220 6.3V Electrolytic	AD
C3037	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3038	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3040	VCAAPD0JJ127MY	J	120 6.3V Electrolytic	AF
C3042	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3043	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3044	VCAAPD0JJ127MY	J	120 6.3V Electrolytic	AF
C3046	VCKYCY0JB105KY	J	1 6.3V Ceramic	AC
C3047	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3509	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3510	VCEAPF1CW476MY	J	47 16V Electrolytic	AC
C3511	VCCCCY1HH120JY	J	12p 50V Ceramic	AA
C3512	VCCCCY1HH100DY	J	10p 50V Ceramic	AA
C3513	VCCCCY1HH120JY	J	12p 50V Ceramic	AA
C3514	VCCCCY1HH100DY	J	10p 50V Ceramic	AA
C3519	VCCCCY1HH270JY	J	27p 50V Ceramic	AA
C3520	VCCCCY1HH100DY	J	10p 50V Ceramic	AA
C3521	VCCCCY1HH270JY	J	27p 50V Ceramic	AA
C3522	VCCCCY1HH100DY	J	10p 50V Ceramic	AA
C3527	VCE9PF1HW105MY	J	1 50V Elect.(N,P)	AC
C3528	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C3529	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3530	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3531	VCEAPF0JW476MY	J	47 6.3V Electrolytic	AB
C3532	VCEAPF1CW106MY	J	10 16V Electrolytic	AB
C3533	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3534	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3535	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3536	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3537	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3538	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3539	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3540	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3541	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3542	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3543	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3544	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3545	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3546	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3547	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3548	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3549	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3550	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3551	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3554	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3555	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3556	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3559	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3560	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3561	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3562	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3563	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3564	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3565	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3566	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3567	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3568	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3569	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3570	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3571	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3572	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3573	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3574	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3575	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3576	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3577	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3578	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3579	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3580	VCKYCY1EF104ZY	J	0.1 25V Ceramic	AA
C3581	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C3582	VCCCCY1HH100DY	J	10p 50V Ceramic	AA
C3583	VCCCCY1HH100DY	J	10p 50V Ceramic	AA



**DV-HR300(A)/(B)/(M)**  
**DV-HR300RU**  
**DV-HR350H/X**

Ref. No.	Part No.	★	Description	Code
<b>DUNTCK042TE6K (DV-HR350H)</b> <b>DUNTCK042TE6T (DV-HR300(A)/(B)/(M))</b> <b>DUNTCK042TE6U (DV-HR350X)</b> <b>DUNTCK042TE6W (DV-HR300RU)</b> <b>MAIN PWB UNIT(Continued)</b>				
C3584	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3585	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C3586	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C3587	VCEAPF1CW106MY	J 10	16V Electrolytic	AB
C3588	VCEAPF1CW106MY	J 10	16V Electrolytic	AB
C3589	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C3590	VCEAPF1CW106MY	J 10	16V Electrolytic	AB
C3591	VCEAPF1CW106MY	J 10	16V Electrolytic	AB
C3593	VCKYCY1HB331KY	J 330p	50V Ceramic	AA
C3594	VCKYCY1HB221KY	J 220p	50V Ceramic	AA
C3596	VCCCCY1HH101JY	J 100p	50V Ceramic	AA
C3597	VCCCCY1HH151JY	J 150p	50V Ceramic	AA
C3598	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C3599	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3600	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3601	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3602	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3603	VCEAPF0JW226MY	J 22	6.3V Electrolytic	AB
C3604	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3605	VCEAPF0JW227MY	J 220	6.3V Electrolytic	AD
C3606	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3607	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB
C3608	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3609	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3610	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3611	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C3614	VCAAPD0JJ476MY	J 47	6.3V Electrolytic	AE
C4001	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4002	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C4003	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4004	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4005	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4006	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4007	VCEAPF1CW106MY	J 10	16V Electrolytic	AB
C4008	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4009	VCKYCY0JB105KY	J 1	6.3V Ceramic	AC
C4010	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4011	VCKYCY1HB221KY	J 220p	50V Ceramic	AA
C4012	VCKYTV1CB224KY	J 0.22	16V Ceramic	AB
C4013	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4014	VCKYCY1HB221KY	J 220p	50V Ceramic	AA
C4015	VCKYTV1CB224KY	J 0.22	16V Ceramic	AB
C4016	VCKYCY1HB222KY	J 2200p	50V Ceramic	AA
C4017	VCKYCY0JB105KY	J 1	6.3V Ceramic	AC
C4018	VCKYCY1HB222KY	J 2200p	50V Ceramic	AA
C4019	VCCCCY1HH271JY	J 270p	50V Ceramic	AA
C4020	VCEAPF0JW226MY	J 22	6.3V Electrolytic	AB
C4021	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4022	VCEAPF0JW226MY	J 22	6.3V Electrolytic	AB
C4023	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4024	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4025	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4026	VCCCCY1HH100DY	J 10p	50V Ceramic	AA
C4027	VCCCCY1HH100DY	J 10p	50V Ceramic	AA
C4028	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4029	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4030	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB
C4031	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4032	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB
C4035	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4036	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4037	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4039	VCCCCY1HH330JY	J 33p	50V Ceramic	AA
C4040	VCEAPF0JW107MY	J 100	6.3V Electrolytic	AC
C4043	VCKYCY0JB105KY	J 1	6.3V Ceramic	AC
C4044	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4045	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB
C4046	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4047	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4048	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4049	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB

Ref. No.	Part No.	★	Description	Code
C4050	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4051	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4052	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4053	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4054	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4055	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4056	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4057	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4058	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4059	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4060	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4061	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4066	VCEAPF1EW475MY	J 4.7	25V Electrolytic	AB
C4067	VCKYCY1CB473KY	J 0.047	16V Ceramic	AA
C4068	VCEAPF1CW106MY	J 10	16V Electrolytic	AB
C4070	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C4072	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4074	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C4501	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4502	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4503	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4504	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4505	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4506	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4507	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4508	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4509	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4510	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4511	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4512	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4513	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4514	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB
C4515	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4516	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4517	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4518	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4519	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4520	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4522	VCEAPF0JW227MY	J 220	6.3V Electrolytic	AD
C4524	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C4525	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7301	VCKYCY0JB105KY	J 1	6.3V Ceramic	AC
C7308	VCEAPF0JW107MY	J 100	6.3V Electrolytic	AC
C7312	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB
C7313	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB
C7314	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7315	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7316	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7317	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7318	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7319	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7320	VCEAPF1CW106MY	J 10	16V Electrolytic	AB
C7321	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA
C7322	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7323	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7324	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7325	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7326	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7327	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7328	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7329	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7330	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7331	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7332	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7333	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7334	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7335	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7336	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7337	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7338	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7339	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7340	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7341	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7342	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB
C7343	VCKYCY1CB104KY	J 0.1	16V Ceramic	AB

Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
<b>DUNTKC042TE6K (DV-HR350H)</b> <b>DUNTKC042TE6T (DV-HR300(A)/(B)/(M))</b> <b>DUNTKC042TE6U (DV-HR350X)</b> <b>DUNTKC042TE6W (DV-HR300RU)</b> <b>MAIN PWB UNIT(Continued)</b>									
C7344	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7563	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA
C7345	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7564	VCEAPF1CW106MY	J 10	16V Electrolytic	AB
C7346	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7565	VCEAPF1CW106MY	J 10	16V Electrolytic	AB
C7347	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7566	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7348	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7567	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7349	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7568	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7350	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7569	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7351	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7570	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7352	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7571	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7353	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7572	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7354	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7573	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7355	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7574	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7356	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7575	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7357	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	C7576	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7501	VCKYCY0JB105KY	J 1	6.3V Ceramic	AC	C7577	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA
C7503	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AB	R7811	VCCCCY1HH390JY	J 39p	50V Ceramic	AA
C7504	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB	<b>RESISTORS</b>				
C7505	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB	FB4501	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7506	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	FB4502	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7507	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3001	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7508	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R3002	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7509	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R3003	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7510	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3004	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7511	VCEAPF0JW227MY	J 220	6.3V Electrolytic	AD	R3005	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7512	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3006	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7513	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3007	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7514	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3008	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7515	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3009	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7516	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3010	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7517	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3011	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7518	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3013	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7519	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3014	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7520	VCEAPF0JW107MY	J 100	6.3V Electrolytic	AC	R3015	VRS-CY1JF333JY	J 33k	1/16W Metal Oxide	AA
C7521	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3016	VRS-CY1JF333JY	J 33k	1/16W Metal Oxide	AA
C7522	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3017	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
C7523	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3018	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
C7525	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3019	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
C7526	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3020	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
C7527	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3021	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
C7528	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R3022	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
C7529	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3023	VRS-CY1JF562JY	J 5.6k	1/16W Metal Oxide	AA
C7530	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3024	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7532	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3025	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
C7533	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3026	VRS-CY1JF562JY	J 5.6k	1/16W Metal Oxide	AA
C7534	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R3027	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7535	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R3028	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
C7536	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3033	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7537	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R3035	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7538	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R3036	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7539	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3037	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
C7540	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA	R3039	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7541	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB	R3040	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
C7542	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA	R3041	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7543	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3045	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7544	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA	R3046	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7545	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3049	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7546	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA	R3051	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7547	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3052	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7548	VCKYCY1HB102KY	J 1000p	50V Ceramic	AA	R3054	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7549	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R3056	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7550	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3057	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7551	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3060	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7552	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3062	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7555	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB	R3063	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
C7556	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3066	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
C7557	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R3069	VRS-CY1JF333JY	J 33k	1/16W Metal Oxide	AA
C7558	VCKYCY1HB103KY	J 0.01	50V Ceramic	AA	R3070	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7559	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3071	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
C7560	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB	R3072	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
C7561	VCEAPF0JW476MY	J 47	6.3V Electrolytic	AB	R3075	VRS-CY1JF333JY	J 33k	1/16W Metal Oxide	AA
C7562	VCKYCY1EF104ZY	J 0.1	25V Ceramic	AA	R3077	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA
					R3078	VRS-CY1JF333JY	J 33k	1/16W Metal Oxide	AA
					R3080	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
					R3081	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
					R3082	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA







Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
DUNT KC042TE6K (DV-HR350H)					R4059	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
DUNT KC042TE6T (DV-HR300(A)/(B)/(M))					R4061	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
DUNT KC042TE6U (DV-HR350X)					R4062	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
DUNT KC042TE6W (DV-HR300RU)					R4063	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
MAIN PWB UNIT(Continued)					R4064	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3622	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4065	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3623	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4066	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3624	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4067	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R3625	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4068	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3628	VRS-CY1JF470FY	J 47	1/16W Metal Oxide	AA	R4070	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3629	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4071	VRS-CY1JF271JY	J 270	1/16W Metal Oxide	AA
R3630	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4072	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3631	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4073	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3632	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4074	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3633	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4075	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3634	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4076	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3635	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4077	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3636	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4078	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R3637	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4079	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3638	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4080	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3639	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4081	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3640	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4082	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3642	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4083	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3644	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4084	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3646	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R4085	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3647	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R4086	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3648	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4087	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R3661	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4088	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4001	VRS-TV1D000JY	J 0	1/16W Metal Oxide	AA	R4089	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4005	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4090	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4006	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4091	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4007	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4092	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4008	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4093	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4009	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4094	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4011	VRS-CY1JF271JY	J 270	1/16W Metal Oxide	AA	R4095	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4012	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R4096	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4013	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R4097	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4014	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R4098	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4015	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R4099	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4016	VRS-CY1JF560FY	J 56	1/16W Metal Oxide	AA	R4100	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4017	VRS-CY1JF560FY	J 56	1/16W Metal Oxide	AA	R4101	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4018	VRS-CY1JF821JY	J 820	1/16W Metal Oxide	AA	R4102	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4019	VRS-CY1JF512FY	J 5.1k	1/16W Metal Oxide	AA	R4103	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4020	VRS-CY1JF560FY	J 56	1/16W Metal Oxide	AA	R4104	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4021	VRS-CY1JF821JY	J 820	1/16W Metal Oxide	AA	R4105	VRS-CY1JF271JY	J 270	1/16W Metal Oxide	AA
R4022	VRS-CY1JF560FY	J 56	1/16W Metal Oxide	AA	R4106	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4023	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4108	VRS-CY1JF271JY	J 270	1/16W Metal Oxide	AA
R4024	VRS-CY1JF153JY	J 15k	1/16W Metal Oxide	AA	R4109	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4025	VRS-CY1JF153JY	J 15k	1/16W Metal Oxide	AA	R4110	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4026	VRS-CY1JF912FY	J 9.1k	1/16W Metal Oxide	AA	R4112	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4027	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4113	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4029	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4114	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4033	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4115	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4034	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4116	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4035	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4117	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4037	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4118	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4038	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4119	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4039	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4120	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4041	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4121	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4042	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4122	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4043	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4123	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4044	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4124	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4045	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4125	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4046	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4126	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R4047	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4127	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4048	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4128	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4049	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4129	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4050	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4130	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4051	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4131	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4052	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4132	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4053	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4133	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4054	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4134	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4055	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4135	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4056	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R4136	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4057	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R4137	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R4058	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R4138	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA





Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
<b>DUNT KC042TE6K (DV-HR350H)</b> <b>DUNT KC042TE6T (DV-HR300(A)/(B)/(M))</b> <b>DUNT KC042TE6U (DV-HR350X)</b> <b>DUNT KC042TE6W (DV-HR300RU)</b> <b>MAIN PWB UNIT(Continued)</b>					R7560	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
					R7561	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
					R7562	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
					R7563	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
					R7564	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7346	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R7565	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7347	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7566	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7348	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7567	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7349	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7568	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7350	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7569	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7351	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7572	VRS-CY1JF560FY	J 56	1/16W Metal Oxide	AA
R7352	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7574	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7353	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7575	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R7354	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7576	VRS-CY1JF561JY	J 560	1/16W Metal Oxide	AA
R7355	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7578	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7356	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7579	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7357	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7580	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7358	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7581	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7359	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7582	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7360	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7583	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7361	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7584	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7362	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7585	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7363	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R7586	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7364	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R7587	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7365	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R7588	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7367	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7589	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7368	VRS-CY1JF220JY	J 22	1/16W Metal Oxide	AA	R7590	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7369	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7591	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7370	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R7592	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7501	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7593	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7503	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA	R7594	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7504	VRS-CY1JF391FY	J 390	1/16W Metal Oxide	AA	R7595	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA
R7505	VRS-CY1JF560FY	J 56	1/16W Metal Oxide	AA	R7596	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R7511	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7597	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R7512	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7599	VRS-CY1JF560FY	J 56	1/16W Metal Oxide	AA
R7514	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7600	VRS-CY1JF330JY	J 33	1/16W Metal Oxide	AA
R7515	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7601	VRS-CY1JF561JY	J 560	1/16W Metal Oxide	AA
R7516	VRS-CY1JF100JY	J 10	1/16W Metal Oxide	AA	R7602	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R7518	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7604	VRS-CY1JF560FY	J 56	1/16W Metal Oxide	AA
R7519	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7612	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7520	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7637	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7521	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7638	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R7522	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7663	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R7524	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7673	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R7525	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7674	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7526	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7675	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R7527	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7678	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R7528	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7679	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R7529	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7680	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R7530	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7695	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7531	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7696	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7532	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R7705	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7533	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R7706	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R7534	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA	R7712	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7535	VRS-CY1JF391FY	J 390	1/16W Metal Oxide	AA	R7715	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7536	VRS-CY1JF680FY	J 68	1/16W Metal Oxide	AA	R7720	VRS-CY1JF391FY	J 390	1/16W Metal Oxide	AA
R7537	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA	R7721	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7538	VRS-CY1JF391FY	J 390	1/16W Metal Oxide	AA	R7723	VRS-CY1JF8R2JY	J 8.2	1/16W Metal Oxide	AA
R7539	VRS-CY1JF680FY	J 68	1/16W Metal Oxide	AA	R7724	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7540	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R7726	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7542	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA	R7728	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7543	VRS-CY1JF391FY	J 390	1/16W Metal Oxide	AA	R7729	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7544	VRS-CY1JF680FY	J 68	1/16W Metal Oxide	AA	R7730	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7546	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7731	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7547	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R7732	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R7549	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7733	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R7550	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7735	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7551	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7736	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7552	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7737	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7553	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7738	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7554	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7739	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7555	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7740	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7556	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7741	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7557	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7742	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7558	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7743	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R7559	VRS-CY1JF470JY	J 47	1/16W Metal Oxide	AA	R7744	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA

**DV-HR300(A)/(B)/(M)  
DV-HR300RU  
DV-HR350H/X**

Ref. No.	Part No.	★	Description	Code
<b>DUNT KC042TE6K (DV-HR350H)</b>				
<b>DUNT KC042TE6T (DV-HR300(A)/(B)/(M))</b>				
<b>DUNT KC042TE6U (DV-HR350X)</b>				
<b>DUNT KC042TE6W (DV-HR300RU)</b>				
<b>MAIN PWB UNIT(Continued)</b>				

R7745	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7746	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7747	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7748	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7749	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7750	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7751	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7752	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7753	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7754	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7755	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7756	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7757	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7758	VR5-CY1JF473JY	J 47k	1/16W	Metal Oxide	AA
R7759	VR5-CY1JF473JY	J 47k	1/16W	Metal Oxide	AA
R7760	VR5-CY1JF473JY	J 47k	1/16W	Metal Oxide	AA
R7761	VR5-CY1JF473JY	J 47k	1/16W	Metal Oxide	AA
R7762	VR5-CY1JF473JY	J 47k	1/16W	Metal Oxide	AA
R7763	VR5-CY1JF473JY	J 47k	1/16W	Metal Oxide	AA
R7764	VR5-CY1JF473JY	J 47k	1/16W	Metal Oxide	AA
R7765	VR5-CY1JF473JY	J 47k	1/16W	Metal Oxide	AA
R7766	VR5-CY1JF330JY	J 33	1/16W	Metal Oxide	AA
R7767	VR5-CY1JF330JY	J 33	1/16W	Metal Oxide	AA
R7768	VR5-CY1JF330JY	J 33	1/16W	Metal Oxide	AA
R7769	VR5-CY1JF330JY	J 33	1/16W	Metal Oxide	AA
R7770	VR5-CY1JF330JY	J 33	1/16W	Metal Oxide	AA
R7771	VR5-CY1JF330JY	J 33	1/16W	Metal Oxide	AA
R7772	VR5-CY1JF330JY	J 33	1/16W	Metal Oxide	AA
R7773	VR5-CY1JF330JY	J 33	1/16W	Metal Oxide	AA
R7774	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7775	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7776	VR5-CY1JF470JY	J 47	1/16W	Metal Oxide	AA
R7779	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7780	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7781	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7784	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7786	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7787	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7790	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7792	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7794	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7796	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7797	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7804	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7805	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7806	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7807	VR5-CY1JF391FY	J 390	1/16W	Metal Oxide	AA
R7808	VR5-CY1JF561JY	J 560	1/16W	Metal Oxide	AA
R7810	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7812	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7813	VR5-CY1JF183JY	J 18k	1/16W	Metal Oxide	AA
R7814	VR5-CY1JF183JY	J 18k	1/16W	Metal Oxide	AA
R7815	VR5-CY1JF102JY	J 1k	1/16W	Metal Oxide	AA
R7816	VR5-CY1JF102JY	J 1k	1/16W	Metal Oxide	AA
R7817	VR5-CY1JF102JY	J 1k	1/16W	Metal Oxide	AA
R7818	VR5-CY1JF472JY	J 4.7k	1/16W	Metal Oxide	AA
R7819	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7822	VR5-CY1JF103JY	J 10k	1/16W	Metal Oxide	AA
R7824	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA
R7826	VR5-CY1JF000JY	J 0	1/16W	Metal Oxide	AA

**MISCELLANEOUS PARTS**

CN3001	QSO CN2536TAZZY	J	Socket, 25Pin	AF
CN3002	QPLGN0053CEZZY	J	Plug, 3pin	AD
CN3003	QSO CN2136TAZZY	J	Socket, 21Pin	AE
CN3004	QPLGN1264TAZZY	J	Plug, 12Pin	AE
CN4001	QPLGN0564TAZZY	J	Plug, 5Pin	AC
CN4501	QSO CN4078TAZZY	J	Socket, 40Pin	AG
CN4502	QSO CN4072TAZZY	J	Socket, 40Pin	AF
FB3001	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3007	RBLN-0252TAZZY	J	Ferrite Bead	AA

Ref. No.	Part No.	★	Description	Code
FB3008	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3012	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3013	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3014	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3015	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3016	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3017	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3018	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3019	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3021	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3022	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3023	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3501	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3502	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3503	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3504	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3506	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3507	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3508	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4001	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4005	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4006	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4007	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4008	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4011	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4012	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4013	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4014	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4503	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4504	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB4506	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB7303	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB7304	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB3002	RBLN-0253TAZZY	J	Ferrite Bead	AA
FB3003	RBLN-0253TAZZY	J	Ferrite Bead	AA
FB3011	RBLN-0253TAZZY	J	Ferrite Bead	AA
FB7301	RBLN-0253TAZZY	J	Ferrite Bead	AA
FB7302	RBLN-0253TAZZY	J	Ferrite Bead	AA
FB7305	RBLN-0253TAZZY	J	Ferrite Bead	AA
FB7503	RBLN-0253TAZZY	J	Ferrite Bead	AA
FB7504	RBLN-0253TAZZY	J	Ferrite Bead	AA
FB7505	RBLN-0253TAZZY	J	Ferrite Bead	AA
FB7506	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3059	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3065	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3073	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3074	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3094	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3095	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3096	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3097	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3102	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3103	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3104	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3117	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3134	RBLN-0253TAZZY	J	Ferrite Bead	AA
R3135	RBLN-0253TAZZY	J	Ferrite Bead	AA
R7517	RBLN-0253TAZZY	J	Ferrite Bead	AA
FB3006	RBLN-0086GEZZY	J	Ferrite Bead	AB
R3136	RBLN-0086GEZZY	J	Ferrite Bead	AB
FB4002	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4003	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4004	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4015	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4016	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4017	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4018	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4019	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4020	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4021	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4022	RBLN-A001WJZZY	J	Ferrite Bead	AA
FB4023	RBLN-0053TAZZY	J	Ferrite Bead	AB
FB4024	RBLN-0087GEZZY	J	Ferrite Bead	AB
FB4025	RBLN-0255TAZZY	J	Ferrite Bead	AA
FB4027	RBLN-0255TAZZY	J	Ferrite Bead	AA
FB4026	RBLN-0061TAZZY	J	Ferrite Bead	AD



Ref. No.	Part No.	★	Description	Code
<b>DUNT KC050TE6C (DV-HR350H)</b> <b>DUNT KC050TE6D (DV-HR300(A)/(B)/(M)/RU/HR350X)</b> <b>LCD PWB UNIT</b>				
<b>INTEGRATED CIRCUITS</b>				
IC8001	VHiPT6596++-1Q	J	PT6596	AM
<b>TRANSISTORS</b>				
Q8001	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q8002	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q8003	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q8004	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q8005	VSKRA102S/-1Y	J	KRA102S	AA
Q8006	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q8007	VSKRA102S/-1Y	J	KRA102S	AA
Q8008	VSKRA102S/-1Y	J	KRA102S	AA
Q8009	VSKRA102S/-1Y	J	KRA102S	AA
Q8010	VSKRC103S/-1Y	J	KRC103S	AA
Q8011	VSKRA102S/-1Y	J	KRA102S	AA
<b>DIODES AND LED'S</b>				
D8001	RH-EX0637GEZZY	J	Zener Diode, MTZJ11B	AB
D8002	RH-PXA039WJZZ+	J	LED, HDD	AG
D8003	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D8004	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D8005	RH-PXA051WJZZY	J	PhotoDiode	AN
D8006	RH-PXA051WJZZY	J	PhotoDiode	AN
D8007	RH-PXA039WJZZ+	J	LED, DVD	AG
D8008	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D8009	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D8010	RH-PXA051WJZZY	J	PhotoDiode	AN
D8011	RH-PXA051WJZZY	J	PhotoDiode	AN
D8012	RH-PX0297GEZZ+	J	LED, DVD_PLAY	AD
D8013	RH-PX0297GEZZ+	J	LED, HDD_PLAY	AD
D8014	RH-PXA008WJZZ+	J	PhotoDiode	AF
D8015	RH-PXA008WJZZ+	J	PhotoDiode	AF
D8016	RH-PXA046WJZZ+	J	LED, DVD_REC	AD
D8017	RH-PXA046WJZZ+	J	LED, HDD_REC	AD
D8018	RH-PXA008WJZZ+	J	PhotoDiode	AF
D8019	RH-PXA008WJZZ+	J	PhotoDiode	AF
<b>CAPACITORS</b>				
C8001	VCEA9M1CW106M+J	10	16V Electrolytic	AB
C8002	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C8003	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C8004	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C8005	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C8006	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C8007	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C8008	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C8009	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C8010	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C8011	VCEA9M1CW106M+J	10	16V Electrolytic	AB
C8012	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C8013	VCCCCY1HH101JY	J	100p 50V Ceramic	AA
C8014	VCCCCY1HH100DY	J	10p 50V Ceramic	AA
C8015	VCCCCY1HH101JY	J	100p 50V Ceramic	AA
C8016	VCKYCY1HB102KY	J	1000p 50V Ceramic	AA
<b>RESISTORS</b>				
R8001	VRS-TQ2BD222JY	J	2.2k 1/8W Metal Oxide	AA
R8003	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
R8004	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
R8005	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R8006	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R8007	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R8008	VRS-TW2ED331JY	J	330 1/4W Metal Oxide	AB
R8009	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
R8011	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R8012	VRS-TW2ED681JY	J	680 1/4W Metal Oxide	AA
R8013	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R8014	VRS-TW2ED331JY	J	330 1/4W Metal Oxide	AB
R8016	VRS-TW2ED681JY	J	680 1/4W Metal Oxide	AA
R8017	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
R8018	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R8019	VRS-TQ2BD181JY	J	180 1/8W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
R8020	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R8021	VRS-CY1JF181JY	J	180 1/16W Metal Oxide	AA
R8022	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R8023	VRS-TW2ED821JY	J	820 1/4W Metal Oxide	AB
R8024	VRS-TW2ED681JY	J	680 1/4W Metal Oxide	AA
R8025	VRS-CY1JF392JY	J	3.9k 1/16W Metal Oxide	AA
R8026	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R8027	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R8028	VRS-CY1JF392JY	J	3.9k 1/16W Metal Oxide	AA
R8029	VRS-TW2ED821JY	J	820 1/4W Metal Oxide	AB
R8030	VRS-TW2ED681JY	J	680 1/4W Metal Oxide	AA
R8031	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA
R8032	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA
R8033	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA
R8034	VRS-CY1JF272JY	J	2.7k 1/16W Metal Oxide	AA
R8035	VRS-CY1JF332JY	J	3.3k 1/16W Metal Oxide	AA
R8036	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA
R8037	VRS-CY1JF473JY	J	47k 1/16W Metal Oxide	AA
R8038	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
R8041	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
<b>MISCELLANEOUS PARTS</b>				
CN8002	QSOCN0615FJZZ	J	Socket, 18Pin(DB)	AD
SW8001	QSW-K0003AJZZ+	J	Switch, DVD	AB
SW8002	QSW-K0003AJZZ+	J	Switch, HDD	AB
LCD8003	RLCDDA023WJZZ	J	LCD Display	AQ
	PSHEPA133WJZZ	J	Sheet	AC
	PSHEPA149WJZZ	J	Sheet	AB
	LHLDZA247WJZZ	J	Holder	AE
<b>DUNT KC246TE6B (DV-HR350H)</b> <b>DUNT KC246TE6E (DV-HR300(A)/(B)/(M)/RU)</b> <b>DUNT KC246TE6F (DV-HR350X)</b> <b>SUB PWB UNIT</b>				
<b>INTEGRATED CIRCUITS</b>				
IC501	RH-iXB119WJZZQ	J	IXB119WJ (DV-HR300(A)/(B)/(M)/RU/350X)	
IC501	RH-iXA841WJN2Q	J	MN101DF06ZAF (DV-HR350H)	
IC502	VHiPST600H/-1+	J	IC-PST600H-2	AD
IC503	VHiBR24L16F-1Y	J	BR24L16F-WE2	AF
IC506	VHiPST3229N1EY	J	PST3229	AD
IC508	VHiTVHC74T/-1Y	J	TC74VHC74FT	AF
IC1701	VHiMSP3417G-1Q	J	MSP3417G-QG-B8	AY
IC1801	VHiLC74793J1EY	J	LC74793JM-TRM	AV
IC2201	VHiLA7217M/-1Y	J	LA7217M-TRM	AG
IC2251	VHiLV4053AT-1Y	J	SN74LV4053APWR	AE
IC2252	VHiMM1510XN-1Y	J	MM1510XNRE	AE
IC2501	VHiMM1623XF-1Y	J	MM1623XFBE	AM
IC2502	VHiNJM2584M-1Y	J	NJM2584M(Te1)	AG
IC2503	VHiNJM2584M-1Y	J	NJM2584M(Te1)	AG
IC2504	VHiPQ20WZ11-1Y	J	PQ20WZ1U	AF
IC2505	VHiMM1566AJ-1Y	J	MM1566AJBE	AF
IC2601	VHiLA73026V-1Y	J	LA73026AV-TLM	AN
IC2681	VHiMM1505XN-1Y	J	MM1505XNRE	AE
IC2682	VHiMM1507XN-1Y	J	MM1507XNRE	AD
IC2691	VHiPQ20WZ11-1Y	J	PQ20WZ1U	AF
IC2801	VHiMM1389XB-1Y	J	MM1389XFBE	AL
IC2802	VHiMM1166AB-1Y	J	MM1166AFBE	AK
IC2803	VHiMM1389XB-1Y	J	MM1389XFBE	AL
IC6102	VHiNJM4560M-1Y	J	NJM4560M	AG
IC6103	VHiTA79L005P1+	J	TA79L005P	AE
IC6501	VHiNJM4560M-1Y	J	NJM4560M	AG
<b>TRANSISTORS</b>				
Q511	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q512	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q513	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q532	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q533	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q534	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q535	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q536	VS2SC3052EF-1Y	J	2SC3052EF	AC

**DV-HR300(A)/(B)/(M)**  
**DV-HR300RU**  
**DV-HR350H/X**

Ref. No.	Part No.	★	Description	Code
<b>DUNTKC246TE6B (DV-HR350H)</b> <b>DUNTKC246TE6E (DV-HR300(A)/(B)/(M)/RU)</b> <b>DUNTKC246TE6F (DV-HR350X)</b> <b>SUB PWB UNIT(Continued)</b>				
Q537	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q552	VSKRC103S/-1Y	J	KRC103S	AA
Q556	VSKRA102S/-1Y	J	KRA102S	AA
Q557	VS2SD471-KL1E+	J	2SD471-KL1E+	AC
Q558	VSKRC104S/-1Y	J	KRC104S	AA
Q559	VSKRA103S/-1Y	J	KRA103S	AA
Q742	VSKRC102S/-1Y	J	KRC102S	AA
Q743	VS2PD601AR/-1Y	J	2PD601AR	AB
Q744	VS2PD601AR/-1Y	J	2PD601AR	AB
Q1701	VS2PB709AR/-1Y	J	2PB709AR	AB
Q1702	VSKRC104S/-1Y	J	KRC104S	AA
Q1801	VS2SB1117KU1E+	J	2SB1117KU1E+	AE
Q1802	VSKRC102S/-1Y	J	KRC102S	AA
Q2201	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q2202	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q2251	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q2252	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q2254	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q2302	VSKRC104S/-1Y	J	KRC104S	AA
Q2316	VS2PD601AR/-1Y	J	2PD601AR	AB
Q2317	VSKRC104S/-1Y	J	KRC104S	AA
Q2501	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q2502	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q2503	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q2504	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q2505	VSKRC103S/-1Y	J	KRC103S	AA
Q2507	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q2510	VSKRC103S/-1Y	J	KRC103S	AA
Q2511	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q2512	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q2513	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q2514	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q2515	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q2516	VS2SC3052EF-1Y	J	2SC3052EF	AC
Q2518	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q2521	VSKRC103S/-1Y	J	KRC103S	AA
Q2522	VSKRC103S/-1Y	J	KRC103S	AA
Q2524	VSKRC103S/-1Y	J	KRC103S	AA
Q2525	VSKRC103S/-1Y	J	KRC103S	AA
Q2801	VSKRC104S/-1Y	J	KRC104S	AA
Q2802	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q2803	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q2804	VSKRC104S/-1Y	J	KRC104S	AA
Q2805	VSKRC104S/-1Y	J	KRC104S	AA
Q2901	VS2PB709AR/-1Y	J	2PB709AR	AB
Q6101	VSKRC103S/-1Y	J	KRC103S	AA
Q6102	VSKRA103S/-1Y	J	KRA103S	AA
Q6103	VS2SC3203Y/-1+	J	2SC3203Y	AC
Q6501	VSKRC104S/-1Y	J	KRC104S	AA
Q6502	VSKRC104S/-1Y	J	KRC104S	AA
Q6503	VSKRC104S/-1Y	J	KRC104S	AA
Q6504	VSKRA103S/-1Y	J	KRA103S	AA
Q6505	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q6506	VSKRC104S/-1Y	J	KRC104S	AA
Q6507	VSKRA103S/-1Y	J	KRA103S	AA
Q6508	VSKRC104S/-1Y	J	KRC104S	AA
Q6509	VSKRA103S/-1Y	J	KRA103S	AA
Q6510	VS2SD1306-E-1Y	J	2SD1306-E	AC
Q6511	VS2SD1306-E-1Y	J	2SD1306-E	AC
Q6601	VS2SC3052EF-1Y	J	2SC3052EF	AC
<b>DIODES AND LED'S</b>				
D501	VHD1SS400++-1Y	J	1SS400++	AB
D502	VHD1SS400++-1Y	J	1SS400++	AB
D503	VHD1SS400++-1Y	J	1SS400++	AB
D505	RH-EX0624GEZZY	J	Zener Diode, 7.5B	AB
D515	VHD1SS400++-1Y	J	1SS400++	AB
D516	VHD1SS400++-1Y	J	1SS400++	AB
D519	VHD1SS400++-1Y	J	1SS400++	AB
D523	VHD1SS400++-1Y	J	1SS400++	AB
D524	VHD1SS400++-1Y	J	1SS400++	AB

Ref. No.	Part No.	★	Description	Code
D525	VHD1SS400++-1Y	J	1SS400++	AB
D1701	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2201	VHD1SS400++-1Y	J	1SS400++	AB
D2202	VHD1SS400++-1Y	J	1SS400++	AB
D2307	VHD1SS400++-1Y	J	1SS400++	AB
D2507	VHD1SS400++-1Y	J	1SS400++	AB
D2508	VHD1SS400++-1Y	J	1SS400++	AB
D2509	VHD1SS400++-1Y	J	1SS400++	AB
D2510	VHD1SS400++-1Y	J	1SS400++	AB
D2512	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2513	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2514	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2515	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2516	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2601	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2602	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2603	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2605	RH-EXA094WJZZY	J	Zener Diode	AB
D2606	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2607	RH-EXA094WJZZY	J	Zener Diode	AB
D2608	RH-EXA094WJZZY	J	Zener Diode	AB
D2609	RH-EXA094WJZZY	J	Zener Diode	AB
D2610	RH-EXA094WJZZY	J	Zener Diode	AB
D2611	RH-EXA094WJZZY	J	Zener Diode	AB
D2612	RH-EXA094WJZZY	J	Zener Diode	AB
D2613	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2614	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2615	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2617	RH-EXA094WJZZY	J	Zener Diode	AB
D2618	RH-EXA094WJZZY	J	Zener Diode	AB
D2619	RH-EXA094WJZZY	J	Zener Diode	AB
D2620	RH-EXA094WJZZY	J	Zener Diode	AB
D2623	RH-EXA094WJZZY	J	Zener Diode	AB
D2624	RH-EXA094WJZZY	J	Zener Diode	AB
D2625	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2626	RH-EX0627GEZZY	J	Zener Diode	AA
D2627	RH-EX0627GEZZY	J	Zener Diode	AA
D2628	RH-EX0627GEZZY	J	Zener Diode	AA
D2629	RH-EX0627GEZZY	J	Zener Diode	AA
D2691	VHD1SS400++-1Y	J	1SS400++	AB
D2692	VHD1SS400++-1Y	J	1SS400++	AB
D2693	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D2694	RH-EX1398CEZZY	J	Zener Diode, 8B	AB
D6502	VHD1SS400++-1Y	J	1SS400++	AB
D6503	VHD1SS400++-1Y	J	1SS400++	AB
D6504	VHD1SS400++-1Y	J	1SS400++	AB
<b>OPT DEVICE</b>				
P6601	VHGP1F550T-1	J	LED	AG
<b>PACKAGED CIRCUITS</b>				
X501	RCRSB0205GEZZ+	J	Crystal	AM
X502	RCRSB0138GEZZ	J	Crystal	AD
X1701	RCRSB0249GEZZ+	J	Crystal	AF
X1801	RCRSB0232GEZZ	J	Crystal	AG
<b>COIL AND TRANSFORMERS</b>				
FL2201	RFiLA0020CEZZ	J	Filter	AD
L1703	VP-MK100K0000+	J	Peaking 10μH	AB
L1704	VP-MK100K0000+	J	Peaking 10μH	AB
L6601	VP-MK100K0000+	J	Peaking 10μH	AB
L1801	VP-MK101K0000+	J	Peaking 100μH	AB
L2201	VP-MK101K0000+	J	Peaking 100μH	AB
L2501	VP-MK101K0000+	J	Peaking 100μH	AB
L2502	VP-MK101K0000+	J	Peaking 100μH	AB
L2503	VP-MK101K0000+	J	Peaking 100μH	AB
L2504	VP-MK101K0000+	J	Peaking 100μH	AB
L2507	VP-MK101K0000+	J	Peaking 100μH	AB
L2681	VP-MK101K0000+	J	Peaking 100μH	AB
L2801	VP-MK101K0000+	J	Peaking 100μH	AB
L6501	VP-MK150K0000+	J	Peaking 15μH	AB
<b>CAPACITORS</b>				
C501	VCEA9M0JW476M+	J	47 6.3V Electrolytic	AB
C502	VCKYCY0JF105ZY	J	1 6.3V Ceramic	AB
C503	VCCCCY1HH120JY	J	12p 50V Ceramic	AA



Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
<b>DUNT KC246TE6B (DV-HR350H)</b> <b>DUNT KC246TE6E (DV-HR300(A)/(B)/(M)/RU)</b> <b>DUNT KC246TE6F (DV-HR350X)</b> <b>SUB PWB UNIT(Continued)</b>					C2261	VCKYCY1HB103KY	J	0.01	50V Ceramic AA
C504	VCCCCY1HH150JY	J	15p	50V Ceramic AA	C2501	VCKYCY1CF104ZY	J	0.1	16V Ceramic AA
C505	VCCCCY1HH180JY	J	18p	50V Ceramic AA	C2502	VCEA9M0JW227M+	J	220	6.3V Electrolytic AB
C506	VCCCCY1HH200J	J	20p	50V Ceramic AA	C2504	VCKYCY1CF104ZY	J	0.1	16V Ceramic AA
C507	VCCCCY1HH101JY	J	100p	50V Ceramic AA	C2505	VCKYCY1CF104ZY	J	0.1	16V Ceramic AA
C508	VCE9EM1HW105M+	J	1	50V Elect.(N,P) AB	C2506	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C509	VCEA9M0JW107M+	J	100	6.3V Electrolytic AB	C2507	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C510	VCKYCY1CF104ZY	J	0.1	16V Ceramic AA	C2508	VCEA9M0JW227M+	J	220	6.3V Electrolytic AB
C511	VCKYCY0JF105ZY	J	1	6.3V Ceramic AB	C2509	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C513	VCKYCY1HB103KY	J	0.01	50V Ceramic AA	C2511	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C514	VCKYCY1HB103KY	J	0.01	50V Ceramic AA	C2512	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C521	VCKYCY1HB103KY	J	0.01	50V Ceramic AA	C2513	VCEA9M0JW227M+	J	220	6.3V Electrolytic AB
C522	VCEA9M1HW105M+	J	1	50V Electrolytic AB	C2514	VCKYCY1HB103KY	J	0.01	50V Ceramic AA
C523	VCEA2A0JW108M+	J	1000	6.3V Electrolytic AB	C2515	VCKYCY1CB104KY	J	0.1	16V Ceramic AB
C531	VCKYCY1CF104ZY	J	0.1	16V Ceramic AA	C2516	VCEA9M0JW226M+	J	22	6.3V Electrolytic AB
C541	RC-EZ0425GEZZ	J		Ceramic AE	C2517	VCKYCY1CB104KY	J	0.1	16V Ceramic AB
C542	VCKYCY1HB103KY	J	0.01	50V Ceramic AA	C2518	VCEA9M1HW475M+	J	4.7	50V Electrolytic AB
C551	VCKYCY1HB103KY	J	0.01	50V Ceramic AA	C2519	VCEA9M1HW475M+	J	4.7	50V Electrolytic AB
C554	VCKYCY1CB104KY	J	0.1	16V Ceramic AB	C2520	VCKYCY1HB103KY	J	0.01	50V Ceramic AA
C555	VCEA9M1HW105M+	J	1	50V Electrolytic AB	C2521	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C558	VCEA9M1CW106M+	J	10	16V Electrolytic AB	C2522	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C566	VCKYCY1CF104ZY	J	0.1	16V Ceramic AA	C2525	VCEA0A0JW108M+	J	1000	6.3V Electrolytic AC
C745	VCKYCY1HB221KY	J	220p	50V Ceramic AA	C2526	VCEA0A0JW108M+	J	1000	6.3V Electrolytic AC
C746	VCKYCY1HB221KY	J	220p	50V Ceramic AA	C2527	VCEA0A0JW108M+	J	1000	6.3V Electrolytic AC
C748	VCEA9M1CW476M+	J	47	16V Electrolytic AB	C2532	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C1701	VCCCCY1HH220JY	J	22p	50V Ceramic AA	C2533	VCEAEM0JW476M+	J	47	6.3V Electrolytic AB
C1702	VCCCCY1HH470JY	J	47p	50V Ceramic AA	C2534	VCEAEM0JW476M+	J	47	6.3V Electrolytic AB
C1704	VCKYCY1HF103ZY	J	0.01	50V Ceramic AA	C2535	VCEAEM0JW476M+	J	47	6.3V Electrolytic AB
C1705	VCEA9M1CW106M+	J	10	16V Electrolytic AB	C2536	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C1706	VCKYCY1HF103ZY	J	0.01	50V Ceramic AA	C2537	VCEAEM0JW476M+	J	47	6.3V Electrolytic AB
C1707	VCEA9M1CW106M+	J	10	16V Electrolytic AB	C2538	VCEA9M1HW474M+	J	0.47	50V Electrolytic AB
C1708	VCEA9M1CW226M+	J	22	16V Electrolytic AB	C2539	VCEA9M1CW107M+	J	100	16V Electrolytic AB
C1709	VCEA9M1CW226M+	J	22	16V Electrolytic AB	C2540	VCEA9M0JW227M+	J	220	6.3V Electrolytic AB
C1710	VCCCCY1HH5R0CYJ	J	5.0p	50V Ceramic AA	C2541	VCKYCY1HB103KY	J	0.01	50V Ceramic AA
C1711	VCCCCY1HH6R0DYJ	J	6.0p	50V Ceramic AA	C2542	VCEA9M0JW226M+	J	22	6.3V Electrolytic AB
C1712	VCKYCY1HF103ZY	J	0.01	50V Ceramic AA	C2543	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C1713	VCKYCY1HF103ZY	J	0.01	50V Ceramic AA	C2544	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C1714	VCEA9M1HW105M+	J	1	50V Electrolytic AB	C2545	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB
C1715	VCKYCY1HF103ZY	J	0.01	50V Ceramic AA	C2546	VCEA0A0JW108M+	J	1000	6.3V Electrolytic AC
C1718	VCEA9M1CW226M+	J	22	16V Electrolytic AB	C2548	VCEA0A0JW108M+	J	1000	6.3V Electrolytic AC
C1720	VCCCCY1HH470JY	J	47p	50V Ceramic AA	C2601	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C1723	VCEA9M1CW106M+	J	10	16V Electrolytic AB	C2602	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C1730	VCEA9M1CW106M+	J	10	16V Electrolytic AB	C2603	VCEA9M1HW105M+	J	1	50V Electrolytic AB
C1731	VCEA9M1CW106M+	J	10	16V Electrolytic AB	C2604	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C1735	VCKYCY1HB122KY	J	1200p	50V Ceramic AA	C2605	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C1738	VCKYCY1HB122KY	J	1200p	50V Ceramic AA	C2606	VCEA9M1HW105M+	J	1	50V Electrolytic AB
C1753	VCKYCY1HB331KY	J	330p	50V Ceramic AA	C2607	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C1801	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB	C2608	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C1802	VCKYCY1HF103ZY	J	0.01	50V Ceramic AA	C2609	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C1803	VCCCCY1HH150JY	J	15p	50V Ceramic AA	C2610	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C1804	VCCCCY1HH150JY	J	15p	50V Ceramic AA	C2611	VCEA9M1HW105M+	J	1	50V Electrolytic AB
C1805	VCQYTA1HM563J+	J	0.056	50V Mylar AB	C2612	VCEA0A1CW337M+	J	330	16V Electrolytic AC
C1806	VCEA9M1HW475M+	J	4.7	50V Electrolytic AB	C2613	VCKYCY1CF104ZY	J	0.1	16V Ceramic AA
C1807	VCEA9M1HW105M+	J	1	50V Electrolytic AB	C2614	VCKYCY1CF104ZY	J	0.1	16V Ceramic AA
C1808	VCEA9M1HW105M+	J	1	50V Electrolytic AB	C2615	VCEA0A0JW477M+	J	470	6.3V Electrolytic AC
C2201	VCQYTA1HM223J+	J	0.022	50V Mylar AB	C2618	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C2202	VCKYCY1HB821KY	J	820p	50V Ceramic AA	C2619	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C2203	VCKYCY1HB103KY	J	0.01	50V Ceramic AA	C2620	VCKYCY1HF103ZY	J	0.01	50V Ceramic AA
C2204	VCQYTA1HM563J+	J	0.056	50V Mylar AB	C2622	VCKYCY1HF103ZY	J	0.01	50V Ceramic AA
C2205	VCEA9M1HW105M+	J	1	50V Electrolytic AB	C2623	VCEA9M0JW107M+	J	100	6.3V Electrolytic AB
C2206	VCKYCY1HB103KY	J	0.01	50V Ceramic AA	C2624	VCEA9M0JW107M+	J	100	6.3V Electrolytic AB
C2207	VCE9EM1HW105M+	J	1	50V Elect.(N,P) AB	C2625	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C2208	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB	C2626	VCEA9M1CW106M+	J	10	16V Electrolytic AB
C2209	VCKYCY1CB104KY	J	0.1	16V Ceramic AB	C2627	VCKYCY1HB103KY	J	0.01	50V Ceramic AA
C2210	VCKYCY1CB473KY	J	0.047	16V Ceramic AA	C2628	VCKYCY1HF473ZY	J	0.047	50V Ceramic AA
C2211	VCEAEM0JW476M+	J	47	6.3V Electrolytic AB	C2638	VCCCCY1HH101JY	J	100p	50V Ceramic AA
C2251	VCEAEM0JW476M+	J	47	6.3V Electrolytic AB	C2639	VCCCCY1HH101JY	J	100p	50V Ceramic AA
C2252	VCKYCY1HB103KY	J	0.01	50V Ceramic AA	C2640	VCCCCY1HH101JY	J	100p	50V Ceramic AA
C2253	VCKYCY0JB105KY	J	1	6.3V Ceramic AC	C2641	VCCCCY1HH101JY	J	100p	50V Ceramic AA
C2254	VCEA9M1HW105M+	J	1	50V Electrolytic AB	C2642	VCCCCY1HH101JY	J	100p	50V Ceramic AA
C2255	VCEA9M0JW476M+	J	47	6.3V Electrolytic AB	C2643	VCCCCY1HH101JY	J	100p	50V Ceramic AA
C2256	VCCCCY1HH151JY	J	150p	50V Ceramic AA	C2644	VCCCCY1HH101JY	J	100p	50V Ceramic AA
					C2645	VCCCCY1HH101JY	J	100p	50V Ceramic AA
					C2646	VCCCCY1HH101JY	J	100p	50V Ceramic AA
					C2647	VCCCCY1HH101JY	J	100p	50V Ceramic AA
					C2667	VCKYD41HB331KY	J	330p	50V Ceramic AA

**DV-HR300(A)/(B)/(M)  
DV-HR300RU  
DV-HR350H/X**

Ref. No.	Part No.	★	Description	Code
<b>DUNTKC246TE6B (DV-HR350H) DUNTKC246TE6E (DV-HR300(A)/(B)/(M)/RU) DUNTKC246TE6F (DV-HR350X) SUB PWB UNIT(Continued)</b>				
C2668	VCKYD41HB331KY	J	330p 50V Ceramic	AA
C2669	VCKYCY1HB331KY	J	330p 50V Ceramic	AA
C2670	VCKYCY1HB331KY	J	330p 50V Ceramic	AA
C2671	VCKYCY1HB331KY	J	330p 50V Ceramic	AA
C2672	VCKYCY1HB331KY	J	330p 50V Ceramic	AA
C2673	VCKYCY1HB331KY	J	330p 50V Ceramic	AA
C2674	VCKYCY1HB331KY	J	330p 50V Ceramic	AA
C2675	VCKYCY1HB331KY	J	330p 50V Ceramic	AA
C2676	VCKYCY1HB331KY	J	330p 50V Ceramic	AA
C2677	VCCCCY1HH151JY	J	150p 50V Ceramic	AA
C2681	VCEAEM0JW476M+	J	47 6.3V Electrolytic	AB
C2682	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C2683	VCEA0A0JW108M+	J	1000 6.3V Electrolytic	AC
C2684	VCEA0A0JW108M+	J	1000 6.3V Electrolytic	AC
C2691	VCEA9M1HW474M+	J	0.47 50V Electrolytic	AB
C2692	VCEA9M1CW107M+	J	100 16V Electrolytic	AB
C2693	VCKYCY1CB104KY	J	0.1 16V Ceramic	AB
C2694	VCEA0A0JW108M+	J	1000 6.3V Electrolytic	AC
C2695	VCKYCY0JB105KY	J	1 6.3V Ceramic	AC
C2696	VCKYCY0JB105KY	J	1 6.3V Ceramic	AC
C2697	VCEAEM0JW476M+	J	47 6.3V Electrolytic	AB
C2699	VCEA0A0JW108M+	J	1000 6.3V Electrolytic	AC
C2801	VCEA9M0JW226M+	J	22 6.3V Electrolytic	AB
C2802	VCEA9M0JW476M+	J	47 6.3V Electrolytic	AB
C2803	VCEA9M0JW476M+	J	47 6.3V Electrolytic	AB
C2804	VCEA9M0JW226M+	J	22 6.3V Electrolytic	AB
C2805	VCEA9M1CW106M+	J	10 16V Electrolytic	AB
C2806	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C2807	VCKYCY1CF104ZY	J	0.1 16V Ceramic	AA
C2808	VCEA9M0JW476M+	J	47 6.3V Electrolytic	AB
C2809	VCEA9M1CW106M+	J	10 16V Electrolytic	AB
C2810	VCEA9M0JW226M+	J	22 6.3V Electrolytic	AB
C2811	VCEA9M0JW476M+	J	47 6.3V Electrolytic	AB
C2812	VCEA9M0JW476M+	J	47 6.3V Electrolytic	AB
C2813	VCEA9M0JW226M+	J	22 6.3V Electrolytic	AB
C2814	VCEA9M1CW106M+	J	10 16V Electrolytic	AB
C2815	VCKYCY1CF104ZY	J	0.1 16V Ceramic	AA
C2816	VCEA9M0JW476M+	J	47 6.3V Electrolytic	AB
C2817	VCEA9M0JW226M+	J	22 6.3V Electrolytic	AB
C6101	VCEA9M0JW227M+	J	220 6.3V Electrolytic	AB
C6102	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C6103	VCKYCY1CF104ZY	J	0.1 16V Ceramic	AA
C6104	VCKYCY1CF104ZY	J	0.1 16V Ceramic	AA
C6501	VCEA0A0JW477M+	J	470 6.3V Electrolytic	AC
C6502	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C6503	VCEA9M1CW106M+	J	10 16V Electrolytic	AB
C6504	VCEA9M1CW106M+	J	10 16V Electrolytic	AB
C6505	VCEA9M0JW227M+	J	220 6.3V Electrolytic	AB
C6507	VCCCCY1HH221JY	J	220p 50V Ceramic	AA
C6509	VCCCCY1HH221JY	J	220p 50V Ceramic	AA
C6510	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C6511	VCEA9M0JW227M+	J	220 6.3V Electrolytic	AB
C6512	VCEA9M1CW226M+	J	22 16V Electrolytic	AB
C6513	VCEA9M1CW226M+	J	22 16V Electrolytic	AB
C6520	VCCCCY1HH221JY	J	220p 50V Ceramic	AA
C6521	VCCCCY1HH221JY	J	220p 50V Ceramic	AA
C6601	VCEA9M1CW107M+	J	100 16V Electrolytic	AB
C6602	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA
C6603	VCEA9M1CW107M+	J	100 16V Electrolytic	AB
C6604	VCEA9M1CW106M+	J	10 16V Electrolytic	AB
C6605	VCKYCY1HB103KY	J	0.01 50V Ceramic	AA

**RESISTORS**

JC2503	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA
JC2504	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA
JC2601	VRS-TV1JD000JY	J	0 1/16W Metal Oxide	AA
JC2602	VRS-TV1JD000JY	J	0 1/16W Metal Oxide	AA
JC2604	VRS-TV1JD000JY	J	0 1/16W Metal Oxide	AA
JC2605	VRS-TV1JD000JY	J	0 1/16W Metal Oxide	AA
JC2607	VRS-TV1JD000JY	J	0 1/16W Metal Oxide	AA
JC5507	VRS-TV1JD000JY	J	0 1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
JC6501	VRS-TV1JD000JY	J	0 1/16W Metal Oxide	AA
JC6601	VRS-TV1JD000JY	J	0 1/16W Metal Oxide	AA
R501	VRS-CY1JF392JY	J	3.9k 1/16W Metal Oxide	AA
R502	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R503	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R504	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R510	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R511	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R512	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R513	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
R514	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R515	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R516	VRS-CY1JF222JY	J	2.2k 1/16W Metal Oxide	AA
R517	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
R518	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
R520	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R521	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R522	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R523	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R524	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R525	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R526	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R527	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R530	VRS-CY1JF564JY	J	560k 1/16W Metal Oxide	AA
R531	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R532	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R534	VRS-CY1JF332JY	J	3.3k 1/16W Metal Oxide	AA
R535	VRS-CY1JF222JY	J	2.2k 1/16W Metal Oxide	AA
R536	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R537	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R538	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
R540	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
R542	VRS-CY1JF561JY	J	560 1/16W Metal Oxide	AA
R543	VRS-CY1JF561JY	J	560 1/16W Metal Oxide	AA
R545	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R546	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R547	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R548	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R549	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R550	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R551	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R552	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R553	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R554	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R555	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R557	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R558	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R560	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R561	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R562	VRS-CY1JF822JY	J	8.2k 1/16W Metal Oxide	AA
R565	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R566	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R567	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R568	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R569	VRS-CY1JF473JY	J	47k 1/16W Metal Oxide	AA
R570	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
R571	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R573	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R574	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R576	VRS-CY1JF151JY	J	150 1/16W Metal Oxide	AA
R577	VRS-CY1JF183JY	J	18k 1/16W Metal Oxide	AA
R578	VRS-CY1JF183JY	J	18k 1/16W Metal Oxide	AA
R579	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA
R581	VRS-TW2ED561JY	J	560 1/4W Metal Oxide	AA
R582	VRS-CY1JF223JY	J	22k 1/16W Metal Oxide	AA
R584	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA
R585	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R586	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R587	VRS-CY1JF473JY	J	47k 1/16W Metal Oxide	AA
R588	VRS-CY1JF183JY	J	18k 1/16W Metal Oxide	AA
R589	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
R590	VRS-TW2ED561JY	J	560 1/4W Metal Oxide	AA
R591	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R592	VRS-CY1JF562JY	J	5.6k 1/16W Metal Oxide	AA
R593	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
R598	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA



Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
<b>DUNT KC246TE6B (DV-HR350H)</b> <b>DUNT KC246TE6E (DV-HR300(A)/(B)/(M)/RU)</b> <b>DUNT KC246TE6F (DV-HR350X)</b> <b>SUB PWB UNIT(Continued)</b>					R1826	VRS-TW2ED471JY	J 470	1/4W Metal Oxide	AA
R599	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2201	VRS-CY1JF684JY	J 680k	1/16W Metal Oxide	AA
R701	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2202	VRS-CY1JF561JY	J 560	1/16W Metal Oxide	AA
R702	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2203	VRS-CY1JF154JY	J 150k	1/16W Metal Oxide	AA
R708	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2204	VRS-CY1JF392JY	J 3.9k	1/16W Metal Oxide	AA
R709	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2205	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R711	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2206	VRS-CY1JF125JY	J 1.2M	1/16W Metal Oxide	AA
R712	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2207	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R713	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2208	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R714	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2211	VRS-CY1JF125JY	J 1.2M	1/16W Metal Oxide	AA
R716	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2212	VRS-CY1JF334JY	J 330k	1/16W Metal Oxide	AA
R717	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2215	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R718	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2251	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R719	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2252	VRS-CY1JF682JY	J 6.8k	1/16W Metal Oxide	AA
R720	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2253	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R721	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2254	VRS-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R722	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2255	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R726	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2256	VRS-CY1JF682JY	J 6.8k	1/16W Metal Oxide	AA
R727	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2257	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R728	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2258	VRS-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R729	VRS-CY1JF561JY	J 560	1/16W Metal Oxide	AA	R2263	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R740	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R2264	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R755	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2265	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R756	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2267	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R757	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2301	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R758	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2341	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R759	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2342	VRS-TW2ED750JY	J 75	1/4W Metal Oxide	AA
R760	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2501	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R761	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2502	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R762	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2503	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R763	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2504	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R764	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2505	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R765	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2506	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R766	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2510	VRS-CY1JF331JY	J 330	1/16W Metal Oxide	AA
R767	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2511	VRS-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R773	VRS-CY1JF392JY	J 3.9k	1/16W Metal Oxide	AA	R2512	VRS-CY1JF221JY	J 220	1/16W Metal Oxide	AA
R774	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R2513	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R775	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R2514	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R776	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2515	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R777	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2516	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R778	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2520	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R780	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R2521	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R781	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2522	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R782	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2523	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R783	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2524	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R785	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R2527	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R786	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2528	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R787	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2529	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R788	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2530	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R790	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2533	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R792	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R2534	VRS-CY1JF105JY	J 1M	1/16W Metal Oxide	AA
R798	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R2535	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1703	VRS-CY1JF473JY	J 47k	1/16W Metal Oxide	AA	R2536	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1710	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2537	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1711	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA	R2538	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1714	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA	R2539	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1720	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2542	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1723	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2544	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1748	VRS-TW2ED101JY	J 100	1/4W Metal Oxide	AA	R2546	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1749	VRS-CY1JF333JY	J 33k	1/16W Metal Oxide	AA	R2548	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1750	VRS-CY1JF104JY	J 100k	1/16W Metal Oxide	AA	R2549	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1801	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2550	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1802	VRS-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA	R2552	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1803	VRS-CY1JF562JY	J 5.6k	1/16W Metal Oxide	AA	R2553	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1814	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2554	VRS-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R1817	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2557	VRS-CY1JF105JY	J 1M	1/16W Metal Oxide	AA
R1818	VRS-TW2ED471JY	J 470	1/4W Metal Oxide	AA	R2565	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1820	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R2566	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1822	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA	R2567	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R1823	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA	R2568	VRS-CY1JF153JY	J 15k	1/16W Metal Oxide	AA
R1824	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R2569	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R1825	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA	R2570	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
					R2573	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
					R2574	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
					R2577	VRS-CY1JF682JY	J 6.8k	1/16W Metal Oxide	AA
					R2578	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA

**DV-HR300(A)/(B)/(M)  
DV-HR300RU  
DV-HR350H/X**

Ref. No.	Part No.	★	Description	Code
<b>DUNTKC246TE6B (DV-HR350H) DUNTKC246TE6E (DV-HR300(A)/(B)/(M)/RU) DUNTKC246TE6F (DV-HR350X) SUB PWB UNIT(Continued)</b>				
R2579	VR5-CY1JF183JY	J 18k	1/16W Metal Oxide	AA
R2580	VR5-CY1JF122JY	J 1.2k	1/16W Metal Oxide	AA
R2581	VR5-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2582	VR5-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2583	VR5-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2584	VR5-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2585	VR5-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R2586	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2587	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2591	VR5-CY1JF271JY	J 270	1/16W Metal Oxide	AA
R2592	VR5-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2593	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2595	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2597	VR5-CY1JF271JY	J 270	1/16W Metal Oxide	AA
R2598	VR5-CY1JF271JY	J 270	1/16W Metal Oxide	AA
R2599	VR5-CY1JF271JY	J 270	1/16W Metal Oxide	AA
R2601	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2602	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2603	VR5-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R2604	VR5-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R2605	VR5-CY1JF821JY	J 820	1/16W Metal Oxide	AA
R2606	VR5-CY1JF821JY	J 820	1/16W Metal Oxide	AA
R2607	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2608	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2609	VR5-CY1JF821JY	J 820	1/16W Metal Oxide	AA
R2610	VR5-CY1JF821JY	J 820	1/16W Metal Oxide	AA
R2611	VR5-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R2612	VR5-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R2613	VR5-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R2614	VR5-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R2615	VR5-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R2616	VR5-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R2617	VR5-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R2618	VR5-TQ2BD750JY	J 75	1/8W Metal Oxide	AA
R2621	VR5-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2622	VR5-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2623	VR5-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2624	VR5-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2627	VR5-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2628	VR5-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2636	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2637	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2667	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2670	VR5-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2691	VR5-CY1JF682JY	J 6.8k	1/16W Metal Oxide	AA
R2692	VR5-CY1JF153JY	J 15k	1/16W Metal Oxide	AA
R2693	VR5-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R2803	VR5-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R2804	VR5-CY1JF333JY	J 33k	1/16W Metal Oxide	AA
R2805	VR5-CY1JF123FY	J 12k	1/16W Metal Oxide	AA
R2806	VR5-CY1JF273FY	J 27k	1/16W Metal Oxide	AA
R2807	VR5-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2808	VR5-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2809	VR5-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2810	VR5-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2811	VR5-CY1JF333JY	J 33k	1/16W Metal Oxide	AA
R2812	VR5-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R2813	VR5-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R2814	VR5-CY1JF472FY	J 4.7k	1/16W Metal Oxide	AA
R2815	VR5-CY1JF103FY	J 10k	1/16W Metal Oxide	AA
R2817	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2818	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2819	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2901	VR5-TW2ED331JY	J 330	1/4W Metal Oxide	AB
R2903	VR5-CY1JF183JY	J 18k	1/16W Metal Oxide	AA
R2904	VR5-CY1JF153JY	J 15k	1/16W Metal Oxide	AA
R2907	VR5-CY1JF821JY	J 820	1/16W Metal Oxide	AA
R2909	VR5-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R5501	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5502	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5556	VR5-CY1JF101JY	J 100	1/16W Metal Oxide	AA

Ref. No.	Part No.	★	Description	Code
R5557	VR5-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R5558	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5559	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5560	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5565	VR5-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R5568	VR5-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R5570	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5580	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5581	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5582	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5583	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5584	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5585	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5586	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5587	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5588	VR5-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R5589	VR5-CY1JF104JY	J 100k	1/16W Metal Oxide	AA
R5590	VR5-CY1JF221JY	J 220	1/16W Metal Oxide	AA
R5591	VR5-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R5592	VR5-CY1JF273JY	J 27k	1/16W Metal Oxide	AA
R5595	VR5-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R6101	VR5-TQ2BD330JY	J 33	1/8W Metal Oxide	AA
R6102	VR5-TQ2BD153JY	J 15k	1/8W Metal Oxide	AA
R6103	VR5-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R6106	VR5-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R6107	VR5-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R6108	VR5-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R6109	VR5-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R6110	VR5-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R6111	VR5-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R6501	VR5-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R6502	VR5-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R6503	VR5-CY1JF222JY	J 2.2k	1/16W Metal Oxide	AA
R6504	VR5-CY1JF152JY	J 1.5k	1/16W Metal Oxide	AA
R6505	VR5-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R6506	VR5-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R6507	VR5-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R6508	VR5-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R6509	VR5-CY1JF183JY	J 18k	1/16W Metal Oxide	AA
R6510	VR5-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R6511	VR5-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R6512	VR5-CY1JF183JY	J 18k	1/16W Metal Oxide	AA
R6513	VR5-CY1JF153JY	J 15k	1/16W Metal Oxide	AA
R6514	VR5-CY1JF153JY	J 15k	1/16W Metal Oxide	AA
R6515	VR5-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R6516	VR5-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R6517	VR5-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R6518	VR5-CY1JF473JY	J 47k	1/16W Metal Oxide	AA
R6520	VR5-CY1JF271JY	J 270	1/16W Metal Oxide	AA
R6521	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R6522	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R6523	VR5-CY1JF271JY	J 270	1/16W Metal Oxide	AA
R6524	VR5-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R6525	VR5-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R6601	VR5-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R6602	VR5-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R6603	VR5-TW2ED221JY	J 220	1/4W Metal Oxide	AB
R6604	VR5-CY1JF151JY	J 150	1/16W Metal Oxide	AA
R6605	VR5-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R6606	VR5-CY1JF681JY	J 680	1/16W Metal Oxide	AA
R6608	VR5-TW2ED221JY	J 220	1/4W Metal Oxide	AB

**MISCELLANEOUS PARTS**

FB502	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB514	RBLN-0252TAZZY	J	Ferrite Bead	AA
FB2601	RBLN-0077TAZZY	J	Ferrite Bead	AB
FB2602	RBLN-0077TAZZY	J	Ferrite Bead	AB
FB2605	RBLN-0077TAZZY	J	Ferrite Bead	AB
FB2606	RBLN-0077TAZZY	J	Ferrite Bead	AB
FB2607	RBLN-0077TAZZY	J	Ferrite Bead	AB
FB2608	RBLN-0076TAZZY	J	Ferrite Bead	AC
FB2609	RBLN-0077TAZZY	J	Ferrite Bead	AB
FB2610	RBLN-0077TAZZY	J	Ferrite Bead	AB
FB2611	RBLN-0077TAZZY	J	Ferrite Bead	AB
FB2612	RBLN-0077TAZZY	J	Ferrite Bead	AB
FB2613	RBLN-0077TAZZY	J	Ferrite Bead	AB



Ref. No.	Part No.	★	Description	Code	Ref. No.	Part No.	★	Description	Code
FB2614	RBLN-0076TAZZY	J	Ferrite Bead	AC	△ C904	RC-KZ0103GEZZ	J	1000p 250V Ceramic	AD
FB6601	RBLN-0252TAZZY	J	Ferrite Bead	AA	△ C905	RC-KZ0103GEZZ	J	1000p 250V Ceramic	AD
R2638	RBLN-0077TAZZY	J	Ferrite Bead	AB	△ C908	RC-EZA255WJZZ	J	220 400V Electrolytic	AP
R2639	RBLN-0077TAZZY	J	Ferrite Bead	AB	△ C909	VCEA0A1EW227M+	J	220 25V Electrolytic	AB
J2601	QTANJA006WJZZ	J	Component Terminal	AE	△ C910	RC-KZ1017CEZZ+	J	680p 2kV Ceramic	AD
J2602	QJAKGA035WJZZ	J	Output Jack	AD	△ C912	VCQYTA1HM222J+	J	2200p 50V Mylar	AA
J6601	QTANJA013WJZZ	J	Digital Terminal	AD	△ C913	VCQYTA1HM102J+	J	1000p 50V Mylar	AB
P501	QPLGN1078GEZZ	J	Plug, 10Pin	AC	△ C914	VCQYTA1HM101K+	J	100p 50V Mylar	AC
P502	QPLGN1178GEZZ	J	Plug, 11Pin	AC	△ C916	VCEA9M1HW475M+	J	4.7 50V Electrolytic	AB
P503	QPLGN0378GEZZ	J	Plug, 3Pin	AB	C9001	VCEA0A1CW227M+	J	220 16V Electrolytic	AC
<b>DUNT KC247TEV2 (DV-HR350H)</b> <b>DUNT KC247TEV5 (DV-HR300(A)/(B)/(M)/RU)</b> <b>DUNT KC247TEV4 (DV-HR350X)</b> <b>POWER PWB</b>					C9002	VCKYCY1HB104KY	J	0.1 50V Ceramic	AA
					C9004	VCKYCY1HB472KY	J	4700p 50V Ceramic	AA
					C9010	VCEA0A2AW106M+	J	10 100V Electrolytic	AC
					C9011	RC-EZ1238CEZZ	J	1000 25V Electrolytic	AE
<b>INTEGRATED CIRCUITS</b>					C9012	RC-EZ1238CEZZ	J	1000 25V Electrolytic	AE
△ IC901	VHiMR2920+-1	J	MR2920	AQ	C9013	VCEA0A1EW228M	J	2200 25V Electrolytic	AF
IC9006	VHiKIA431/-1+	J	KIA431	AE	C9014	RC-EZ1206CEZZ	J	1200 10V Electrolytic	AE
IC9022	VHiPQ07VK02-1	J	PQ070VK02FZ	AK	C9015	RC-EZ1206CEZZ	J	1200 10V Electrolytic	AE
IC9023	VHiPQ30RV31-2	J	PQ30RV31	AL	C9016	VCEA0A1AW338M	J	3300 10V Electrolytic	AE
IC9051	VHiMD1422N+-1Y	J	MD1422N	AQ	C9017	VCEA0A1EW228M	J	2200 25V Electrolytic	AF
IC9061	VHiPQ15RW21-1	J	PQ15RW21	AK	C9022	VCEA9M1HW474M+	J	0.47 50V Electrolytic	AB
<b>TRANSISTORS</b>					C9023	VCEA9A1CW476M+	J	47 16V Electrolytic	AB
△ Q905	VS2SC3052EF-1Y	J	2SC3052EF	AC	C9024	VCEA9M1HW474M+	J	0.47 50V Electrolytic	AB
Q906	VSKRC102S/-1Y	J	KRC102S	AA	C9025	VCEA9M0JW107M+	J	100 6.3V Electrolytic	AB
△ Q907	VS2SC3052EF-1Y	J	2SC3052EF	AC	C9051	VCKYCY1HB102KY	J	1000p 50V Ceramic	AA
Q9001	VSKRC102S/-1Y	J	KRC102S	AA	C9052	RC-EZ1231CEZZ+	J	220 25V Electrolytic	AC
Q9025	VS2SB1117KU1E+	J	2SB1117KU1E+	AE	C9053	RC-EZ1231CEZZ+	J	220 25V Electrolytic	AC
Q9026	VSKRC102S/-1Y	J	KRC102S	AA	C9054	VCKYCY1HB104KY	J	0.1 50V Ceramic	AA
Q9051	VSKRC102S/-1Y	J	KRC102S	AA	C9055	VCKYCY1HB102KY	J	1000p 50V Ceramic	AA
Q9061	VS2SB1117KU1E+	J	2SB1117KU1E+	AE	C9056	VCKYCY1HB104KY	J	0.1 50V Ceramic	AA
Q9062	VSKRC102S/-1Y	J	KRC102S	AA	C9057	VCKYCY1CB473KY	J	0.047 16V Ceramic	AA
Q9063	VS2SB1117KU1E+	J	2SB1117KU1E+	AE	C9058	RC-EZ1190CEZZ	J	1200 6.3V Electrolytic	AD
Q9064	VSKRC102S/-1Y	J	KRC102S	AA	C9059	RC-EZ1190CEZZ	J	1200 6.3V Electrolytic	AD
<b>DIODES AND LED'S</b>					C9061	VCEA9M0JW107M+	J	100 6.3V Electrolytic	AB
△ D901	RH-DX0476CEZZ	J	Diode	AG	<b>RESISTORS</b>				
△ D903	VHD10ELS4/-1Y	J	10ELS4	AD	△ R901	RR-HZ0014GEZZY	J	12M 1W	AE
△ D904	RH-EX0633GEZZY	J	Zener Diode, MTZJ10B	AB	△ R902	VRD-RM2HD105JY	J	1M 1/2W Carbon	AA
△ D905	VHD1SS119/-1Y	J	1SS119	AA	△ R903	RR-WZA008WJZZ	J	3.3 5W	AF
△ D906	VHD1SS119/-1Y	J	1SS119	AA	△ R906	VRD-RM2HD180JY	J	18 1/2W Carbon	AA
△ D907	VHD10ELS4/-1Y	J	10ELS4	AD	△ R907	VRD-RA2BE562JY	J	5.6k 1/8W Carbon	AA
△ D908	VHD05NU42/-1Y	J	05NU42	AD	△ R908	VRD-RA2BE103JY	J	10k 1/8W Carbon	AA
D9001	VHD10ELS4/-1Y	J	10ELS4	AD	△ R910	VRD-RA2BE822JY	J	8.2k 1/8W Carbon	AA
D9002	VHD10ELS4/-1Y	J	10ELS4	AD	△ R911	VRD-RA2BE183JY	J	18k 1/8W Carbon	AA
D9005	VHDSF6L20U+-1	J	SF6L20U+	AG	△ R912	VRN-VV3DBR15J	J	0.15 2W Metal Film	AB
D9007	RH-DX0459CEZZ	J	Diode	AE	△ R917	VRD-RM2HD101JY	J	100 1/2W Carbon	AA
D9009	RH-EX0602GEZZY	J	Zener Diode, MTZJ3.6B	AB	△ R918	VRD-RA2BE103JY	J	10k 1/8W Carbon	AA
D9021	VHD1SS119/-1Y	J	1SS119	AA	△ R919	VRD-RA2BE103JY	J	10k 1/8W Carbon	AA
D9051	VHDSFPB74/2EY	J	Diode	AD	△ R922	VRD-RA2BE104JY	J	100k 1/8W Carbon	AA
D9052	VHD1SS119/-1Y	J	1SS119	AA	R9001	VRS-CY1JF1R0JY	J	1 1/16W Metal Oxide	AA
D9053	RH-EX0609GEZZY	J	Zener Diode, MTZJ4.7B	AA	R9003	VRD-RA2BE473JY	J	47k 1/8W Carbon	AA
D9054	VHD1SS119/-1Y	J	1SS119	AA	R9004	VRD-RA2BE272JY	J	2.7k 1/8W Carbon	AA
D9091	VHD1SS119/-1Y	J	1SS119	AA	R9005	VRD-RA2BE102JY	J	1k 1/8W Carbon	AA
D9092	VHD1SS119/-1Y	J	1SS119	AA	R9007	VRS-CY1JF102JY	J	1k 1/16W Metal Oxide	AA
D9093	VHD1SS119/-1Y	J	1SS119	AA	R9008	VRS-CY1JF471FY	J	470 1/16W Metal Oxide	AA
D9094	VHD1SS119/-1Y	J	1SS119	AA	R9009	VRS-CY1JF102FY	J	1k 1/16W Metal Oxide	AA
D9096	VHD1SS119/-1Y	J	1SS119	AA	R9010	VRS-CY1JF102FY	J	1k 1/16W Metal Oxide	AA
△ IC902	RH-FX0008GEZZ	J	PC123FY8	AE	R9011	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA
△ IC903	RH-FX0008GEZZ	J	PC123FY8	AE	R9013	VRD-RA2BE152JY	J	1.5k 1/8W Carbon	AA
△ IC904	RH-FX0008GEZZ	J	PC123FY8	AE	R9014	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
<b>COIL AND TRANSFORMERS</b>					R9015	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA
△ L901	RCiLFA078WJZZ	J	Coil	AF	R9016	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
L9001	RCiLP0184CEZZ+	J	Coil	AD	R9017	VRD-RA2BE331JY	J	330 1/8W Carbon	AA
L9002	RCiLP0184CEZZ+	J	Coil	AD	R9028	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
L9051	RCiLPA130WJZZ	J	Coil	AC	R9029	VRD-RM2HD681JY	J	680 1/2W Carbon	AB
△ T901	RTRNWA116WJZZ	J	Transformer	AM	R9030	VRS-CY1JF472JY	J	4.7k 1/16W Metal Oxide	AA
<b>CAPACITORS</b>					R9031	VRS-CY1JF223JY	J	22k 1/16W Metal Oxide	AA
△ C901	RC-FZ036SCEZZ	J	0.1 25V	AC	R9032	VRS-CY1JF561JY	J	560 1/16W Metal Oxide	AA
△ C902	RC-FZ036SCEZZ	J	0.1 25V	AC	R9033	VRS-CY1JF562JY	J	5.6k 1/16W Metal Oxide	AA
△ C903	RC-KZ0103GEZZ	J	1000p 250V Ceramic	AD	R9034	VRS-CY1JF222JY	J	2.2k 1/16W Metal Oxide	AA
					R9035	VRS-CY1JF123JY	J	12k 1/16W Metal Oxide	AA
					R9051	VRS-CY1JF104JY	J	100k 1/16W Metal Oxide	AA
					R9052	VRS-CY1JF105JY	J	1M 1/16W Metal Oxide	AA
					R9053	VRS-TW2HPR10JY	J	0.1 1/2W Metal Oxide	AA
					R9054	VRS-TW2HPR10JY	J	0.1 1/2W Metal Oxide	AA
					R9055	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA

**DV-HR300(A)/(B)/(M)  
DV-HR300RU  
DV-HR350H/X**

Ref. No.	Part No.	★	Description	Code
<b>DUNT KC247TEV2 (DV-HR350H) DUNT KC247TEV5 (DV-HR300(A)/(B)/(M)/RU) DUNT KC247TEV4 (DV-HR350X) POWER PWB(Continued)</b>				
R9056	VRS-CY1JF561FY	J 560	1/16W Metal Oxide	AA
R9057	VRS-CY1JF181FY	J 180	1/16W Metal Oxide	AA
R9058	VRS-CY1JF222FY	J 2.2k	1/16W Metal Oxide	AA
R9059	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R9061	VRS-CY1JF102FY	J 1k	1/16W Metal Oxide	AA
R9062	VRS-CY1JF122FY	J 1.2k	1/16W Metal Oxide	AA
R9063	VRS-CY1JF682FY	J 6.8k	1/16W Metal Oxide	AA
R9064	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R9065	VRD-RM2HD221JY	J 220	1/2W Carbon	AA
R9066	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R9067	VRD-RM2HD221JY	J 220	1/2W Carbon	AA

**MISCELLANEOUS PARTS**

△ CN901	QPLGN0269GEZZ	J	Plug, 2Pin(AC IN)	AB
FB9051	RBLN-0020CEZZ+	J	Ferrite Bead	AB
FB9052	RBLN-0090GEZZY	J	Ferrite Bead	AB
FB9061	RBLN-0090GEZZY	J	Ferrite Bead	AB
△ F901	QFS-C2025CEZZ	J	Fuse, 2A/250V	AD
△ FH901	QFSDH1014CEZZ+	J	Fuse Holder	AC
△ FH902	QFSDH1013CEZZ+	J	Fuse Holder	AC
P9001	QPLGN0578GEZZ	J	Plug, 5Pin	AB
P9002	QPLGN0441CEZZ	J	Plug, 4Pin	AB
P9003	QPLGN1178GEZZ	J	Plug, 11Pin	AC
P9004	QPLGN1078GEZZ	J	Plug, 10Pin	AC
P9005	QPLGN1278GEZZ	J	Plug, 12Pin	AC
△ W901	PRDARA047WJFW	J	Heat Sink for IC901	AF
W9005	PRDAR0103AJFW	J	Heat Sink for D9005	AE
W9007	PRDAR0103AJFW	J	Heat Sink for D9007	AE
W9022	PRDARA044WJFW	J	Heat Sink for IC9022	AE
W9025	PRDARA044WJFW	J	Heat Sink for IC9025	AE
W9061	PRDARA044WJFW	J	Heat Sink for IC9061	AE
W9051	QEARPA013WJZZ	J	Grounding Part	AC
W9052	QEARPA013WJZZ	J	Grounding Part	AC
W9053	QEARPA013WJZZ	J	Grounding Part	AC
W9054	QEARPA013WJZZ	J	Grounding Part	AC
W9055	QEARPA013WJZZ	J	Grounding Part	AC
	PSPA ZA371WJZZ	J	Spacer	AB
	XBPSD30P10KS0	J	Screw	AA

**DUNT KC248TEV2 (DV-HR350H)  
DUNT KC248TEV3 (DV-HR300(A)/(B)/(M)/RU/HR350X)  
OPERATION (R) PWB UNIT**

**RESISTORS**

R5028	VRS-CY1JF563JY	J 56k	1/16W Metal Oxide	AA
R5032	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R5036	VRS-CY1JF822JY	J 8.2k	1/16W Metal Oxide	AA
R5038	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R5040	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA
R5041	VRS-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R5042	VRS-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R5049	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA

**SWITCHES**

SW5005	QSW-K0003AJZZ+	J	Switch, TEST	AB
SW5009	QSW-K0003AJZZ+	J	Switch, STOP	AB
SW5012	QSW-K0003AJZZ+	J	Switch, OPEN/CLOSE	AB
SW5013	QSW-K0003AJZZ+	J	Switch, PLAY PAUSE	AB
SW5014	QSW-K0003AJZZ+	J	Switch, PLAY	AB

**MISCELLANEOUS PARTS**

CN5001	QEARPA013WJZZ	J	Grounding Part	AC
S5001	QSOCN0601FJZZ	J	Socket, 4Pin	AC

**DUNT KC249TEV2 (DV-HR350H)  
DUNT KC249TEV3 (DV-HR300(A)/(B)/(M)/RU/HR350X)  
OPERATION (L) PWB UNIT**

**TRANSISTORS**

Q2701	VSKRA102S/-1Y	J	KRA102S	AA
Q2703	VSKRA102S/-1Y	J	KRA102S	AA

**DIODES AND LED'S**

D2701	RH-PXA046WJZZ+	J	STANDBY LED (RED)	AD
D2703	RH-PXA046WJZZ+	J	Timer LED (RED)	AD

**CAPACITORS**

C2701	VCEA9M0JW476M+	J 47	6.3V Electrolytic	AB
C2703	VCKYCY1HF104ZY	J 0.1	50V Ceramic	AA
C2706	VCKYCY1CF104ZY	J 0.1	16V Ceramic	AA
C2708	VCKYCY1HB331KY	J 330p	50V Ceramic	AA
C2709	VCKYCY1HB331KY	J 330p	50V Ceramic	AA

**RESISTORS**

RJ2701	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R2701	VRS-CY1JF101JY	J 100	1/16W Metal Oxide	AA
R2704	VRS-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2705	VRS-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2706	VRS-CY1JF750JY	J 75	1/16W Metal Oxide	AA
R2709	VRS-CY1JF102JY	J 1k	1/16W Metal Oxide	AA
R2710	VRS-CY1JF392JY	J 3.9k	1/16W Metal Oxide	AA
R2712	VRS-CY1JF392JY	J 3.9k	1/16W Metal Oxide	AA
R2713	VRS-CY1JF563JY	J 56k	1/16W Metal Oxide	AA
R2714	VRS-CY1JF223JY	J 22k	1/16W Metal Oxide	AA
R2715	VRS-CY1JF103JY	J 10k	1/16W Metal Oxide	AA
R2716	VRS-CY1JF822JY	J 8.2k	1/16W Metal Oxide	AA
R2717	VRS-CY1JF472JY	J 4.7k	1/16W Metal Oxide	AA
R2718	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA
R2719	VRS-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R2720	VRS-CY1JF332JY	J 3.3k	1/16W Metal Oxide	AA
R2721	VRS-CY1JF272JY	J 2.7k	1/16W Metal Oxide	AA
R5043	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5044	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA
R5045	VRS-CY1JF000JY	J 0	1/16W Metal Oxide	AA

**SWITCHES**

SW2701	QSW-K0003AJZZ+	J	Switch, POWER	AB
SW2702	QSW-K0003AJZZ+	J	Switch, RESET	AB
SW2703	QSW-K0003AJZZ+	J	Switch, REC	AB
SW2704	QSW-K0003AJZZ+	J	Switch, REC STOP	AB
SW2705	QSW-K0003AJZZ+	J	Switch, REC PAUSE	AB
SW2706	QSW-K0003AJZZ+	J	Switch, CH +	AB
SW2707	QSW-K0003AJZZ+	J	Switch, CH -	AB

**MISCELLANEOUS PARTS**

J2701	QSOC D0439CEZZ	J	Socket	AF
J2702	QJAKGA053WJZZ	J	Front A/VJack	AE
J2703	QSOCZA043WJZZ	J	Socket, 4Pin	AG
P2701	QPLGN0580GEZZ	J	Plug, 5Pin	AB
RMC2702	RRMCU0064GEZZ	J	Remote Receiver	AG
S2701	QSOCN0616FJZZ	J	Socket, 19Pin	AD
W2701	QEARPA013WJZZ	J	Grounding Part	AC
W2702	QEARPA013WJZZ	J	Grounding Part	AC

**DUNT KC251TEV2 (DV-HR350H)  
DUNT KC434TEV2 (DV-HR300(A)/(B)/(M)/RU)  
DUNT KC251TEV3 (DV-HR350X)  
TUNER PWB UNIT**

**TUNER AND ASSEMBLY**

TU1501	VTUK0601PD20H	J	VHF Tuner (DV-HR300(A)/(B)/(M)/RU)	AZ
TU1501	VTUATMDB2-633	J	VHF Tuner (DV-HR350H)	BD
TU1501	VTUATMDG2-836	J	VHF Tuner (DV-HR350X)	BE



Ref. No.	Part No.	★	Description	Code
DUNTKC251TEV2 (DV-HR350H)				
DUNTKC434TEV2 (DV-HR300(A)/(B)/(M)/RU)				
DUNTKC251TEV3 (DV-HR350X)				
TUNER PWB UNIT(Continued)				

#### TRANSISTORS

Q1501	VSKRC103S/-1Y	J	KRC103S	AA
Q1502	VS2SA1530ARS1Y	J	2SA1530ARS	AC
Q1503	VSKRC103S/-1Y	J	KRC103S	AA
Q1504	VS2SB1117KU1E+	J	2SB1117KU1E+	AE

#### DIODES

D1501	RH-EX0675GEZZY	J	Zener Diode	AB
D1502	RH-EX0627GEZZY	J	Zener Diode	AA
D1503	RH-EX0627GEZZY	J	Zener Diode	AA

#### COILS

L1501	VP-CF101K0000Y	J	Peaking 100μH	AB
L1502	VP-CF101K0000Y	J	Peaking 100μH	AB
L1503	VP-XF100K0000Y	J	Peaking 10μH (DV-HR350H/X)	AB
L1504	VP-XF100K0000Y	J	Peaking 10μH (DV-HR350H/X)	AB

#### CAPACITORS

C1501	VCEA0A1HW476M+	J	47 50V Electrolytic	AB
C1502	VCKYCY1HF103ZY	J	0.01 50V Ceramic	AA
C1503	VCEA9M0JW476M+	J	47 6.3V Electrolytic	AB
C1504	VCEA2A0JW477M+	J	470 6.3V Electrolytic	AC
C1505	VCKYCY1HF103ZY	J	0.01 50V Ceramic	AA
C1506	VCCCCY1HH101JY	J	100P 50V Ceramic (DV-HR300(A)/(B)/(M)/RU)	AA
C1507	VCCCCY1HH101JY	J	100P 50V Ceramic (DV-HR300(A)/(B)/(M)/RU)	AA
C1508	VCKYCY1HF103ZY	J	0.01 50V Ceramic	AA
C1509	VCKYCY1CF104ZY	J	0.1 16V Ceramic	AA

#### RESISTORS

RJ1504	VRS-CY1JF000JY	J	0 1/16W Metal Oxide (DV-HR350H/X)	AA
RJ1505	VRS-CY1JF000JY	J	0 1/16W Metal Oxide (DV-HR350H/X)	AA
RJ1506	VRS-CY1JF000JY	J	0 1/16W Metal Oxide (DV-HR350H/X)	AA
R1501	VRS-CY1JF154JY	J	150k 1/16W Metal Oxide	AA
R1502	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R1503	VRD-RM2HD102JY	J	1k 1/2W Carbon	AA
R1504	VRD-RM2HD221JY	J	220 1/2W Carbon	AA
R1505	VRS-CY1JF103JY	J	10k 1/16W Metal Oxide	AA
R1506	VRS-CY1JF000JY	J	0 1/16W Metal Oxide	AA
R1508	VRD-RA2BE224JY	J	220k 1/8W Carbon (DV-HR300(A)/(B)/(M)/RU)	AA
R1508	VRS-CY1JF224JY	J	220k 1/16W Metal Oxide (DV-HR350H/X)	AA
R1510	VRS-CY1JF000JY	J	0 1/16W Metal Oxide (DV-HR350H/X)	AA
R1511	VRS-CY1JF000JY	J	0 1/16W Metal Oxide (DV-HR350H/X)	AA
R1512	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
R1513	VRS-CY1JF101JY	J	100 1/16W Metal Oxide	AA
R1520	VRS-CY1JF000JY	J	0 1/16W Metal Oxide (DV-HR350H/X)	AA
R1523	VRS-CY1JF000JY	J	0 1/16W Metal Oxide (DV-HR300(A)/(B)/(M)/RU)	AA
R1525	VRS-CY1JF000JY	J	0 1/16W Metal Oxide (DV-HR300(A)/(B)/(M)/RU)	AA
R1526	VRS-CY1JF000JY	J	0 1/16W Metal Oxide (DV-HR300(A)/(B)/(M)/RU)	AA
R1531	VRS-CY1JF000JY	J	0 1/16W Metal Oxide (DV-HR300(A)/(B)/(M)/RU)	AA

#### MISCELLANEOUS PARTS

S1501	QSO CN0579GEZZ	J	Socket, 5Pin	AC
S1502	QSO CN1079GEZZ	J	Socket, 10Pin	AC

Ref. No.	Part No.	★	Description	Code
----------	----------	---	-------------	------

**DV-HR300(A)/(B)/(M)**  
**DV-HR300RU**  
**DV-HR350H/X**

Ref. No.	Part No.	★	Description	Code
<b>CABINET PARTS</b>				
1	CCABAA444TEV4	J	Top Body Ass'y (DV-HR300RU)	AV
1	CCABAA444TEV6	J	Top Body Ass'y (DV-HR350H)	AV
1	CCABAA444TEV8	J	Top Body Ass'y (DV-HR350X)	AV
1	CCABAA444TEV9	J	Top Body Ass'y (DV-HR300(A)/(B)/(M))	AV
2	GBDYUA048WJFW	J	Chassis Ass'y (DV-HR350X/300(A)/(B)/(M)/RU)	AT
2	GBDYUA099WJFW	J	Chassis Ass'y(DV-HR350H)	
3	GCOVAA824WJZZ	J	Rear Cover (DV-HR350X)	AN
3	GCOVAB008WJZZ	J	Rear Cover (DV-HR300RU)	
3	GCOVAA689WJZZ	J	Rear Cover (DV-HR350H)	AN
3	GCOVAA951WJZZ	J	Rear Cover (DV-HR300(A)/(B)/(M))	AM
4	LANGFA054WJFW	J	HDD Angle	AK
5	LANGFA055WJFW	J	Writer Angle (L)	AE
6	LANGFA056WJFW	J	Writer Angle (R)	AD
7	PSPAZA291WJZZ	J	HDD Angle Spacer	AB
8	PSPAZA290WJZZ	J	Writer Angle Spacer	AB
9	PSPAZA335WJZZ	J	Fan Spacer	AC
10	NFANRA021WJZZ	J	Fan	AS
⚠ 12	QACCB018WJPZ	J	AC Cord (DV-HR350H)	AR
⚠ 12	QACCV008WJPZ	J	AC Cord (DV-HR300(A)/(B)/(M)/RU)	AL
⚠ 12	QACCLA009WJPZ	J	AC Cord (DV-HR350X)	AN
13	PGUMSA008WJZZ	J	Foot Rubber	AB
14	LHLDZA246WJZZ	J	Tray Holder	AC
15	Ci-OHA007TEV2	J	Hard Disk Drive Unit (DV-HR300(A)/(B)/(M)/RU)	CG
15	Ci-OHA006TEV2	J	Hard Disk Drive Unit (DV-HR350H/X)	CP
16	DUNT KC247TEV2	-	Power Unit (DV-HR350H)	—
16	DUNT KC247TEV5	-	Power Unit (DV-HR300(A)/(B)/(M)/RU)	—
16	DUNT KC247TEV4	-	Power Unit (DV-HR350X)	—
17	LANGFA057WJFW	J	Fan Angle (DV-HR350X/300(A)/(B)/(M)/RU)	AD
17	LANGFA121WJFW	J	Fan Angle (DV-HR350H)	AD
18	DSETV0192TEVE	V	Main Unit (DV-HR350H)	—
18	DSETV0192TEVW	V	Main Unit (DV-HR350X)	—
18	DSETV0192TEVX	V	Main Unit (DV-HR300(A)/(B)/(M))	—
18	DSETV0192TEW1	V	Main Unit (DV-HR300RU)	—
19	DMECDA001TEV1	J	Writer Unit	CG
20	DUNT KC050TE6C	-	LCD Unit (DV-HR350H)	—
20	DUNT KC050TE6D	-	LCD Unit (DV-HR350X/300(A)/(B)/(M)/RU)	—
21	DUNT KC248TEV2	-	Operation (R) Unit (DV-HR350H)	—
21	DUNT KC248TEV3	-	Operation (R) Unit (DV-HR350X/300(A)/(B)/(M)/RU)	—
22	DUNT KC249TEV2	-	Operation (L) Unit (DV-HR350H)	—
22	DUNT KC249TEV3	-	Operation (L) Unit (DV-HR350X/300(A)/(B)/(M)/RU)	—
23	DUNT KC246TE6B	-	Sub Unit (DV-HR350H)	—
23	DUNT KC246TE6E	-	Sub Unit (DV-HR300(A)/(B)/(M)/RU)	—
23	DUNT KC246TE6F	-	Sub Unit (DV-HR350X)	—
24	XHP SF30P06WS0	J	Screw	AA
25	XJBSD30P16000	J	Screw	AA
26	XHBSF30P30000	J	Screw	AB
27	XHP SD30P14XS0	J	Screw	AA
28	LX-HZ3099GEFD	J	Screw	AB
29	LX-AZA003WJZZ	J	Screw	AB
30	MSPRCA021WJFW	J	Tray Spring	AA
31	HDECQA404WJSB	J	Tray Panel (DV-HR300(A)/(B)/(M)/RU)	AH

Ref. No.	Part No.	★	Description	Code
31	HDECQA404WJSA	J	Tray Panel (DV-HR350H/X)	AG
32	XHP SD30P06WS0	J	Screw	AA
33	XEBSF30P08000	J	Screw	AA
34	XHP SF30P06000	J	Screw	AA
35	LHLDZA266WJZZ	J	Holder	AC
36	LHLDZA397WJZZ	J	PWB Holder	AG
37	LHLDZA144WJZZ	J	Palette Pin Holder	AC
38	LHLDW1009CEZZ	J	Wire Holder	AA
39	PSHEPA120WJZZ	J	Sheet	AE
40	PSHEPA201WJZZ	J	Sheet	AD
41	DUNT KC434TEV2	-	Tuner Unit (DV-HR300(A)/(B)/(M)/RU)	—
41	DUNT KC251TEV2	-	Tuner Unit (DV-HR350H)	—
41	DUNT KC251TEV3	-	Tuner Unit (DV-HR350X)	—
43	TLABMB109WJZZ	J	Model Label (DV-HR300(A))	AB
43	TLABMB114WJZZ	J	Model Label (DV-HR300(M))	AB
43	TLABMB141WJZZ	J	Model Label (DV-HR350X)	AB
43	TLABMB146WJZZ	J	Model Label (DV-HR300(B))	AB
43	TLABMB300WJZZ	J	Model Label (DV-HR300RU)	
43	TLABMA838WJZZ	J	Model Label (DV-HR350H)	
44	TLABZA185WJZZ	J	Label	AB
46	TLABZA648WJZZ	J	Licence Label (DV-HR300RU)	AC
46	TLABZA649WJZZ	J	Licence Label (DV-HR350H)	AC
46	TLABZA655WJZZ	J	Licence Label (DV-HR350X)	AC
46	TLABZA745WJZZ	J	Licence Label (DV-HR300(A)/(B)/(M))	AC
47	TLABSA047WJZZ	J	Caution Label (DV-HR300(B))	AB
50	QCNCWA156WJZZ	J	HDD Connector	AQ
51	QCNW-B711WJZZ	J	Connecting Cord	AD
52	QCNW-B705WJZZ	J	Connecting Cord	AF
53	QCNW-B709WJZZ	J	Connecting Cord	AG
54	QCNW-B708WJZZ	J	Connecting Cord	AG
55	QCNW-B710WJZZ	J	Connecting Cord	AH
56	QCNW-B715WJZZ	J	Connecting Cord	AE
57	QCNW-B716WJZZ	J	Connecting Cord	AE
58	QCNW-B712WJZZ	J	Connecting Cord	AH
59	QCNW-B714WJZZ	J	Connecting Cord	AE
60	QCNW-B717WJZZ	J	Connecting Cord	AE
61	QCNW-B707WJZZ	J	Connecting Cord	AS
62	QCNW-B704WJZZ	J	Connecting Cord	AF
63	QCNW-B713WJZZ	J	Connecting Cord	AE
65	PSPA ZA376WJZZ	J	Spacer	AC
66	PSPA ZA375WJZZ	J	Spacer	AB
67	QEARBA008WJZZ	J	Shield Finger	AH
68	PSLDMA159WJZZ	J	Gasket	AG
69	QEARZA054WJZZ	J	Gasket, x2	AE
70	LX-HZ3096GEZZ	J	Screw, x2 (DV-HR300(A)/(B)/(M)/RU)	AB
70	LX-HZ3087GEFN	J	Screw, x2 (DV-HR350H/X)	AB
71	RCORFA020WJZZ	J	Core (DV-HR300RU/350H)	AN

**FRONT PANEL PARTS**

600	CPNLCA124TEV3	J	Front Panel Ass'y (DV-HR350X)	BD
600	CPNLCA125TEV4	J	Front Panel Ass'y (DV-HR300(A)/(B)/(M))	BD
600	CPNLCA124TEV5	J	Front Panel Ass'y (DV-HR350H)	BD
600	CPNLCA125TEV8	J	Front Panel Ass'y (DV-HR300RU)	BD
600-1	JB TN-A199WJSB	J	Button, Power (DV-HR300(A)/(B)/(M)/RU)	AC
600-1	JB TN-A199WJSC	J	Button, Power (DV-HR350H/X)	AC
600-2	JB TN-A200WJSB	J	Button, Eject (DV-HR300(A)/(B)/(M)/RU)	AC
600-2	JB TN-A200WJSC	J	Button, Eject (DV-HR350H/X)	AC
600-3	JB TN-A201WJSA	J	Button, DVD (DV-HR300(A)/(B)/(M)/RU)	AL
600-3	JB TN-A201WJSB	J	Button, DVD (DV-HR350H/X)	AM

Ref. No.	Part No.	★	Description	Code
<b>FRONT PANEL PARTS (Continued)</b>				
600-4	JBTN-A202WJSA	J	Button, HDD (DV-HR300(A)/(B)/(M)/RU)	AL
600-4	JBTN-A202WJSB	J	Button, HDD (DV-HR350H/X)	AM
600-5	JBTN-A198WJSB	J	Button, Play (DV-HR300(A)/(B)/(M)/RU)	AC
600-5	JBTN-A198WJSC	J	Button, Play (DV-HR350H/X)	AC
600-6	JBTN-A188WJSB	J	Button, Operate (DV-HR300(A)/(B)/(M)/RU)	AD
600-6	JBTN-A188WJSC	J	Button, Operate (DV-HR350H/X)	AD
600-7	HDECQA279WJSA	J	LCD Cover Dec.	AF
600-8	JBTN-A213WJSB	J	Button, Reset (DV-HR300(A)/(B)/(M)/RU)	AC
600-8	JBTN-A213WJSC	J	Button, Reset (DV-HR350H/X)	AC
600-9	HDECQA281WJSA	J	HDD Dec.	AC
600-10	HDECQA280WJSA	J	DVD Dec.	AC
600-11	HDECQA278WJSA	J	LED Dec.	AC
600-12	HDECQA279WJSA	J	LCD Cover	AF
600-13	HDECQA271WJSA	J	R/C Cover	AB
600-14	GDORFA090WJSA	J	Door (DV-HR300(A)/(B)/(M))	AK
600-14	GDORFA090WJSB	J	Door (DV-HR350X)	AK
600-14	GDORFA080WJSB	J	Door (DV-HR300RU)	AK
600-14	GDORFA082WJSA	J	Door (DV-HR350H)	AK
600-15	PSHEPA128WJSB	J	Sheet (DV-HR300(A)/(B)/(M)/RU)	AL
600-15	PSHEPA128WJSC	J	Sheet (DV-HR350H/X)	AL
600-16	PSHEPA126WJZZ	J	Sheet	AF

#### WRITER UNIT PARTS

401	<i>Not Available</i>	J	Traverse Mecha Ass'y	—
402	DUNTKB766TEV1	J	Loading PWB	AF
403	QSOCNA180WJZZ	J	Loading PWB Connector	AC
404	QSW-BA001WJZZ	J	Loading Switch	AD
405	GC0VAA347WJSA	J	Tray	AH
406	LCHSMA104WJZZ	J	Loading Base	AL
407	LCRA-A002WJ00	J	Clamper	AC
408	LHLDZA182WJZZ	J	Lifter	AF
409	LPLTMA004WJZZ	J	Yoke	AC
412	MLEVPA006WJZZ	J	Tray Eject Lever	AB
413	MSLiPA001WJZZ	J	Shifter	AC
414	NBLTKA001WJZZ	J	Loading Belt	AC
415	NGERHA010WJZZ	J	Pully Gear	AB
416	NGERHA011WJZZ	J	Relay Gear	AC
417	NPLYMA001WJZZ	J	Motor Pully	AB
418	PCAPHA016WJZZ	J	Insulater Cap	AB
419	PCASZA006WJZZ	J	Upper Plate	AH
420	PCASZA007WJZZ	J	Bottom Plate	AF
421	PCOVMA008WJZZ	J	Clamper Cover	AE
422	PMLT-A094WJZZ	J	Tray Spacer	AD
423	PSPAZA261WJZZ	J	Spacer	AB
424	PSPAZA376WJZZ	J	Bottom Spacer	AC
425	QCNW-B170WJZZ	J	Loading Motor FFC	AC
426	RMOTVA003WJZZ	J	Loading Motor	AH
428	PCUSGA001WJZZ	J	Insulator	AC
429	<i>Not Available</i>	-	Writer Main PWB	—
430	TLABSA027WJZZ	J	LAZER Label	AB
a	LX-BZA033WJZZ	J	Screw, x2	AB
b	XJBSD26P08000	J	Screw, x5	AA
c	LX-JZA001WJFD	J	Screw, x4	AC

#### SUPPLIED ACCESSORIES


RRMCGA250WJSA	J	Remote Control Unit (DV-HR350H)	AY
RRMCGA344WJSA	J	Remote Control Unit (DV-HR300RU)	AX
RRMCGA286WJSA	J	Remote Control Unit (DV-HR300(A)/(B)/(M))	AX

Ref. No.	Part No.	★	Description	Code
<b>SUPPLIED ACCESSORIES(Continued)</b>				
	RRMCGA325WJSA	J	Remote Control Unit (DV-HR350X)	AY
	TiNS-B101WJN1	J	Operation Manual (DV-HR350H)	AT
	TiNS-B102WJN1	J	Operation Manual (DV-HR350H)	AE
	TiNS-B208WJN1	J	Operation Manual (DV-HR350X)	AL
	TiNS-B373WJZZ	J	Operation Manual (DV-HR300(A)/(M))	AW
	TiNS-B521WJZZ	J	Operation Manual (DV-HR300(B))	—
	TiNS-B548WJZZ	J	Operation Manual (DV-HR300RU)	—
	QCNW-B557WJPZ	J	AV Cable	AK
	QCNW-A003WJPZ	J	RF Cable	AK
	QJAKZA021WJZZ	J	SCART Adaptor (DV-HR300(A)/(B)/(M)/RU/350X)	AT
	TGANEA004WJN1	-	Guarantee Card (DV-HR350H)	AD
	TGAN-A101WJZZ	-	Guarantee Card (DV-HR300RU)	AC


#### PACKING PARTS (NOT REPLACEMENT ITEM)

SPAKCB111WJZZ	-	Packing Case (DV-HR350H)	—
SPAKCB555WJZZ	-	Packing Case (DV-HR300(A)/(B)/(M))	—
SPAKCB579WJZZ	-	Packing Case (DV-HR350X)	—
SPAKCB688WJZZ	-	Packing Case (DV-HR300RU)	—
SPAKFA380WJZZ	-	Packing Material	—
SPAKFA415WJZZ	-	Packing Material	—
SPAKFA416WJZZ	-	Packing Material	—
SPAKFA462WJZZ	-	Packing Material	—
SPAKFA463WJZZ	-	Rear Pad	—
SPAKFA466WJZZ	-	Packing Material	—
SPAKP0209AJZZ	-	Hoso P/P	—
SPAKXA306WJZZ	-	Packing Add	—
SSAKA0005PEZZ	-	Polyethylene Bag	—

# CABINET EXPLODED VIEW

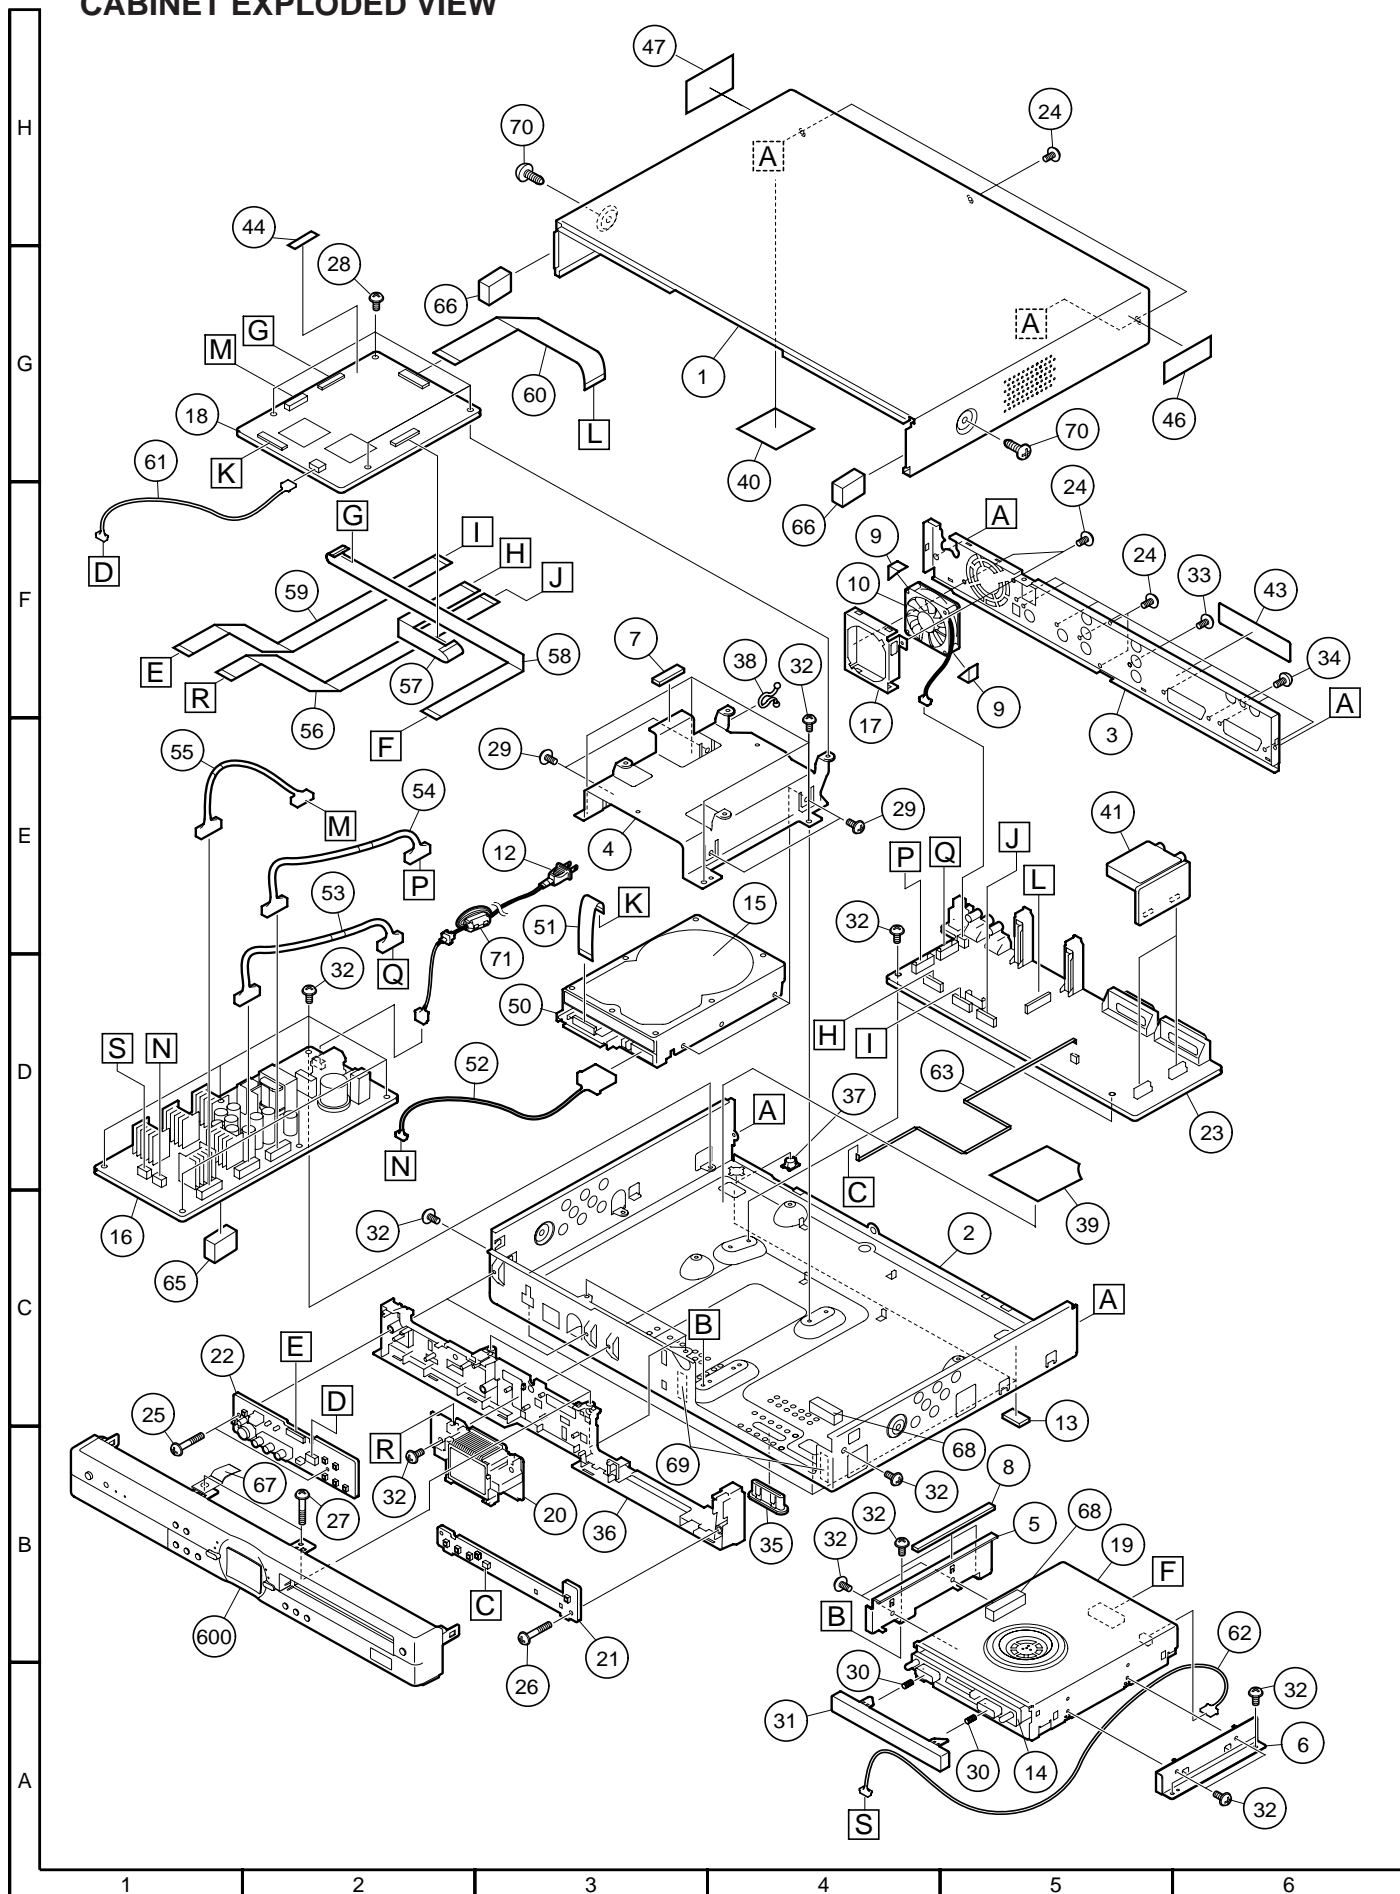

## 11. PACKING OF THE SET

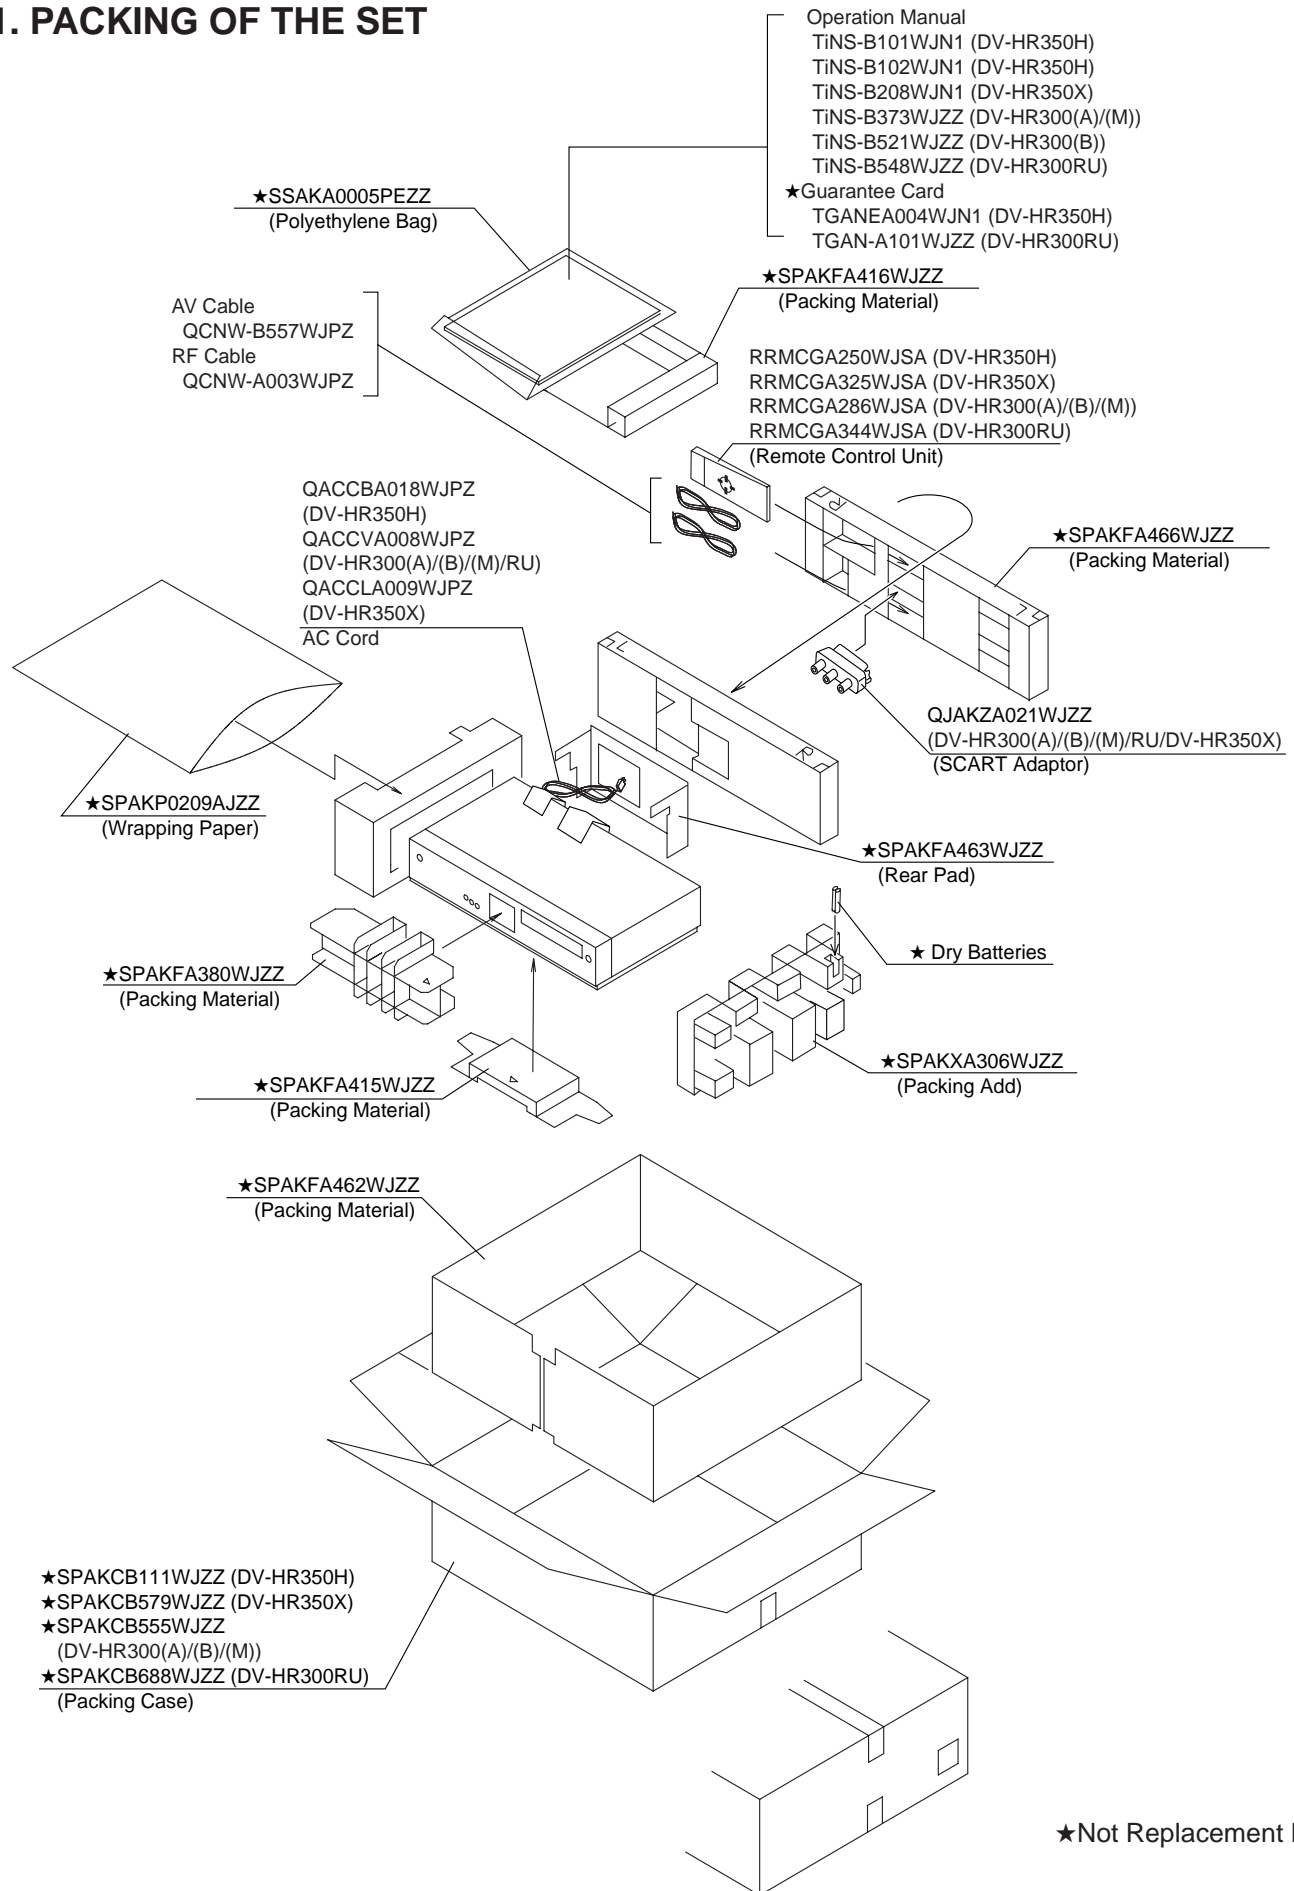

DV-HR300(A)/(B)/(M)  
DV-HR300RU  
DV-HR350H/X

# SHARP

COPYRIGHT © 2004 BY SHARP CORPORATION

ALL RIGHTS RESERVED.

No part of this publication may be reproduced,  
stored in a retrieval system, or transmitted in  
any form or by any means, electronic, mechanical,  
photocopying, recording, or otherwise, without  
prior written permission of the publisher.

Aug. 2004 Printed in Japan

Design and Production Information
-----------------------------------

Design : SEM
--------------

Production : SMM
------------------

SA. DS

SHARP CORPORATION  
AV Systems Group  
Quality & Reliability Control Center  
Yaita, Tochigi 329-2193, Japan