

PARTS LIST

[MX-JD3]


* All printed circuit boards and its assemblies are not available as service parts.


Area suffix
EE ----- Russian Federation

- Contents -

Exploded view of general assembly and parts list (Block No.M1)	3- 2
DVD mechanism assembly and parts list (Block No.MJ)	3- 6
DVD Loading base assembly and parts list (Block No.MN)	3- 8
Electrical parts list (Block No.01~05)	3-10
Packing materials and accessories parts list (Block No.M3)	3-20

Exploded view of general assembly and parts list

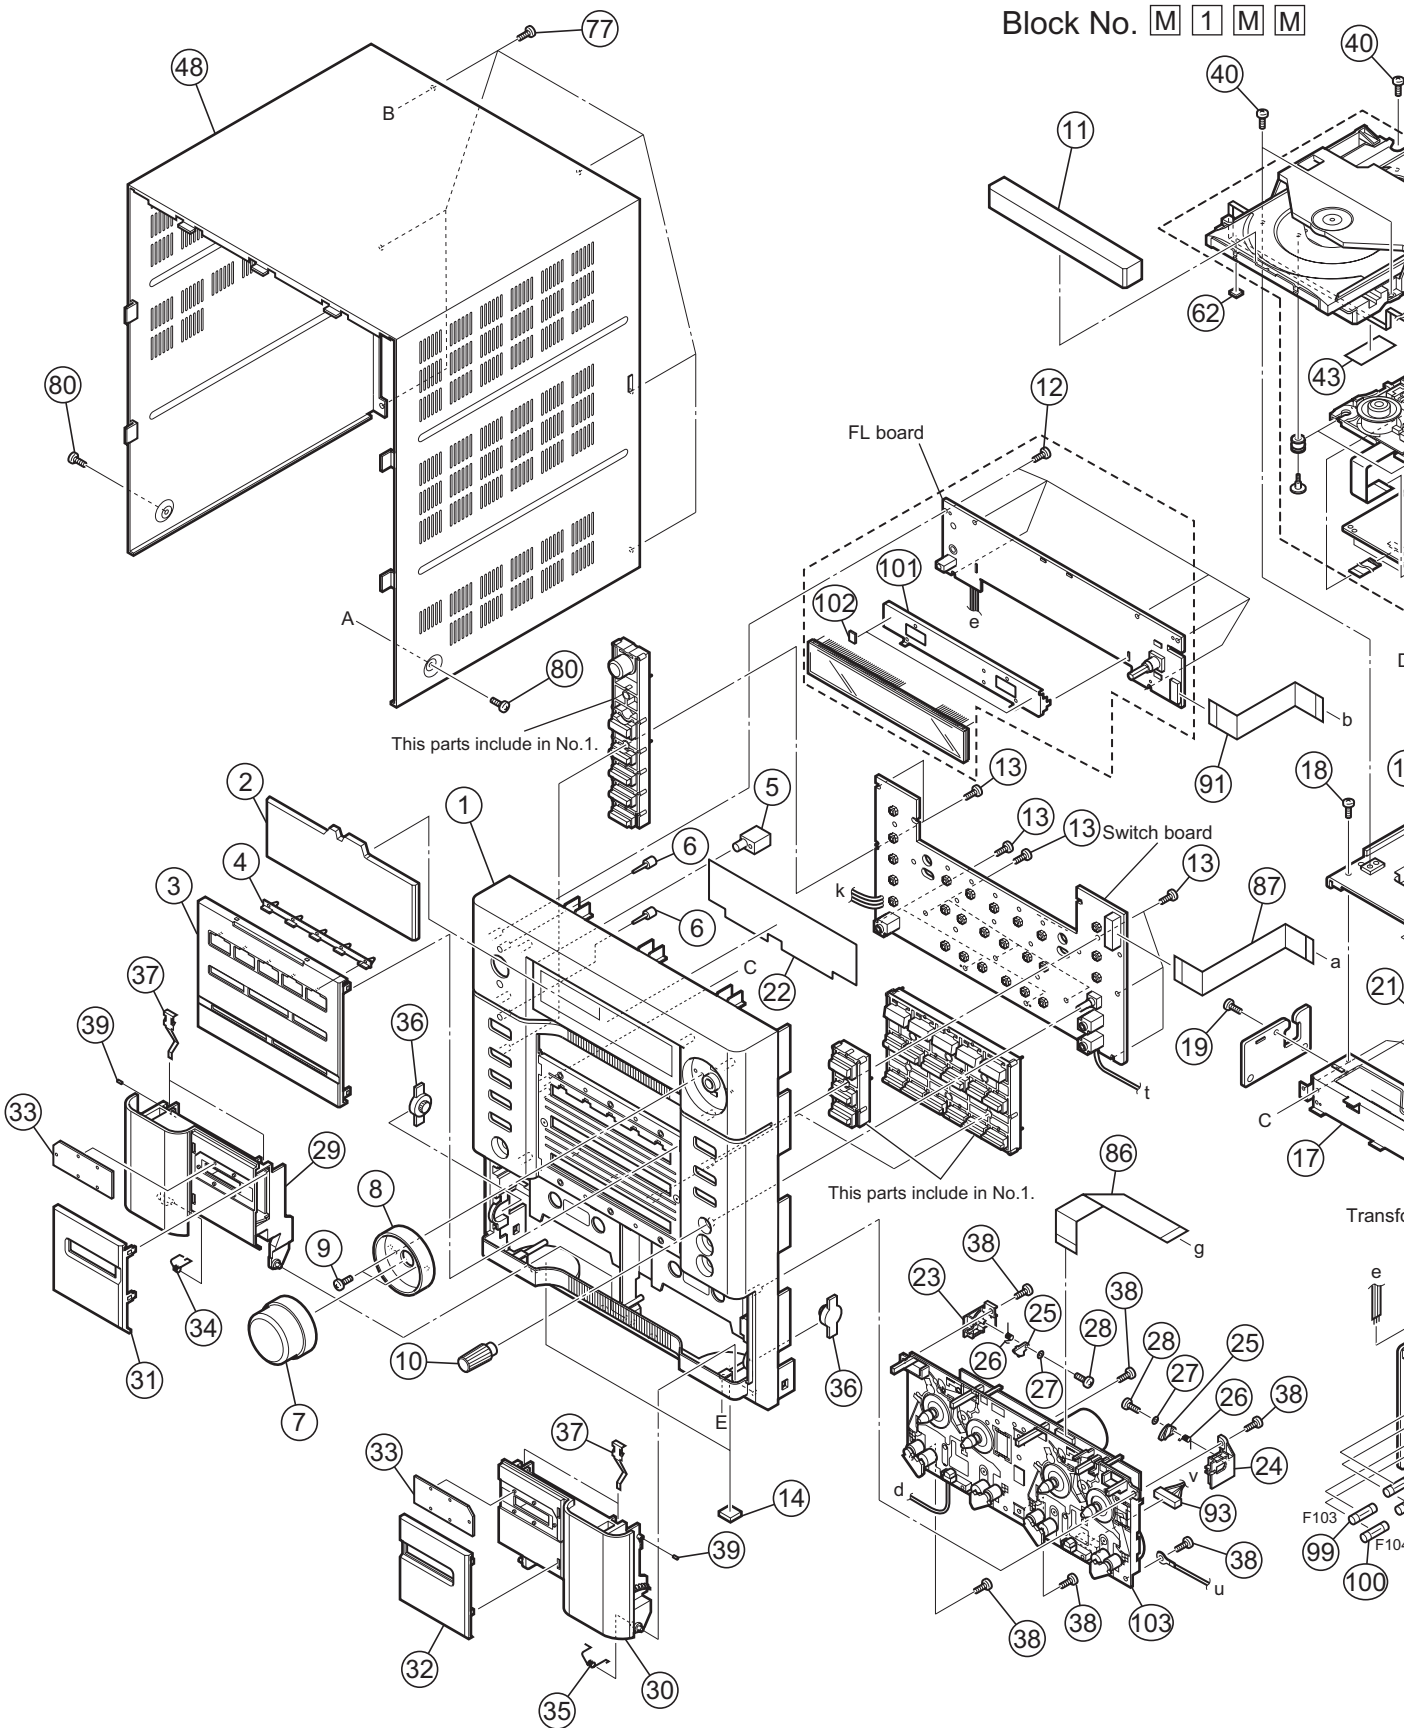

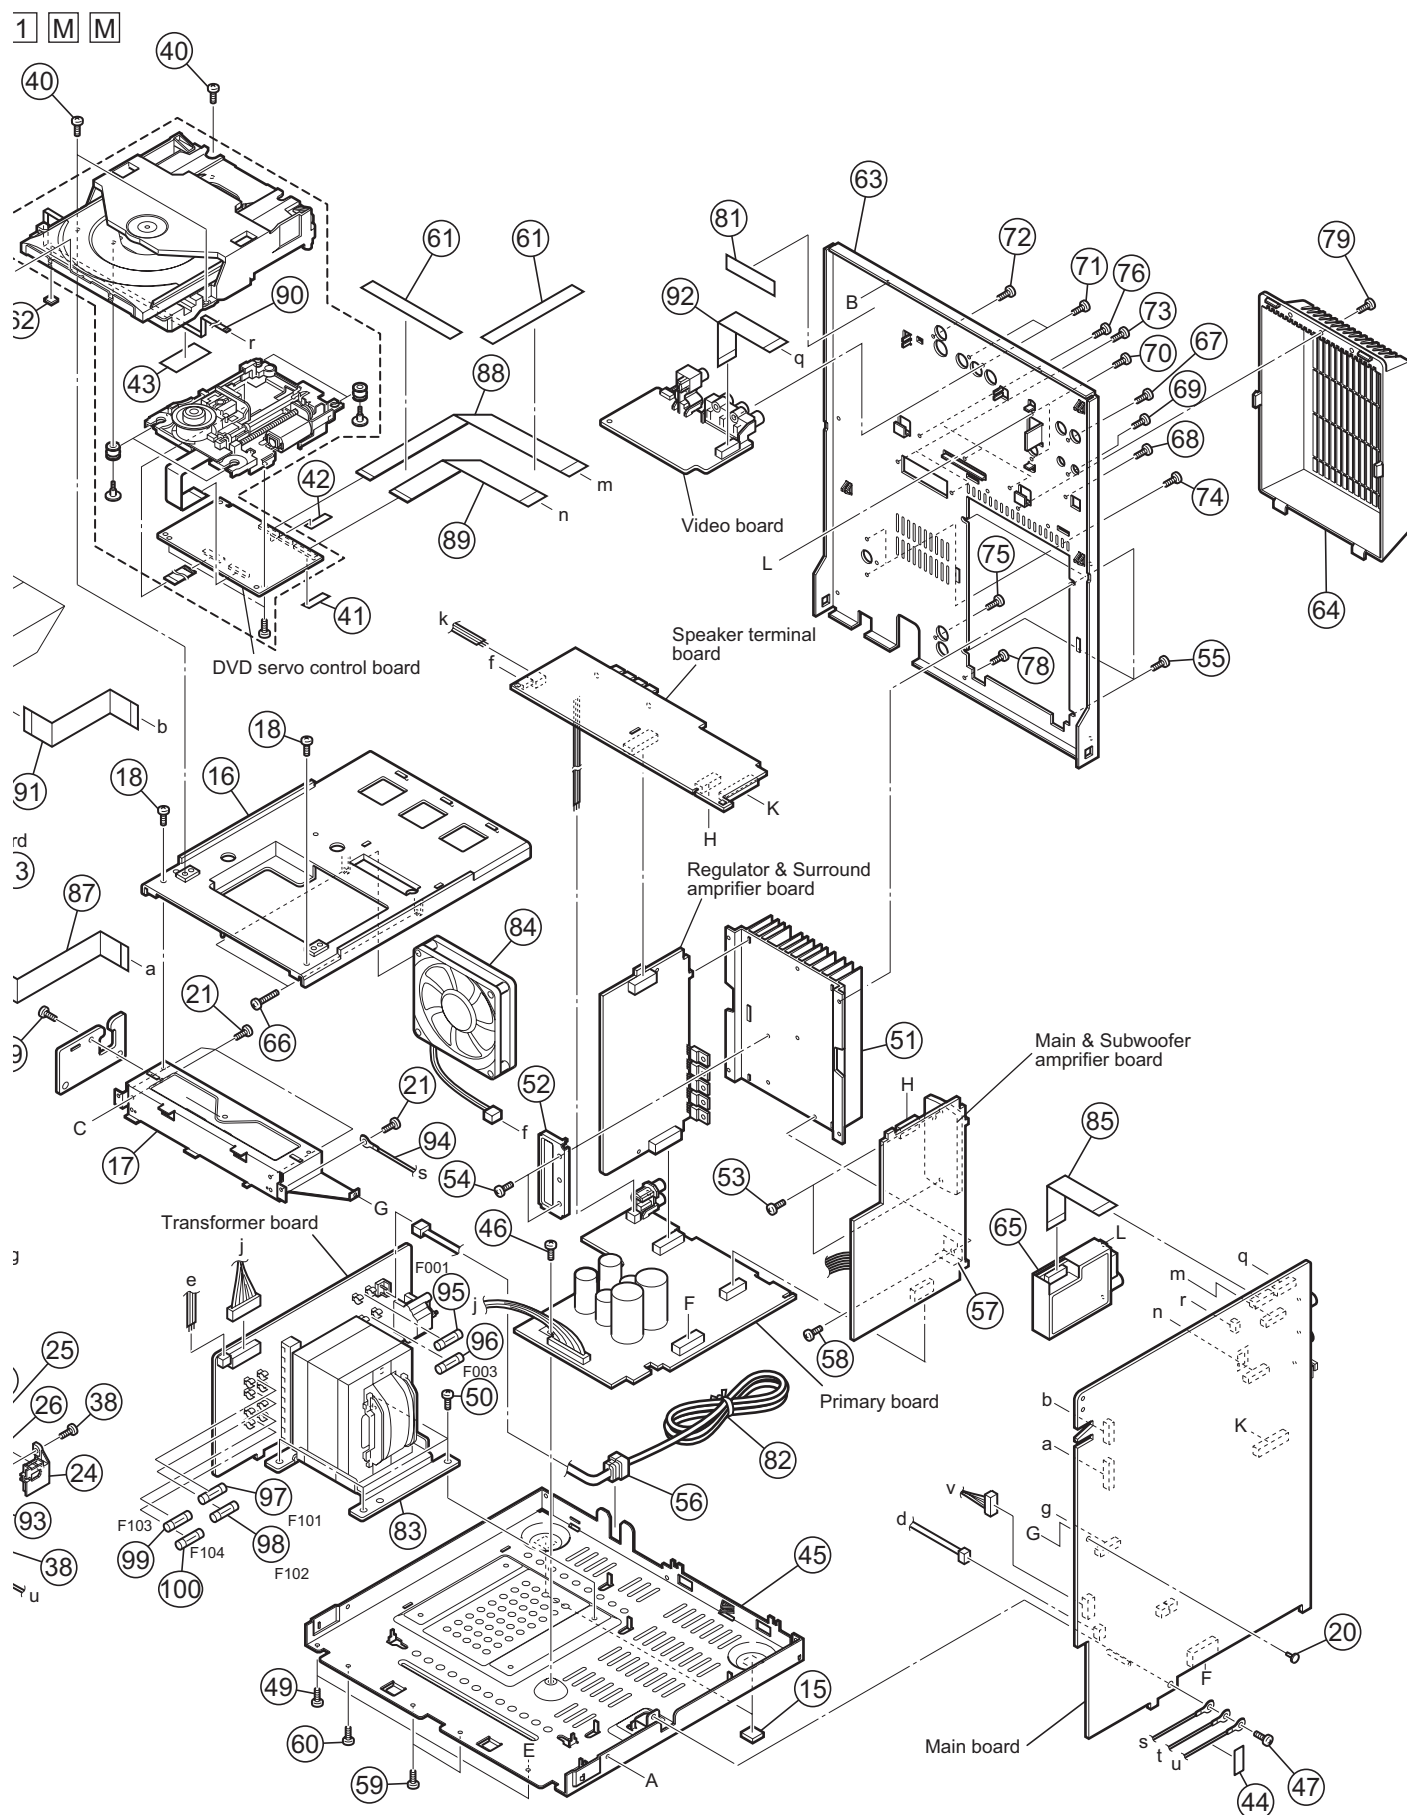


General Assembly

Block No. [M][1][M][M]

Symbol No.	Part No.	Part Name	Description	Local
1	GV10220-003A	FRONT PANEL ASSY		
2	GV30576-003A	FL LENS		
3	GV20277-005A	FRONT COVER		
4	GV30577-001A	FUNC.INDICATOR		
5	GV40485-002A	REMOTE LENS		
6	GV40486-002A	INDICATOR LENS	(x2)	
7	GV30580-001A	VOLUME KNOB		
8	LV42979-002A	VOLUME RING		
9	QYSDSF2608Z	TAP SCREW	M2.6 x 8mm(x2)	
10	GV40083-004A	MIC.KNOB		
11	GV30583-002A	TRAY FITTING		
12	QYSDSF2608Z	TAP SCREW	M2.6 x 8mm(x6)	
13	QYSDSF2608Z	TAP SCREW	M2.6 x 8mm(x11)	
14	GV40246-001A	FOOT SPACER	(x2)	
15	GV40246-002A	FOOT SPACER	(x2)	
16	GV10206-002A	CENTER CHASSIS		
17	GV20275-001A	STAY BRACKET		
18	QYSBSG3008Z	TAP SCREW	M3 x 8mm(x2)	
19	QYSBSG3008Z	TAP SCREW	M3 x 8mm	
20	E310243-002	PLASTIC RIVET		
21	QYSDSF2608Z	TAP SCREW	M2.6 x 8mm(x4)	
22	GV40512-002A	FL FILTER		
23	GV40496-001A	SWING CAM(L)		
24	GV40497-001A	SWING CAM(R)		
25	GV40501-001A	SWING CAM	(x2)	
26	GV40502-002A	SPRING	(x2)	
27	GV40503-001A	WASHER	(x2)	
28	GV40504-001A	SCREW	(x2)	
29	GV10204-001A	CASS.HOLDER(L)		
30	GV10205-001A	CASS.HOLDER(R)		
31	GV20278-004A	CASS.COVER (L)		
32	GV20279-004A	CASS.COVER (R)		
33	GV40487-001A	CASS.LENS	(x2)	
34	GV40489-001A	DOOR SPRING		
35	GV40490-001A	DOOR SPRING(R)		
36	GV40034-001A	DAMPER ASSY.	(x2)	
37	VKY4180-401	CASSETTE SPRING	(x4)	
38	QYSBSF3010Z	TAP SCREW	M3 x 10mm(x6)	
39	GV40515-001A	METAL PIN	(x2)	
40	QYSBSF3012Z	TAP SCREW	M3 x 12mm(x3)	
41	LV30225-011A	SPACER		
42	LV30225-011A	SPACER		
43	LV30225-011A	SPACER		
44	LV30225-011A	SPACER		
45	GV10209-001A	BOTTOM CHASSIS		
46	QYSBSGG3008E	TAP SCREW	M3 x 8mm	
47	QYSBSGG3008E	TAP SCREW	M3 x 8mm	
48	GV10217-003A/S/	METAL COVER		
49	QYSBSG3010Z	TAP SCREW	M3 x 10mm(x2)	
50	QYSDSTL4008Z	TAP SCREW	M4 x 8mm(x4)	
51	GV30581-002A	HEAT SINK		
52	GV40488-001A	LEAF SPRING		
53	QYSBSG3014E	TAP SCREW	M3 x 14mm(x2)	
54	QYSBSG3014E	TAP SCREW	M3 x 14mm(x2)	
55	QYSBSGY3008E	TAP SCREW	M3 x 8mm(x4)	
56	QZW0033-001	STRAIN RELIEF		
57	GV40327-002A	IC BRD.HOLDER		
58	QYSBSG3014E	TAP SCREW	M3 x 14mm	
59	QYSSST3006Z	TAP SCREW	M3 x 6mm(x2)	
60	QYSBSG3010Z	TAP SCREW	M3 x 10mm	
61	GV30349-003A	SPACER	(x2)	
62	E3400-431	SPECER		
63	GV10207-022A	REAR PANEL		
64	GV10208-001A	REAR COVER		
65	QAU0346-001	TUNER	TU 1	
66	QYSBSF3035Z	TAP SCREW	M3 x 35mm(x2)	
67	QYSBSGY3008E	TAP SCREW	M3 x 8mm	
68	QYSBSGY3008E	TAP SCREW	M3 x 8mm	
69	QYSBSGY3008E	TAP SCREW	M3 x 8mm	
70	QYSBSGY3008E	TAP SCREW	M3 x 8mm(x2)	
71	QYSBSGY3008E	TAP SCREW	M3 x 8mm(x2)	
72	QYSBSGY3008E	TAP SCREW	M3 x 8mm	
73	QYSBSGY3008E	TAP SCREW	M3 x 8mm(x2)	
74	QYSBSF3012E	TAP SCREW	M3 x 12mm(x2)	

△	Symbol No.	Part No.	Part Name	Description	Local
	75	QYSBSGY3008E	TAP SCREW	M3 x 8mm	
	76	QYSBSGY3008E	TAP SCREW	M3 x 8mm(x3)	
	77	QYSBSGY3008E	TAP SCREW	M3 x 8mm(x6)	
	78	QYSBSGY3008E	TAP SCREW	M3 x 8mm	
	79	QYSBSGY3008E	TAP SCREW	M3 x 8mm	
	80	QYSDSG3006N	TAP SCREW	M3 x 6mm(x2)	
	81	LV41843-002A	LASER CAUTION		
△	82	QMPK210-205-JN	POWER CORD(EU)	2.05m BLACK	
△	83	QQT0437-001	POWER TRANSF		
	84	QAR0317-001	FAN		
	85	QUQH12-1108AJ	FFC WIRE	FC 21 11pin 8cm	
	86	QUQH12-1314AJ	FFC WIRE	FC 303 13pin 14cm	
	87	QUQH12-1714BJ	FFC WIRE	FC 860 17pin 14cm	
	88	QUQH10-1730BJ	FFC WIRE	FC 513 17pin 30cm	
	89	QUQH10-1920BJ	FFC WIRE	FC 511 19pin 20cm	
	90	QUQH10-0541BJ	FFC WIRE	FC 11 5pin 41cm	
	91	QUQH12-1211AJ	FFC WIRE	FC 880 12pin 11cm	
	92	QUQH12-1210AJ	FFC WIRE	FC 410 12pin 10cm	
	93	WJN0074-005A	SIGNAL WIRE	FW 301	
	94	WJZ0137-001A	S.WIRE	TW 992	
△	95	QMF51W2-4R0-J8	FUSE	F 001 4A AC250V	
△	96	QMF51W2-2R0-J8	FUSE	F 003 2A AC250V	
△	97	QMF51W2-3R15-J8	FUSE	F 101 3.15A AC250V	
△	98	QMF51W2-3R15-J8	FUSE	F 102 3.15A AC250V	
△	99	QMF51W2-2R0-J8	FUSE	F 103 2A AC250V	
△	100	QMF51W2-3R15-J8	FUSE	F 104 3.15A AC250V	
	101	GV30507-001A	FL HOLDER		
	102	GV30349-021A	SPACER	(x2)	
	103	CMAT5Z226	ALPS CASS.MECHA		

DVD mechanism assembly and parts list

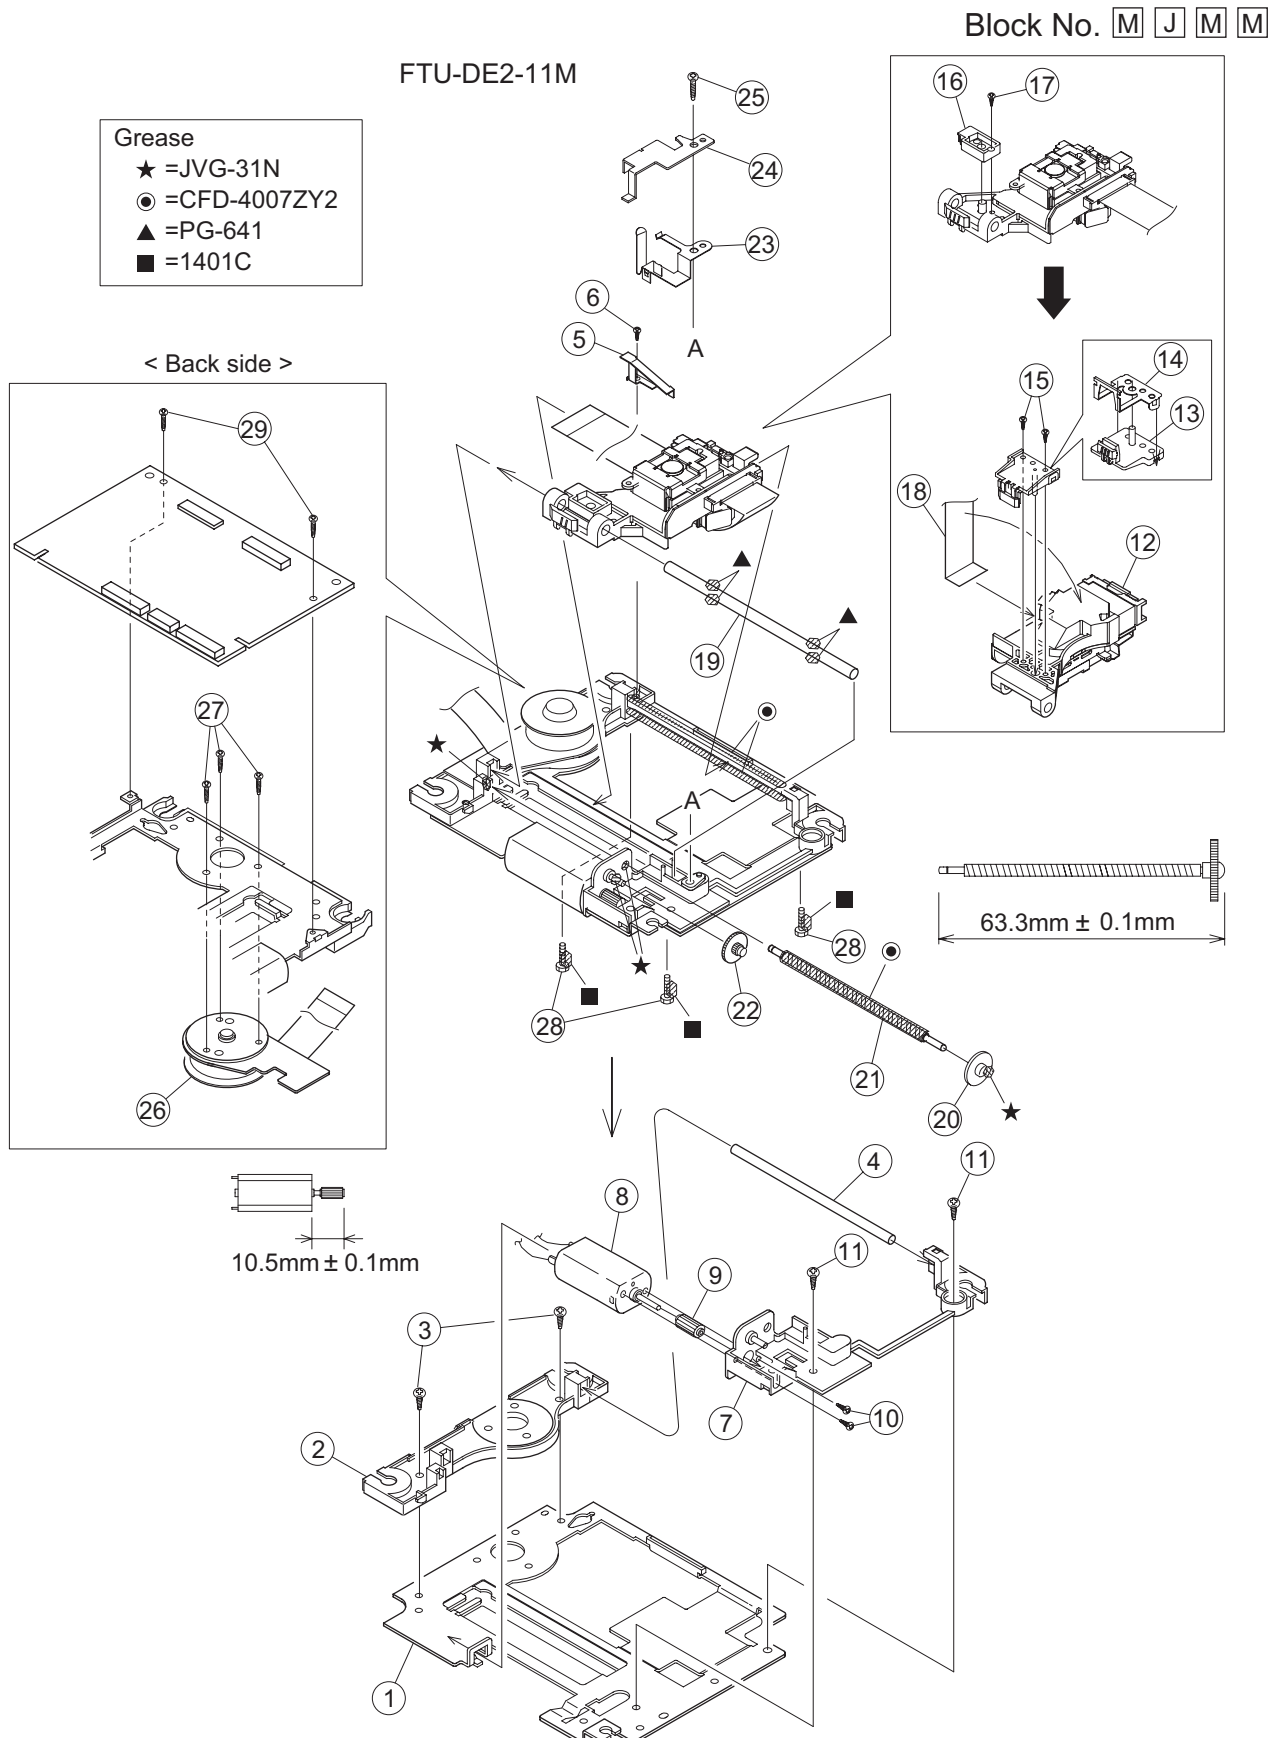

DVD mechanism

Block No. [M][J][M][M]


△	Symbol No.	Part No.	Part Name	Description	Local
1		LE20725-001A	MECHA BASE		
2		LE20699-002A	SPINDLE BASE		
3		QYSDST2605M	TAP SCREW	M2.6 x 5mm(x2)	
4		LE40931-001A	SHAFT		
5		LV33991-001A	ADJUST SPRING		
6		QYSPSFU2040M	TAP SCREW	M2 x 4mm	
7		LE20698-004A	FEED HOLDER		
8		QAR0215-001	FEED MOTOR		
9		LV41510-201A	FEED GEAR T		
10		QYSPSPU2040M	SCREW	M2 x 4mm(x2)	
11		QYSDST2605M	TAP SCREW	M2.6 x 5mm(x2)	
12		QAL0507-001	PICK UP		
13		LE20700-001A	SW ACTUATOR		
14		LE31067-002A	LEAD SPRING		
15		QYSPSFU1740Z	TAP SCREW	M1.7 x 4mm(x2)	
16		LE40929-001A	SW.LEVER		
17		QYSPSFU1740Z	TAP SCREW	M1.7 x 4mm	
18		QUQ105-2411AC	FFC		
19		LE40931-001A	SHAFT		
20		LE40855-001A	FEED GEAR E		
21		LE40918-001A	LEAD SCREW		
22		LE40930-001A	FEED GEAR M		
23		LE40928-001A	THURUST SPRING		
24		LE40927-001A	PLATE		
25		QYSDST2614Z	TAPPING SCREW	M2.6 x 14mm	
26		QAR0316-001	SPINDLE MOTOR		
27		QYSPSPU1740Z	SCREW	M1.7 x 4mm(x3)	
28		LE40858-002A	SPECIAL SCREW	(x3)	
29		QYSDST2004Z	SCREW	2mm x 4mm(x2)	

DVD loading base assembly and parts list

Grease
 ★ JVG-31N
 ● JVS-1003

FMU-DE2-11M

Block No. M N M M

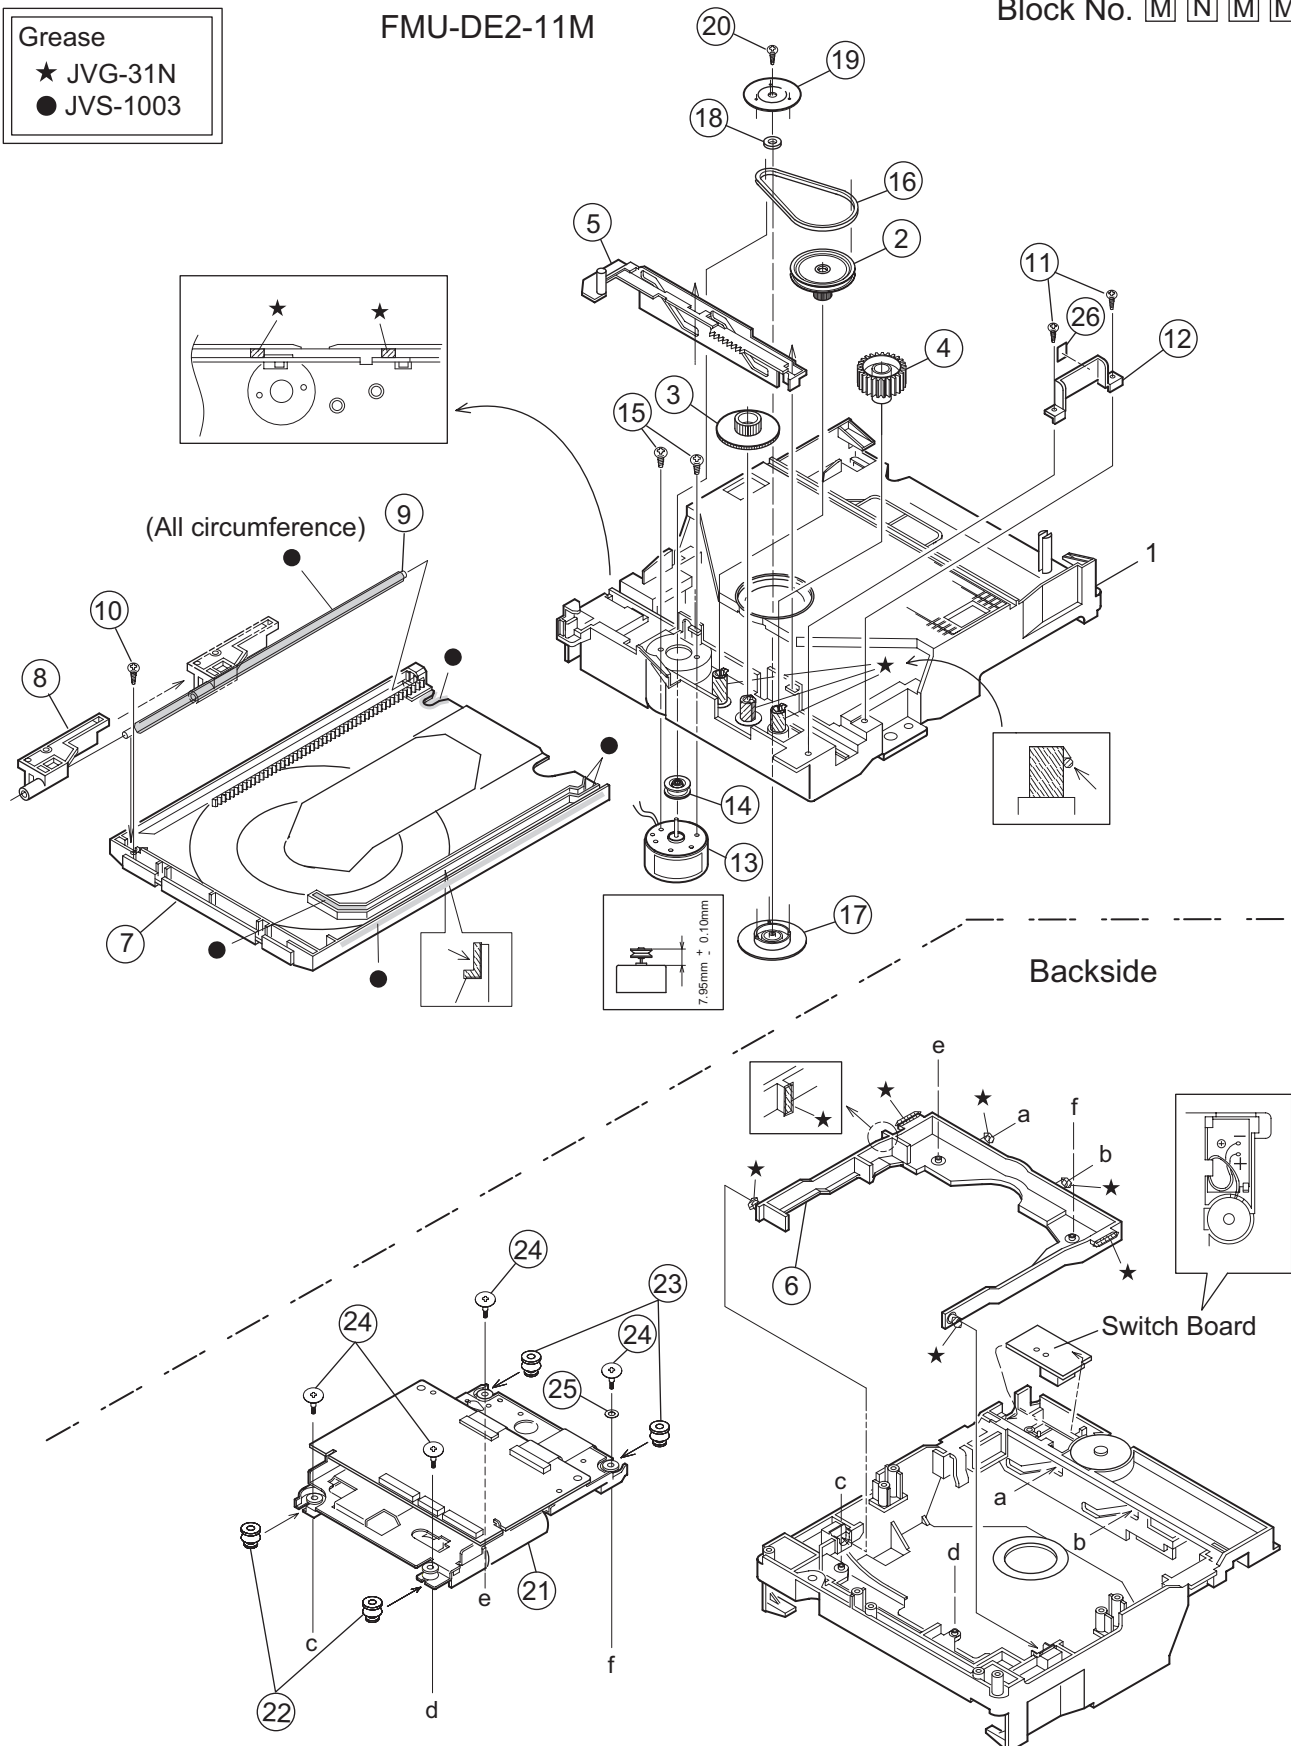

The parts without symbol number are not service.

DVD loading base

Block No. [M][N][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
1		LE10275-006A	LOADING BASE		
2		LE31043-001A	PULLEY GEAR		
3		LE31042-001A	MIDDLE GEAR		
4		LE31044-001A	IDLE GEAR		
5		LE20665-001A	SLIDE CAM		
6		LE20666-003A	ELEVATOR		
7		LE10276-002A	TRAY		
8		LE31045-001A	BUSHING		
9		LE40898-001A	SHAFT		
10		QYSSSF2008Z	TAP SCREW	M2 x 8mm	
11		QYSDSF2008Z	TAP SCREW	M2 x 8mm(x2)	
12		LE40937-002A	LEAF SPRING		
13		QAR0197-001	MOTOR		
14		LV42087-002A	MOTOR PULLEY		
15		QYSPSPU1730Z	SCREW	M1.7 x 3mm(x2)	
16		LE40897-001A	BELT		
17		LE31046-003A	CLAMPER		
18		LV42930-003A	P.C.MAGNET		
19		LE40899-001A	YOKE		
20		LE40906-001A	SPECIAL SCREW		
21		-----	DVD TRAMECHA		
22		LE40900-003A	INSULATOR	(x2)	
23		LE40900-005A	INSULATOR	(x2)	
24		LE40901-001A	SPECIAL SCREW	(x4)	
25		QYWFM419025	WASHER	1.9mm/21.4mm x 0.02mm	
26		LV43828-001A	SPACER		

Electrical parts list

Power board

Block No. [0][1]

△ Symbol No.	Part No.	Part Name	Description	Local
IC100	MM1623XF-X	IC		
△ IC230	KIA317PI	IC		
△ IC250	PQ05RD21	IC		
△ IC260	KIA7809API	IC		
△ IC270	KIA7805API	IC		
△ IC280	KIA7812API	IC		
△ IC290	KIA7809API	IC		
△ IC701	STK412-400	IC		
Q181	KTC3203/OY/-T	TRANSISTOR		
Q190	2SC3576-JVC-T	TRANSISTOR		
Q191	2SC3576-JVC-T	TRANSISTOR		
Q192	2SC3576-JVC-T	TRANSISTOR		
Q193	2SC3576-JVC-T	TRANSISTOR		
Q194	KRA111M-T	DIGI TRANSISTOR		
Q195	KTC3199/GL/-T	TRANSISTOR		
△ Q221	KTA1046/Y/	TRANSISTOR		
Q222	KTC3199/GL/-T	TRANSISTOR		
Q223	KTC3199/GL/-T	TRANSISTOR		
Q230	KRC102M-T	DIGI TRANSISTOR		
Q681	2SK301/PQ/-T	TRANSISTOR		
Q701	KTC3199/GL/-T	TRANSISTOR		
Q702	KTC3199/GL/-T	TRANSISTOR		
Q710	KTA1023/OY/-T	TRANSISTOR		
Q711	KTC3200/GL/-T	TRANSISTOR		
Q712	KTA1268/GL/-T	TRANSISTOR		
Q713	KTC1027/OY/-T	TRANSISTOR		
Q725	KTA1267/YG/-T	TRANSISTOR		
Q726	KTC3199/GL/-T	TRANSISTOR		
Q727	KTA1267/YG/-T	TRANSISTOR		
Q728	KTC3199/GL/-T	TRANSISTOR		
D160	1SS133-T2	DIODE		
D161	1SS133-T2	DIODE		
D162	1SS133-T2	DIODE		
D180	MTZJ5.1B-T2	Z DIODE		
△ D201	1N5402M-20	DIODE		
△ D202	1N5402M-20	DIODE		
△ D203	1N5402M-20	DIODE		
△ D204	1N5402M-20	DIODE		
△ D211	1N5402M-20	DIODE		
△ D212	1N5402M-20	DIODE		
△ D213	1N5402M-20	DIODE		
△ D214	1N5402M-20	DIODE		
D221	MTZJ5.6C-T2	Z DIODE		
D222	2A02-M	DIODE		
D231	MTZJ13B-T2	Z DIODE		
D250	MTZJ5.6C-T2	Z DIODE		
D260	MTZJ11B-T2	Z DIODE		
D270	1SS133-T2	DIODE		
D271	MTZJ6.8C-T2	Z DIODE		
D280	MTZJ15B-T2	Z DIODE		
D290	MTZJ11B-T2	Z DIODE		
D681	MTZJ2.4B-T2	Z DIODE		
D703	MTZJ15B-T2	Z DIODE		
D704	MTZJ15B-T2	Z DIODE		
D719	1SS133-T2	DIODE		
D720	1SS133-T2	DIODE		
D723	MTZJ36B-T2	Z DIODE		
D724	MTZJ36B-T2	Z DIODE		
D726	1SS133-T2	DIODE		
D728	1SS133-T2	DIODE		
C162	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C163	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C164	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C165	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C180	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C201	QFKC2EK-103Z	MM CAPACITOR	0.01uF 250V K	
C202	QFKC2EK-103Z	MM CAPACITOR	0.01uF 250V K	
C203	QFKC2EK-104Z	MM CAPACITOR	0.1uF 250V K	
C204	QEZO510-478	E CAPACITOR	4700uF	

△ Symbol No.	Part No.	Part Name	Description	Local
C205	QEZO510-478	E CAPACITOR	4700uF	
C211	QFLC2AJ-103Z	M CAPACITOR	0.01uF 100V J	
C212	QFLC2AJ-103Z	M CAPACITOR	0.01uF 100V J	
C213	QFKC2EK-104Z	MM CAPACITOR	0.1uF 250V K	
C214	EETB1VM-228JC	E CAPACITOR		
C215	EETB1VM-228JC	E CAPACITOR		
C221	QETM1EM-828	E CAPACITOR	8200uF 25V M	
C222	EETB1CM-828JC	E CAPACITOR		
C225	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C226	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
C250	QFVF1HJ-334Z	MF CAPACITOR	0.33uF 50V J	
C251	QETN1EM-477Z	E CAPACITOR	470uF 25V M	
C260	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C261	QETN1CM-227Z	E CAPACITOR	220uF 16V M	
C270	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C271	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C280	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C281	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C290	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C291	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C681	QETN1HM-224Z	E CAPACITOR	0.22uF 50V M	
C682	QFLC1HJ-823Z	M CAPACITOR	0.082uF 50V J	
C703	QCBB1HK-471Y	C CAPACITOR	470pF 50V K	
C704	QCBB1HK-471Y	C CAPACITOR	470pF 50V K	
C705	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
C706	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
C707	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
C708	QETN1JM-476Z	E CAPACITOR	47uF 63V M	
C709	QCSB1HK-4R7Y	C CAPACITOR	4.7pF 50V K	
C710	QCSB1HK-4R7Y	C CAPACITOR	4.7pF 50V K	
C711	QFZO212-104Z	M CAPACITOR	0.1uF	
C712	QFZO212-104Z	M CAPACITOR	0.1uF	
C713	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C714	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C715	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C716	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J	
C721	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C722	QTE1V06-106Z	E CAPACITOR	10uF 35V	
C723	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C726	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C729	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C730	FQCF31HZ-223Z	D.CAPACITOR		
C731	FQCF31HZ-223Z	D.CAPACITOR		
C738	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C739	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C1000	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C1001	QCFB1HZ-105Y	C CAPACITOR	1uF 50V Z	
C1002	QCFB1HZ-105Y	C CAPACITOR	1uF 50V Z	
C1003	QCFB1HZ-105Y	C CAPACITOR	1uF 50V Z	
C1004	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C1005	QCFB1HZ-105Y	C CAPACITOR	1uF 50V Z	
C1006	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C1007	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C1008	QCFB1HZ-104Y	C CAPACITOR	0.1uF 50V Z	
C1009	QETN1AM-477Z	E CAPACITOR	470uF 10V M	
C1010	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
C1011	QCBB1HK-181Y	C CAPACITOR	180pF 50V K	
C1012	QCBB1HK-181Y	C CAPACITOR	180pF 50V K	
C1013	QETN1AM-477Z	E CAPACITOR	470uF 10V M	
C1014	QCBB1HK-181Y	C CAPACITOR	180pF 50V K	
C1015	QETN1AM-477Z	E CAPACITOR	470uF 10V M	
C1016	QETN1AM-477Z	E CAPACITOR	470uF 10V M	
C1017	QETN1AM-477Z	E CAPACITOR	470uF 10V M	
C1018	QCBB1HK-181Y	C CAPACITOR	180pF 50V K	
C1019	QCBB1HK-181Y	C CAPACITOR	180pF 50V K	
C1020	QCBB1HK-181Y	C CAPACITOR	180pF 50V K	
△ R160	FQRL01DJ-820X	OMF RESISTOR		
△ R161	FQRL01DJ-820X	OMF RESISTOR		
△ R162	FQRL01DJ-820X	OMF RESISTOR		
R165	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	
R166	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	
△ R167	QRL01DJ-471X	OMF RESISTOR	470Ω 1W J	
R168	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R169	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
△ R177	QRL01DJ-471X	OMF RESISTOR	470Ω 1W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R180	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J		R1001	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R181	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R1002	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R182	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R1003	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R190	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		R1004	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R191	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		R1005	QRE141J-201Y	C RESISTOR	200Ω 1/4W J	
R192	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		R1006	QRE141J-121Y	C RESISTOR	120Ω 1/4W J	
R193	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		R1007	QRE141J-201Y	C RESISTOR	200Ω 1/4W J	
R195	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R1008	QRE141J-121Y	C RESISTOR	120Ω 1/4W J	
R215	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		R1009	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R216	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		R1010	QRE141J-331Y	C RESISTOR	330Ω 1/4W J	
R217	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		R1011	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R218	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		R1012	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R221	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R1013	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R222	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R1014	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R223	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R1015	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R224	QRE141J-681Y	C RESISTOR	680Ω 1/4W J		R1016	QRE141J-750Y	C RESISTOR	75Ω 1/4W J	
R225	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J						
R226	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J		L701	QQLZ035-R39	COIL	0.39uH	
R227	QRE141J-681Y	C RESISTOR	680Ω 1/4W J		L702	QQLZ035-R39	COIL	0.39uH	
△ R230	QRZ9006-4R7X	F.RESISTOR	4.7Ω 1/4W J						
R232	QRE141J-332Y	C RESISTOR	3.3kΩ 1/4W J		CN105	QGA2501F1-03	CONNECTOR	W-B (1-3)	
R233	QRE141J-242Y	C RESISTOR	2.4kΩ 1/4W J		CN106	QGD2503F1-03	CONNECTOR	(1-3)	
R234	QRE141J-271Y	C RESISTOR	270Ω 1/4W J		CN201	QGB2510J1-09	CONNECTOR	B-B (1-9)	
R235	QRE141J-100Y	C RESISTOR	10Ω 1/4W J		CN202	QGB2510J1-07	CONNECTOR	B-B (1-7)	
R271	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		CN203	QGB2510J1-09	CONNECTOR	B-B (1-9)	
R681	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J		CN204	QGB2510K1-06	CONNECTOR	B-B (1-6)	
R682	QRE141J-203Y	C RESISTOR	20kΩ 1/4W J		CN205	QGB2510J1-08	CONNECTOR	B-B (1-8)	
R683	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J		CN206	QGB2510K1-11	CONNECTOR	B-B (1-11)	
R684	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		CN212	QGB2510K1-07	CONNECTOR	B-B (1-7)	
R685	QRE141J-475Y	C RESISTOR	4.7MΩ 1/4W J		CN213	QGB2510K1-09	CONNECTOR	B-B (1-9)	
R686	QRE141J-392Y	C RESISTOR	3.9kΩ 1/4W J		CN214	QGB2510J1-06	CONNECTOR	B-B (1-6)	
R687	QRE141J-105Y	C RESISTOR	1MΩ 1/4W J		CN215	QGB2510K1-08	CONNECTOR	B-B (1-8)	
△ R701	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J		CN219	QGD2504C1-03Z	CONNECTOR	(1-3)	
△ R702	QRJ146J-470X	UNF C RESISTOR	47Ω 1/4W J		CN420	QGF1205C1-12	CONNECTOR	FFC/FPC (1-12)	
R703	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		EP201	QNZ0136-001Z	EARTH PLATE		
R704	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		FW109	QJK015-082924	WIRE SOCKET		
△ R705	QRJ146J-821X	UNF C RESISTOR	820Ω 1/4W J		FW208	QUM156-08DGZ4	FLAT WIRE		
△ R706	QRJ146J-821X	UNF C RESISTOR	820Ω 1/4W J		FW209	QUM153-18DGZ4	FLAT WIRE		
R707	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		FW601	QUM154-10Z4Z4	FLAT WIRE		
R708	QRE141J-563Y	C RESISTOR	56kΩ 1/4W J		J81	QNB0089-001	SPK.TERMINAL		
△ R713	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		J130	QNN0420-001	SURROUND JACK		
△ R714	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		J1010	QNN0434-001	PIN JACK		
△ R715	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		J1020	QNN0624-001	PIN JACK		
△ R716	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J		RY160	QSK0109-001	RELAY		
R717	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		S1001	QSW0454-001	SW		
R718	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		SP100	GV40205-001A	IC HOLDER		
R719	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J						
R720	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J						
R721	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J						
R722	QRE141J-473Y	C RESISTOR	47kΩ 1/4W J						
R723	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J						
R724	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J						
R727	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J						
R728	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R729	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J						
R730	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R739	QRE141J-823Y	C RESISTOR	82kΩ 1/4W J						
R740	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J						
R741	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J						
R742	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J						
R743	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R744	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J						
R753	QRZ0224-R22	EMIT RESISTOR	0.22Ω						
R754	QRZ0224-R22	EMIT RESISTOR	0.22Ω						
R761	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J						
R762	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J						
R766	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J						
R768	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J						
R769	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J						
R774	QRJ146J-100X	UNF C RESISTOR	10Ω 1/4W J						
R775	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J						
R776	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J						
R777	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R778	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R786	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R787	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J						
R792	QRE141J-823Y	C RESISTOR	82kΩ 1/4W J						
R793	QRE141J-823Y	C RESISTOR	82kΩ 1/4W J						

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
Q362	KRA111M-T	DIGI TRANSISTOR			C335	QCBB1HK-271Y	C CAPACITOR	270pF 50V K	
Q363	2SC3576-JVC-T	TRANSISTOR			C336	QCBB1HK-391Y	C CAPACITOR	390pF 50V K	
Q364	2SC3576-JVC-T	TRANSISTOR			C337	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
Q365	2SC3576-JVC-T	TRANSISTOR			C338	QFLA1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q366	2SC3576-JVC-T	TRANSISTOR			C339	NCS21HJ-821X	C CAPACITOR	820pF 50V J	
Q387	2SD601A/RS/-X	TRANSISTOR			C340	QFLA1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q388	2SD601A/RS/-X	TRANSISTOR			C341	QCBB1HK-271Y	C CAPACITOR	270pF 50V K	
Q389	2SD601A/RS/-X	TRANSISTOR			C343	QCBB1HK-391Y	C CAPACITOR	390pF 50V K	
Q390	2SD601A/RS/-X	TRANSISTOR			C344	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
Q392	2SD601A/RS/-X	TRANSISTOR			C345	QFLA1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q393	2SD601A/RS/-X	TRANSISTOR			C346	QFLA1HJ-104Z	M CAPACITOR	0.1uF 50V J	
Q394	2SD601A/RS/-X	TRANSISTOR			C350	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
Q410	UN2113-X	DIGI TRANSISTOR			C351	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
Q415	UN2213-X	DIGI TRANSISTOR			C352	QETN1HM-476Z	E CAPACITOR	47uF 50V M	
Q417	UN2115-X	D.TRANSISTOR			C353	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
Q420	2SD1328/ST/-X	TRANSISTOR			C354	QETN1HM-476Z	E CAPACITOR	47uF 50V M	
Q421	2SD1328/ST/-X	TRANSISTOR			C355	QCBB1HK-221Y	C CAPACITOR	220pF 50V K	
Q480	KTC3199/GL-T	TRANSISTOR			C356	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
Q520	UN2113-X	DIGI TRANSISTOR			C357	NCS21HJ-821X	C CAPACITOR	820pF 50V J	
Q521	2SD1328/ST/-X	TRANSISTOR			C358	NCS21HJ-821X	C CAPACITOR	820pF 50V J	
Q550	2SD601A/RS/-X	TRANSISTOR			C359	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
Q551	2SD601A/RS/-X	TRANSISTOR			C367	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
Q552	2SD601A/RS/-X	TRANSISTOR			C368	QDYB1CM-682Y	C CAPACITOR	6800pF 16V M	
Q585	UN2113-X	DIGI TRANSISTOR			C369	QDYB1CM-682Y	C CAPACITOR	6800pF 16V M	
Q586	2SD1328/ST/-X	TRANSISTOR			C370	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
Q587	2SD1328/ST/-X	TRANSISTOR			C377	QETN1AM-477Z	E CAPACITOR	470uF 10V M	
Q801	UN2115-X	D.TRANSISTOR			C397	QFVF1HJ-184Z	MF CAPACITOR	0.18uF 50V J	
Q802	UN2211-X	TRANSISTOR			C398	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
Q806	UN2211-X	TRANSISTOR			C399	NCB31CK-823X	C CAPACITOR	0.082uF 16V K	
Q880	2SD601A/RS/-X	TRANSISTOR			C406	QTE1V06-106Z	E CAPACITOR	10uF 35V	
					C407	QTE1V06-106Z	E CAPACITOR	10uF 35V	
D303	1SR139-400-T2	SI DIODE			C408	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
D304	1SR139-400-T2	SI DIODE			C409	NDC31HJ-101X	C CAPACITOR	100pF 50V J	
D374	1SS133-T2	DIODE			C411	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
D375	1N4003S-T5	SI DIODE			C412	NCF31CZ-104X	C CAPACITOR	0.1uF 16V Z	
D384	MTZJ3.9B-T2	Z DIODE			C413	QETN1AM-477Z	E CAPACITOR	470uF 10V M	
D385	MTZJ3.9B-T2	Z DIODE			C414	QFLC1HJ-103Z	M CAPACITOR	0.01uF 50V J	
D410	MTZJ5.6A-T2	Z DIODE			C415	NCB31HK-103X	C CAPACITOR	0.01uF 50V K	
D414	MTZJ6.2B-T2	Z DIODE			C420	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D415	MTZJ5.6B-T2	Z DIODE			C421	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D420	MTZJ3.9B-T2	Z DIODE			C436	QTE1V06-106Z	E CAPACITOR	10uF 35V	
D444	1N4003S-T5	SI DIODE			C437	QTE1V06-106Z	E CAPACITOR	10uF 35V	
D454	1SS133-T2	DIODE			C445	QETN1HM-105Z	E CAPACITOR	1uF 50V M	
D455	1SS133-T2	DIODE			C446	NDC31HJ-470X	C CAPACITOR	47pF 50V J	
D551	1SS133-T2	DIODE			C447	NDC31HJ-470X	C CAPACITOR	47pF 50V J	
D801	1SS244-T2	SI DIODE			C454	NCB31HK-221X	C CAPACITOR	220pF 50V K	
D802	1SS133-T2	DIODE			C455	NCB31HK-221X	C CAPACITOR	220pF 50V K	
D803	1SS244-T2	SI DIODE			C456	NCB31HK-102X	C CAPACITOR	1000pF 50V K	
D804	MTZJ4.3B-T2	Z DIODE			C460	NCB31HK-471X	C CAPACITOR	470pF 50V K	
D805	1SS133-T2	DIODE			C461	NCB31HK-471X	C CAPACITOR	470pF 50V K	
D806	1SS133-T2	DIODE			C462	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
D807	1SS133-T2	DIODE			C463	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
D808	1N4003S-T5	SI DIODE			C464	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D809	1SS133-T2	DIODE			C465	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D815	1SS133-T2	DIODE			C466	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
D862	1SS133-T2	DIODE			C467	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
					C468	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C300	QCSB1HK-4R7Y	C CAPACITOR	4.7pF 50V K		C469	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C301	QCSB1HK-4R7Y	C CAPACITOR	4.7pF 50V K		C470	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C303	QFLC1HJ-104Z	M CAPACITOR	0.1uF 50V J		C471	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C306	QETN1HM-226Z	E CAPACITOR	22uF 50V M		C472	NCB31HK-272X	C CAPACITOR	2700pF 50V K	
C307	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		C473	NCB31HK-272X	C CAPACITOR	2700pF 50V K	
C309	QETN1CM-107Z	E CAPACITOR	100uF 16V M		C474	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C311	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M		C475	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C313	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M		C476	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C314	QETN1CM-107Z	E CAPACITOR	100uF 16V M		C477	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C315	QDXB1CM-152Y	C CAPACITOR	1500pF 16V M		C478	NCB31HK-471X	C CAPACITOR	470pF 50V K	
C318	QCBB1HK-223Y	C CAPACITOR	0.022uF 50V K		C479	QTE1C28-107Z	E CAPACITOR	100uF 16V	
C321	QCFB1HZ-105Y	C CAPACITOR	1uF 50V Z		C480	QETN1HM-474Z	E CAPACITOR	0.47uF 50V M	
C322	QETN1CM-107Z	E CAPACITOR	100uF 16V M		C481	QETN1HM-224Z	E CAPACITOR	0.22uF 50V M	
C323	QFVJ1HJ-223Z	MF CAPACITOR	0.022uF 50V J		C482	QETN1EM-476Z	E CAPACITOR	47uF 25V M	
C324	QFLC1HJ-472Z	M CAPACITOR	4700pF 50V J		C484	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C325	QCBB1HK-331Y	C CAPACITOR	330pF 50V K		C485	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C326	QCBB1HK-331Y	C CAPACITOR	330pF 50V K		C486	QTE1H28-106Z	E CAPACITOR	10uF 50V	
C330	QETN1AM-227Z	E CAPACITOR	220uF 10V M		C487	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C331	QETN1HM-105Z	E CAPACITOR	1uF 50V M		C488	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C332	QETN1HM-106Z	E CAPACITOR	10uF 50V M		C489	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C334	NCS21HJ-821X	C CAPACITOR	820pF 50V J		C490	QETN1HM-106Z	E CAPACITOR	10uF 50V M	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C491	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R361	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C492	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R362	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C493	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R363	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
C496	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R364	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
C499	NCB31EK-273X	C CAPACITOR	0.027uF 25V K		R365	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
C500	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M		R366	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
C501	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R367	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
C508	QETN1AM-337Z	E CAPACITOR	330uF 10V M		R368	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
C526	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R369	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
C527	NCB21EK-683X	C CAPACITOR	0.068uF 25V K		R370	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C528	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M		R373	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C529	NCB31HK-271X	C CAPACITOR	270pF 50V K		R374	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J	
C532	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R377	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C533	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R378	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C551	NCB31CK-823X	C CAPACITOR	0.082uF 16V K		R379	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C552	NCB31CK-823X	C CAPACITOR	0.082uF 16V K		R380	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
C553	NCB31CK-823X	C CAPACITOR	0.082uF 16V K		R383	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
C554	QETN1EM-476Z	E CAPACITOR	47uF 25V M		R384	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
C555	QETN1HM-105Z	E CAPACITOR	1uF 50V M		R385	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
C560	QETN1HM-476Z	E CAPACITOR	47uF 50V M		R386	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
C587	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R387	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
C800	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R388	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
C801	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M		R389	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J	
C802	NCB31CK-224X	C CAPACITOR	0.22uF 16V K		R390	NRSA63J-563X	MG RESISTOR	56kΩ 1/16W J	
C803	NCB31CK-224X	C CAPACITOR	0.22uF 16V K		R391	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J	
C804	QETN1AM-477Z	E CAPACITOR	470uF 10V M		R392	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C805	QETN1AM-227Z	E CAPACITOR	220uF 10V M		R393	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
C806	NCF21CZ-105X	C CAPACITOR	1uF 16V Z		R394	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
C807	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R395	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J	
C808	NDC31HJ-270X	C CAPACITOR	27pF 50V J		R396	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J	
C809	NDC31HJ-300X	C CAPACITOR	30pF 50V J		R397	QRE141J-152Y	C RESISTOR	1.5kΩ 1/4W J	
C810	NCB31CK-103X	C CAPACITOR	0.01uF 16V K		R398	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C811	NCB31CK-223X	C CAPACITOR	0.022uF 16V K		R399	NRSA63J-244X	MG RESISTOR	240kΩ 1/16W J	
C812	NCB31HK-221X	C CAPACITOR	220pF 50V K		R403	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
C813	NCB31HK-221X	C CAPACITOR	220pF 50V K		R405	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C814	QETN1CM-107Z	E CAPACITOR	100uF 16V M		R406	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C815	QETN1HM-106Z	E CAPACITOR	10uF 50V M		R408	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J	
C816	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M		R409	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R300	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J		R410	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R301	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R411	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R302	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J		R412	NRSA63J-122X	MG RESISTOR	1.2kΩ 1/16W J	
R303	QRE141J-243Y	C RESISTOR	24kΩ 1/4W J		R413	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
R304	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R430	QRZ9006-4R7X	F RESISTOR	4.7Ω 1/4W J	
R305	QRE141J-393Y	C RESISTOR	39kΩ 1/4W J		R451	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R306	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J		R452	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R307	QRE141J-332Y	C RESISTOR	3.3kΩ 1/4W J		R462	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	
R309	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R463	NRSA63J-823X	MG RESISTOR	82kΩ 1/16W J	
R310	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		R464	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R311	QRE141J-151Y	C RESISTOR	150Ω 1/4W J		R465	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R312	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J		R466	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R313	QRE141J-151Y	C RESISTOR	150Ω 1/4W J		R467	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R315	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J		R468	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R316	QRE141J-101Y	C RESISTOR	100Ω 1/4W J		R469	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
△ R317	QRZ9005-100X	FUSI RESISTOR	10Ω		R480	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
R318	QRE141J-2R2Y	C RESISTOR	2.2Ω 1/4W J		R481	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
△ R319	QRJ146J-4R7X	UNF C RESISTOR	4.7Ω 1/4W J		R482	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	
R320	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R483	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	
R324	QRE141J-474Y	C RESISTOR	470kΩ 1/4W J		R484	NRSA63J-362X	MG RESISTOR	3.6kΩ 1/16W J	
R325	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J		R485	NRSA63J-362X	MG RESISTOR	3.6kΩ 1/16W J	
R326	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J		R486	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R330	QRE141J-101Y	C RESISTOR	100Ω 1/4W J		R487	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R332	QRE141J-104Y	C RESISTOR	100kΩ 1/4W J		R488	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R333	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J		R489	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R335	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J		R490	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R336	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J		R491	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R337	QRE141J-113Y	C RESISTOR	11kΩ 1/4W J		R492	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R338	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R493	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R339	QRE141J-512Y	C RESISTOR	5.1kΩ 1/4W J		R494	NRSA63J-622X	MG RESISTOR	6.2kΩ 1/16W J	
R340	QRE141J-512Y	C RESISTOR	5.1kΩ 1/4W J		R495	NRSA63J-622X	MG RESISTOR	6.2kΩ 1/16W J	
R341	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J		R496	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R343	QRE141J-273Y	C RESISTOR	27kΩ 1/4W J		R497	NRSA63J-562X	MG RESISTOR	5.6kΩ 1/16W J	
R344	QRE141J-113Y	C RESISTOR	11kΩ 1/4W J		R498	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R345	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R500	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R346	QRE141J-512Y	C RESISTOR	5.1kΩ 1/4W J		R501	NRSA63J-474X	MG RESISTOR	470kΩ 1/16W J	
R347	QRE141J-512Y	C RESISTOR	5.1kΩ 1/4W J		R502	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R359	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J		R503	NRSA63J-225X	MG RESISTOR	2.2MΩ 1/16W J	
R360	QRE141J-223Y	C RESISTOR	22kΩ 1/4W J		R504	NRSA63J-153X	MG RESISTOR	15kΩ 1/16W J	
					R520	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
R521	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R850	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R522	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J		R853	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R523	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R854	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R524	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R857	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R525	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R858	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R526	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R860	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R527	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R861	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R528	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R862	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R529	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R863	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R530	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R864	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R531	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R865	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R533	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R866	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R551	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		R867	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R552	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		R868	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R553	NRSA63J-132X	MG RESISTOR	1.3kΩ 1/16W J		R869	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R555	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J		R871	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R557	QRE141J-152Y	C RESISTOR	1.5kΩ 1/4W J		R872	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R558	QRE141J-222Y	C RESISTOR	2.2kΩ 1/4W J		R873	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R559	NRSA63J-123X	MG RESISTOR	12kΩ 1/16W J		R874	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R560	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R876	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R562	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R877	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R563	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R878	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R564	NRSA63J-224X	MG RESISTOR	220kΩ 1/16W J		R879	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R566	NRSA63J-274X	MG RESISTOR	270kΩ 1/16W J		R880	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R571	NRSA63J-302X	MG RESISTOR	3kΩ 1/16W J		R882	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
R583	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J		R883	NRSA63J-470X	MG RESISTOR	47Ω 1/16W J	
R584	QRE141J-682Y	C RESISTOR	6.8kΩ 1/4W J		R884	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R585	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R885	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R586	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R886	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R587	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R887	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R588	QRE141J-752Y	C RESISTOR	7.5kΩ 1/4W J		R888	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R589	QRE141J-752Y	C RESISTOR	7.5kΩ 1/4W J		R889	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R800	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R890	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R801	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R891	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R802	NRSA63J-222X	MG RESISTOR	2.2kΩ 1/16W J		R892	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R803	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R893	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R804	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R894	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R805	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J		R895	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R806	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J		R896	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R807	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		R897	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R810	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R898	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R811	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R899	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R812	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R900	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R813	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R901	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R814	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R902	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R815	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R903	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R816	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R904	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R817	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R905	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R818	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R906	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R819	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		R907	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R820	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		R908	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R821	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J		VR320	QVP0004-203Z	TRIM RESISTOR	20kΩ	
R822	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J						
R823	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		L317	QQL244K-100Z	COIL	10uH K	
R824	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		L320	QQR1118-002	OSC COIL(BIAS)		
R825	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		L812	QQL231K-2R2Y	COIL	2.2uH K	
R826	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		L813	QQL231K-2R2Y	COIL	2.2uH K	
R827	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J						
R828	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN11	QGF1036C1-05	CONNECTOR	FFC/FPC (1-5)	
R829	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		CN21	QGF1205C1-11	CONNECTOR	FFC/FPC (1-11)	
R830	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		CN211	QGB2510K1-09	CONNECTOR	B-B (1-9)	
R831	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		CN216	QGB2510J1-11	CONNECTOR	B-B (1-11)	
R832	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN220	QGD2504C1-03Z	CONNECTOR	(1-3)	
R833	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		CN221	QGD2504C1-03Z	CONNECTOR	(1-3)	
R834	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN301	QGA2001C1-07	CONNECTOR	W-B (1-7)	
R835	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN302	QGA2001C1-03	CONNECTOR	W-B (1-3)	
R836	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN303	QGF1205C1-13	CONNECTOR	FFC/FPC (1-13)	
R837	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN410	QGF1205C1-12	CONNECTOR	FFC/FPC (1-12)	
R838	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN511	QGF1036C1-19	CONNECTOR	FFC/FPC (1-19)	
R839	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN513	QGF1036C1-17	CONNECTOR	FFC/FPC (1-17)	
R840	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		CN860	QGF1205C1-17	CONNECTOR	FFC/FPC (1-17)	
R841	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		CN880	QGF1205C1-12	CONNECTOR	FFC/FPC (1-12)	
R842	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		HS420	LE40505-001A	HEAT SINK		
R843	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		J454	QNN0420-001	SURROUND JACK		
R844	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		J812	QNS0089-001	3.5 JACK		
R845	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		J814	GP1FA553TZ	OPT TRANSMITTER		
R846	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J		PP301	QZW0038-001	WIRE CLAMP		
R847	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		SP400	LV30225-011A	SPACER		

△ Symbol No.	Part No.	Part Name	Description	Local
SP888	LV30225-011A	SPACER		
TW400	QUB230-06A4A4	WIRE		
TW888	QUB460-08A4A4	SINGLE WIRE		
X801	QAX0724-001Z	CRYSTAL	12.000000MHz	

Front board

Block No. [0][3]

△ Symbol No.	Part No.	Part Name	Description	Local
IC900	SN74HCU04N	FL DRIVER		
IC920	PT6305	FL DRIVER		
IC930	GP1UM281XKVF	IR DETECT UNIT		
IC970	BU9253AS	IC		
IC971	RC4580IP	IC		
Q933	KRC102M-T	DIGI TRANSISTOR		
Q934	KRC102M-T	DIGI TRANSISTOR		
Q935	KRC102M-T	DIGI TRANSISTOR		
Q936	KRC102M-T	DIGI TRANSISTOR		
Q937	KRC102M-T	DIGI TRANSISTOR		
Q938	KRC102M-T	DIGI TRANSISTOR		
Q980	KRA111M-T	DIGI TRANSISTOR		
Q981	KRA111M-T	DIGI TRANSISTOR		
Q982	KRA111M-T	DIGI TRANSISTOR		
Q987	2SC3576-JVC-T	TRANSISTOR		
△ Q2010	KTC2026/OY/	TRANSISTOR		
Q2011	KTC3199/GL-T	TRANSISTOR		
D925	SLA-362LT-T	LED		
D933	SLA-362LT-T	LED		
D934	SLA-362LT-T	LED		
D935	SLA-362LT-T	LED		
D936	SLA-362LT-T	LED		
D937	SLA-362LT-T	LED		
D938	SLA-362LT-T	LED		
D971	MTZJ5.1B-T2	Z DIODE		
D991	MTZJ2.4B-T2	Z DIODE		
D992	1SS133-T2	DIODE		
△ D2010	1N5402M-20	DIODE		
△ D2011	1N5402M-20	DIODE		
△ D2012	1N5402M-20	DIODE		
△ D2013	1N5402M-20	DIODE		
D2015	1N4003S-T5	SI DIODE		
D2016	1N4003S-T5	SI DIODE		
D2017	1N4003S-T5	SI DIODE		
D2018	MTZJ20B-T2	Z DIODE		
D2019	MTZJ18B-T2	Z DIODE		
D2020	MTZJ6.8B-T2	Z DIODE		
C903	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C904	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C905	QCBB1HK-103Y	C CAPACITOR	0.01uF 50V K	
C920	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C921	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C922	QKCC1AM-107Z	E CAPACITOR	100uF 10V M	
C923	QCBB1HK-104Y	C CAPACITOR	0.1uF 50V K	
C924	QKCC1HM-226Z	E CAPACITOR	22uF 50V M	
C925	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C926	QCFB1HZ-104Y	C CAPACITOR	0.1uF 50V Z	
C930	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C931	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C970	QCBB1HK-101Y	C CAPACITOR	100pF 50V K	
C971	QCFB1HZ-104Y	C CAPACITOR	0.1uF 50V Z	
C972	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C973	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C974	QDXB1CM-472Y	C CAPACITOR	4700pF 16V M	
C975	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C976	QKCC1CM-226Z	E CAPACITOR	22uF 16V M	
C977	QKCC1HM-474Z	E CAPACITOR	0.47uF 50V M	
C978	QDXB1CM-332Y	C CAPACITOR	3300pF 16V M	
C979	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C980	QKCC1HM-475Z	E CAPACITOR	4.7uF 50V M	
C981	QKCC1HM-224Z	E CAPACITOR	0.22uF 50V M	

△ Symbol No.	Part No.	Part Name	Description	Local
C982	QETN1HM-225Z	E CAPACITOR	2.2uF 50V M	
C983	QCBB1HK-151Y	C CAPACITOR	150pF 50V K	
C984	QCBB1HK-331Y	C CAPACITOR	330pF 50V K	
C985	QCBB1HK-151Y	C CAPACITOR	150pF 50V K	
C986	QETN1HM-475Z	E CAPACITOR	4.7uF 50V M	
C987	QETN1CM-107Z	E CAPACITOR	100uF 16V M	
C988	QKCC1AM-227Z	E CAPACITOR	220uF 10V M	
C989	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C990	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C991	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C992	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C993	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C995	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C996	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C997	QDGB1HK-102Y	C CAPACITOR	1000pF 50V K	
C998	QDXB1CM-392Y	C CAPACITOR	3900pF 16V M	
C999	QDXB1CM-392Y	C CAPACITOR	3900pF 16V M	
C2010	QETN1JM-107Z	E CAPACITOR	100uF 63V M	
C2011	QETM2CM-226	E CAPACITOR	22uF 160V M	
C2012	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C2013	QETN1HM-226Z	E CAPACITOR	22uF 50V M	
C2014	QDYB1CM-103Y	C CAPACITOR	0.01uF 16V M	
C2015	QETN1HM-106Z	E CAPACITOR	10uF 50V M	
C2017	QCFB1HZ-104Y	C CAPACITOR	0.1uF 50V Z	
C2018	QCFB1HZ-104Y	C CAPACITOR	0.1uF 50V Z	
R920	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R924	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R926	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R927	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R928	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R929	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R930	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R933	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R934	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R935	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R936	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R937	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R938	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R940	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R941	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R942	QRE141J-121Y	C RESISTOR	120Ω 1/4W J	
R943	QRE141J-151Y	C RESISTOR	150Ω 1/4W J	
R944	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R945	QRE141J-271Y	C RESISTOR	270Ω 1/4W J	
R946	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R947	QRE141J-561Y	C RESISTOR	560Ω 1/4W J	
R948	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R949	QRE141J-182Y	C RESISTOR	1.8kΩ 1/4W J	
R950	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R951	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R952	QRE141J-121Y	C RESISTOR	120Ω 1/4W J	
R953	QRE141J-151Y	C RESISTOR	150Ω 1/4W J	
R954	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R955	QRE141J-271Y	C RESISTOR	270Ω 1/4W J	
R960	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R961	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R962	QRE141J-121Y	C RESISTOR	120Ω 1/4W J	
R963	QRE141J-151Y	C RESISTOR	150Ω 1/4W J	
R964	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R965	QRE141J-271Y	C RESISTOR	270Ω 1/4W J	
R966	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R967	QRE141J-561Y	C RESISTOR	560Ω 1/4W J	
R969	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R970	QRE141J-333Y	C RESISTOR	33kΩ 1/4W J	
R971	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R972	QRE141J-822Y	C RESISTOR	8.2kΩ 1/4W J	
R973	QRE141J-203Y	C RESISTOR	20kΩ 1/4W J	
R974	QRE141J-203Y	C RESISTOR	20kΩ 1/4W J	
R975	QRE141J-221Y	C RESISTOR	220Ω 1/4W J	
R976	QRE141J-203Y	C RESISTOR	20kΩ 1/4W J	
R977	QRE141J-272Y	C RESISTOR	2.7kΩ 1/4W J	
R978	QRE141J-562Y	C RESISTOR	5.6kΩ 1/4W J	
R979	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R980	QRE141J-203Y	C RESISTOR	20kΩ 1/4W J	
R981	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R982	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R983	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	

△ Symbol No.	Part No.	Part Name	Description	Local
R984	QRE141J-153Y	C RESISTOR	15kΩ 1/4W J	
R985	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R986	QRE141J-102Y	C RESISTOR	1kΩ 1/4W J	
R987	QRE141J-561Y	C RESISTOR	560Ω 1/4W J	
R988	QRE141J-203Y	C RESISTOR	20kΩ 1/4W J	
R989	QRE141J-510Y	C RESISTOR	51Ω 1/4W J	
R990	QRE141J-475Y	C RESISTOR	4.7MΩ 1/4W J	
R991	QRE141J-101Y	C RESISTOR	100Ω 1/4W J	
R992	QRE141J-152Y	C RESISTOR	1.5kΩ 1/4W J	
R993	QRE141J-391Y	C RESISTOR	390Ω 1/4W J	
R994	QRE141J-123Y	C RESISTOR	12kΩ 1/4W J	
R995	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
R996	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R997	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R998	QRE141J-472Y	C RESISTOR	4.7kΩ 1/4W J	
R999	QRE141J-152Y	C RESISTOR	1.5kΩ 1/4W J	
△ R2010	QRJ146J-4R7X	UNF C RESISTOR	4.7Ω 1/4W J	
R2011	FQRK123J-153X	C RESISTOR		
R2012	QRE141J-103Y	C RESISTOR	10kΩ 1/4W J	
△ R2014	ERX12SJR33E	UNF C RESISTOR		
VR970	QVQ0299-B54	V RESISTOR		
L996	QQL231K-470Y	COIL	47uH K	
L997	QQL231K-470Y	COIL	47uH K	
L998	QQR1183-001Z	FERRITE BEADS		
CN101	QGD2504C1-03Z	CONNECTOR	(1-3)	
CN119	QGA3901F1-08	CONNECTOR	W-B (1-8)	
CN250	QGA7901C1-02	CONNECTOR	W-B (1-2)	
CN870	QGF1205C1-17	CONNECTOR	FFC/FPC (1-17)	
CN890	QGF1205F1-12	CONNECTOR	FFC/FPC (1-12)	
FL910	QLF0136-001	FL TUBE		
FT111	QNG0003-001Z	FUSE CLIP		
FT112	QNG0003-001Z	FUSE CLIP		
FT131	QNG0003-001Z	FUSE CLIP		
FT132	QNG0003-001Z	FUSE CLIP		
FT151	QNG0003-001Z	FUSE CLIP		
FT152	QNG0003-001Z	FUSE CLIP		
FT511	QNG0003-001Z	FUSE CLIP		
FT512	QNG0003-001Z	FUSE CLIP		
FT521	QNG0003-001Z	FUSE CLIP		
FT522	QNG0003-001Z	FUSE CLIP		
FT531	QNG0003-001Z	FUSE CLIP		
FT532	QNG0003-001Z	FUSE CLIP		
FW116	QUM153-29DGZ4	FLAT WIRE		
FW241	QUM153-18DGZ4	FLAT WIRE		
J970	QNS0236-001	PHONE JACK		
J971	QNS0236-001	PHONE JACK		
J995	QNS0237-001	PHONE JACK		
JS920	QSW0857-001	ROTARY SW		
△ S500	QSW0812-001	VOLTAGE SWITCH		
S920	QSW0825-001Z	TACT SW		
S939	QSW0825-001Z	TACT SW		
S940	QSW0825-001Z	TACT SW		
S941	QSW0825-001Z	TACT SW		
S942	QSW0825-001Z	TACT SW		
S943	QSW0825-001Z	TACT SW		
S944	QSW0825-001Z	TACT SW		
S945	QSW0825-001Z	TACT SW		
S946	QSW0825-001Z	TACT SW		
S947	QSW0825-001Z	TACT SW		
S948	QSW0825-001Z	TACT SW		
S949	QSW0825-001Z	TACT SW		
S950	QSW0825-001Z	TACT SW		
S951	QSW0825-001Z	TACT SW		
S952	QSW0825-001Z	TACT SW		
S953	QSW0825-001Z	TACT SW		
S954	QSW0825-001Z	TACT SW		
S955	QSW0825-001Z	TACT SW		
S960	QSW0825-001Z	TACT SW		
S961	QSW0825-001Z	TACT SW		
S962	QSW0825-001Z	TACT SW		
S963	QSW0825-001Z	TACT SW		
S964	QSW0825-001Z	TACT SW		
S965	QSW0825-001Z	TACT SW		
S966	QSW0825-001Z	TACT SW		
S967	QSW0825-001Z	TACT SW		
SP920	GV40205-004A	IC HOLDER		

△ Symbol No.	Part No.	Part Name	Description	Local
TW991	QUB220-18HPDM	S.WIRE		
DVD servo board				
Block No. [0][4]				
△ Symbol No.	Part No.	Part Name	Description	Local
IC201	LA6502-X	IC		
IC301	MN2DS0003AA-H	IC		
IC302	LM1117MP-ADJ-X	IC		
IC453	S-80827CNNB-W	IC		
IC505	K4S641632F-TC75	IC(DIGITAL)		
IC505	or K4S641632H-TC75	IC(DIGITAL)		
IC505	or HY57V641620HGT7	IC		
IC509	AT49LV1614T90TC	IC (FLASH)		
IC701	AK4384VT-X	IC		
Q101	KTA1001/Y/-X	TRANSISTOR		
Q101	or 2SB1424/R/-W	TRANSISTOR		
Q102	2SC4617/R/-X	TRANSISTOR		
Q103	KTA1001/Y/-X	TRANSISTOR		
Q103	or 2SB1424/R/-W	TRANSISTOR		
Q104	2SC4617/R/-X	TRANSISTOR		
Q105	UN2119-X	TRANSISTOR		
C101	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C102	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C103	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C104	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C105	NEA70JM-476X	E CAPACITOR	47uF 6.3V M	
C106	NEA70JM-476X	E CAPACITOR	47uF 6.3V M	
C107	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C108	NEA70JM-476X	E CAPACITOR	47uF 6.3V M	
C111	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C204	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C205	NCB31HK-271X	C CAPACITOR	270pF 50V K	
C206	NDC31HJ-151X	C CAPACITOR	150pF 50V J	
C208	NCB31HK-561X	C CAPACITOR	560pF 50V K	
C211	NCB31HK-223X	C CAPACITOR	0.022uF 50V K	
C212	NCB31CK-103X	C CAPACITOR	0.01uF 16V K	
C217	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C251	NCB31AK-474X	C CAPACITOR	0.47uF 10V K	
C253	NCB31HK-561X	C CAPACITOR	560pF 50V K	
C255	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C256	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C257	NCB31HK-822X	C CAPACITOR	8200pF 50V K	
C258	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C259	NCB31CK-153X	C CAPACITOR	0.015uF 16V K	
C260	NCB31EK-223X	C CAPACITOR	0.022uF 25V K	
C261	NCB31EK-223X	C CAPACITOR	0.022uF 25V K	
C262	NCB31EK-223X	C CAPACITOR	0.022uF 25V K	
C301	NEA70GM-227X	E CAPACITOR	220uF 4V M	
C302	NEA70GM-476X	E CAPACITOR	47uF 4V M	
C303	NEA70GM-476X	E CAPACITOR	47uF 4V M	
C304	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C305	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C306	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C307	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C308	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C309	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C310	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C311	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C312	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C313	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C314	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C315	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C316	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C317	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C318	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C319	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C320	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C321	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C322	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	
C323	NCB31CK-104X	C CAPACITOR	0.1uF 16V K	

△ Symbol No.	Part No.	Part Name	Description	Local	△ Symbol No.	Part No.	Part Name	Description	Local
C324	NCB21CK-105X	C CAPACITOR	1uF 16V K		R221	NRSA63J-682X	MG RESISTOR	6.8kΩ 1/16W J	
C325	NDC31HJ-180X	C CAPACITOR	18pF 50V J		R251	NRS125J-R47X	MG RESISTOR	0.47Ω 1/2W J	
C326	NDC31HJ-150X	C CAPACITOR	15pF 50V J		R252	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J	
C327	NCB31HK-103X	C CAPACITOR	0.01uF 50V K		R254	NRSA63J-203X	MG RESISTOR	20kΩ 1/16W J	
C330	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R255	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C331	NCB31CK-333X	C CAPACITOR	0.033uF 16V K		R257	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C332	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R259	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C333	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R302	NRSA63J-240X	MG RESISTOR	24Ω 1/16W J	
C334	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R303	NRSA63J-270X	MG RESISTOR	27Ω 1/16W J	
C335	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R306	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C337	NCB31CK-183X	C CAPACITOR	0.018uF 16V K		R307	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
C338	NCB31HK-562X	C CAPACITOR	5600pF 50V K		R308	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J	
C339	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R309	NRSA63J-104X	MG RESISTOR	100kΩ 1/16W J	
C340	NCB21CK-105X	C CAPACITOR	1uF 16V K		R310	NRS125J-R47X	MG RESISTOR	0.47Ω 1/2W J	
C341	NCB30JK-105X	C CAPACITOR	1uF 6.3V K		R312	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C347	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R313	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C348	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R314	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C349	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R315	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C350	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R316	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C356	NCB21CK-105X	C CAPACITOR	1uF 16V K		R317	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C359	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R318	NRSA63J-333X	MG RESISTOR	33kΩ 1/16W J	
C371	NCB21CK-105X	C CAPACITOR	1uF 16V K		R319	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C391	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R320	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
C455	NCB31CK-103X	C CAPACITOR	0.01uF 16V K		R322	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	
C551	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R323	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C552	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R325	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
C553	NBE20JM-226X	TA E CAPACITOR	22uF 6.3V M		R326	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
C554	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R333	NRSA63J-163X	MG RESISTOR	16kΩ 1/16W J	
C555	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R334	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
C556	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R335	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
C557	NCF31AZ-105X	C CAPACITOR	1uF 10V Z		R336	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
C558	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R337	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
C559	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R338	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C701	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R339	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C704	NEA70JM-227X	E CAPACITOR	220uF 6.3V M		R340	NRSA63D-303X	MG RESISTOR	30kΩ 1/16W D	
C706	NEA71CM-106X	E CAPACITOR	10uF 16V M		R341	NRSA63D-362X	MG RESISTOR	3.6kΩ 1/16W D	
C707	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R342	NRSA63D-222X	MG RESISTOR	2.2kΩ 1/16W D	
C721	NCB31HK-102X	C CAPACITOR	1000pF 50V K		R343	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C902	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R345	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
C903	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R351	NRSA63J-681X	MG RESISTOR	680Ω 1/16W J	
C904	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R352	NRSA63J-105X	MG RESISTOR	1MΩ 1/16W J	
C906	NCB31CK-104X	C CAPACITOR	0.1uF 16V K		R357	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R101	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R358	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R102	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R361	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R103	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J		R362	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J	
R104	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J		R363	NRSA63J-151X	MG RESISTOR	150Ω 1/16W J	
R105	NRS125J-270X	MG RESISTOR	27Ω 1/2W J		R372	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R106	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J		R373	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R107	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R378	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R108	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		R379	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R109	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		R384	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R110	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R385	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R111	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J		R390	NRSA63J-472X	MG RESISTOR	4.7kΩ 1/16W J	
R112	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J		R391	NAD0025-103X	N THERMISTOR	10kΩ	
R113	NRS125J-270X	MG RESISTOR	27Ω 1/2W J		R392	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J	
R114	NRSA63J-2R2X	MG RESISTOR	2.2Ω 1/16W J		R393	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R115	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J		R394	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R116	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J		R395	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R117	NRSA63J-331X	MG RESISTOR	330Ω 1/16W J		R457	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R118	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R458	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R119	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R501	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R120	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R502	NRSA63J-471X	MG RESISTOR	470Ω 1/16W J	
R122	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R510	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R123	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R551	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R125	NRS125J-1R0X	MG RESISTOR	1Ω 1/2W J		R553	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R126	NRSA02J-181X	MG RESISTOR	180Ω 1/10W J		R554	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R128	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J		R555	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R204	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		R556	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R205	NRSA63J-273X	MG RESISTOR	27kΩ 1/16W J		R557	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R206	NRSA63J-303X	MG RESISTOR	30kΩ 1/16W J		R558	NRSA63J-102X	MG RESISTOR	1kΩ 1/16W J	
R207	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J		R701	NRSA63J-1R0X	MG RESISTOR	1Ω 1/16W J	
R208	NRSA63J-223X	MG RESISTOR	22kΩ 1/16W J		R702	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R213	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R710	NRSA63J-100X	MG RESISTOR	10Ω 1/16W J	
R214	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R711	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R215	NRSA63J-103X	MG RESISTOR	10kΩ 1/16W J		R712	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R219	NRSA63J-183X	MG RESISTOR	18kΩ 1/16W J		R713	NRSA63J-221X	MG RESISTOR	220Ω 1/16W J	
R220	NRSA63J-243X	MG RESISTOR	24kΩ 1/16W J		R716	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
					R718	NRSA63J-473X	MG RESISTOR	47kΩ 1/16W J	

Symbol No.	Part No.	Part Name	Description	Local
R719	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R723	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R724	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R725	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R727	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
R728	NRSA63J-0R0X	MG RESISTOR	0Ω 1/16W J	
R909	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
R911	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
L501	NQL044K-100X	COIL	0.20Ω 10uH K	
CN101	QGF0523F1-24W	CONNECTOR	FFC/FPC (1-24)	
CN201	QGF1016F2-08W	CONNECTOR	FFC/FPC (1-8)	
CN501	QGF1016F2-19W	CONNECTOR	FFC/FPC (1-19)	
CN502	QGF1016F2-08W	CONNECTOR	FFC/FPC (1-8)	
CN503	QGF1016F2-17W	CONNECTOR	FFC/FPC (1-17)	
K101	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K102	NRSA02J-0R0X	MG RESISTOR	0Ω 1/10W J	
K301	NQR0354-001X	FERRITE BEADS		
K302	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
K303	NRSA63J-101X	MG RESISTOR	100Ω 1/16W J	
K551	NQR0129-002X	FERRITE BEADS		
K552	NQR0129-002X	FERRITE BEADS		
K553	NQR0129-002X	FERRITE BEADS		
K554	NQR0129-002X	FERRITE BEADS		
K555	NQR0022-005X	FERRITE BEADS		
K556	NQR0129-002X	FERRITE BEADS		
K721	NQR0251-004X	FERRITE BEADS		
K722	NQR0251-004X	FERRITE BEADS		
K723	NQR0251-004X	FERRITE BEADS		
X351	NAX0550-001X	CRYSTAL	27.000MHz	

DVD loading switch board


Block No. [0][5]

Symbol No.	Part No.	Part Name	Description	Local
CN1	QGF1016F3-05	CONNECTOR	FFC/FPC (1-5)	
S1	QSW1007-001	DETECT SWITCH		

<MEMO>

Packing materials and accessories parts list

Block No. M 3 M M

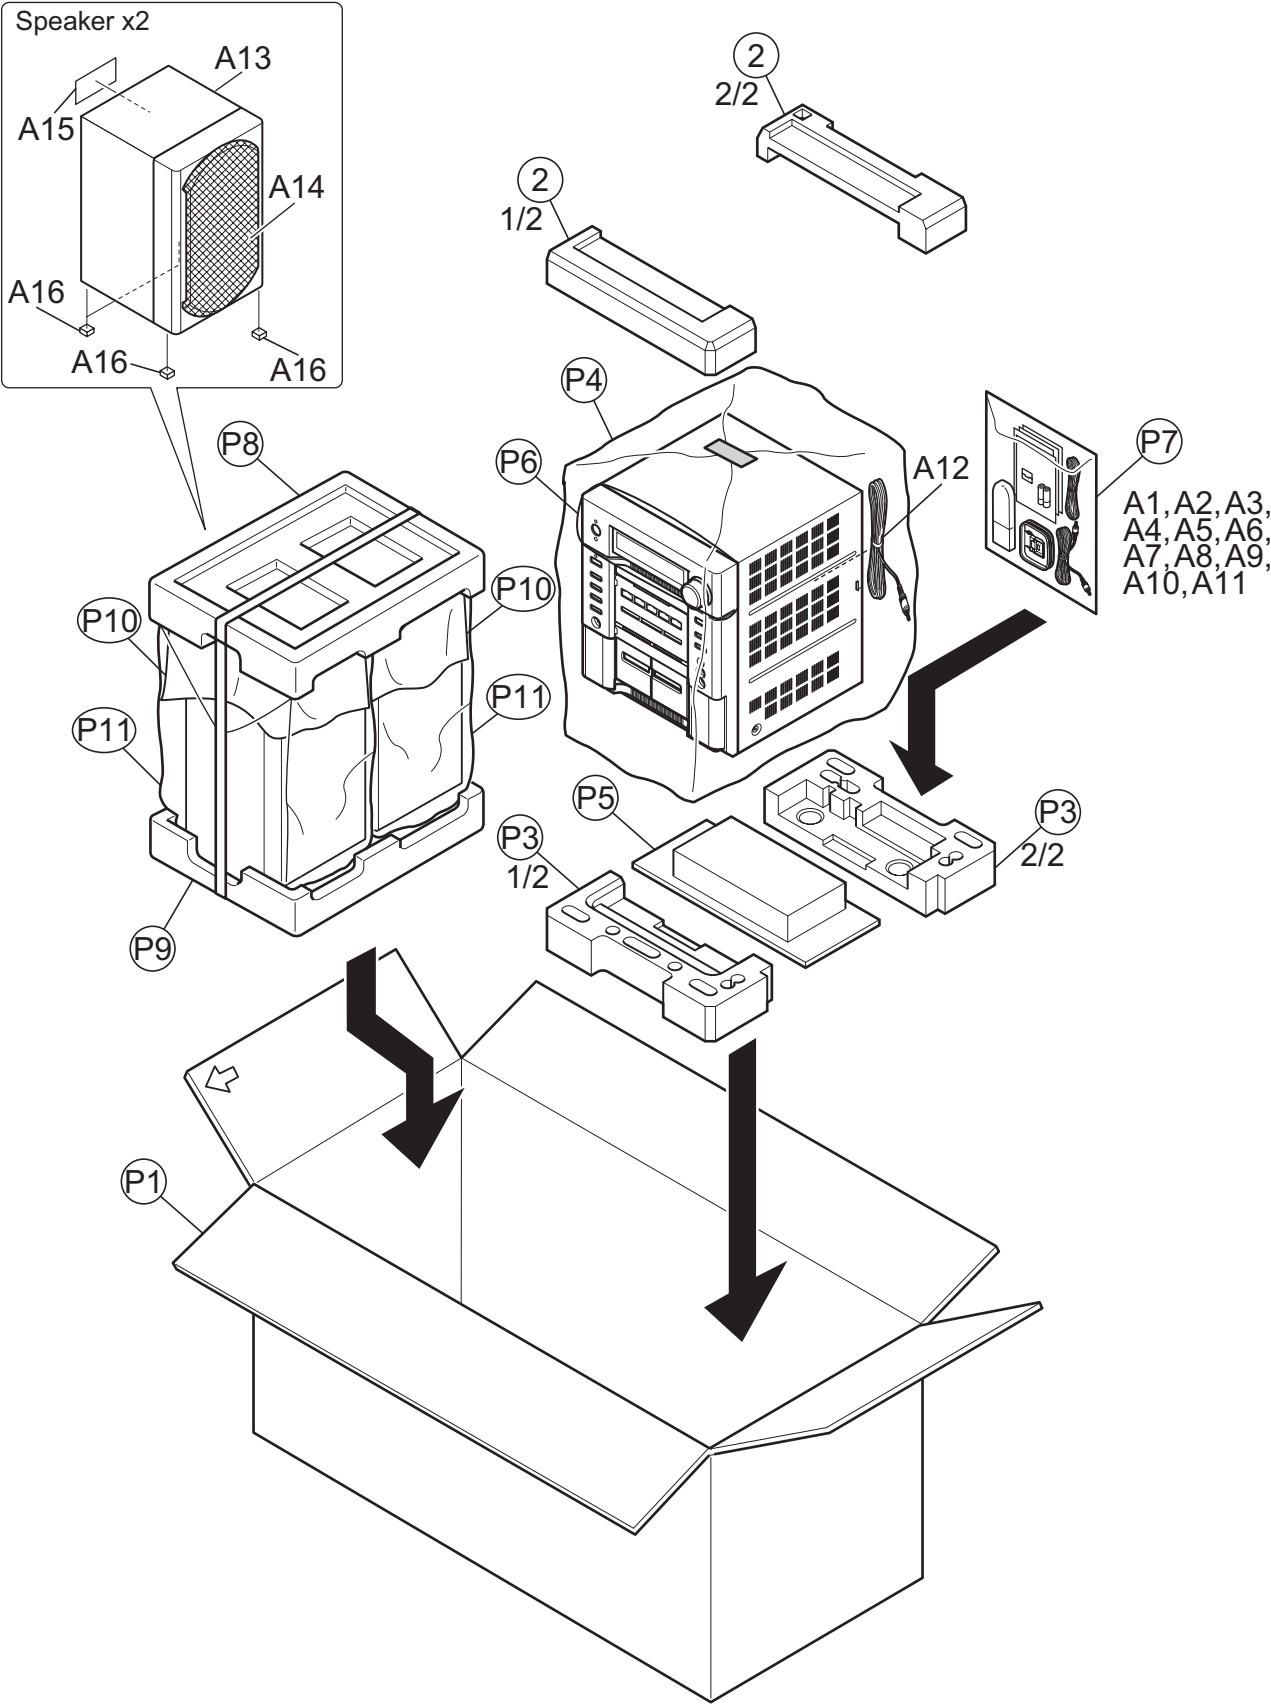

Packing and Accessories

Block No. [M][3][M][M]

△	Symbol No.	Part No.	Part Name	Description	Local
A 1		GVT0126-004A	INST BOOK	RUS	
A 2		GV40524-002A	NOTICE SHEET		
A 3		GV40538-001A	INFO. SHEET		
A 4		GV40559-001A	ERRATA SHT.		
A 5		QAL0014-001	AM LOOP ANT		
A 6		QAL0457-001	ANT.WIRE		
A 7		QAM0216-001	SIGNAL CORD		
A 8		RM-SMXJD3U	REMOCON		
A 9		-----	BATTERY	(x2)	
A 10		QQR0919-001	FERRITE CORE		
A 11		BT-54023-1	WARRANTY CARD		
A 12		QAN0057-003	MICROPHONE		
A 13		MXJD3K-SPBOX	SPEAKER BOX	(x2)	
A 14		J201-XJD301G-10	SPK NET ASSY	(x2)	
A 15		600-0JD3US-00	SPEC LABEL	(x2)	
A 16		441-802104-00	LEG CUSHION	(x8)	
P 1		GV20290-007A	CARTON ASSY.		
P 2		GV10223-001A	CUSHION (TOP)		
P 3		GV10224-001A	CUSHION (BOTTOM)		
P 4		QPC06507030P	POLY BAG	65cm x 70cm	
P 5		GV30209-003A	CARTON SPACER		
P 6		GV40437-003A	CLOTH		
P 7		QPC02503515P	POLY BAG	25cm x 35cm	
P 8		720-MXJD3T-00	TOP CUSHION		
P 9		720-MXJD3B-00	BOTTOM CUSHION		
P 10		715-250031-00	MIRAMAT SHEET	(x2)	
P 11		700-120034-20	HDPE BAG	(x2)	