


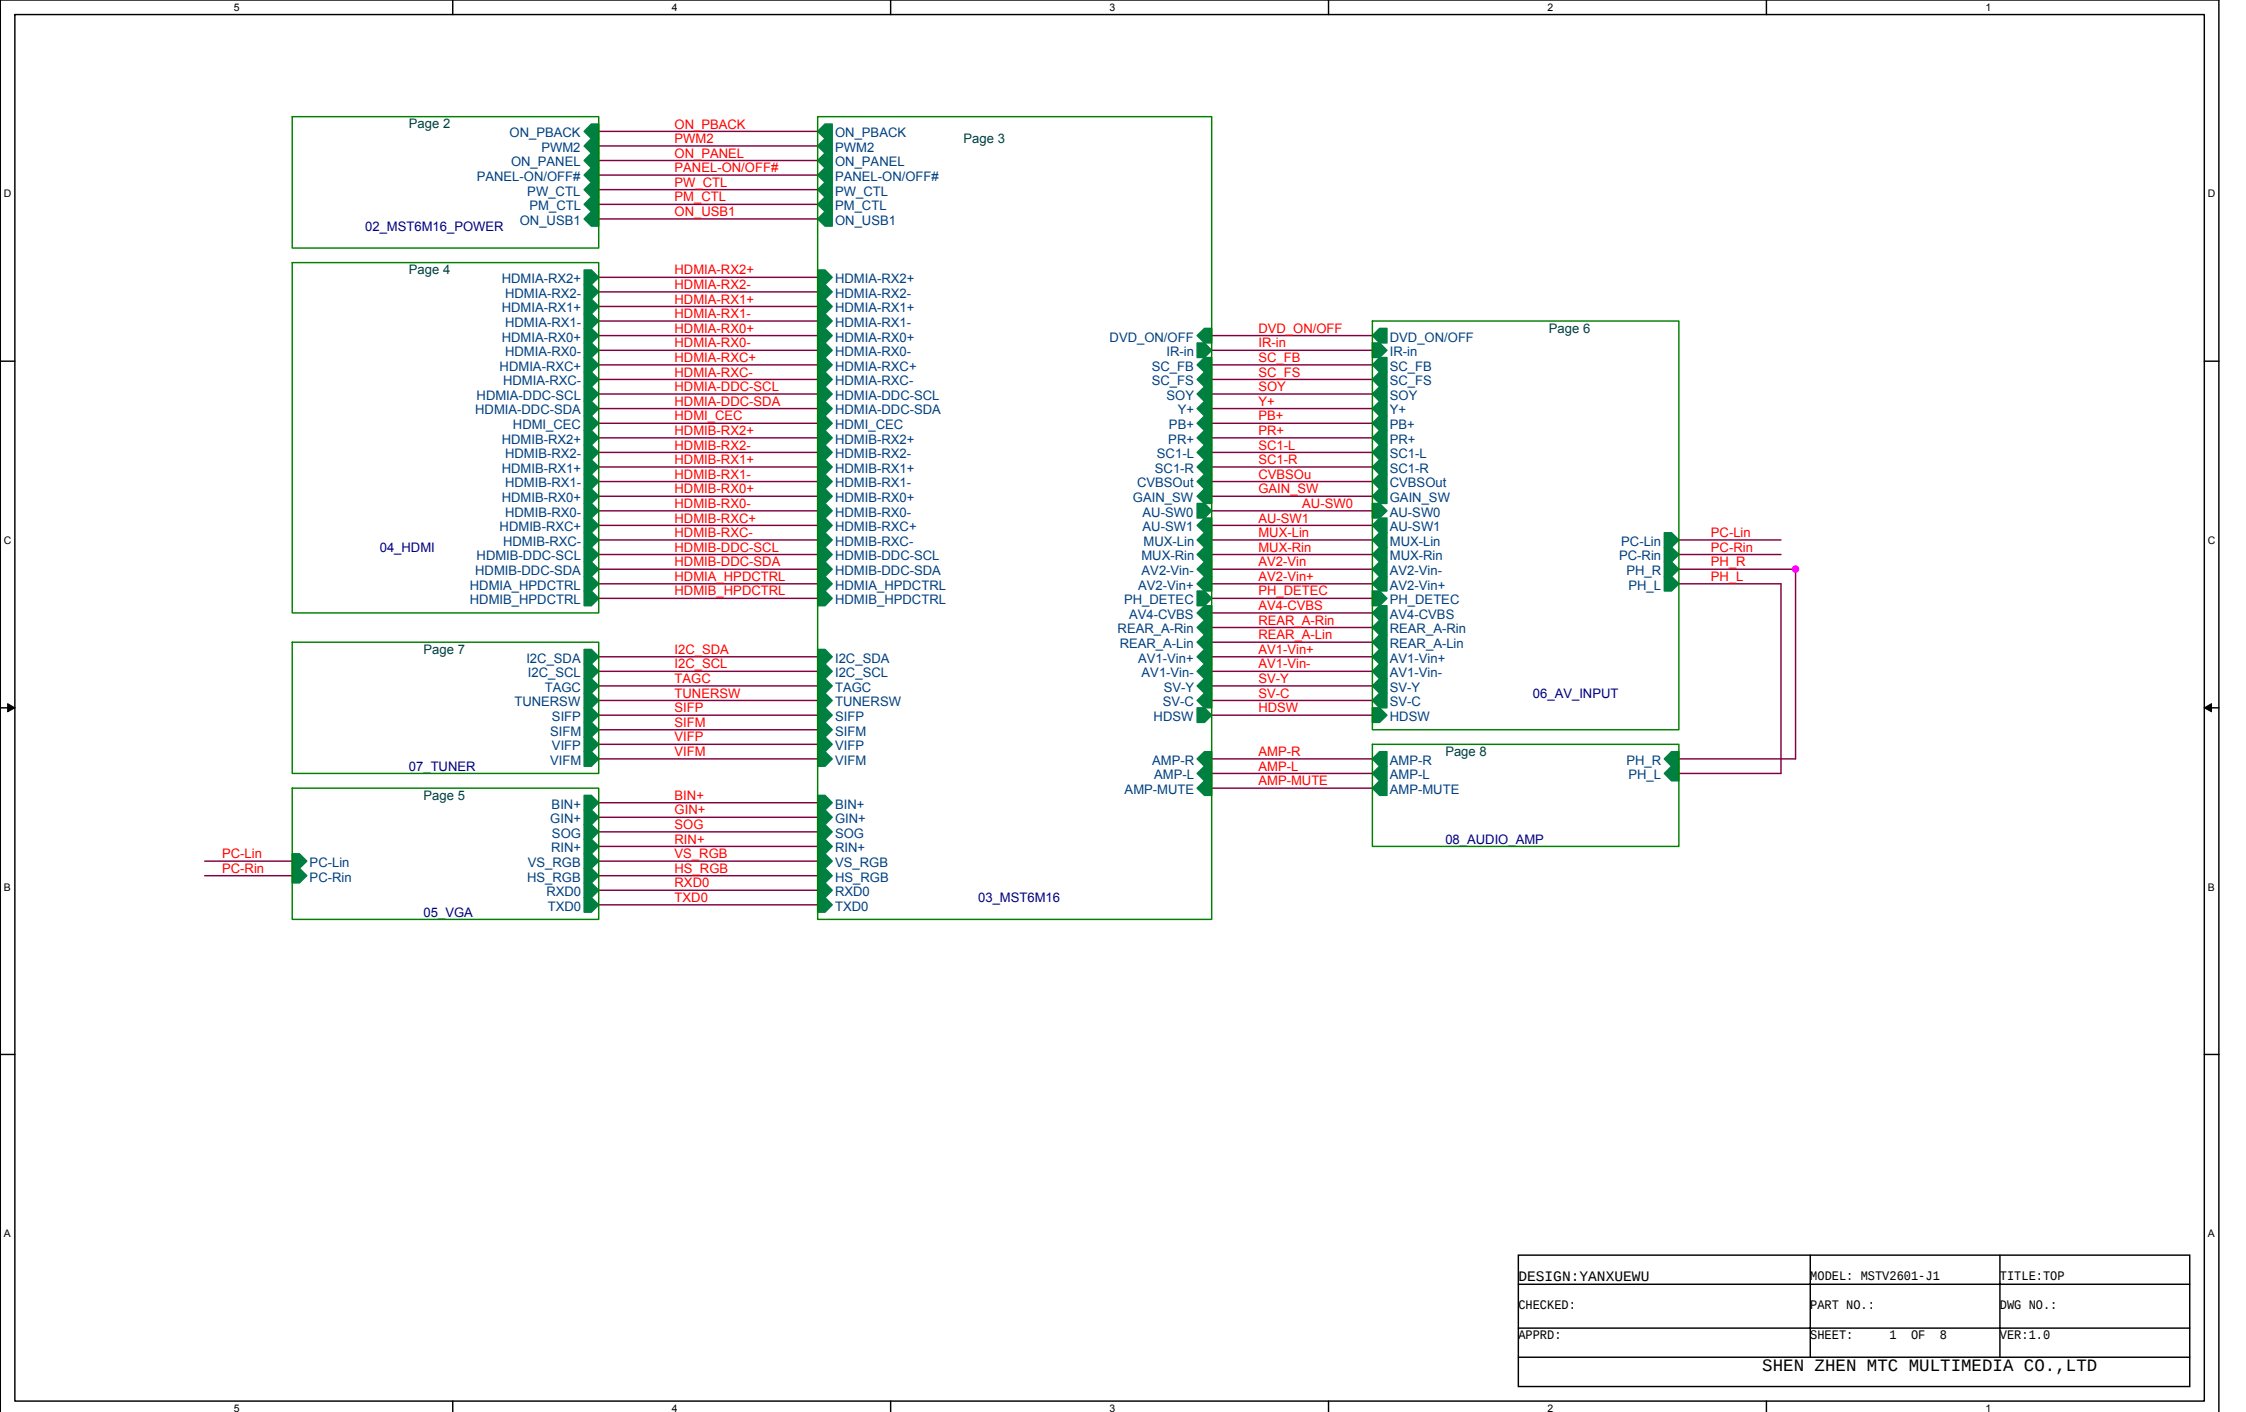
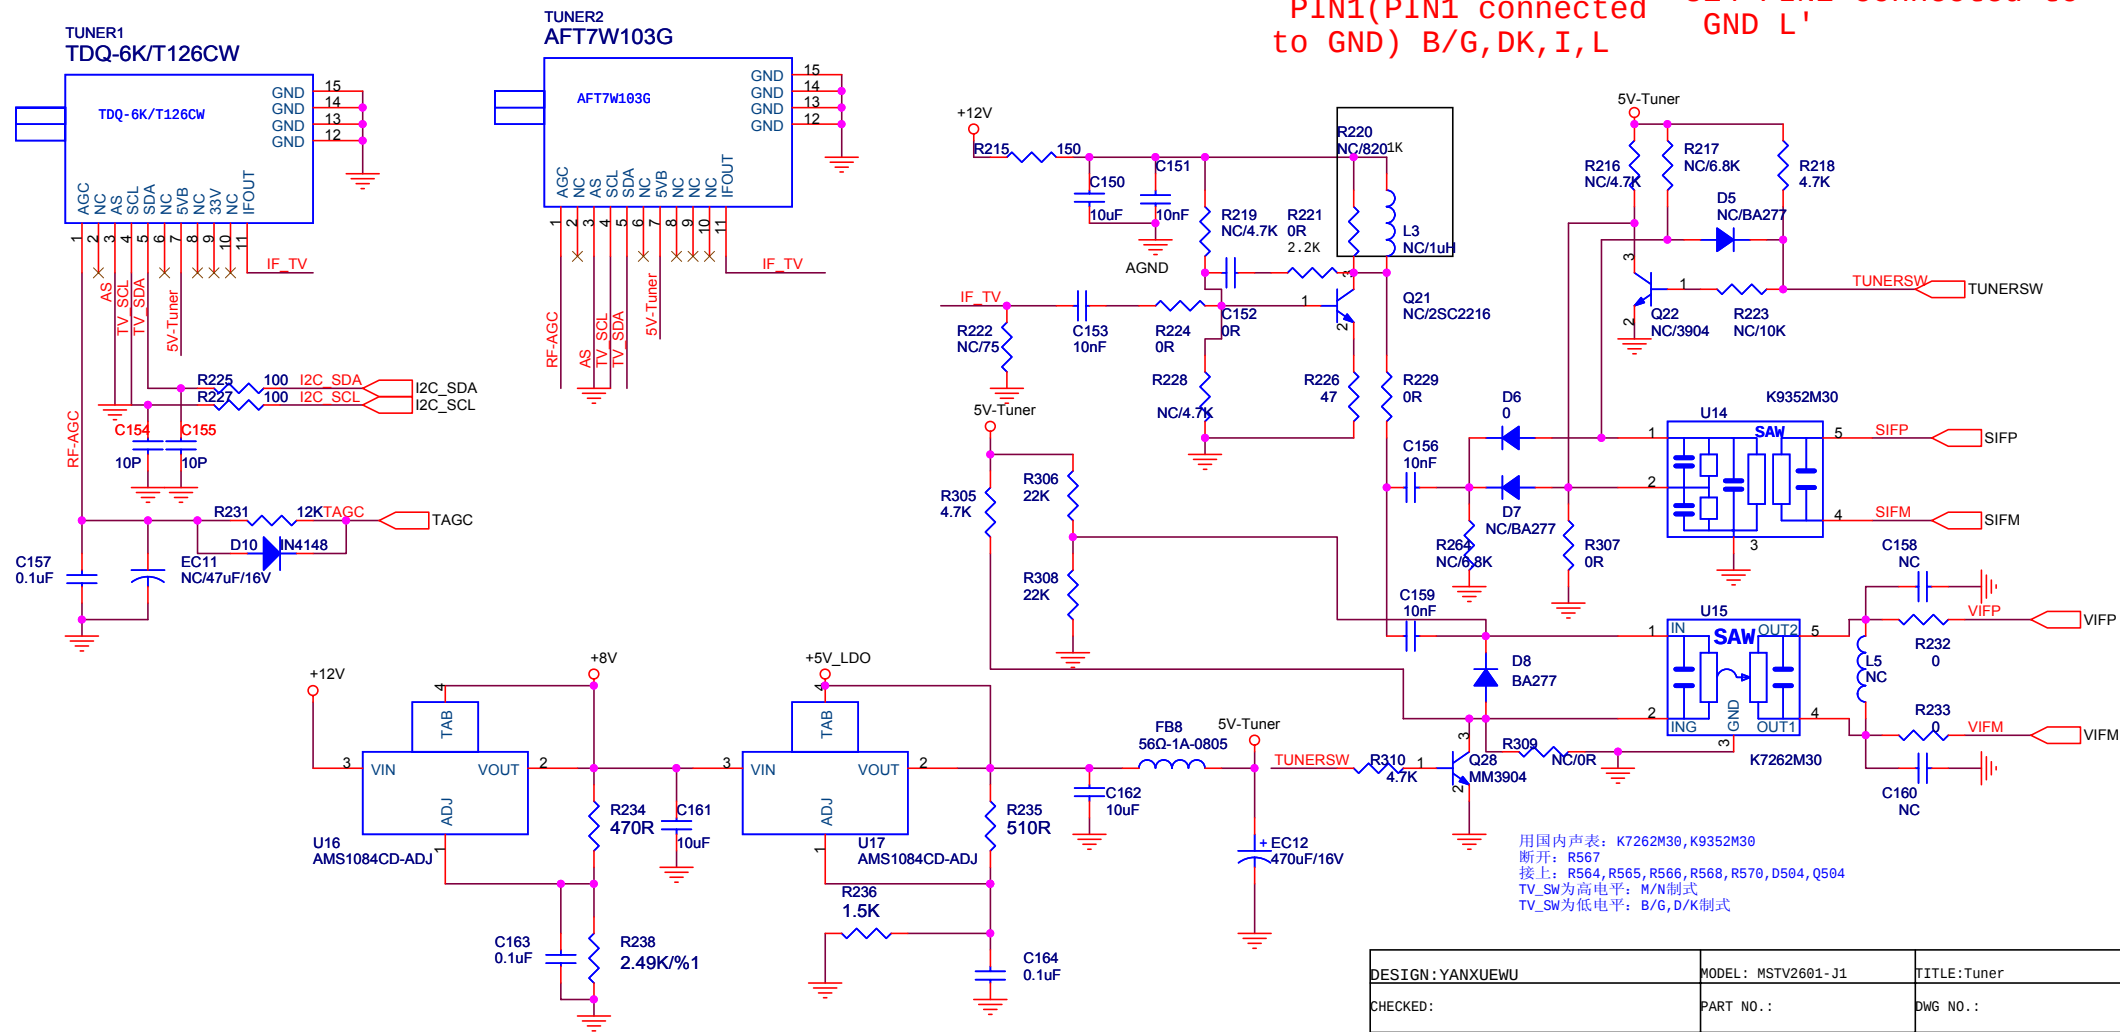
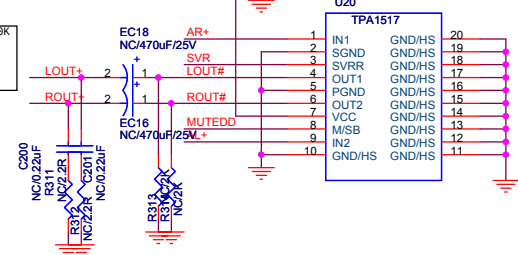
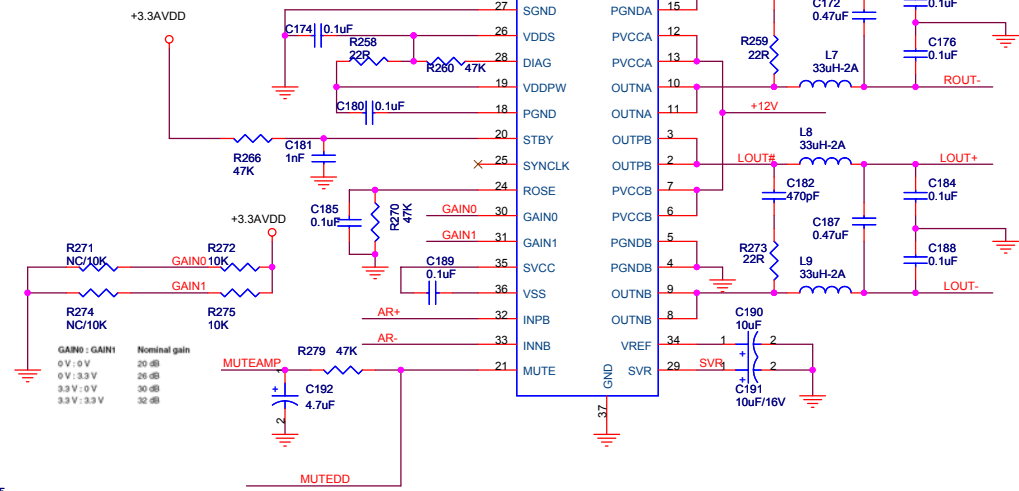
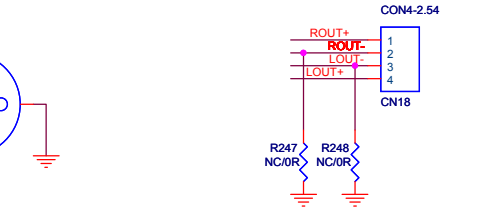
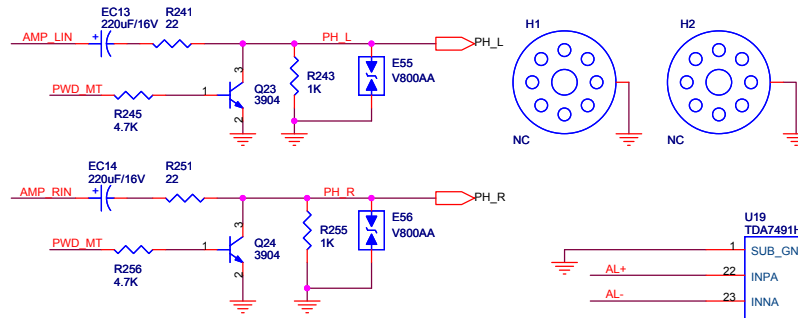


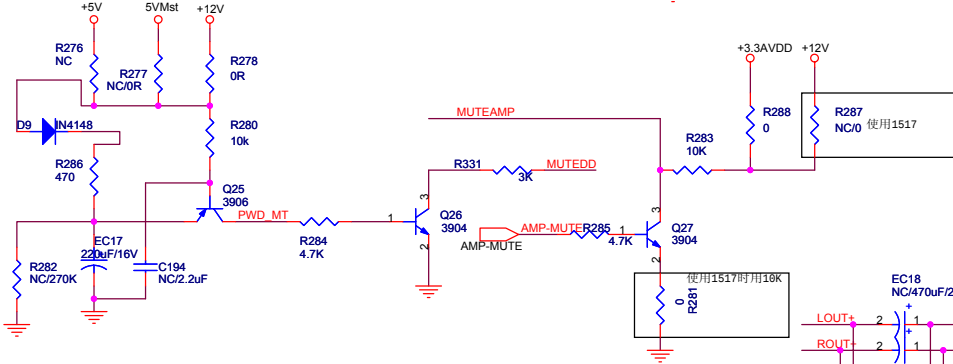



DESIGN: YANXUEWU	MODEL: MSTV2601-J1	TITLE: TOP
CHECKED:	PART NO.:	DWG NO.:
APPRD:	SHEET: 1 OF 8	VER: 1.0
SHEN ZHEN MTC MULTIMEDIA CO., LTD		

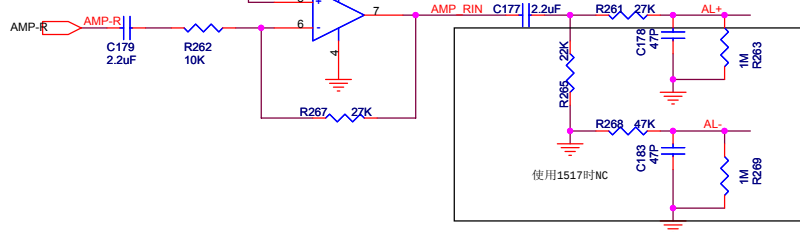



PH_Drive

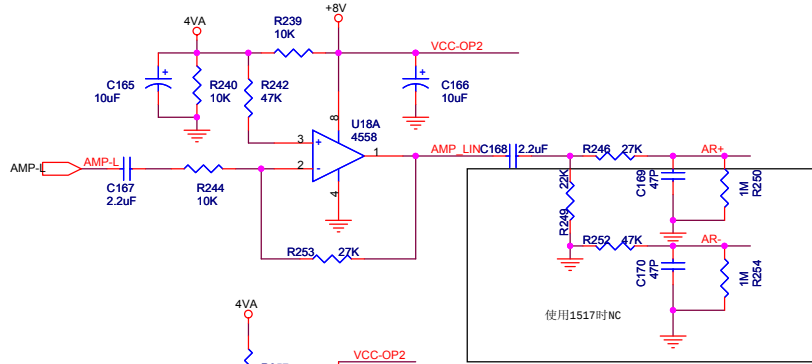

DESIGN:YANXUEWU	MODEL: MSTV2681-J1	TITLE:AUDIO_AMP
CHECKED:	PART NO.:	DWG NO.:
APPRD:	SHEET: 8 OF 8	VER:1.0
SHEN ZHEN MTC MULTIMEDIA CO.,LTD		

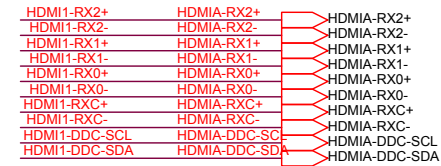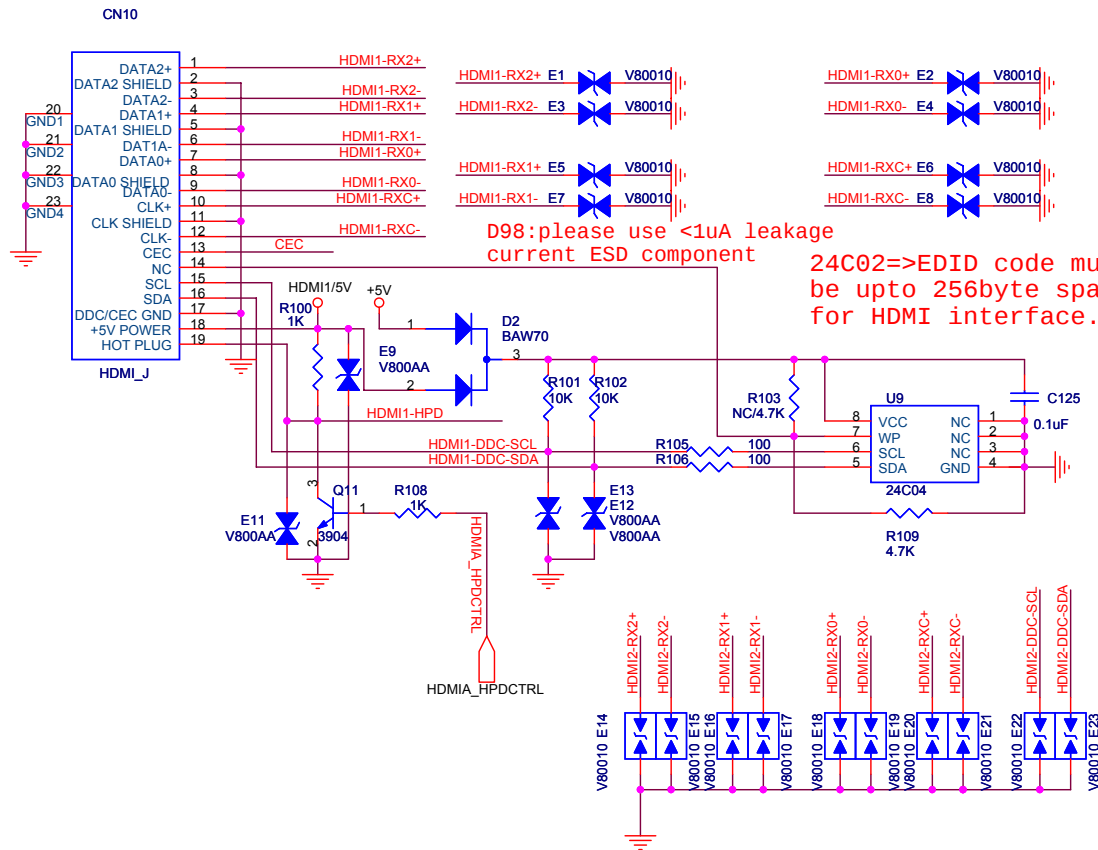


For CEC Leakage Protect

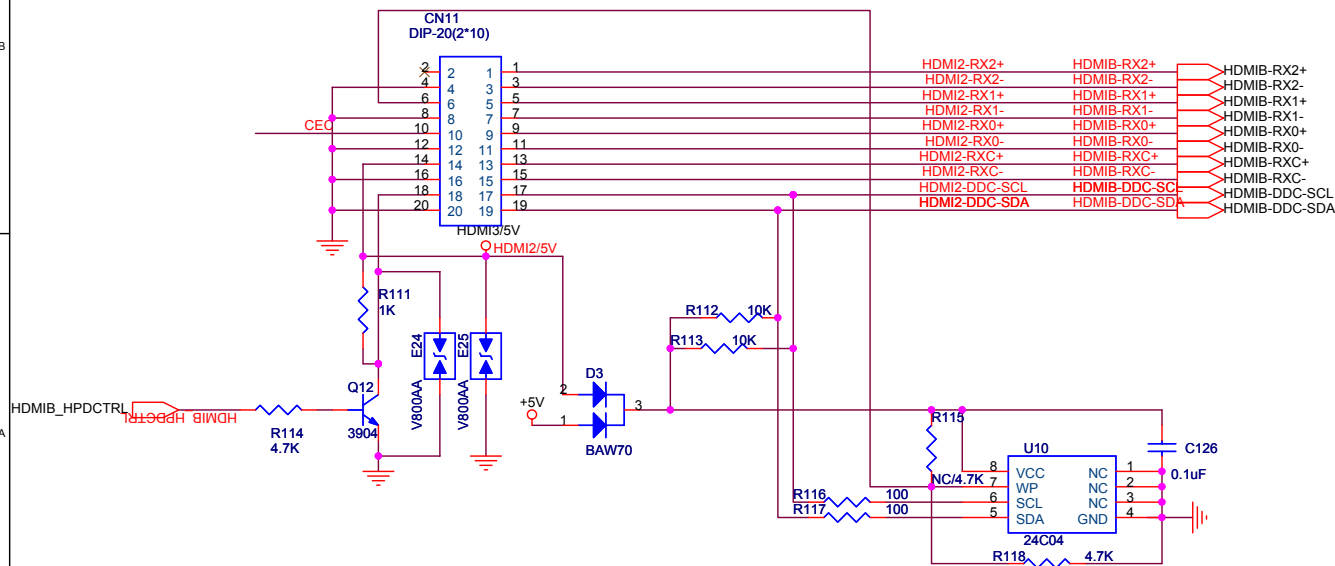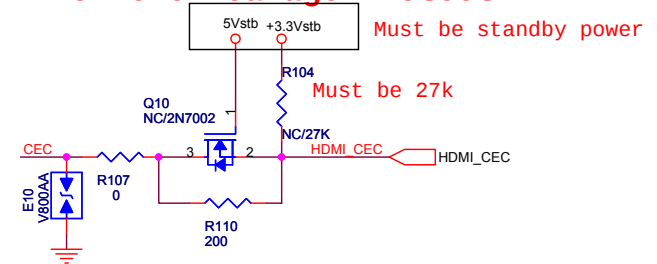


24C02=>EDID code must be upto 256byte space, for HDMI interface.


DESIGN:YANXUEWU	MODEL: MSTV2601-J1	TITLE:HDMI
CHECKED:	PART NO.:	DWG NO.:
APPRD:	SHEET: 4 OF 8	VER:1.0
SHEN ZHEN MTC MULTIMEDIA CO.,LTD		

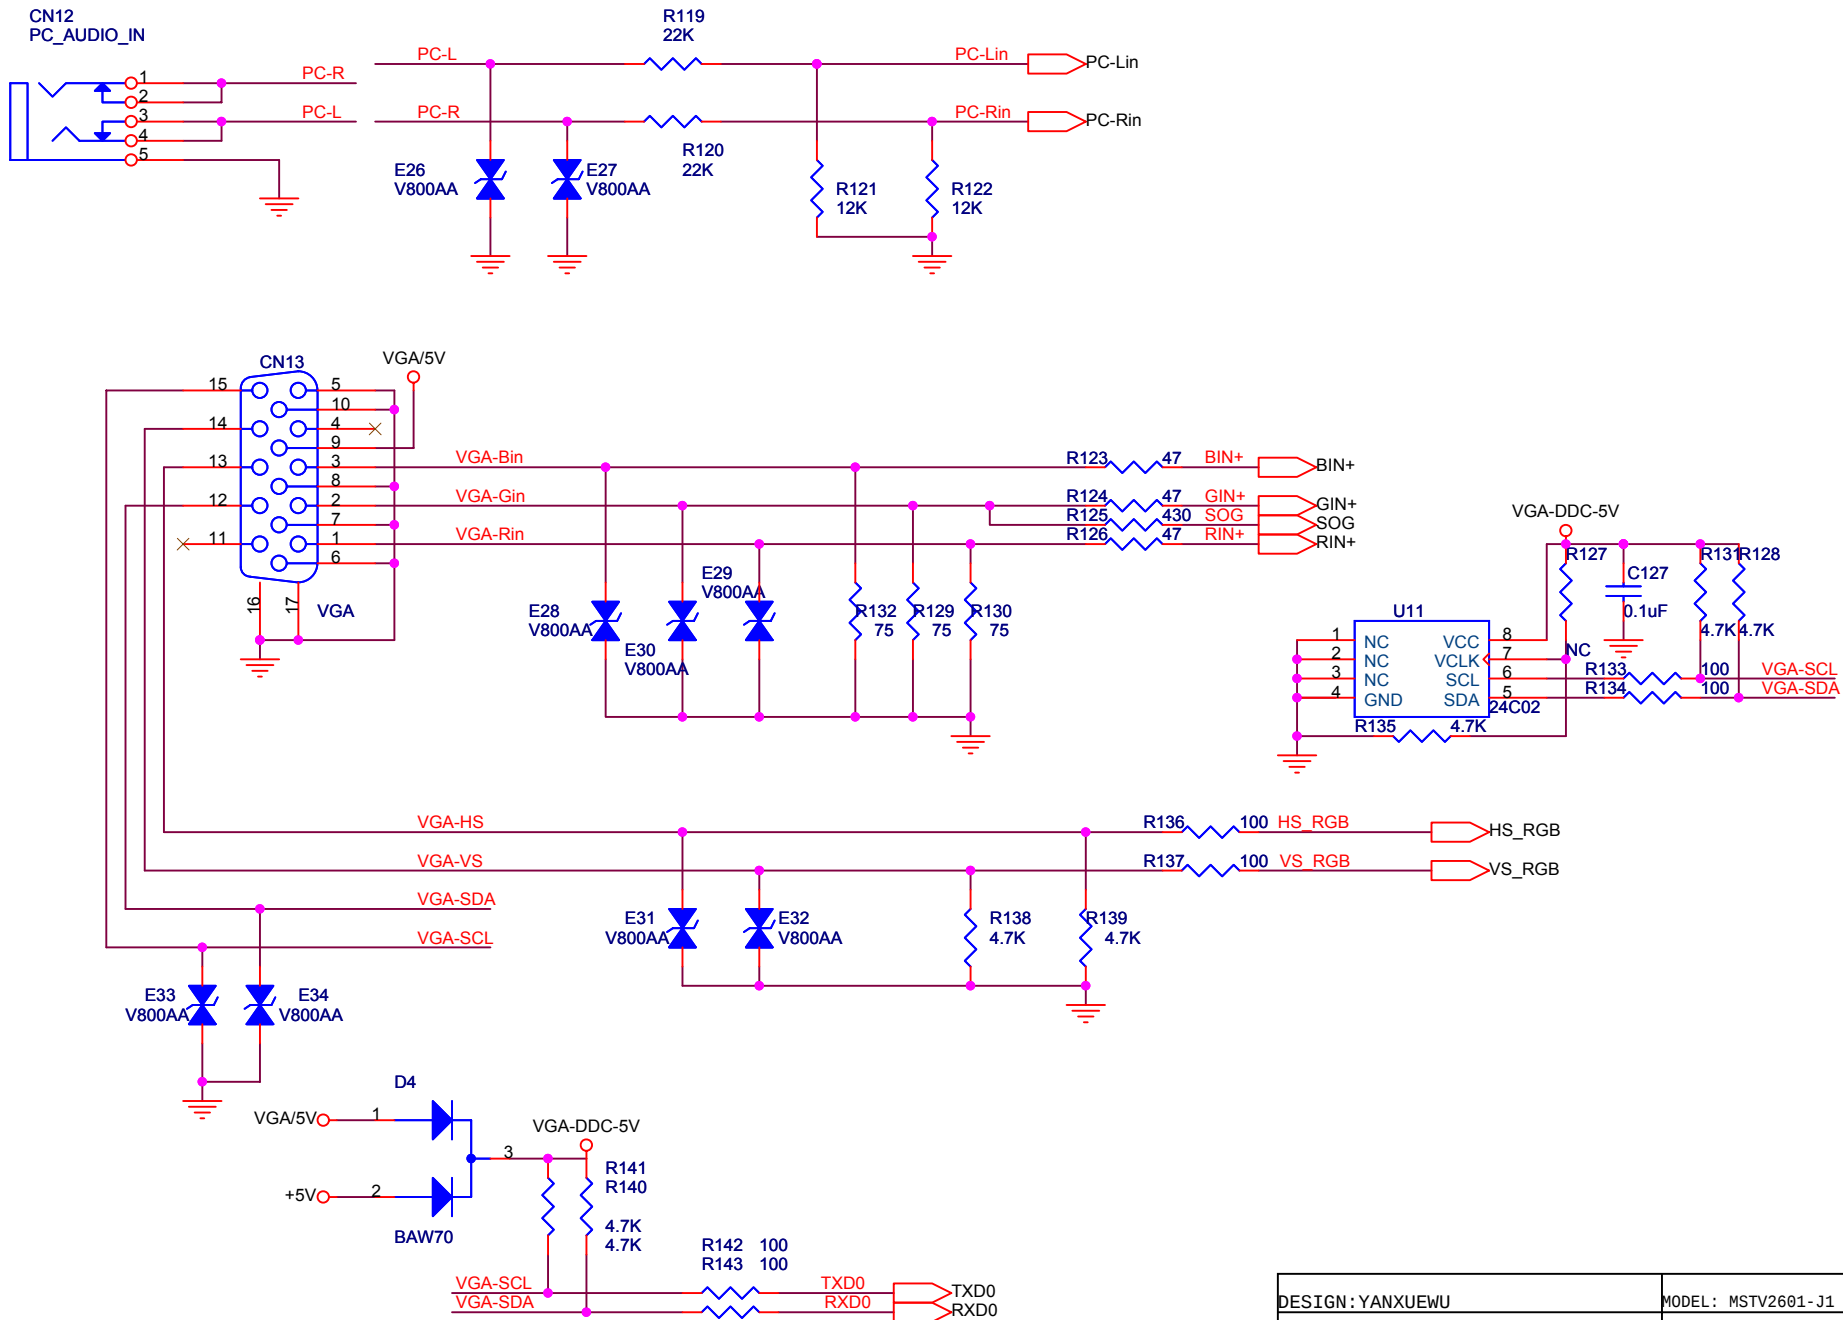



DESIGN:YANXUEWU	MODEL: MSTV2601-J1	TITLE:VGA
CHECKED:	PART NO.:	DWG NO.:
APPRD:	SHEET: 5 OF 8	VER:1.0
SHEN ZHEN MTC MULTIMEDIA CO.,LTD		

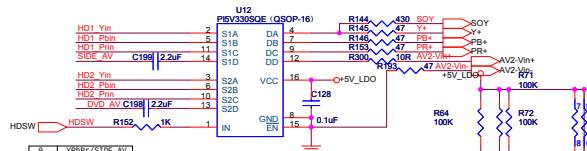

Signal	Pin
AV1-V	1
SCART1 VOUT	2
SC_FB IN	3
HD2 Pr	4
HD2 Y	5
SC_FS IN	6
HD2 Pb	7
AV1-L	8
SCart1 Lout	9
AV1-R	10
SCart1 Rout	11
GND	12
GND	13
GND	14
GND	15
GND	16
GND	17

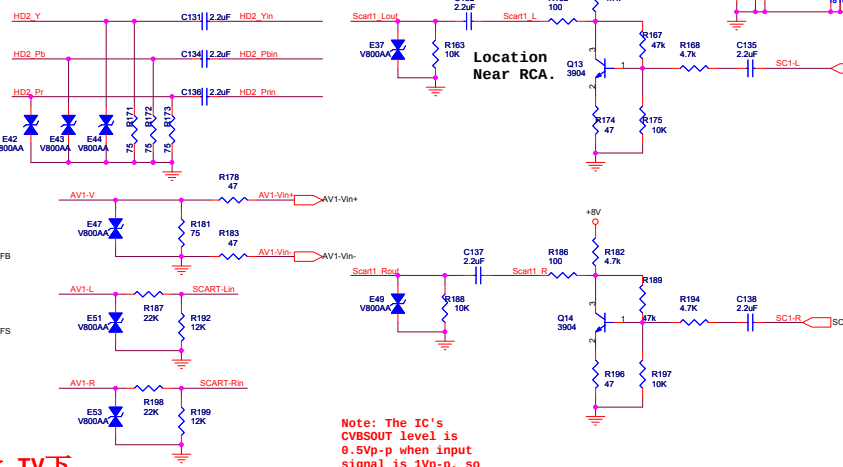


Note: The IC's CVBSOUT level is 0.5Vp-p when input signal is 1Vp-p, so it must multiply signal by four (GAIN X 4) for 2Vp-p output

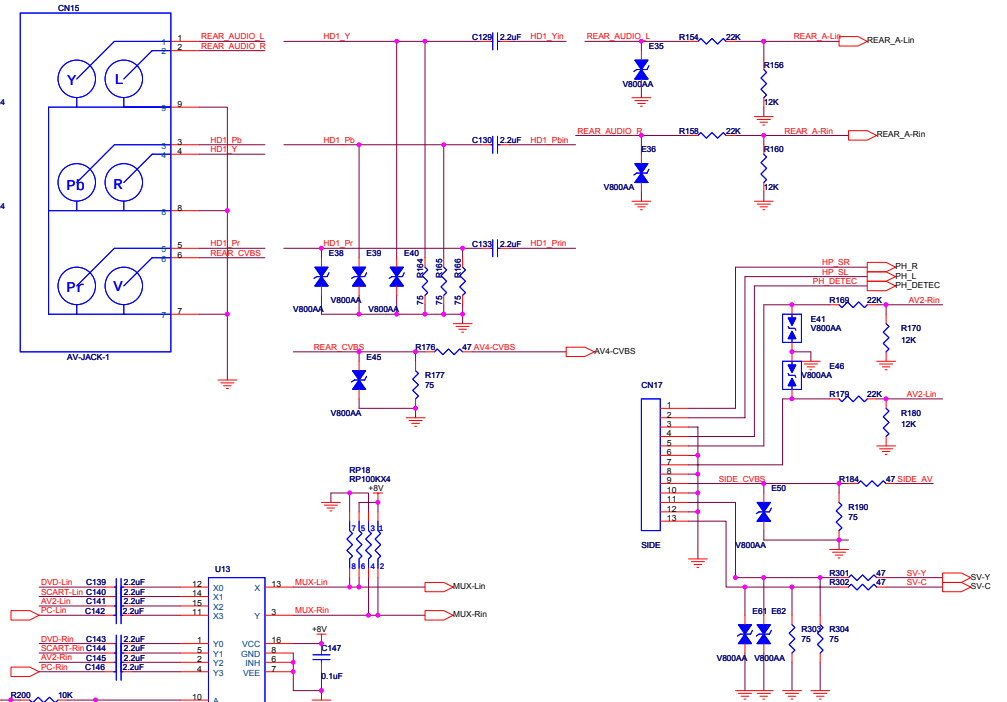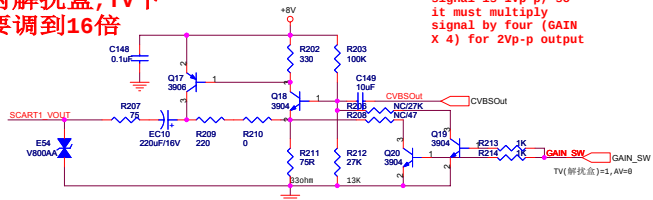

PIN9	PIN10	
AU-SW1	AU-SW0	Input
1	1	DVD
1	0	SCART
0	1	SIDE-AV
0	0	PC

DESIGN: YANXUEWU	MODEL: MSTV2061-J1	TITLE: AV_INPUT
CHECKED:	PART NO.:	DWG NO.:
APPRD:	SHEET: 6 OF 8	VER: 1.0
SHEN ZHEN MTC MULTIMEDIA CO.,LTD		

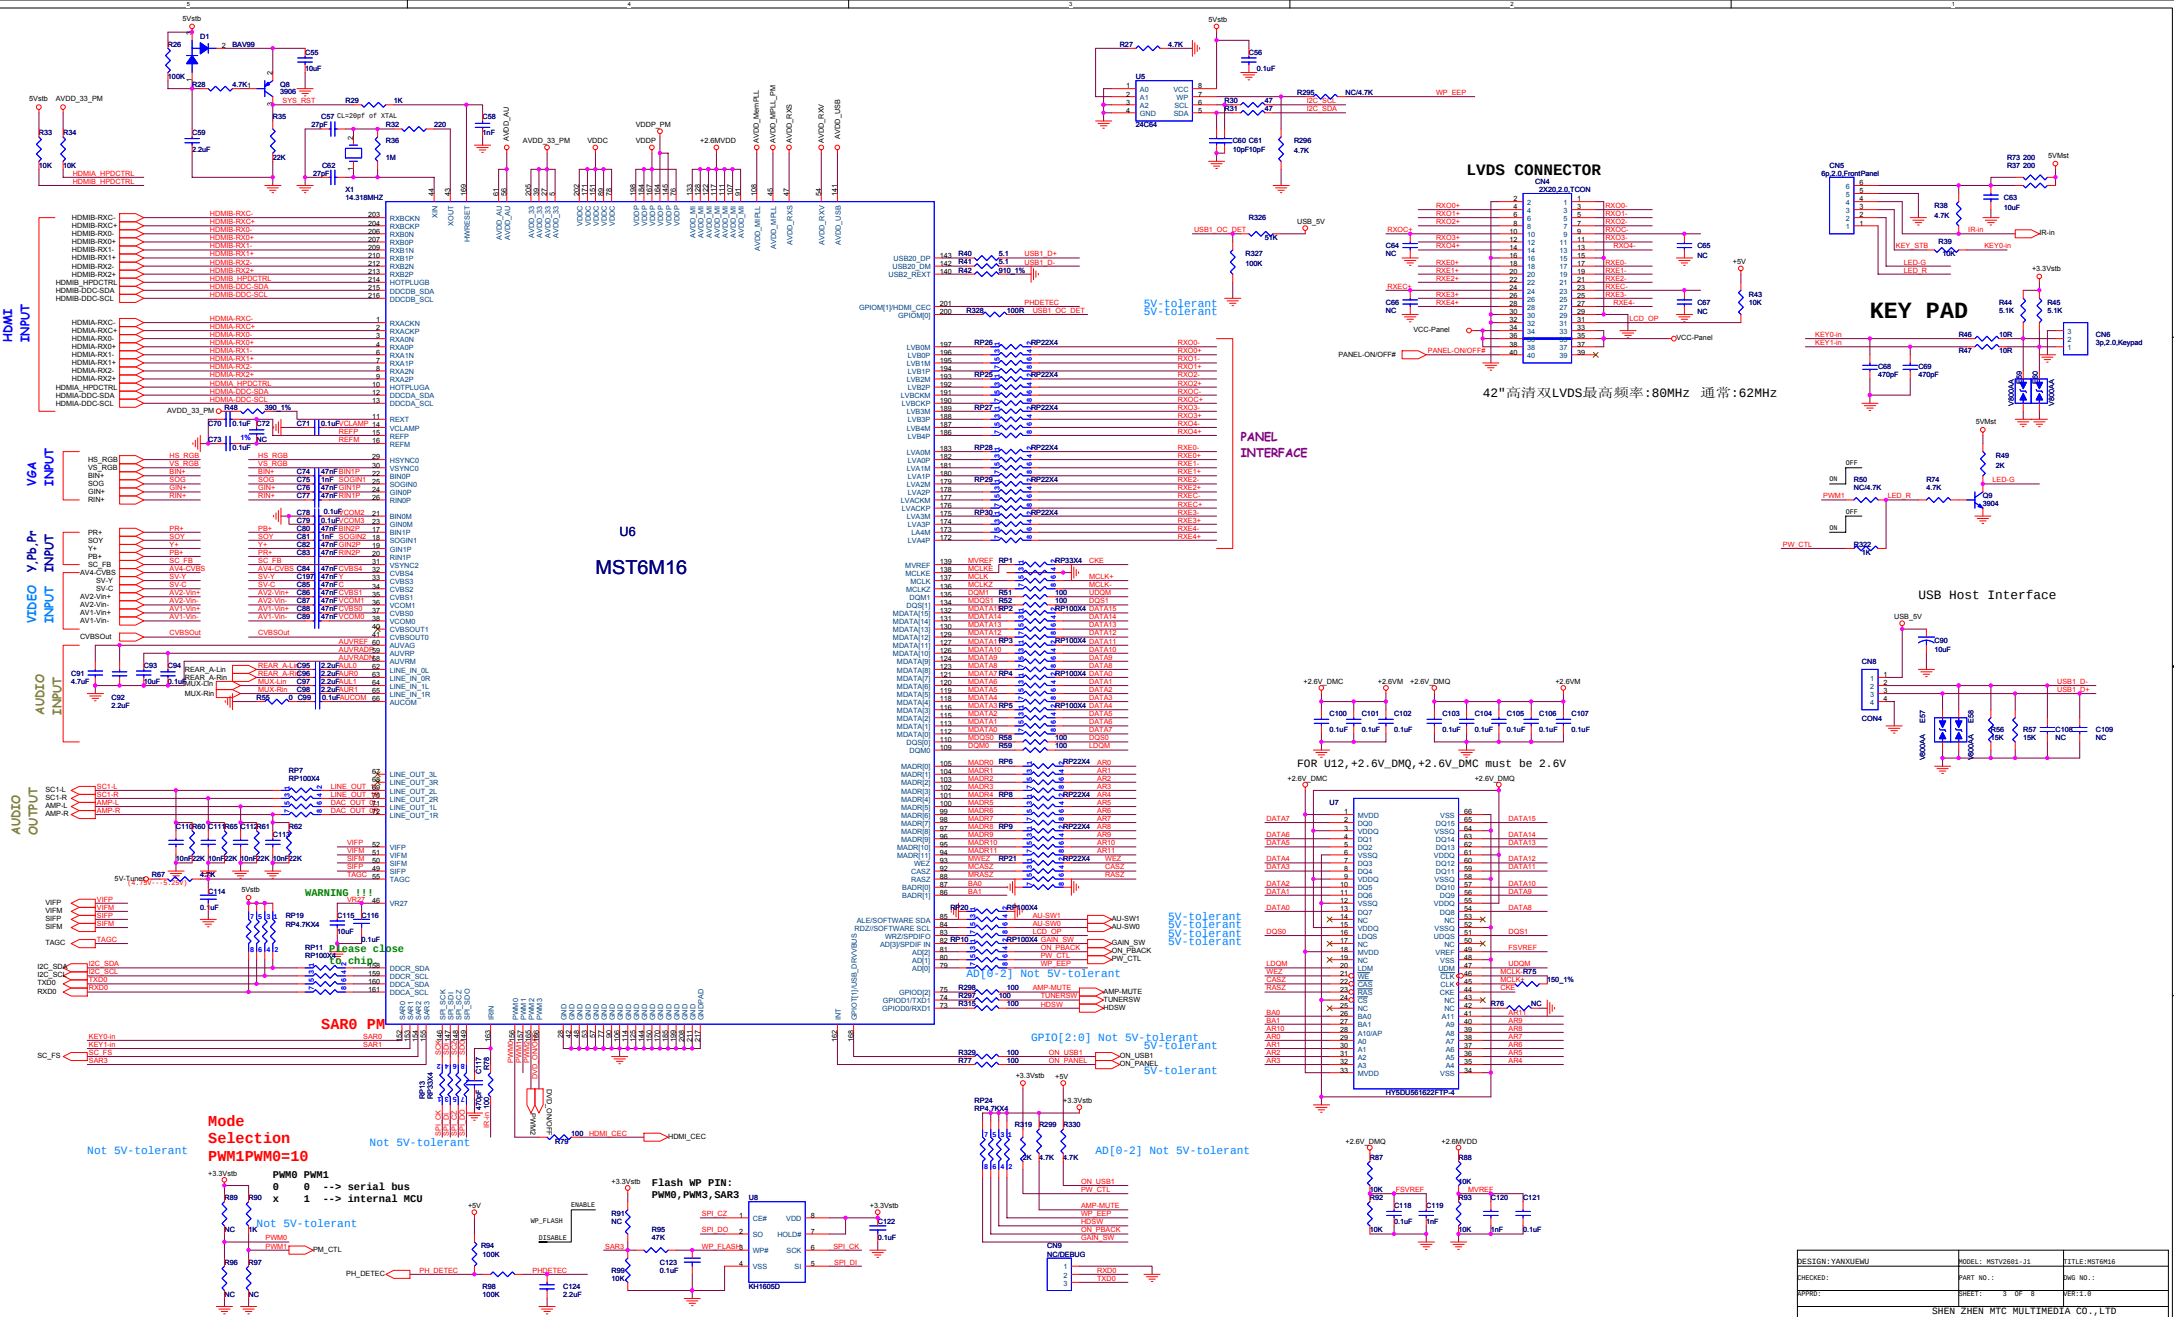

DESIGN: YANXUEWU	MODEL: MSTV2601-31	FILE: MSTGM16
CHECKED:	PART NO.:	ZWG NO.:
APPRD:	DRAWN: 3 OF 8	VER: 1.0
SHEN ZHEN MTC MULTIMEDIA CO., LTD		

