


Service
Service
Service

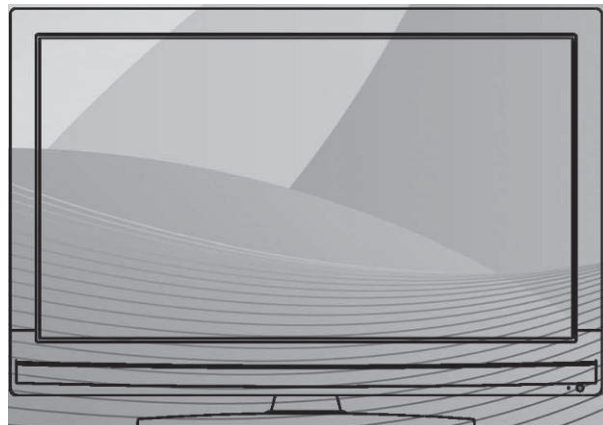

Service Manual

Horizontal Frequency
31~68 KHz

TABLE OF CONTENTS

Description	Page	Description	Page
Table of Contents.....	1	6.1 Main Board.....	38
Important Safety Notice.....	2	6.2 Power Board.....	40
Revision List.....	3	6.3 Key Board.....	55
1. General Specification.....	4	6.4 IR Board.....	55
2. Operating Instructions.....	5	7. Adjustment.....	56
2.1 The Use of Remote Control.....	5	8. Block Diagram.....	57
2.2 To Use the Menus.....	7	9. Schematic Diagram.....	58
2.3 How to Connect.....	19	9.1 Main Board.....	58
2.4 Front Panel Control Knobs.....	22	9.2 Power Board.....	67
3. Input/Output Specification.....	23	9.3 Key Board.....	77
4. Mechanical Instructions.....	25	9.4 IR Board.....	78
5. Repair Flow Chart	31	10. Exploded View.....	79
6. PCB Layout	38	11. BOM List.....	83

SAFETY NOTICE

ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS
AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING
ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

Important Safety Notice

Proper service and repair is important to the safe, reliable operation of all AOC Company Equipment. The service procedures recommended by AOC and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It is also important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. AOC could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, AOC has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by AOC must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

Hereafter throughout this manual, AOC Company will be referred to as AOC.

WARNING

Use of substitute replacement parts, which do not have the same, specified safety characteristics might create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from AOC. AOC assumes no liability, express or implied, arising out of any unauthorized modification of design. Servicer assumes all liability.

FOR PRODUCTS CONTAINING LASER:

DANGER-Invisible laser radiations when open AVOID DIRECT EXPOSURE TO BEAM.

CAUTION-Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION -The use of optical instruments with this product will increase eye hazard.

TO ENSURE THE CONTINUED RELIABILITY OF THIS PRODUCT, USE ONLY ORIGINAL MANUFACTURER'S REPLACEMENT PARTS, WHICH ARE LISTED WITH THEIR PART NUMBERS IN THE PARTS LIST SECTION OF THIS SERVICE MANUAL.

Take care during handling the LCD module with backlight unit

- Must mount the module using mounting holes arranged in four corners.
- Do not press on the panel, edge of the frame strongly or electric shock as this will result in damage to the screen.
- Do not scratch or press on the panel with any sharp objects, such as pencil or pen as this may result in damage to the panel.
- Protect the module from the ESD as it may damage the electronic circuit (C-MOS).
- Make certain that treatment person's body is grounded through wristband.
- Do not leave the module in high temperature and in areas of high humidity for a long time.
- Avoid contact with water as it may a short circuit within the module.
- If the surface of panel becomes dirty, please wipe it off with a soft material. (Cleaning with a dirty or rough cloth may damage the panel.)

Revision List

[illegible]

1. General Specification

Design and specifications are subject to change without notice.

Model	LC32W033M	LC42H033M
Display size of the panel	80cm (31.5")	106.7 cm(42")
Embedded resolution	1366 x 768	1920 x 1080
Viewing angle	Horizontal 170°, Vertical 170°	Horizontal 170°, Vertical 170°
Brightness	500 cd/ m2	450 cd/m ²
Speaker	10W x 2	10W x 2
Video system	PAL, NTSC, SECAM	PAL, NTSC, SECAM
Audio system	D/K, I, B/G, M	D/K, I, B/G, M
Antenna impedance	75Ω.	75Ω
Input voltage	100-240V, 50/60Hz	100-240V, 50/60Hz
Power consumption of the full TV set	150W	180W
Power consumption at standby mode	≤1W	≤1W
Dimension (W x H x D) (without stand and supporting rack in mm)	778.5 x 509.2 x 79.9 (mm)	1011 x 649.7 x 108 (mm)
Net weight	10 Kg	17.6 Kg
Gross weight	12.3 Kg	20 Kg
Wall mount dimension	200 x 200 (mm); M6 screws x 4	400 x 200 (mm); M6 screws x 4
Operation temperature	0°~35°	0°~35°
Operation humidity	10~90%	10~90%
Storage temperature	-20°~50°	-20°~50°
Storage humidity	10~90%	10~90%

2. Operating Instructions

2.1 The Use of Remote Control



Button		Description
	(Standby/On)	Switch the TV to standby if it is on. Switch on the TV if it is in standby.
	TV/AV(S-video)/ HDMI(PC)/ YPbPr/Component	Short cut key for selecting a variable input sources.
	0-9	Press any number key among 0-9 to select desired TV channel.
	-/--	Fast access to multi digit channels like ch24, ch95, ch139 etc. Press the key and then input a number.
	Back	Press this key to go back to the last TV channel or input source. USB: Used to switch into folder for music playback.
	VOL +/-	Press to adjust the volume.
	Source	Press this key to show the table of available input sources. Note: Not available when the input source is USB.
	Mute	Press this key to mute or un-mute sound.
	CH +/-	Press to select the previous or next TV channel.
		Press the up/down/left/right arrow keys respectively to select available options or adjust the OSD menu settings. Multimedia: Use left/right keys to switch between previous/next pictures while playing a slideshow or Switch between previous/next tracks when playing an audio file. TV: Use up/down key to change channels. Use left/right key to change volume.
	OK	Press the OK key to confirm your selection or to adjust the OSD menu settings. Multimedia: Press OK or START/PAUSE key to play/pause the slide show and music playback.
	Zoom	Change the picture aspect ratio.
	MENU	Press Menu key to display/close OSD menu or return to previous OSD menu. Multimedia: This key is used for the Exit function.
	Display	Press to display the current signal information. Multimedia: Press to display the JPEG in full screen.
	Sleep	Press repeatedly to cycle through the available sleep timer from 0~180 minutes. Sleep timer can be set to 5, 10, 15, 30, 45, 60, 90, 120, 180 minutes.
	FREEZE	Freeze or unfreeze the screen when RF/AV/YPbPr inputs are selected. Note: Play back will not be paused only screen will be frozen Input signal of 1080P resolution does not support this feature.
	Picture	Press repeatedly to select required pre-defined picture modes. Note: Not available in for USB input.

Button		Description
	Sound	Press repeatedly to select required pre-defined sound modes. Note: Not available in for USB input.
	Nicam	Select mono or stereo if stereo broadcast is available. Note: Effective only when RF input is selected.
	Play/Pause, Stop, Next/Previous.	Control key available for multimedia operation:   : Switch between previous/next pictures when playing a slideshow.  : To START/STOP playing slide show/music.  : To STOP playing slideshow and go back to the previous menu or to stop music playback.

2.2 To Use the Menus

Power on and off

Press the power button at your TV set or remote controller to turn on your TV.



Reminder

- 1. Your TV set continues consuming powers at a very low consumption rate. When you will not use it for extended period of time, disconnect the power cable between the TV set and power socket.
- 2. When the remote control is not available and if you want to turn on your TV set from the standby mode, please press the CH+/- key or the source key at its side.
- 3. When turning your TV set off with the power switch of your TV set, it enters the power saving mode and displays red light. You can turn on your TV set only with its power switch.

Switch between input sources

You can select signal sources to your AOC TV set directly with your remote controller. You can also press the **Source** key in the display menu to select signal source.

- 1) Directly select the input signal sources by using .
- 2) Select signal source with the **Source** key:


1	Source	Press the Source button to display source menu
2		Press the  button to select desired input source. Input source contains: TV, COMP, VGA, HDMI 1, HDMI 2, AV IN 1, AV IN 2/S-video, USB.
3		Press the OK .

Note: Source key does not work when the input is USB.

How to select on screen menu items

1		Press the MENU button to display main menu
2		Press the ▲/▼ button to select required menu  icon for picture setup,  icon for sound setup,  icon for feature setup,  icon for Installation setup and  icon for Computer setup.
3		Press the ▼/▲ and ◀/▶ button to select the desired menu item and then press the OK for entering into the sub menus
4		Follow sub-menu operations and the detailed description refer to the table under each settings description.
5		Press the MENU button return to previous menu.

Picture Setting

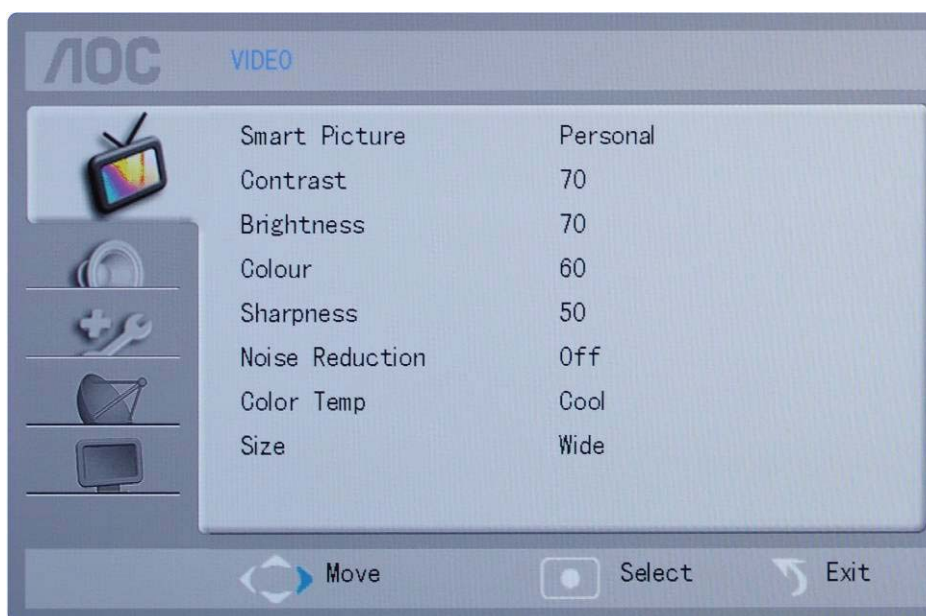


Items	Description	
Smart picture	Personal	User can set their favorite setting.
	Vivid	For Enhances picture contrast and sharpness.
	Standard	For standard picture settings. Recommended for home entertainment.
	ECO	Decrease backlight level to save the power
	Movie	For viewing film-based content. Most suitable for viewing in a theater-like environment.
Contrast	To sharpen the picture quality.	
Brightness	To brighten the dark parts of the picture.	
Color	To add or reduce color.	
Sharpness	To improve details. Not available in PC mode.	
Noise reduction	To filter out and reduces the image noise and improve picture quality.	Off
		Low
		Standard
		High
Color temp.	Normal	Natural whitish color
	Cool	Bluish white color
	Warm	Reddish white color

Size	To select the available display format. Picture size can also be accessed by Zoom button on remote control.	Wide
		Normal
		Zoom1
		Zoom2

Note: Certain screen setups may be unavailable or have different options in accordance with the input sources.

Picture Setting (For PC source only)

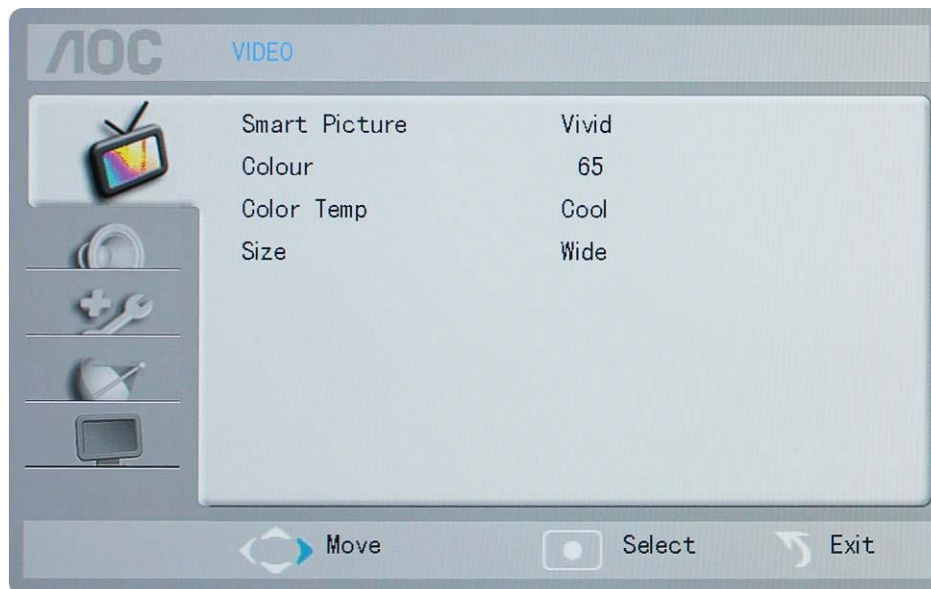

Items	Description	
Smart Picture	Personal	User can set their favorite setting.
	Vivid	For Enhances picture contrast and sharpness.
	Standard	For standard picture settings. Recommended for home entertainment.
	ECO	Decrease backlight level to save the power
	Movie	For viewing film-based content. Most suitable for viewing in a theater-like environment.
Contrast	To sharpen the picture quality.	
Brightness	To brighten the dark parts of the picture.	
Color temp.	Normal	Natural whitish color
	Cool	Bluish white color
	Warm	Reddish white color
	User	Adjust hue(Red, Green, Blue) in PC mode
Size	To select the display format. Picture size can also be accessed by Zoom button on remote control.	Wide
		4:3

Note:

- If the PC is connected to the TV and no signal has been input from the PC for more than 30 seconds, the TV enters the standby mode automatically.

Audio Setting



AOC co-works with SRS Labs to create unique and exclusive sound technology- DSS Dream Surround. DSS effect creates a truly immersive surround sound experience with rich bass and clear dialog from only two speakers.




TruSurround XT is a trademark of SRS Labs, Inc. DSS technology is incorporated under license from SRS Labs, Inc.



Items	Description
Smart sound	Standard: Suitable for spoken dialog.
	Music: Enhance treble and bass
	Speech: Enhance treble and keep the bass at medium level
	Personal: Adjust sound mode as per personal requirement.
	Sound Mode can also be accessed by pressing the Sound button on the remote control.
Bass	Adjust the bass effect.(Increases or decreases lower-pitched sounds).
Treble	Adjust the treble effect (Increases or decreases high-pitched sounds).
Balance	Adjust the balance between left and right speakers to adapt to your listening position.
Sound mode	Select sound mode: Mono or Stereo. It is default FM mono for India region.
DSS Effect	Provides surround sound effect with rich bass and clear dialog when DSS effect is On.
Auto Volume Level	Automatically reduces sudden volume changes, for example, when switching between the channels.

Features Setting

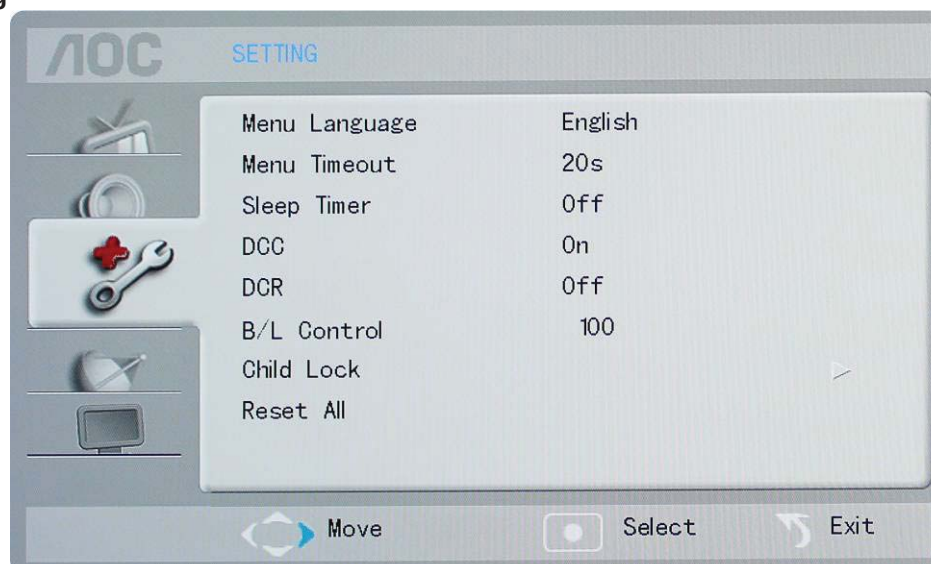

Items		Description
Menu language		Select an OSD menu language can be displayed. Default English is selected as menu language.
Menu Timeout		Set up the amount of time that the OSD menu screen is to be displayed.
Sleep Timer		Sleep timer can be set to 5, 10, 15, 30, 45, 60, 90, 120, 180 minutes. Tips: 1. The TV switches to standby after the specified time. 2. This can also be set by using the SLEEP button on the remote control. 3. Inactive for PC / USB modes.
DCC		Dynamic Color Control: Using DCC image on the LCD display become more vivid and superior color saturation. Industry leading performance makes DCC ideal to LCD TV for high end graphics and multimedia.
DCR		Dynamic contrast ratio: Setup the contrast of the TV set to vary in accordance with the brightness and darkness of the TV set when it is set to on.
Backlight control		Control the brightness of the backlight from 0 to 100. Lower the backlight value brightness is low and Higher the backlight value higher the brightness.
Child Lock Menu	Child Lock	You can restrict to access of the channels setting menu, so that initial tuned channels are not disturbed by the unauthorized users, How to enable the child lock? 1. Select the child lock ON. 2. Turn off the TV. 3. Turn ON the TV, now Child lock is enabled. 4. Once child lock is enabled, Password is required to re-enter the child lock sub menu.
	Password setting	The initial password for AOC is 0000. You can change the password to any 4-digit number of your choice. A supper password 3448 is pre-defined to enter into child lock setup function in case you have forgotten the password. The super password cannot be used as a normal password. It is used for setting up user password only. Note: All the passwords are cleared after a valid password is entered once in power on mode.
Reset All		You can restore the factory default picture and sound settings of your TV. The channel installation settings and Child lock remains the same.

Channel setting




Items	Description
Auto Search	TV automatically searches for the channel in the available frequency band and stores sequentially. 1. Select Channel menu. 2. Select Auto search and press OK key or ► arrow key to tune channels automatically and store. 3. During auto searching Press Menu key to stop search.
Update Search	Update your program list by adding new channels to the end of list. Consequently, it costs more time than auto search.
Manual Search	Search for the channels manually and store it to the desired channel number. It can also be used for editing of channels searched by auto search if required. Please refer to Manual Search description in next page for details.
Channel Lock	Lock the required channels, so that you can restrict the children to watch unsuitable programs. Press OK to select channels to be locked. Tips: 1. To enable the channel lock, Child lock should be in on condition. 2. Switch the TV off and on again for the channel lock to take effect.
Channel Skip	To skip the unwanted channel while changing the channels. Select channels to be skipped by pressing OK key. Tips: 1. The selected channel is skipped when you press CH +/- on your remote control. 2. Press the Numeric buttons on the remote control to access the skipped channel. 3. To un-skip the channel, enter into Channel skip sub menu and un-select the channels not to be skipped from the channel list.
Channel swap	It is used to interchange the channels. So that you can arrange tuned channels as per your requirements. Select the channels to be interchanged by pressing OK . Channel swap can be done only between two channels.

Note: Make sure you have connected RF signal cable before performing channel search.

Manual search description:


1. Select **Channel** menu.
2. Select **Manual Search** and press **OK** key or **►** arrow key to get Manual search sub-menu.

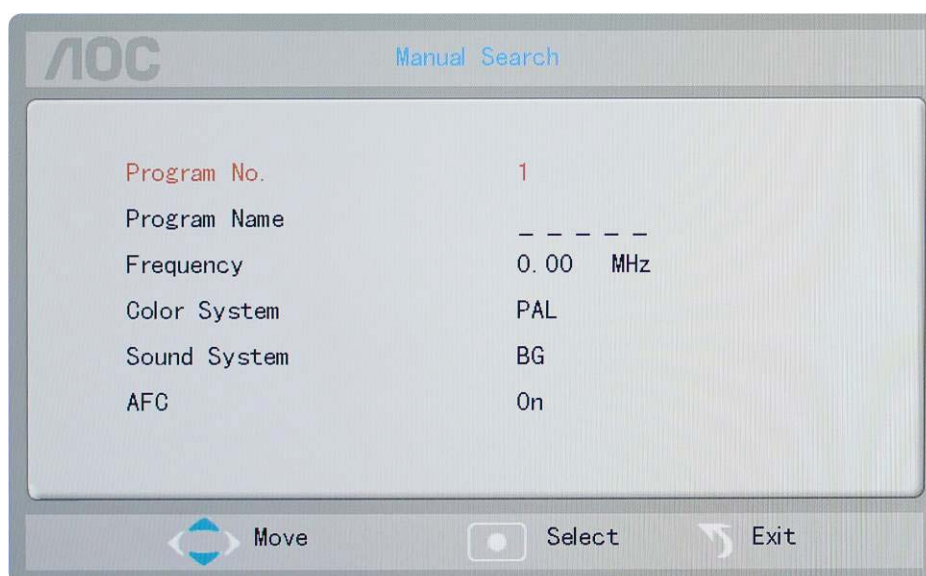

3. Select a manual tuning parameter by using **▲/▼** arrow.

Items	Description
Program No.	Press the ◀/▶ arrow button to select desired channel number.
Program Name	To Enter a name for the selected channel. Press ► arrow button and then press ▲/▼ arrow button to select a character. Press ► arrow to move the cursor to next position. Program Name can be a word of maximum 5 characters. To confirm the name press Menu button.
Frequency	Press numeric buttons on remote to manually enter the frequency if the desired channel frequency is known. If the desired channel frequency is unknown then simply press hold ► button for 3 second to enter into Manual search mode. If the desired channel is found press Menu button to store the channel found to the specified channel number else press ► button till desired channel is found.
Color system	Press the ►/◀ button to select the required Color system. Available color systems are [AUTO], [PAL], [NTSC] and [SECAM]. India region: Auto or PAL must be selected as the color system. Tips: Skip this step if your system setting is correct.
Sound system	Press the ►/◀ button to select the required Sound system Available sound systems are [AUTO], [M], [B/G], [I] and [D/K]. India region: Auto or B/G must be selected as the sound system. Tips: Skip this step if your system setting is correct.
AFC	Automatic Frequency Control: Reduces the tuning error of a TV tuner by automatically fine tuning the TV tuner to desired channel. By default AFC is On.

Computer Settings

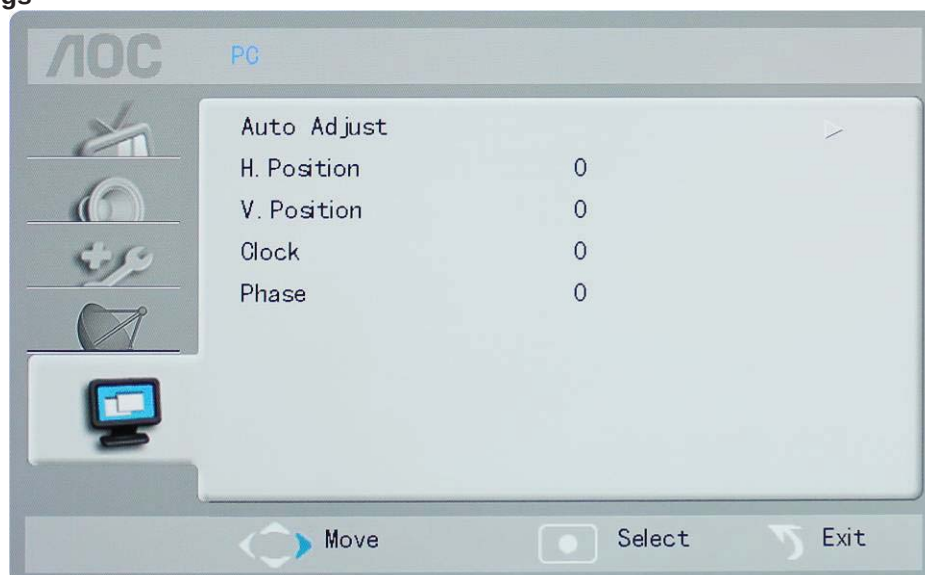

Items	Description
Auto Adjust	Press ► arrow button to adjust the screen automatically to the optimal position of the picture.
H. Position	Adjusts the horizontal position of the picture.
V. Position	Adjusts the vertical position of the picture.
Clock	Eliminate the vertical interfering lines.
Phase	Eliminate the horizontal interfering lines.

Note:

If the PC is connected to the TV and no signal has been input from the PC for more than 30 seconds, the TV enters the standby mode automatically.

USB Media Center

TV USB port can be used to play picture and music present in USB devices.

Selecting USB Media Center:

1	Source	Press the Source button to display the list of signal sources.
2		Press the ▲/▼ button to select USB input source.
3		Press OK button to enter USB input source.

1. Viewing JPEG files

1. Press the ►/◀ button to select Photo and press **OK**.



2. TV displays directory **C:** as shown below then press **OK** button to enter into USB folder.



3. If JPEG files are available then thumbnails of the pictures are displayed as shown below else select the folder containing pictures by pressing **▲/▼** button and then press **OK** to enter into sub-folder.



Displaying the pictures in Full screen

To display the pictures in full screen select the thumbnail by press **►/◄** buttons and press **Display** button on the remote.



	Press this button to Play or pause the picture slide show.
	Press these buttons to view previous or next picture.
	Press this button to Zoom the current picture.
	At any screen to Exit and to go back to previous screen press Menu button.

2. Playing MP3 files:

1. Press the ►/◀ button to select Music and press OK.



2. TV displays directory C: as shown below then press OK to enter into USB folder.



3. If Music files are available then list of Music files available in the folder are displayed as shown below else select the sub-folder containing Music files.

To select the sub-folder follow the steps below:

- a. Press **Back** button to switch to folder selection.
 - b. Press ▲/▼ button and then press **OK** to enter into sub-folder.
4. If files are present in that folder then the Music files will be listed.
 5. Press **Back** button to switch to files selection.



6. After selecting the music file press **OK** button on the selected music file to get music playback screen as shown below.




	Press this button to Play or pause the music playback.
	Press these buttons to select previous or next music track present in the folder.
	Press this button to stop the current music track.
	At any screen to Exit and to go back to previous screen press Menu button.

3. USB Media Center Settings

1. At media center main menu press the ►/◀ button to select **Setup** and press **OK**.



2. Press ▲/▼ button to select required setup parameter.

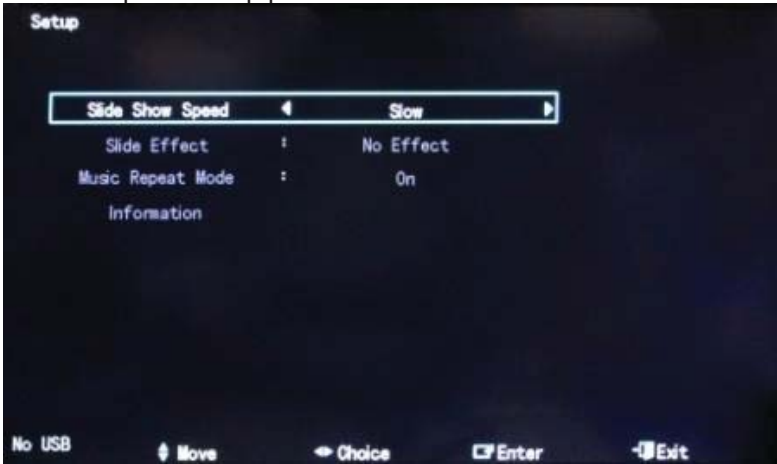

Setup Parameter	Description
Slide Show Speed	Select the time each slide to be displayed. Press ►/◄ button to select the speed Available slide show speeds are Slow , Normal and fast .
Slide Effect	Select the style of slide transition from one picture to other. Press ►/◄ button to select the effect. Available slide effects are No effect , Bottom to Top , Top to Bottom , Right to left , Left to right , Snake , Cross , Diagonal , Waterfall and Random Playback .
Music Repeat Mode	Press ►/◄ button to On or Off the music repeat mode
Information	Press Ok button to display the information of the connected USB device.

Caution:

AOC is not responsible if the USB storage device is not supported, nor is it responsible for damage or loss of data in the device.

A reminder pops up when Photo/Music is selected before connecting the USB device.

2.3 How to Connect

Connections to TV


Cable or VHF/UHF antenna connection

In addition to SD Simulation programs you will be able to receive SD and HD Digital signal as long as they are available in your region.

Your TV set can receive lossless digital programs sent by cable and VHF/UHF antenna.

AOC strongly recommend using 75Ω coaxial cable to connect to cable/broadcasting input to receive the best image quality. The 300Ω dual core wires may cause frequent signal downgrading as they are prone to RF interruptions.


Broadcasting or VHF/UHF (or VHF only)

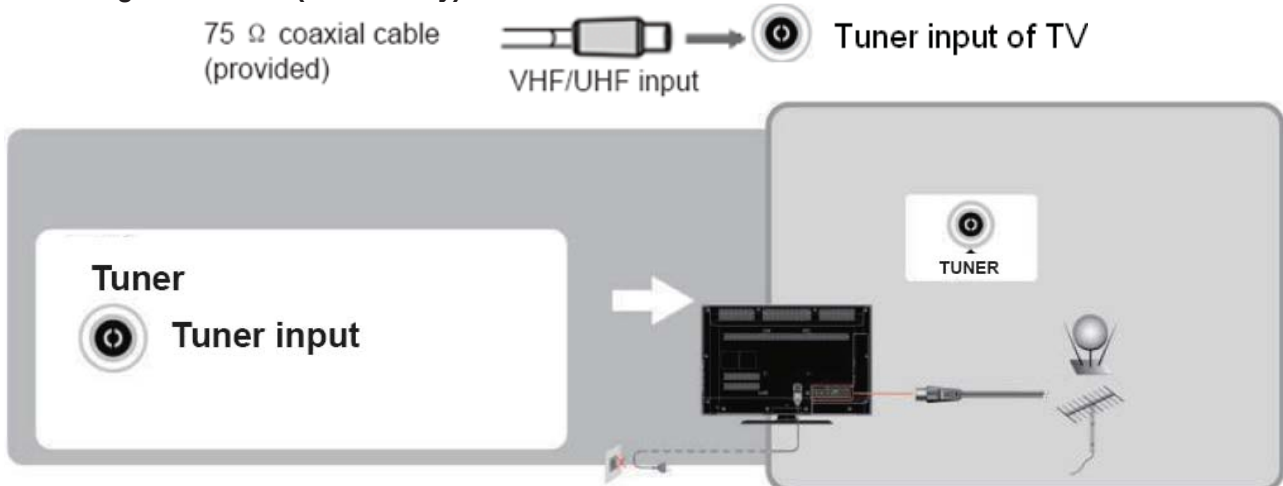

High Definition Interface


You can watch HDTV programs by using the Cable or Satellite HDTV services. Please connect device provided by your service providers to the HDMI or component video (along with audio) input port at the back of your TV set for best quality image.

HDMI Connection

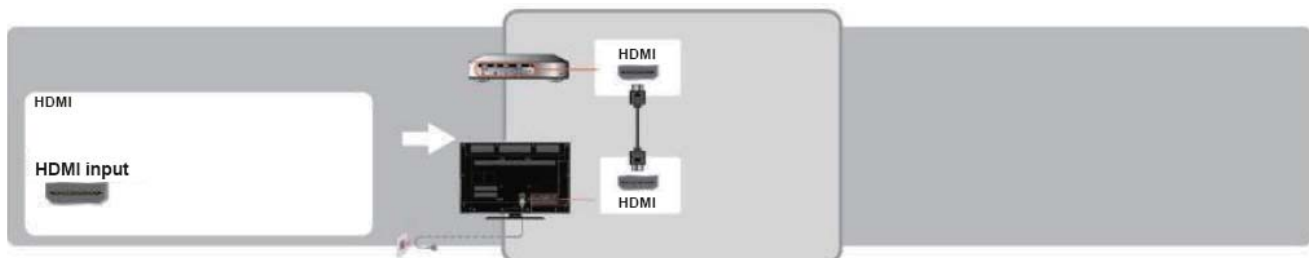


If the equipment has a DVI jack and not an HDMI jack, connect the DVI jack to the HDMI IN (with DVI-to-HDMI cable or adapter) jack and connect the audio jack to the PC AUDIO IN jacks.


Component (YPbPr) Signal Connection

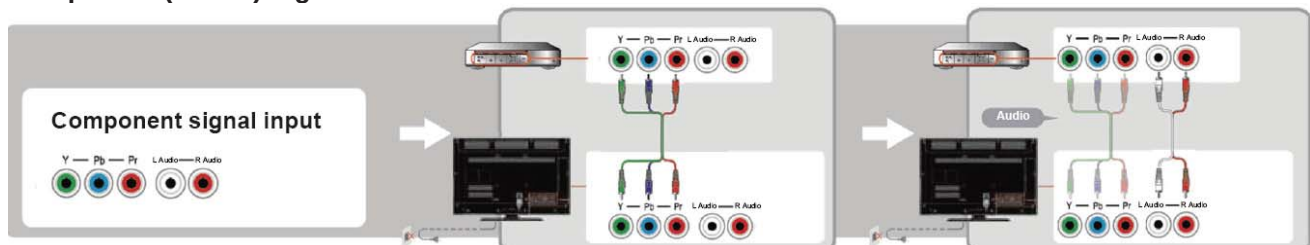

Audio/Video (Composite) Signal Connection

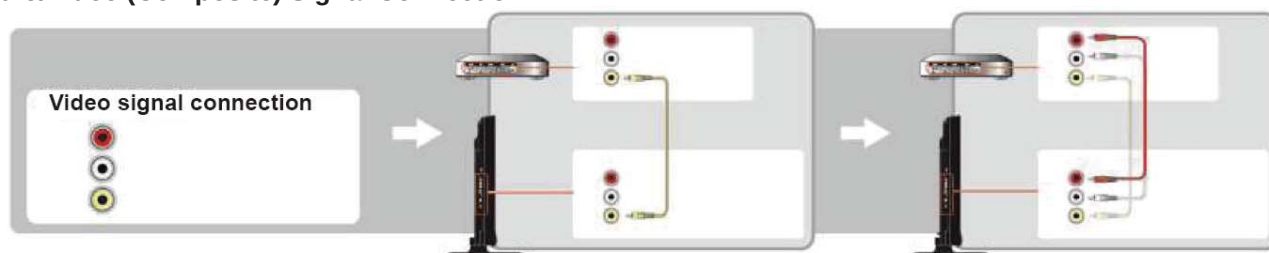


Connecting S-video

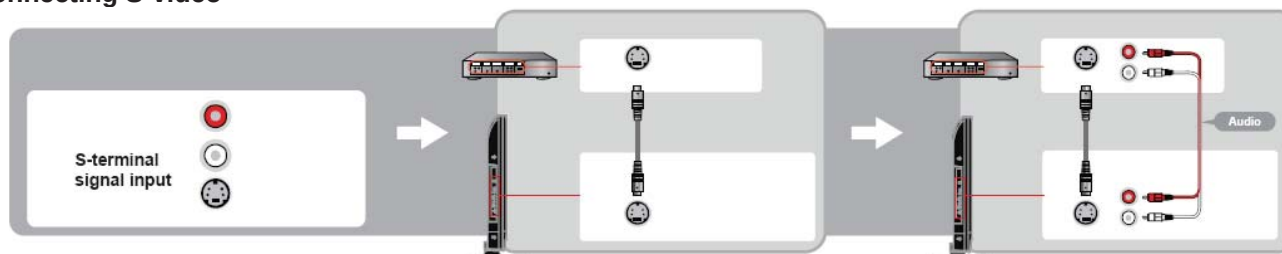


Note: AV2 audio left/right input are common for both S-Video and AV2 input.

Connecting USB drive

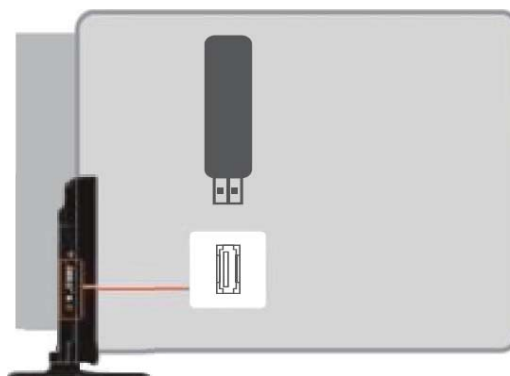


Connecting Earphone

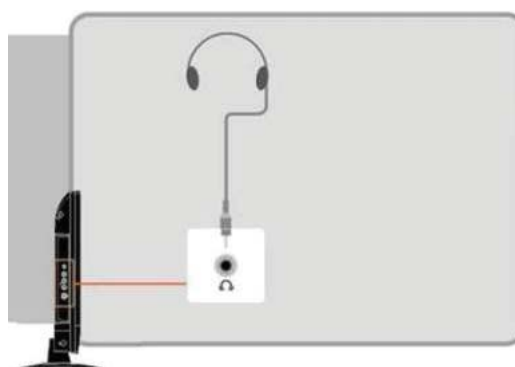

Connecting computer to TV

Use the TV as a monitor for your PC as shown below by connecting TV set to a computer with VGA cable. This TV can also be connected to a PC with HDMI output.

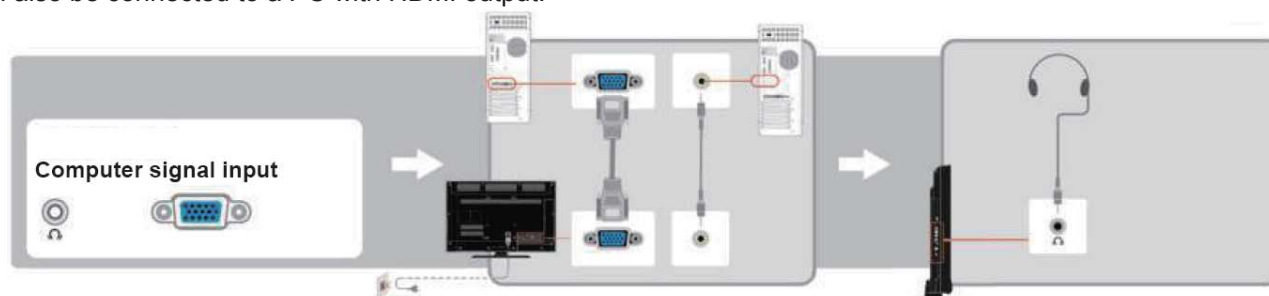


- Connect the PC IN jack to the PC using the D-sub15- D-sub15 cable and audio cable.

Note:

- If the PC is connected to the TV and no signal has been input from the PC for more than 30 seconds, the TV enters the standby mode automatically.

Connect your TV set to a computer with VGA cable of Ferrite core.

2.4 Front Panel Control Knobs

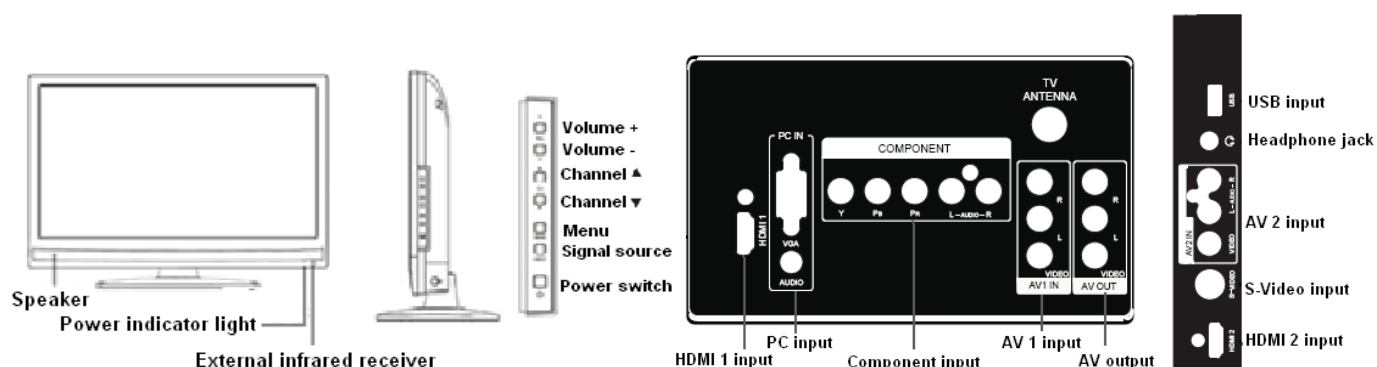

Controls

Item	Description
1. Volume +/-	Press to increase or decrease the sound volume level.
2. Channel ▲/▼	Press to select the next higher or lower program number.
3. MENU	Press to open or exit the OSD menu.
4. Signal source	Press to select the input source.
5. ⏻ (Power)	Switches the product on/standby or off. The product is not powered off completely unless it is physically unplugged.

Connections

Item	Description
Headphone Jack	Connect to your headphones. While headphones are connected, the TV speakers are muted.
AV(Audio/Video) Input	Connect audio (L/R)/video output from an external device to these jacks.
AV Output	For connecting the Audio (L/R) / Video signal of the TV to other display devices as their source signal.
S-Video	Connect S-VIDEO output from an external device to this jack. AV2 Audio IN is common for both S-video and AV2 IN, so at a time only one input can be selected. S-VIDEO provides better picture quality than composite video.
HDMI Input	Connect a HDMI signal to HDMI port. The HDMI (High definition Multimedia Input) connector provides No-compressed and fully digital audio/video data transmission between TV set and any HDMI audio/video devices, including the set top box, DVD player, Blue-ray player, A/V receiver and computer. You need an HDMI connection for viewing in 480i, 480p, 576i, 576p 720p, 1080i and 1080p modes.
PC VGA IN (RGB)& PC Audio IN	It is used to Connect the video output port of a personal computer with a 15 pin D-sub (Analog RGB) VGA cable. It can be connected to other simulated RGB devices. Connect separate audio cable between PC and TV to get sound. Please refer to "Reference Table for computer input signal" for signals that can be displayed.
Component input	Connect a component video (YPbPr)/audio (L/R) device to these jacks. Component provides better picture quality than the composite video connections.
RF Input	The RF input is for connecting to the cable or VHF/UHF antenna.
USB	Connect USB storage device to enjoy a multimedia feature.

3. Input/Output Specification


3.1 RGB Signal Input



15 - Pin Color Display Signal Cable

Pin No.	Description	Pin No.	Description
1	Red Video	9	5V
2	Green Video	10	Sync Ground
3	Blue Video	11	Not Used
4	Not Used	12	Serial Data for DDC
5	Ground	13	H-Sync.
6	Red Ground	14	V-Sync.
7	Green Ground	15	Serial Clock for DDC
8	Blue Ground		

3.2 HDMI Digital Connector Pin Assignments

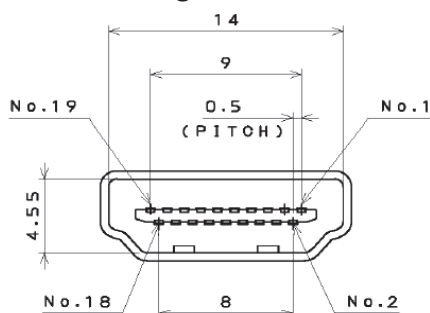

Pin No.	Description	Pin No.	Description
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	NC
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		

3.3 Compatible Mode Table

Reference table for computer input signal

After your TV set is connected to a computer you can set up computer output signal based on the table below.

Default computer mode			
Standard	Resolution	Horizontal frequency (KHz)	Vertical frequency (Hz)
VESA	640 x 480	31.469	59.94
VESA	800 x 600	35.156	56.250
VESA	800 x 600	37.879	60.317
VESA	1024 x 768	48.363	60.004
VESA	1280 x 720	45	60
VESA	1360 x 768	47.72	59.799
VESA(only for LC42H033M)	1920 x 1080	67.5	60

DVI/Computer HDMI input signal reference table

1. When using the DVI terminal: connect the DVI terminal with the DVI to HDMI line to your TV set, then set up the output signal of the video devices as specified in the table below.
2. When using the computer HDMI terminal: connect the HDMI terminal of your computer with the HDMI wire to your TV set, then set up the output signal of the computers as specified in the table below.

Default HDMI mode			
Standard	Resolution	Horizontal frequency (KHz)	Vertical frequency (Hz)
VESA	640 x 480	31.469	59.94
VESA	800 x 600	35.156	56.250
VESA	800 x 600	37.879	60.317
VESA	1024 x 768	48.363	60.004
VESA	1280 x 720	45	60
VESA	1360 x 768	47.72	59.799
VESA(only for LC42H033M)	1920 x 1080	56.25	50

Supported video formats

1. Connect the component signal or HDMI port of video device to your TV set and set up the output signal of the video device in accordance with table below.
2. If your computer display card supports signals of video format then you can set up following output signal.

Default Component or HDMI mode			
Standard	Resolution	Horizontal frequency (KHz)	Vertical frequency (Hz)
SD	720 x 480i	15.734	60
SD	720 x 480P	31.5	60
SD	720 x 576i	15.625	50
SD	720 x 576P	31.25	50
HD	1280 x 720P	37.5	50
HD	1280 x 720P	45	60
HD	1920 x 1080i	28.125	50
HD	1920 x 1080i	33.75	60
FHD(only for LC42H033M)	1920 x 1080P	56.25	50
FHD(only for LC42H033M)	1920 x 1080P	67.5	60

Video mode supported

PAL D/K B/G I; NTSC M/N.

SD connector

You may use a DVD or VCR player for watching conventional programs. Connect the devices to your TV set with the video input at its side.

4. Mechanical Instructions

LC32W033M

1. Remove the screws to remove BASE BKT.




2. Remove the screws to remove REAR COVER.



3. Remove the screws to remove HINGE.



4. Remove the screws to remove MAIN BOARD, POWER BOARD, INVERTER BOARD and BKT and separate the PANEL and BEZEL.

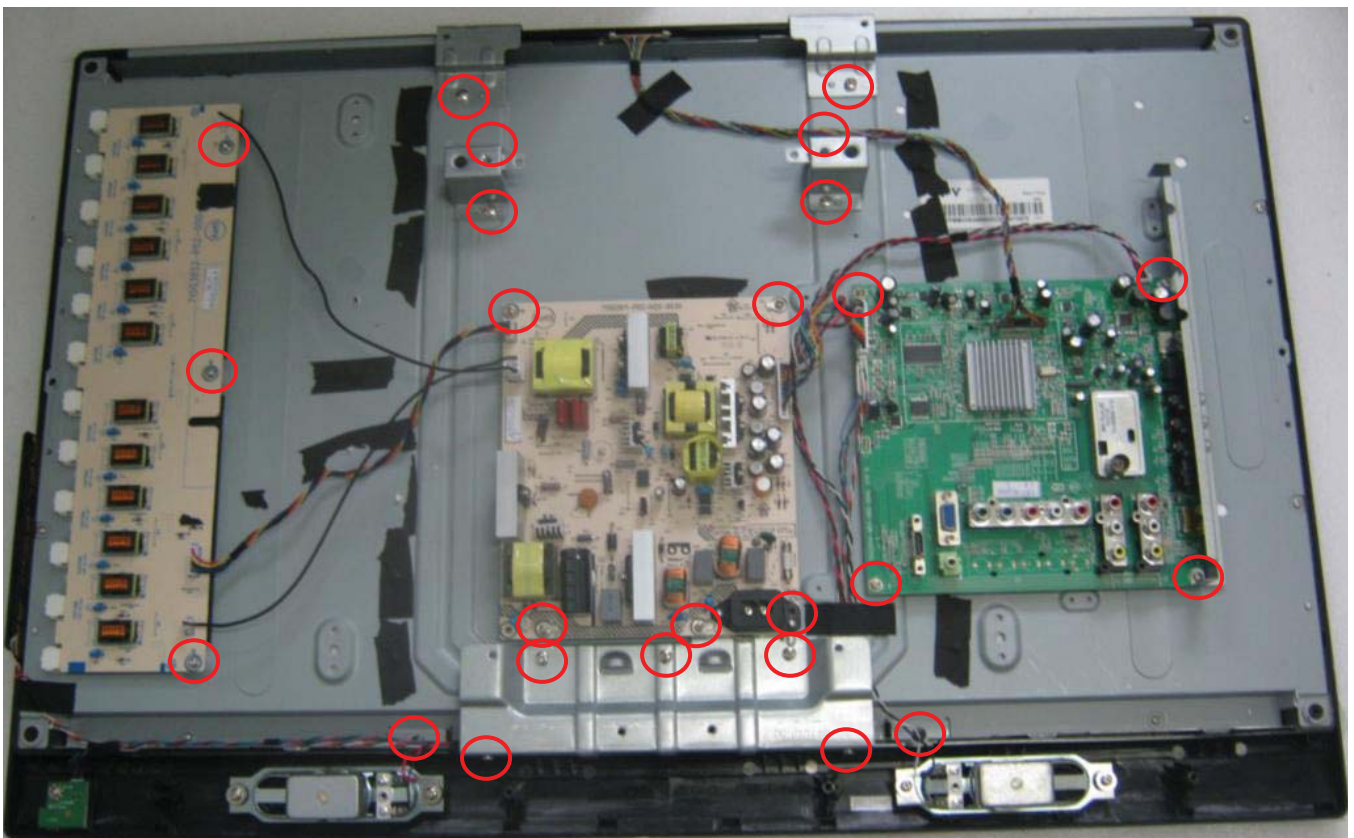

5. Remove the screws to remove KEY BOARD, IR BOARD and SPEAKERS.



LC42H033M

1. Remove the screws to remove BRACKET BASE.





2. Remove the screws to remove REAR COVER.




3. Remove the screws to remove HINGE and BKT.



4. Remove the screws to remove MAIN BOARD, POWER BOARD and INVERTER BOARD.

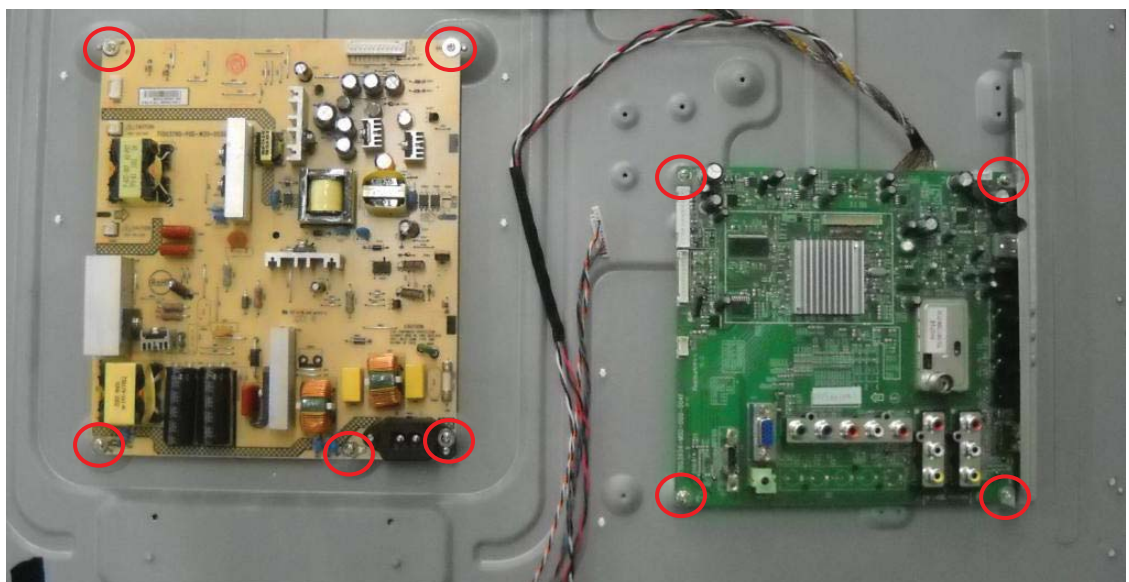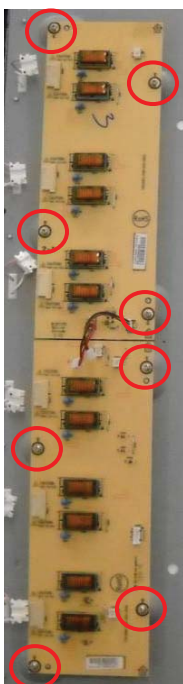

5. Remove the screws to remove BKT and separate PANEL and BEZEL.

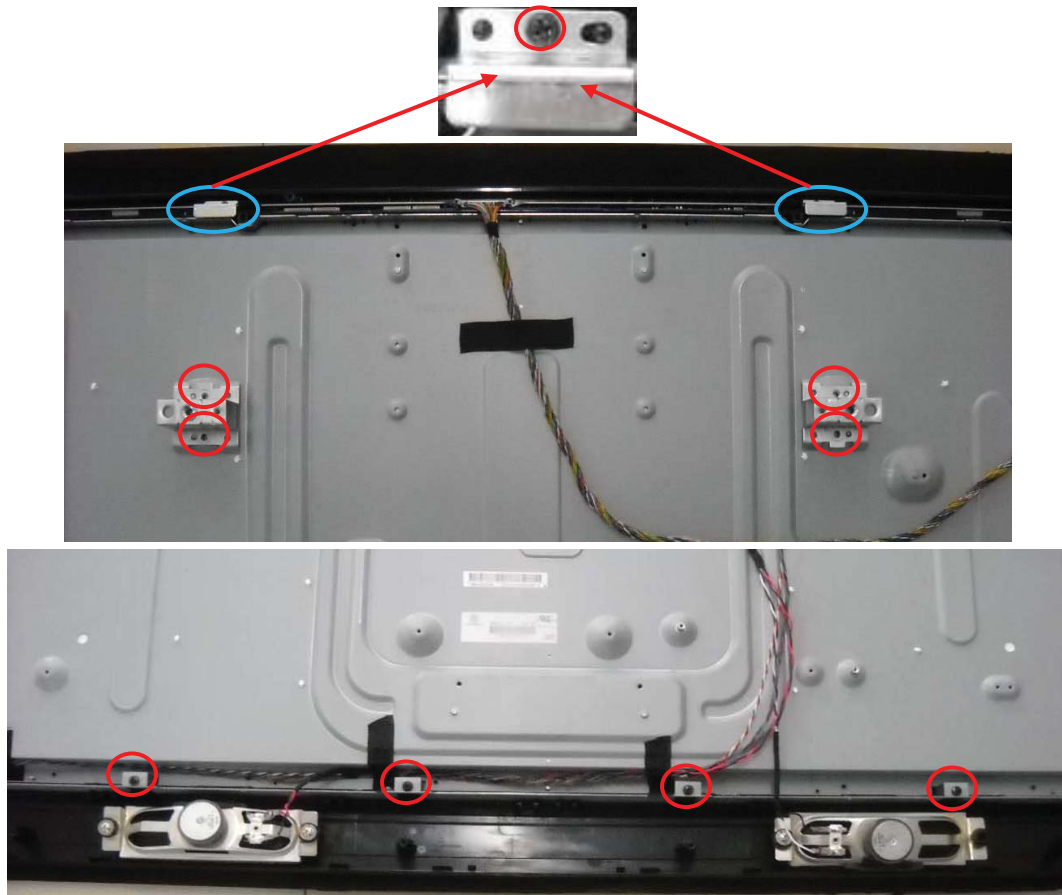


6. Remove the screws to remove KEY BOARD, IR BOARD and SPEAKERS.




5. Repair Flow Chart


1. No power

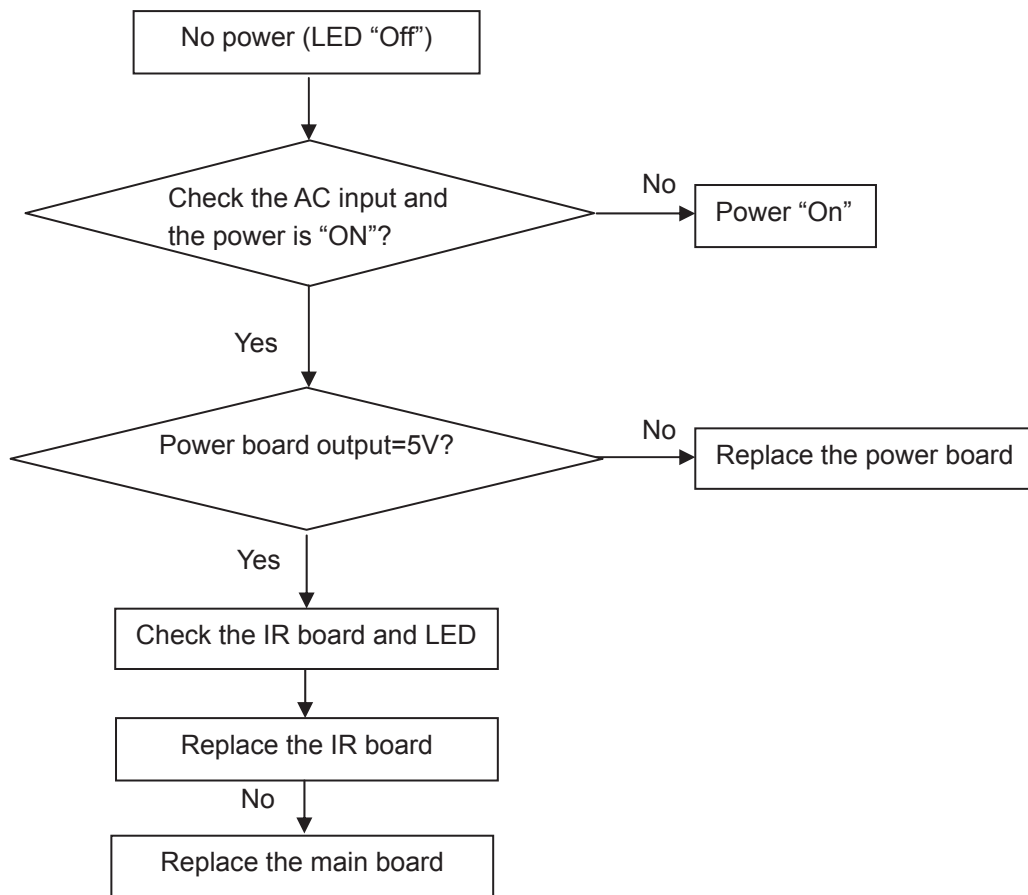


2. Can't start

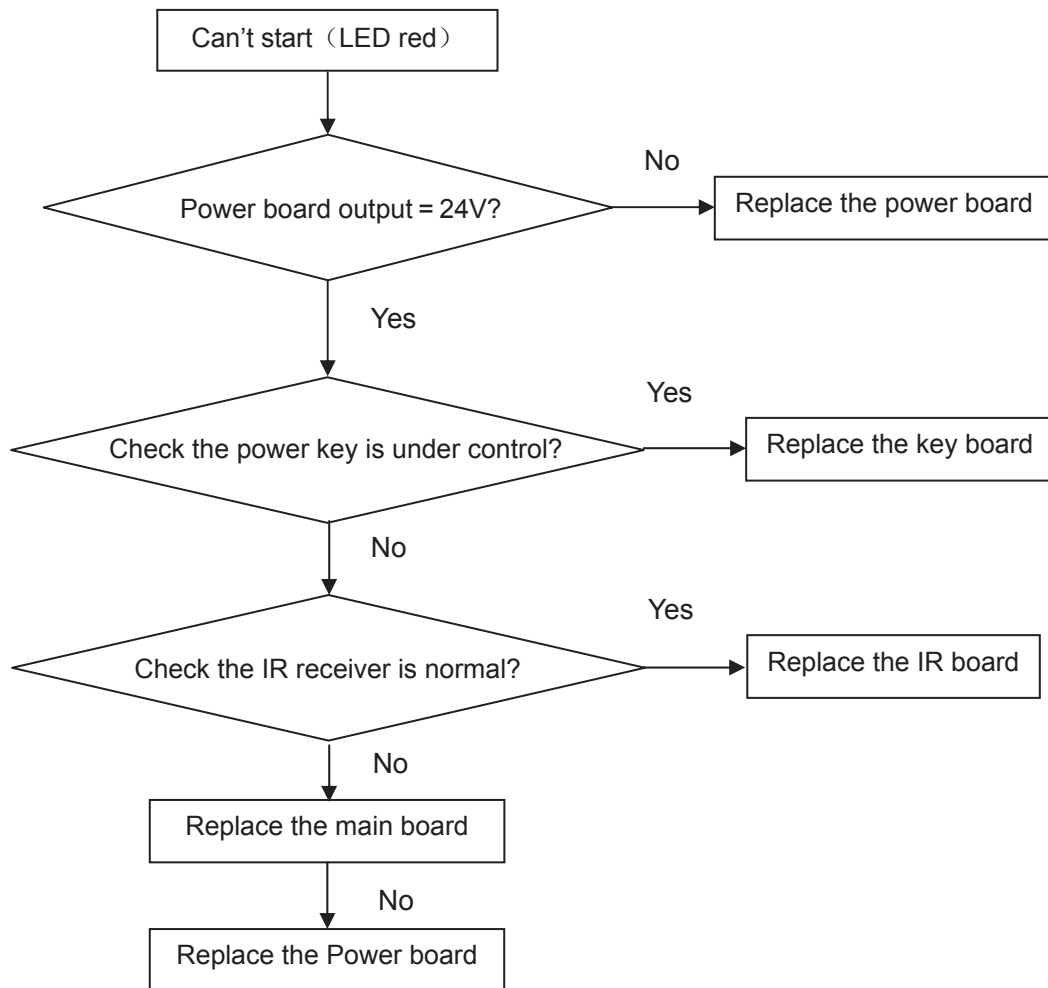


3. Abnormal display

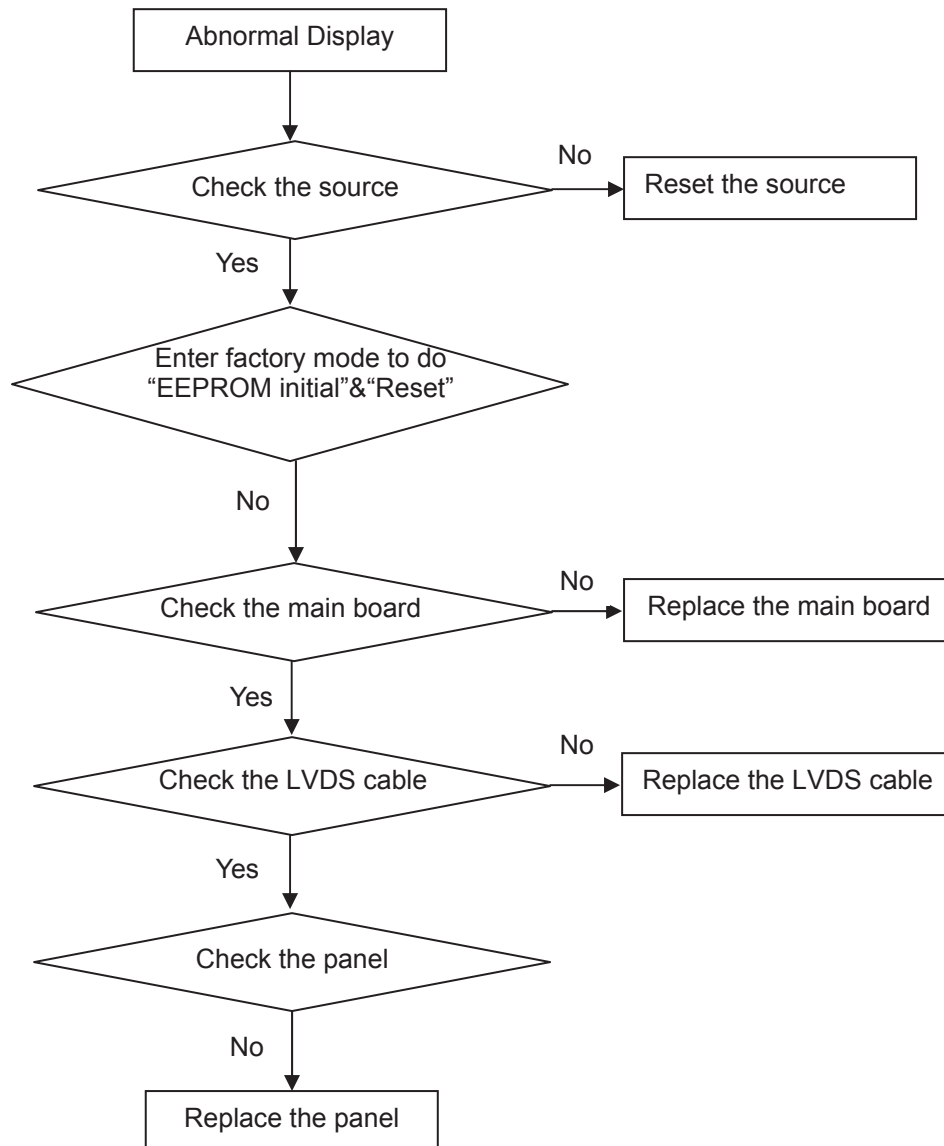


4. No display

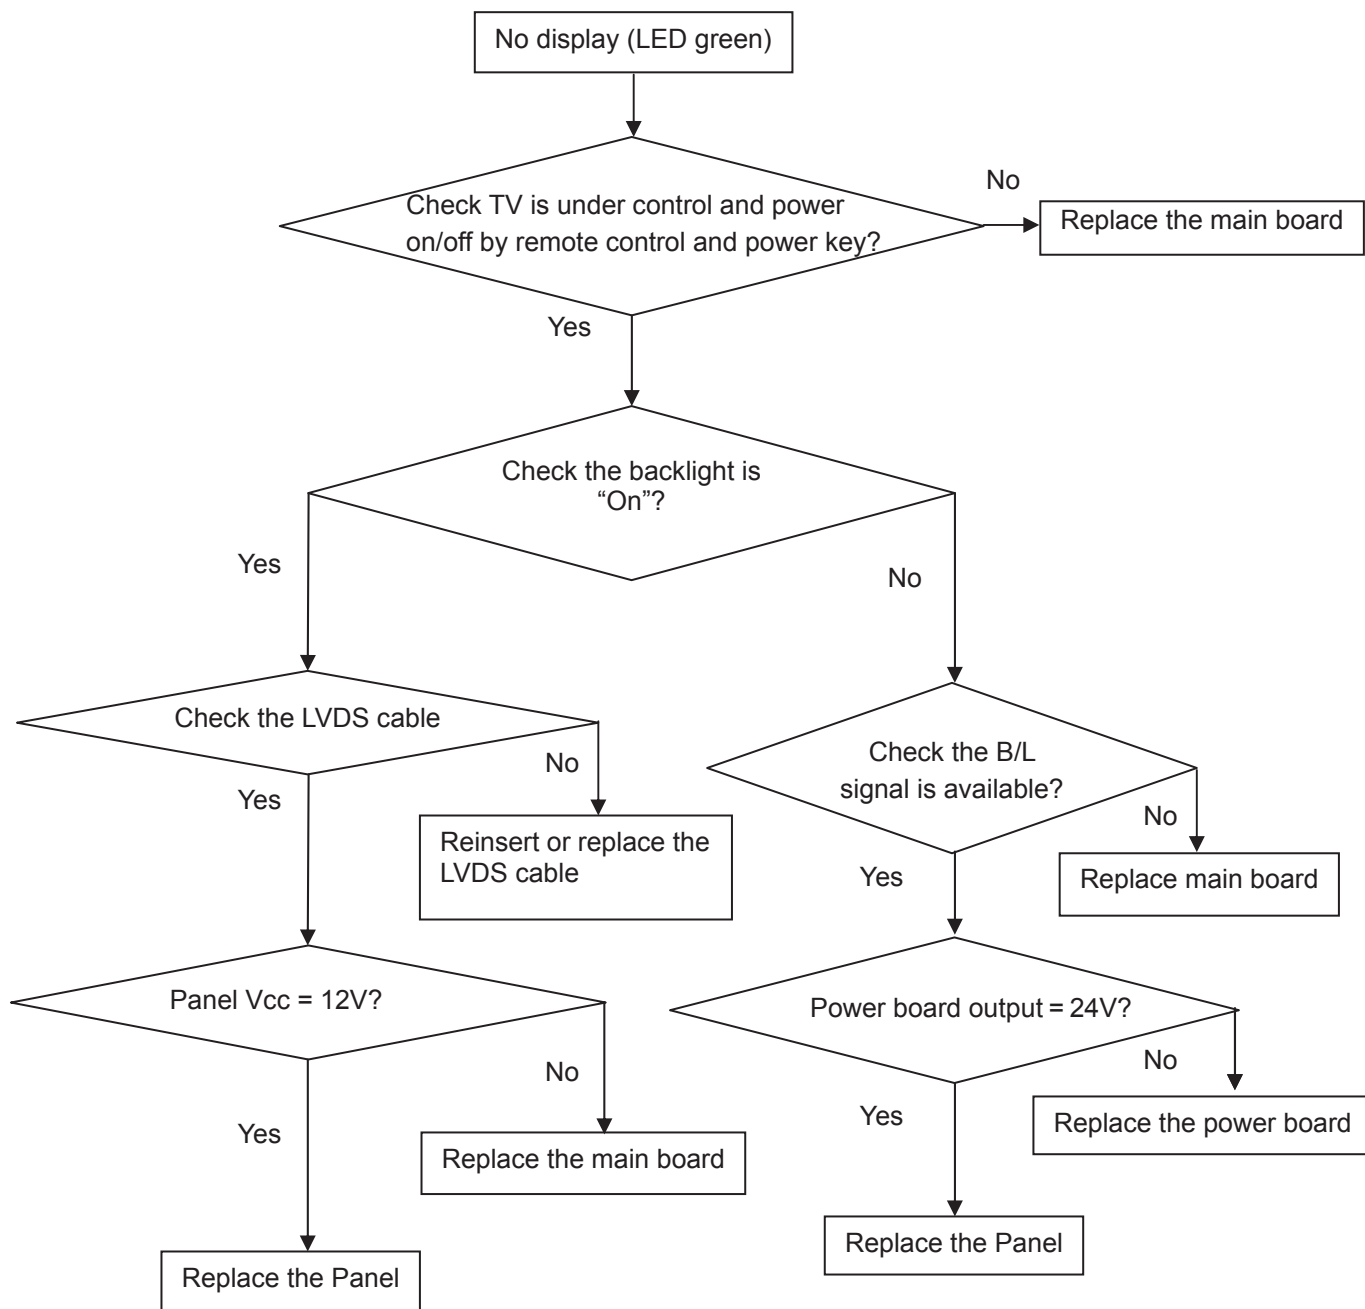


5. Sound problem

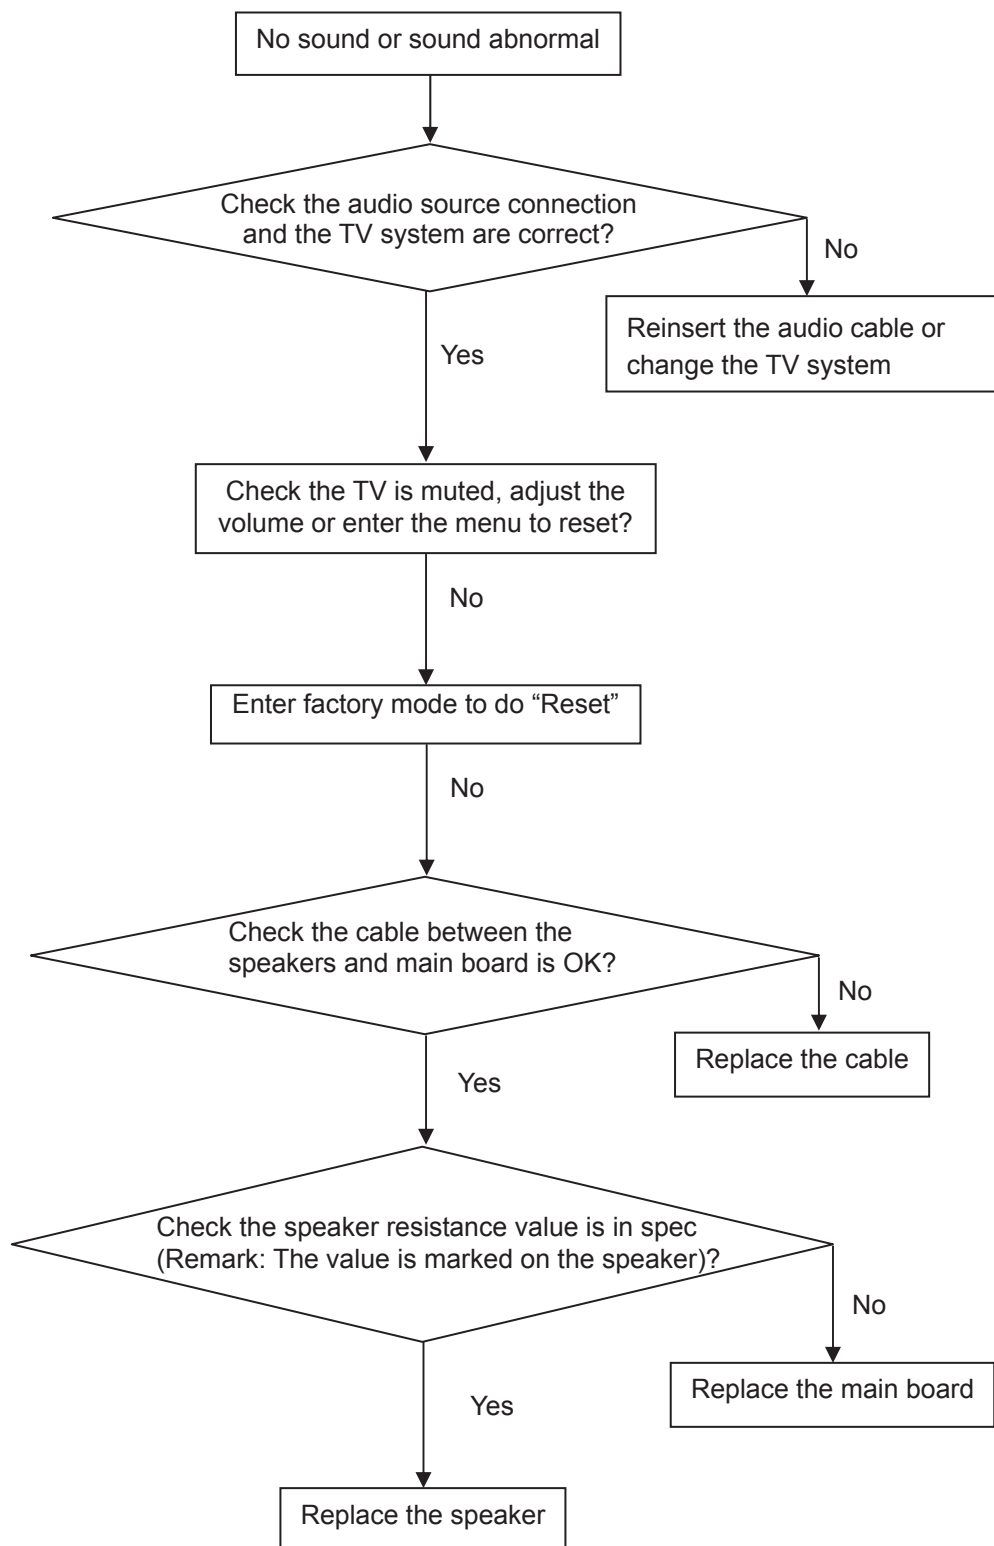

6. Remote control malfunction

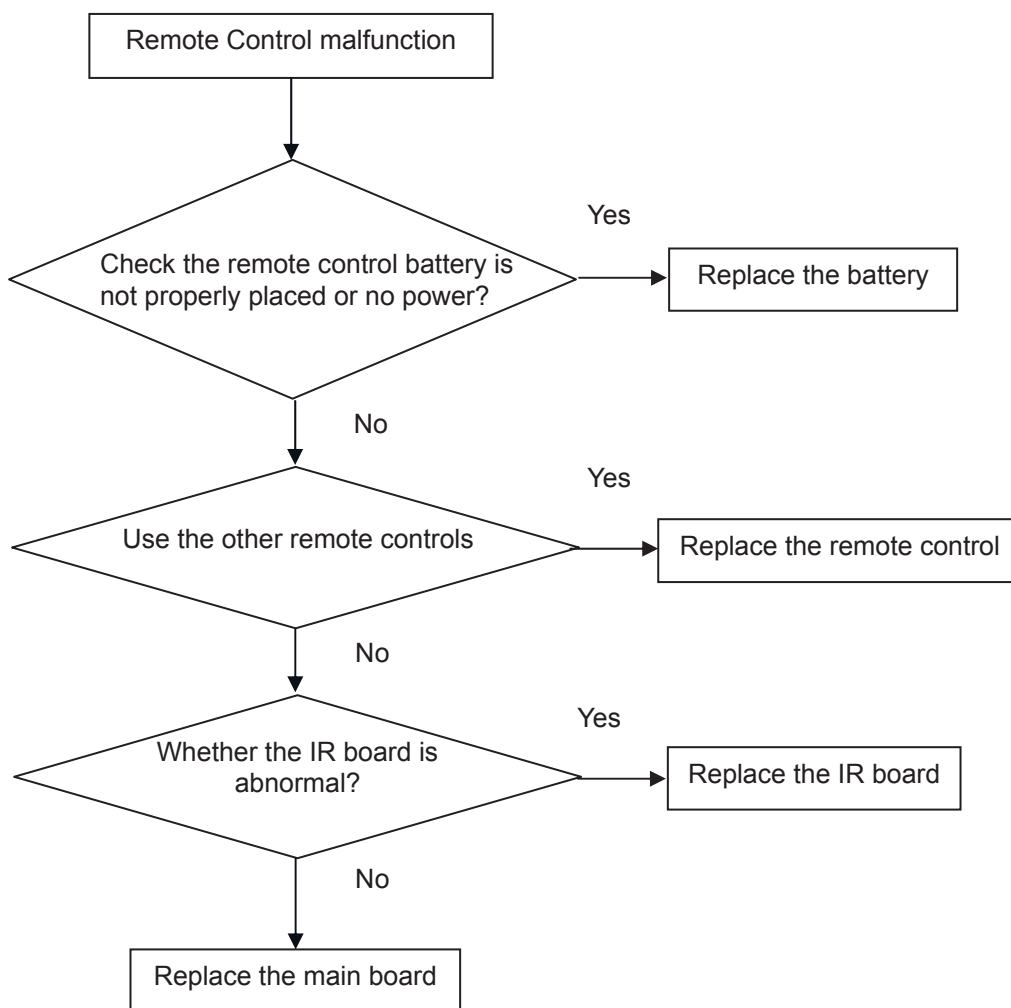


7. OSD is unstable or can't work normally

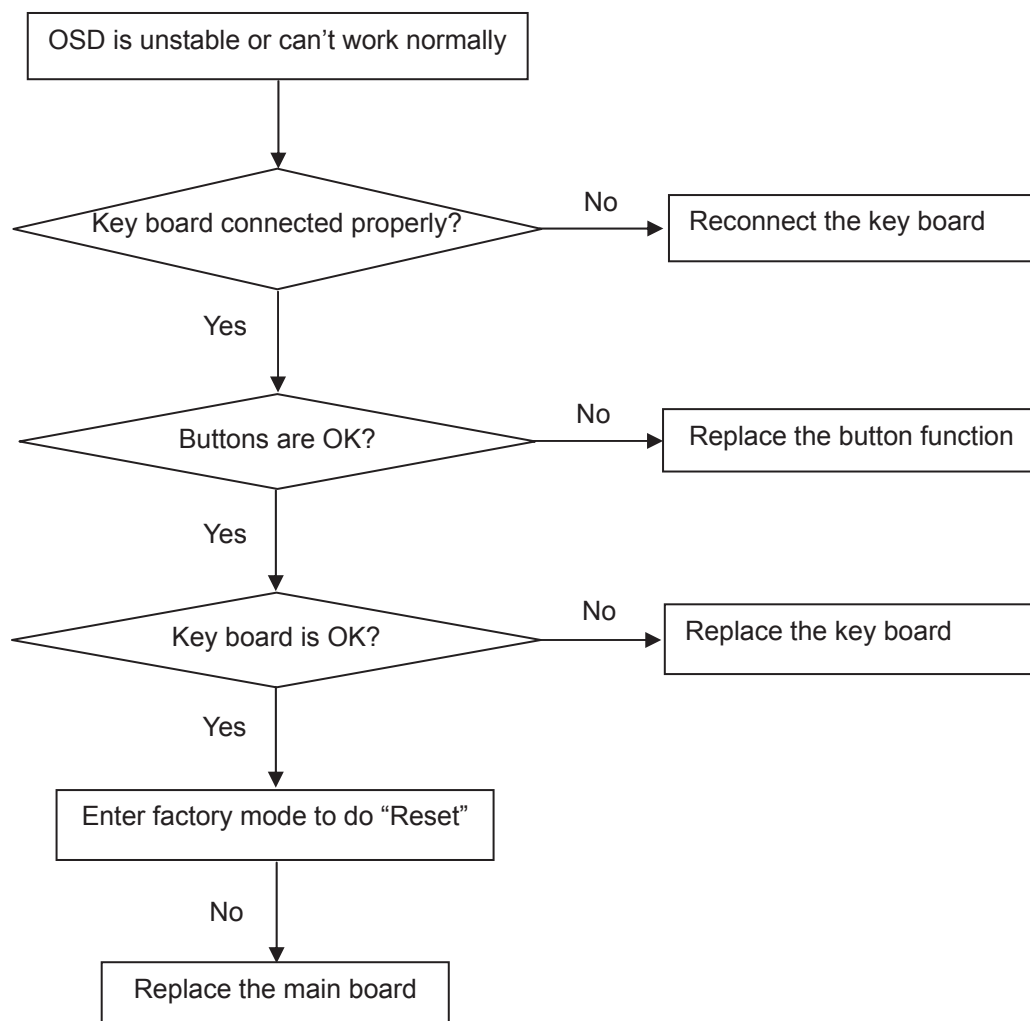

6.1 Main Board


715G3934M04000004F




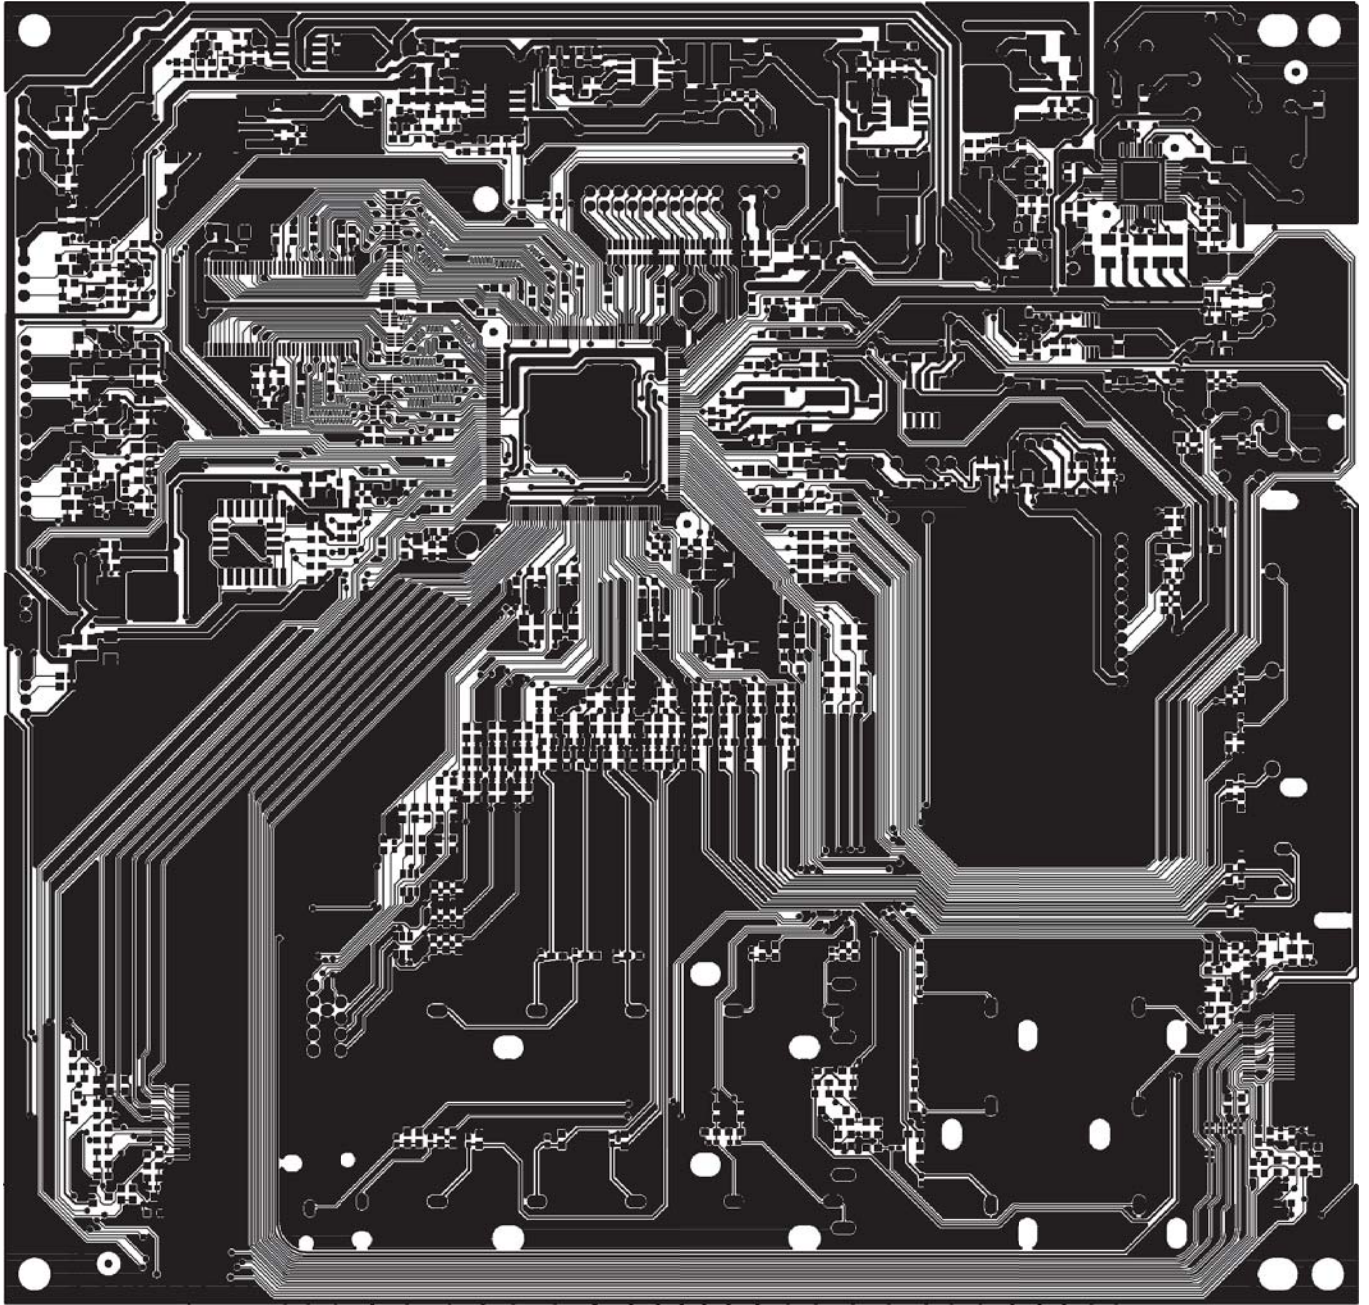


6.2 Power Board


LC32W033M Power 715G3811P02H20003S

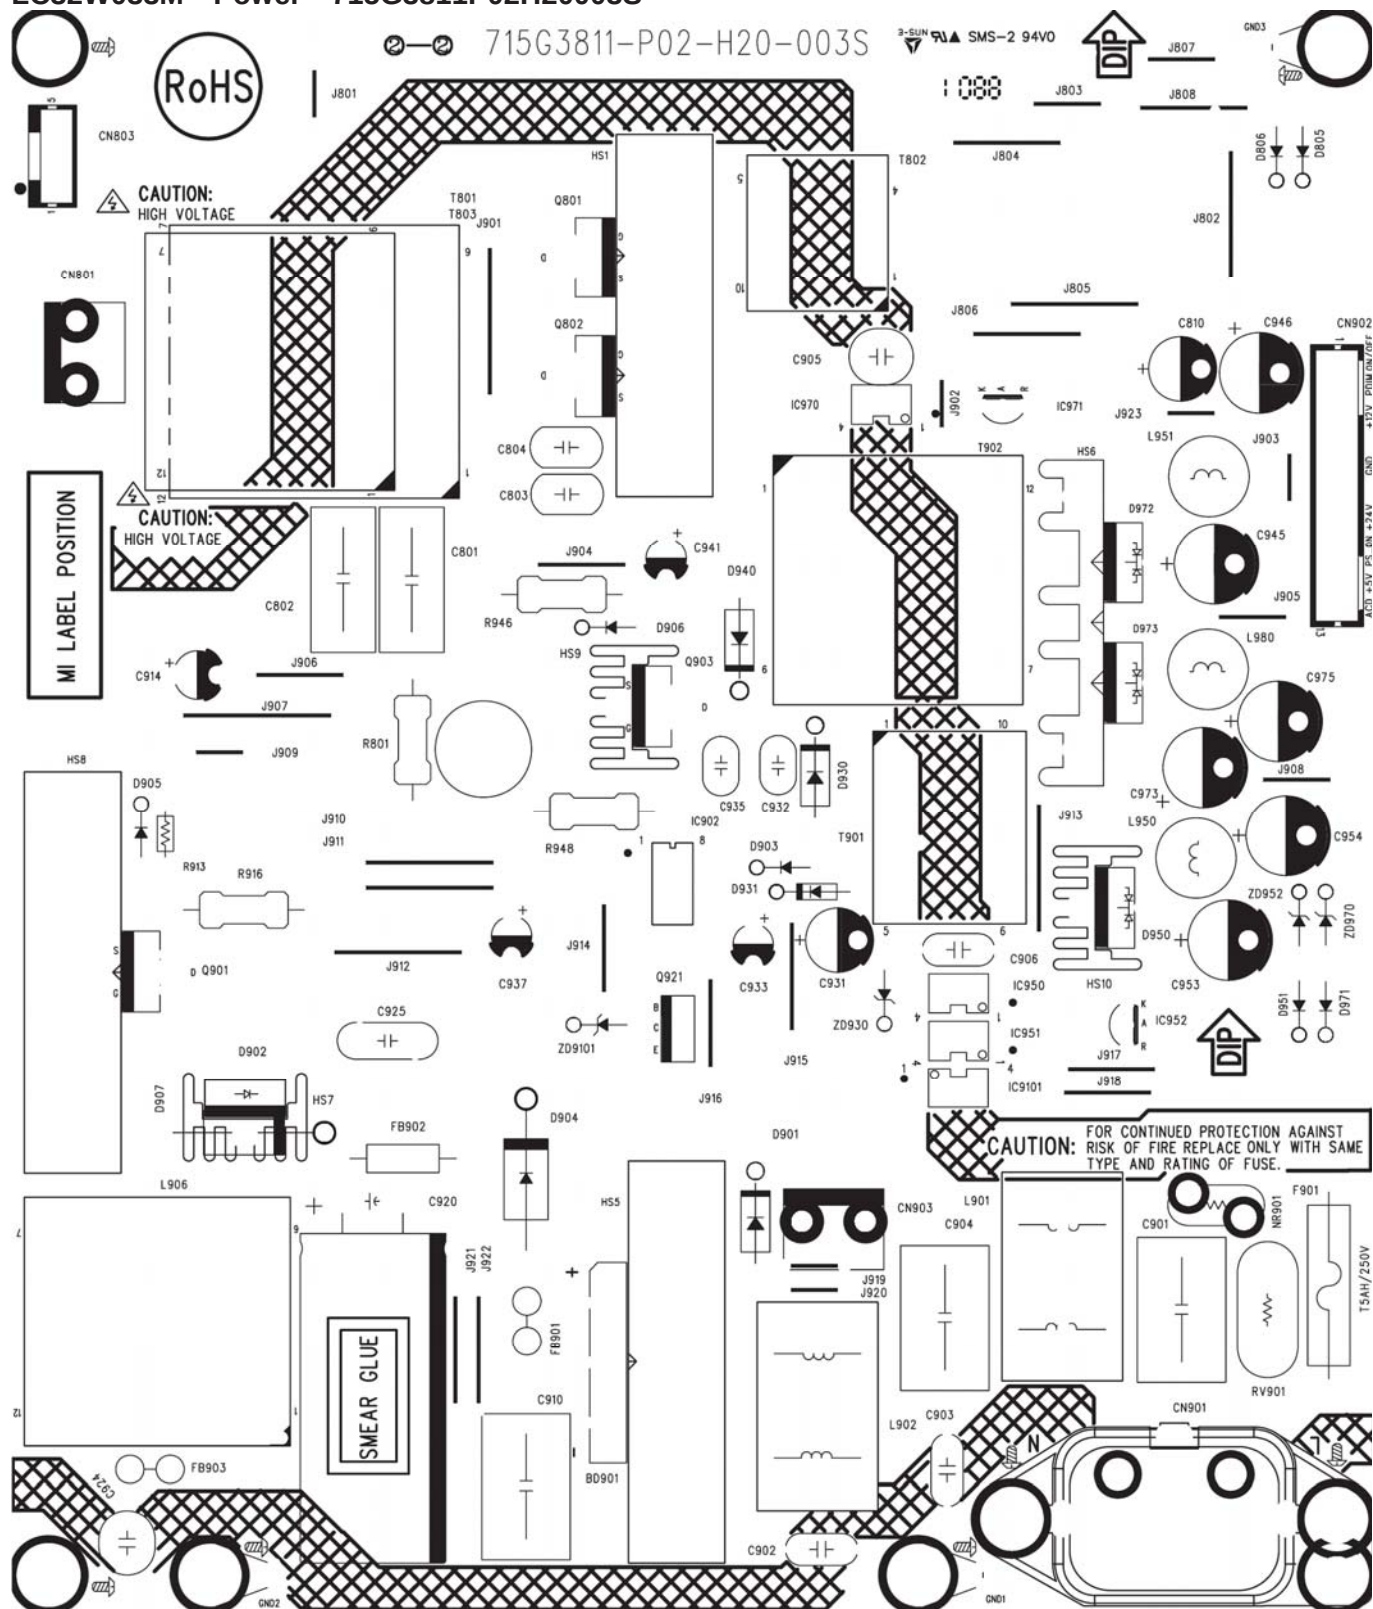

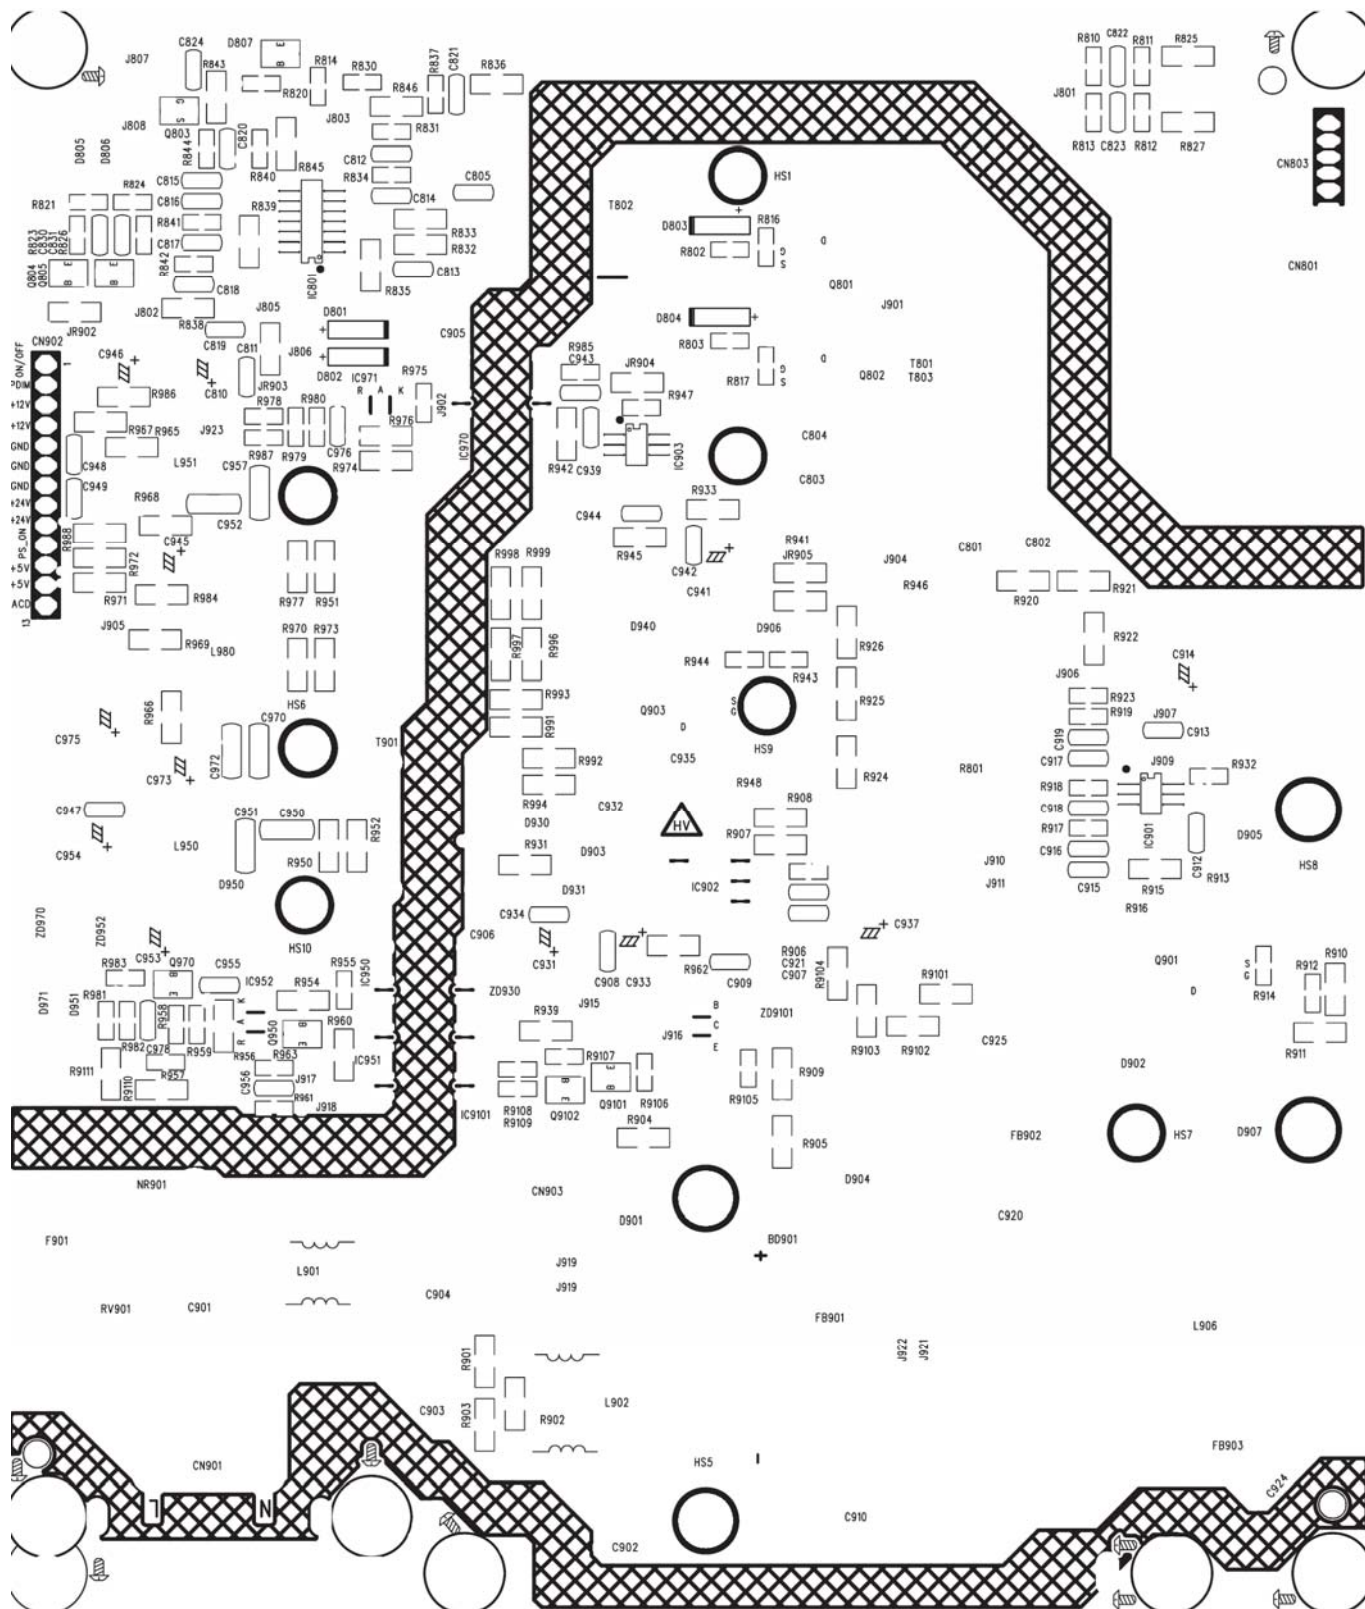

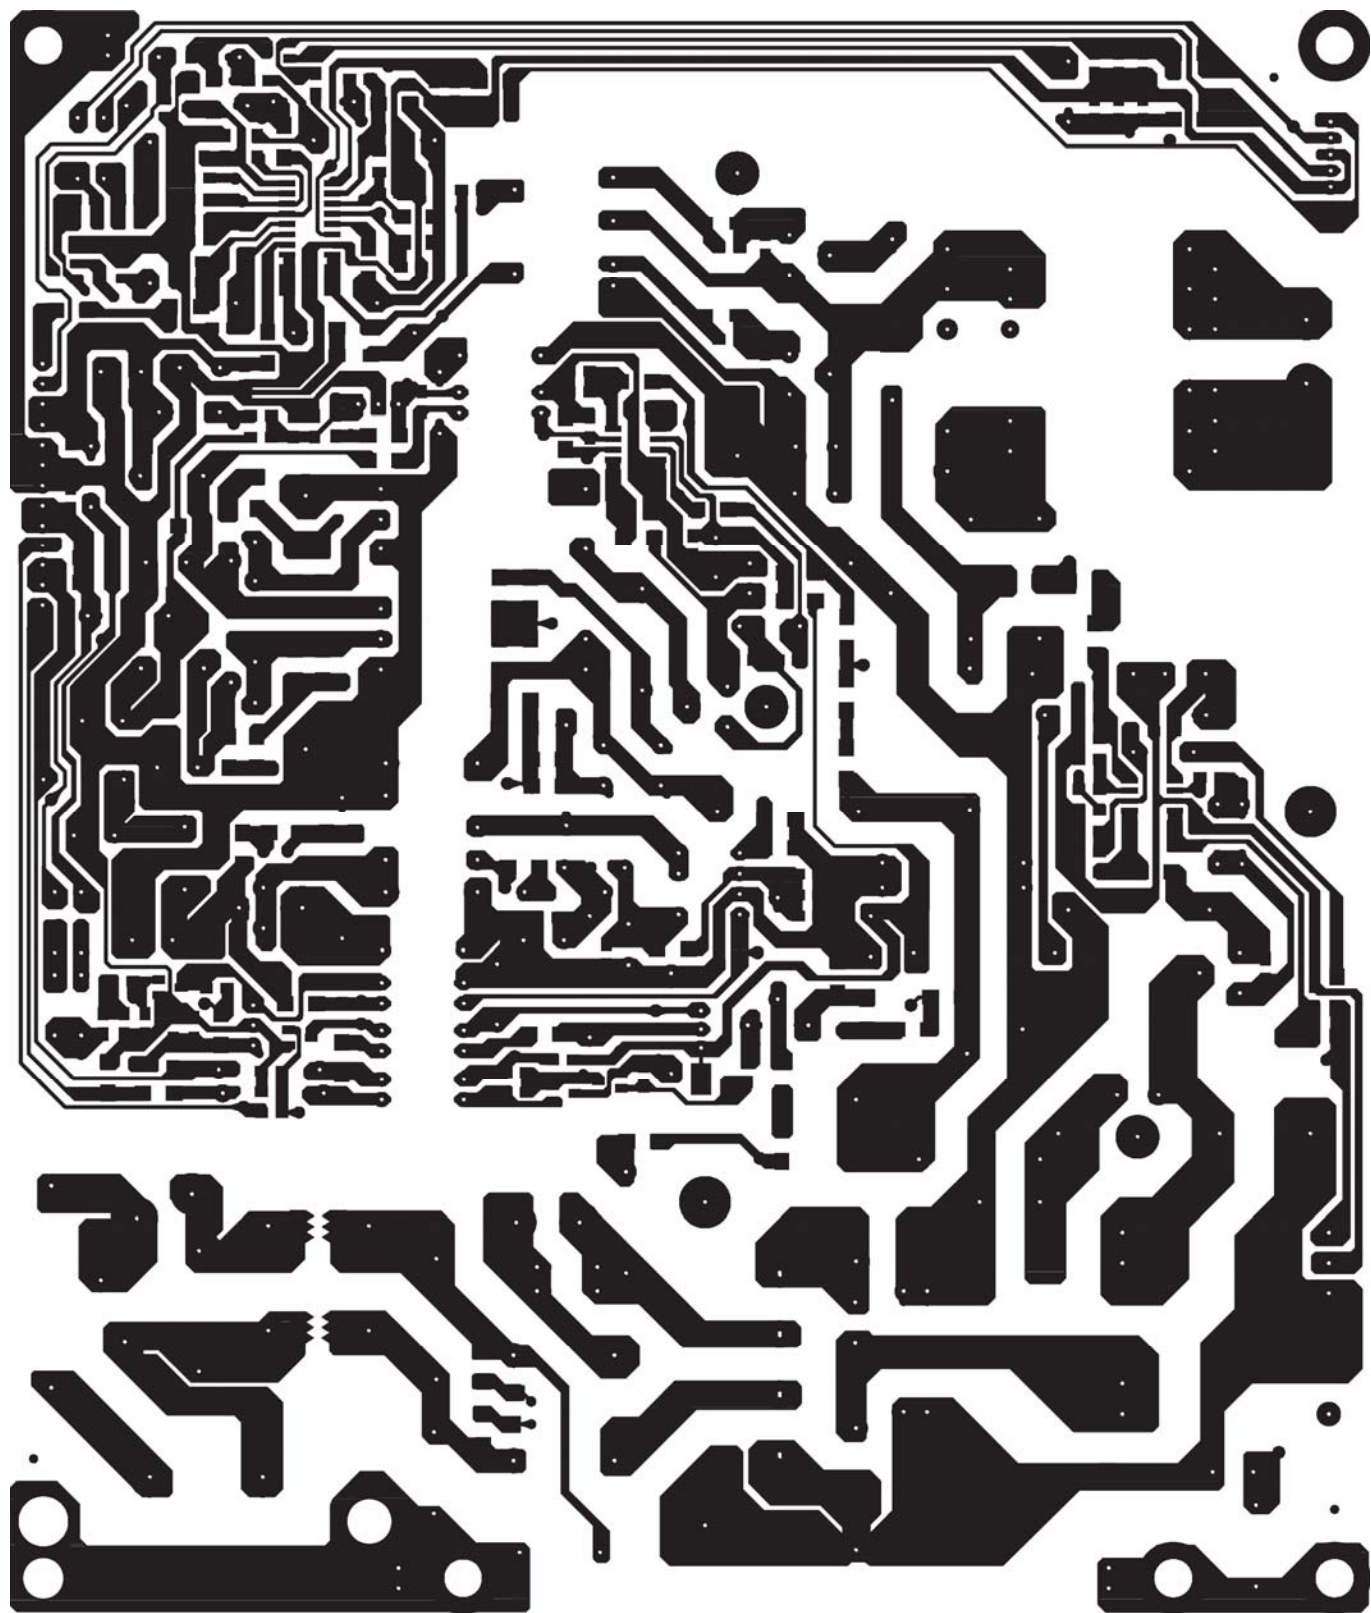

Inverter 715G3652P02000003S

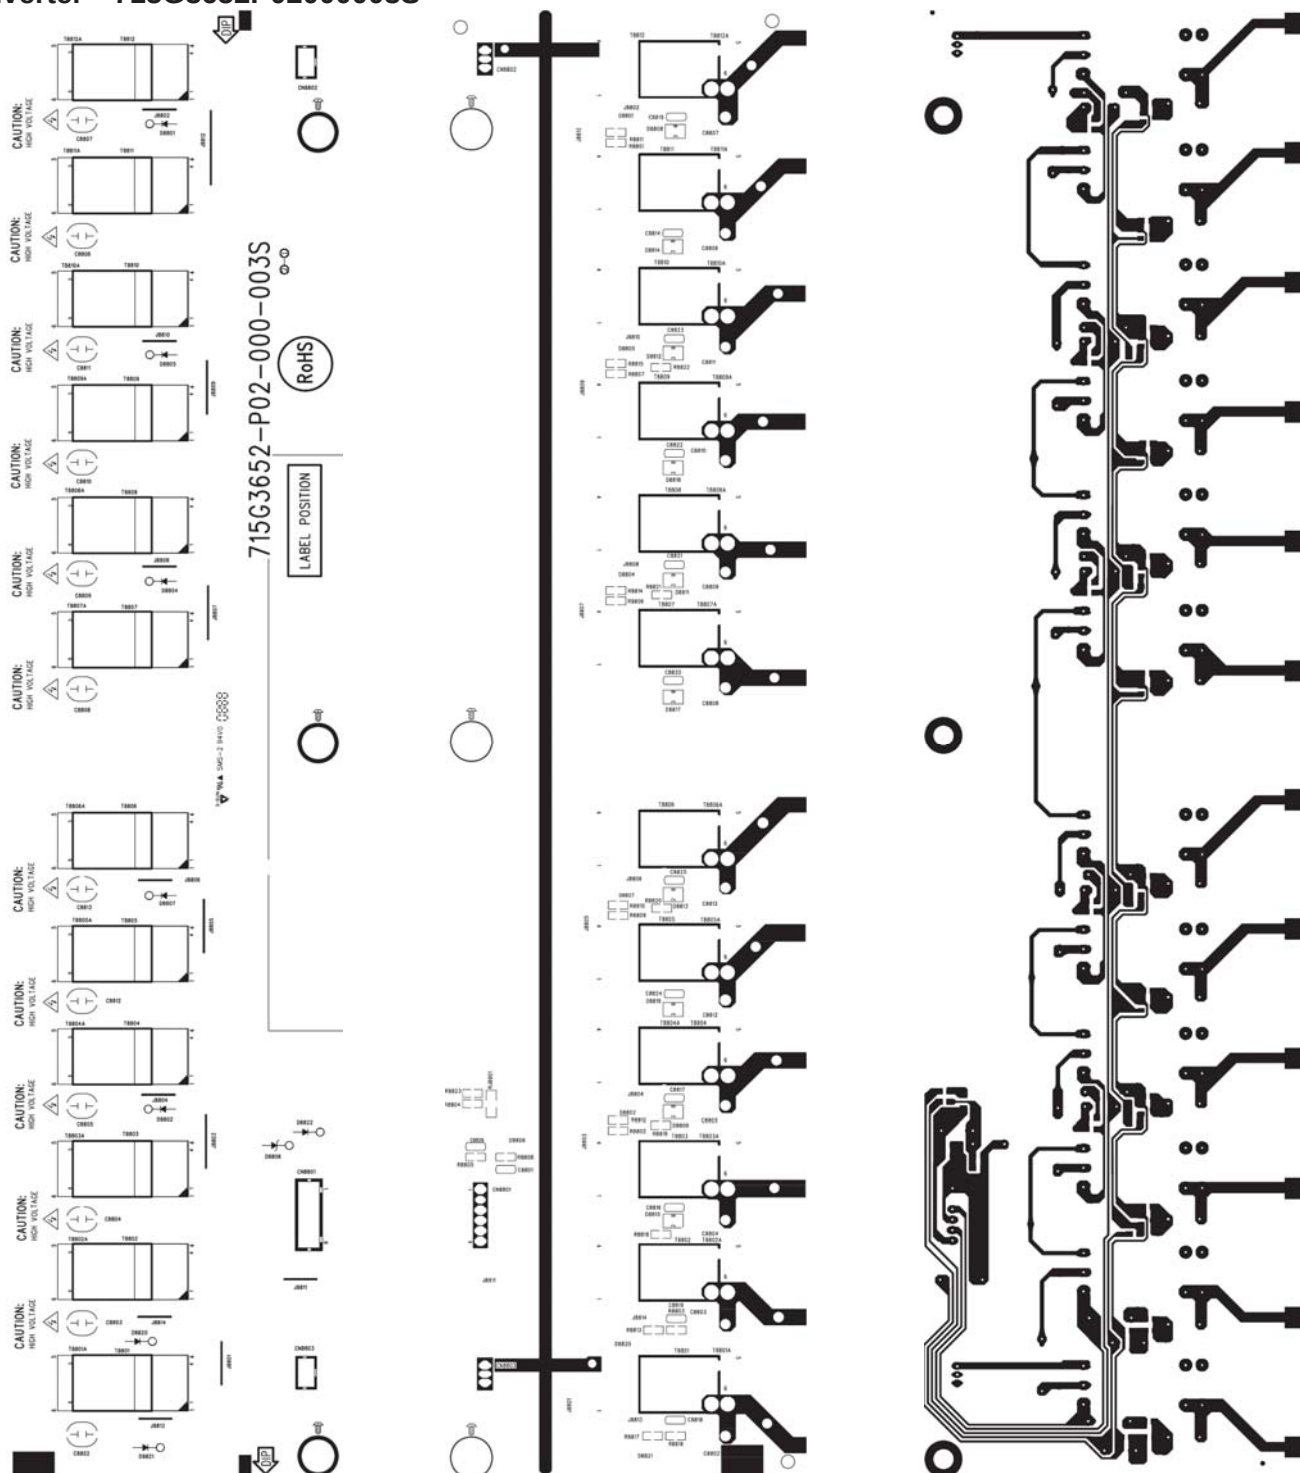

2-2

CH III 24C 94V-0

MI LABEL POSITION

715G4088-P01-W20-003H


DIP


RoHS


SMEAR GLUE


CAUTION: FOR CONTINUED PROTECTION AGAINST RISK OF FIRE REPLACE ONLY WITH SAME TYPE AND RATING OF FUSE.


T5AH/250VAC


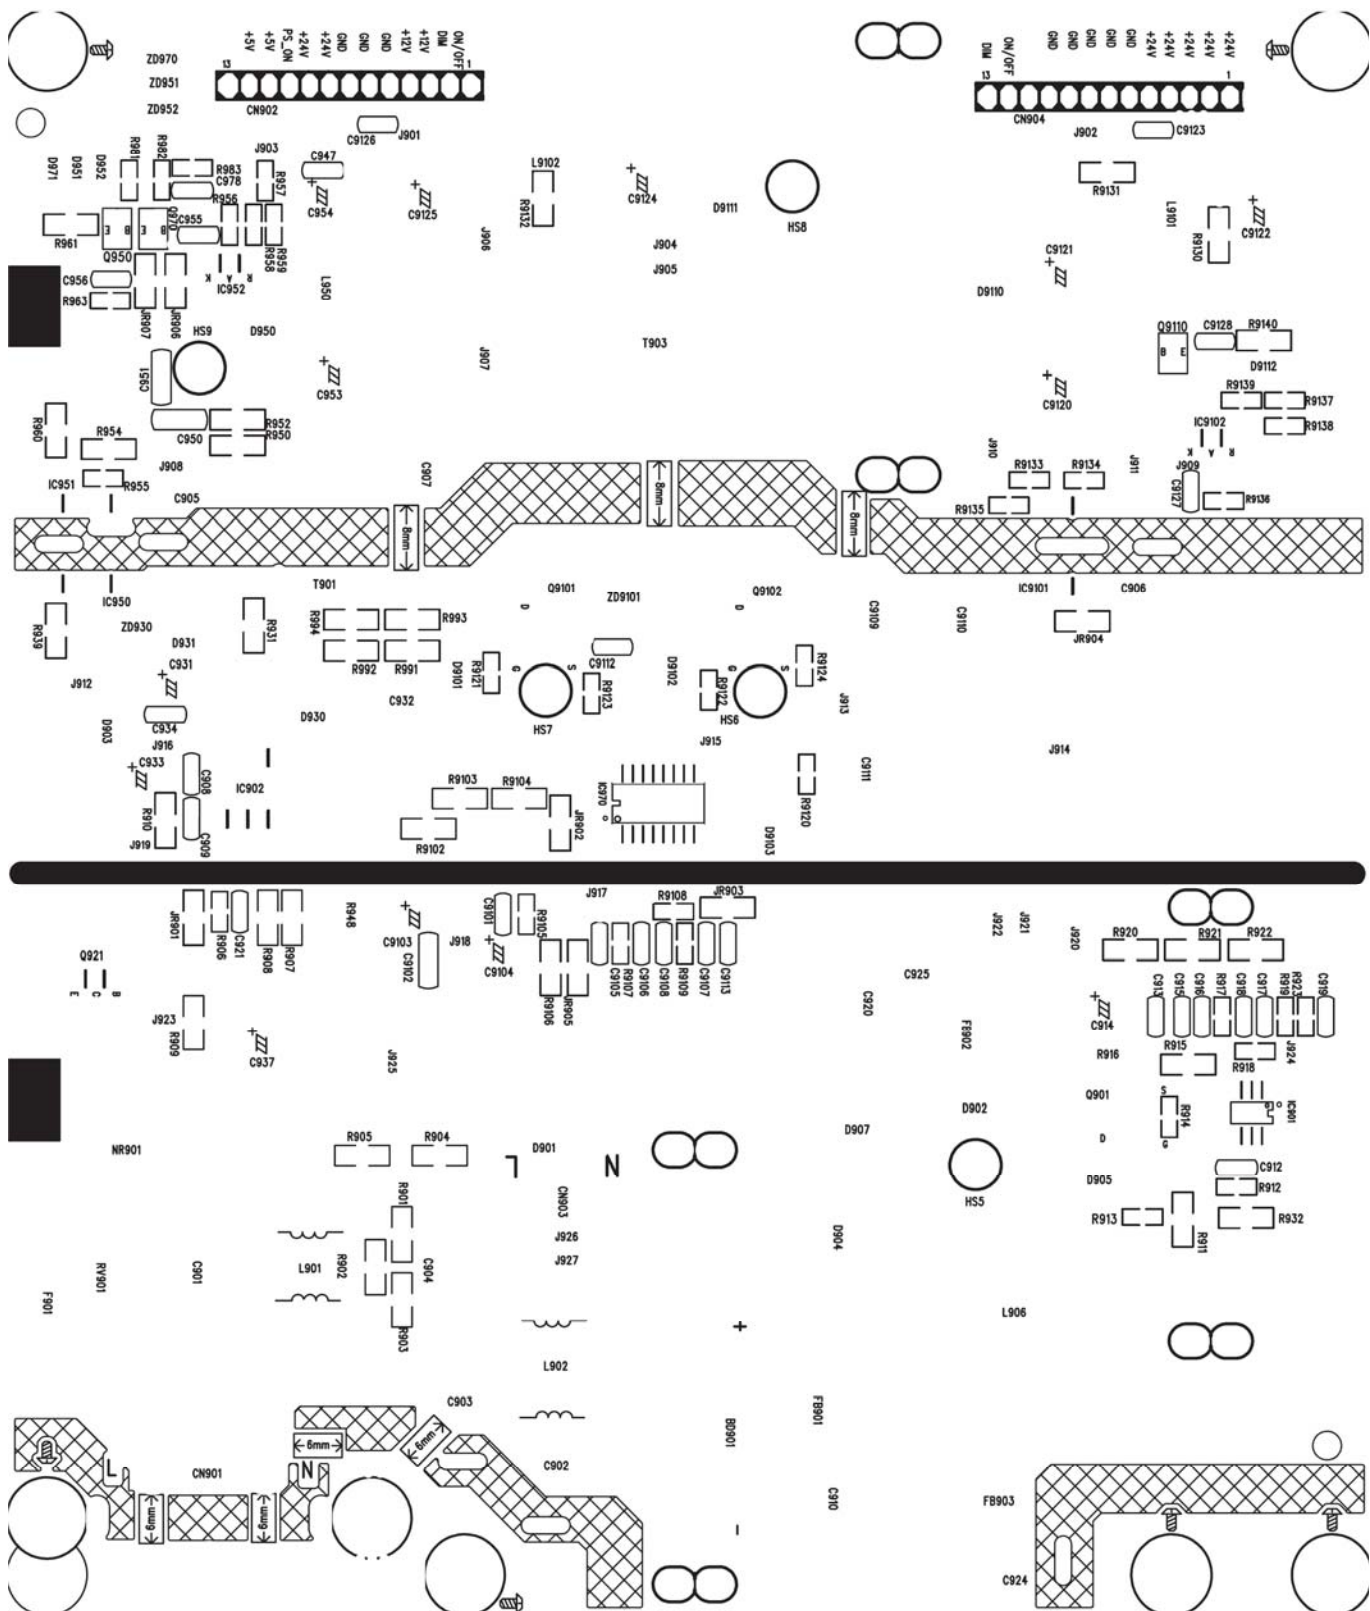


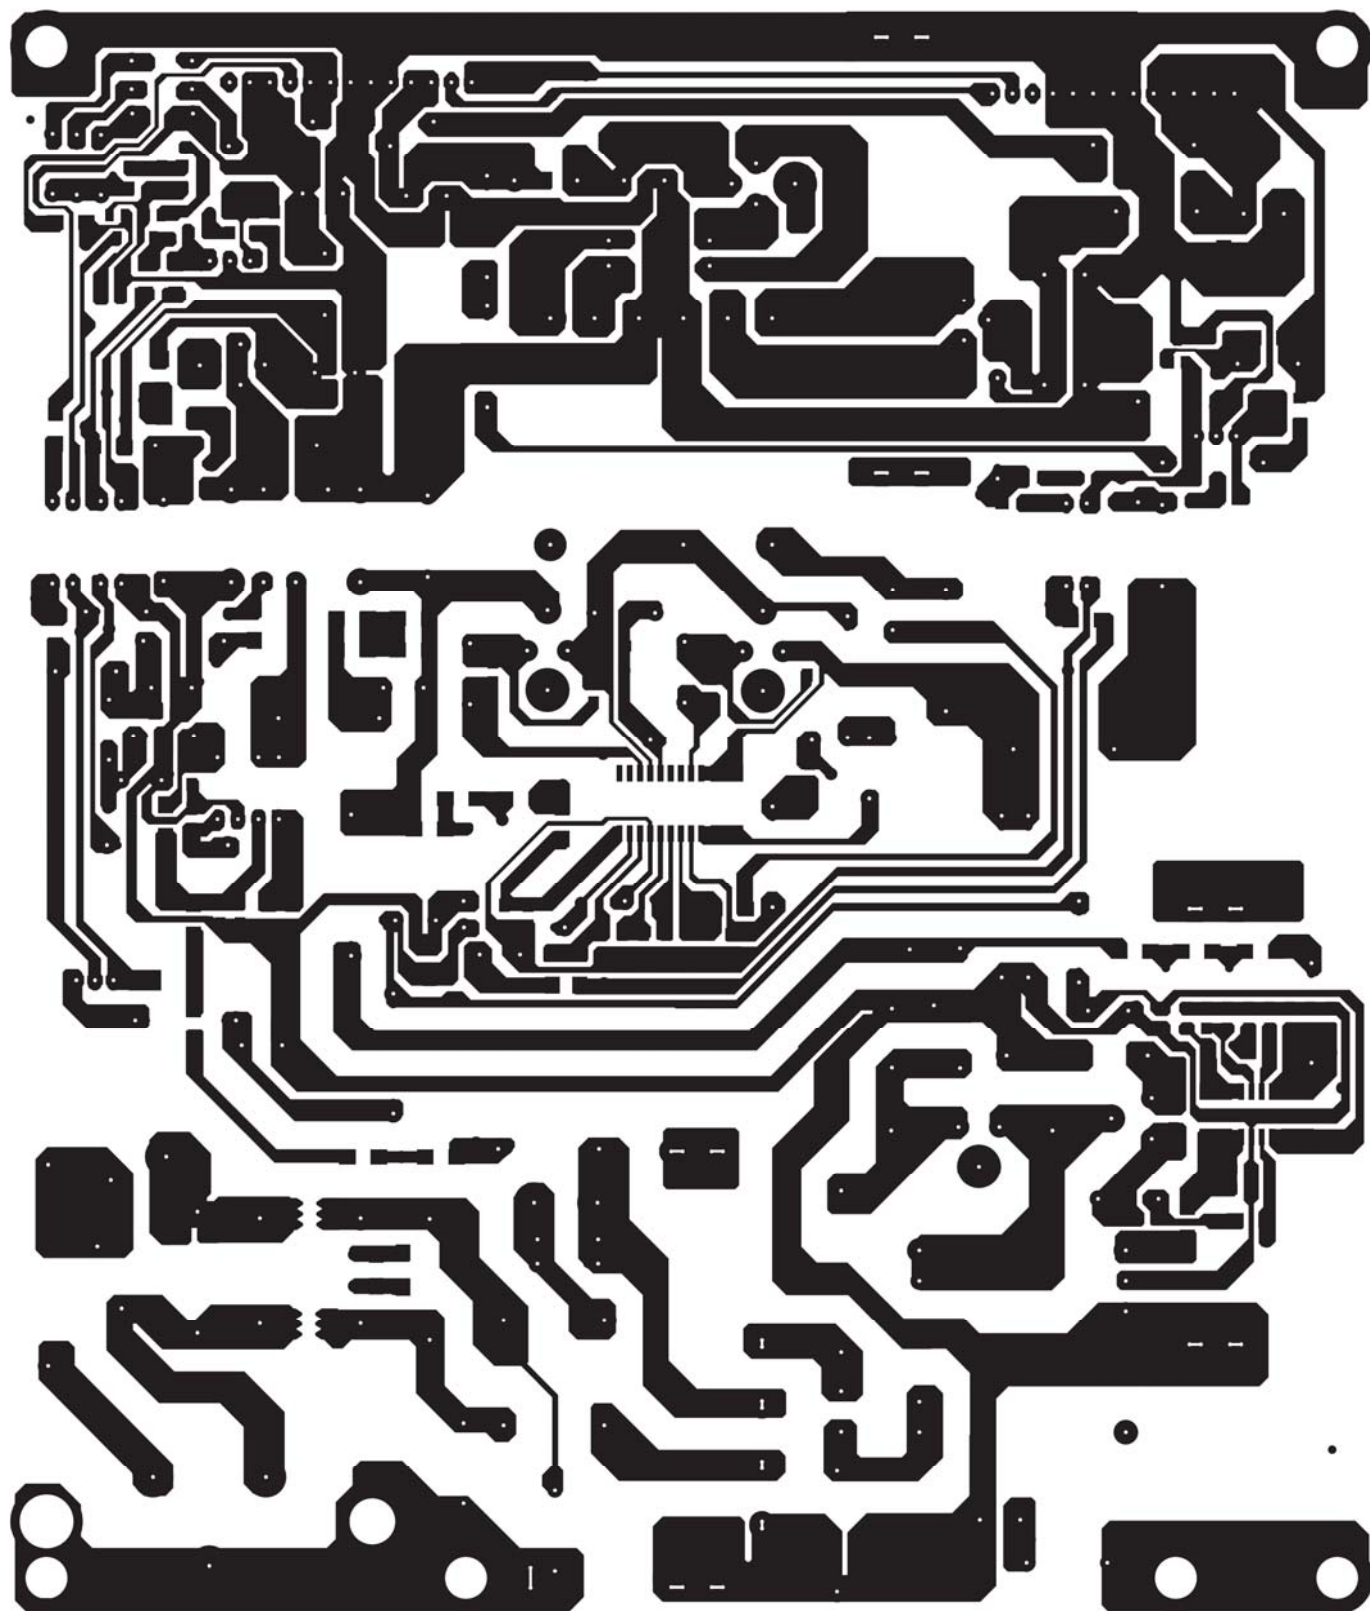


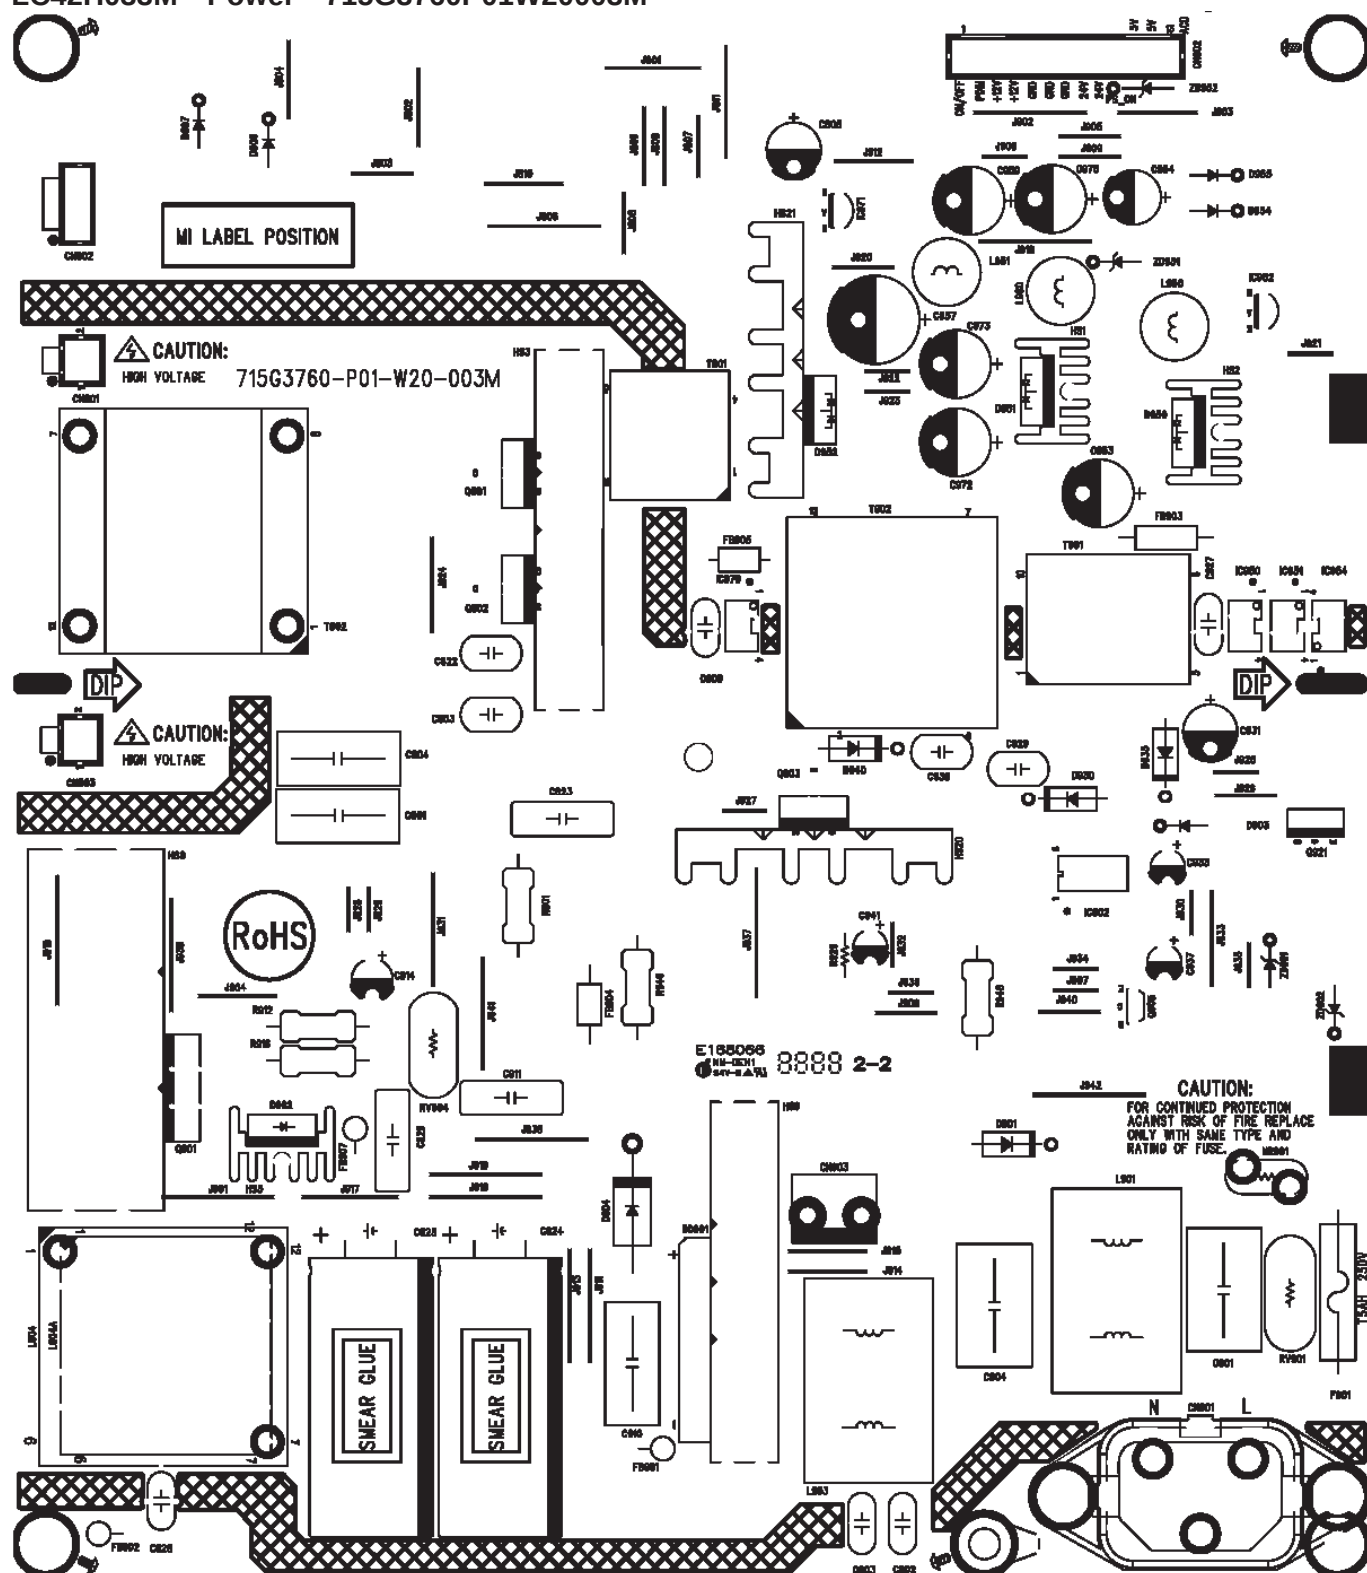


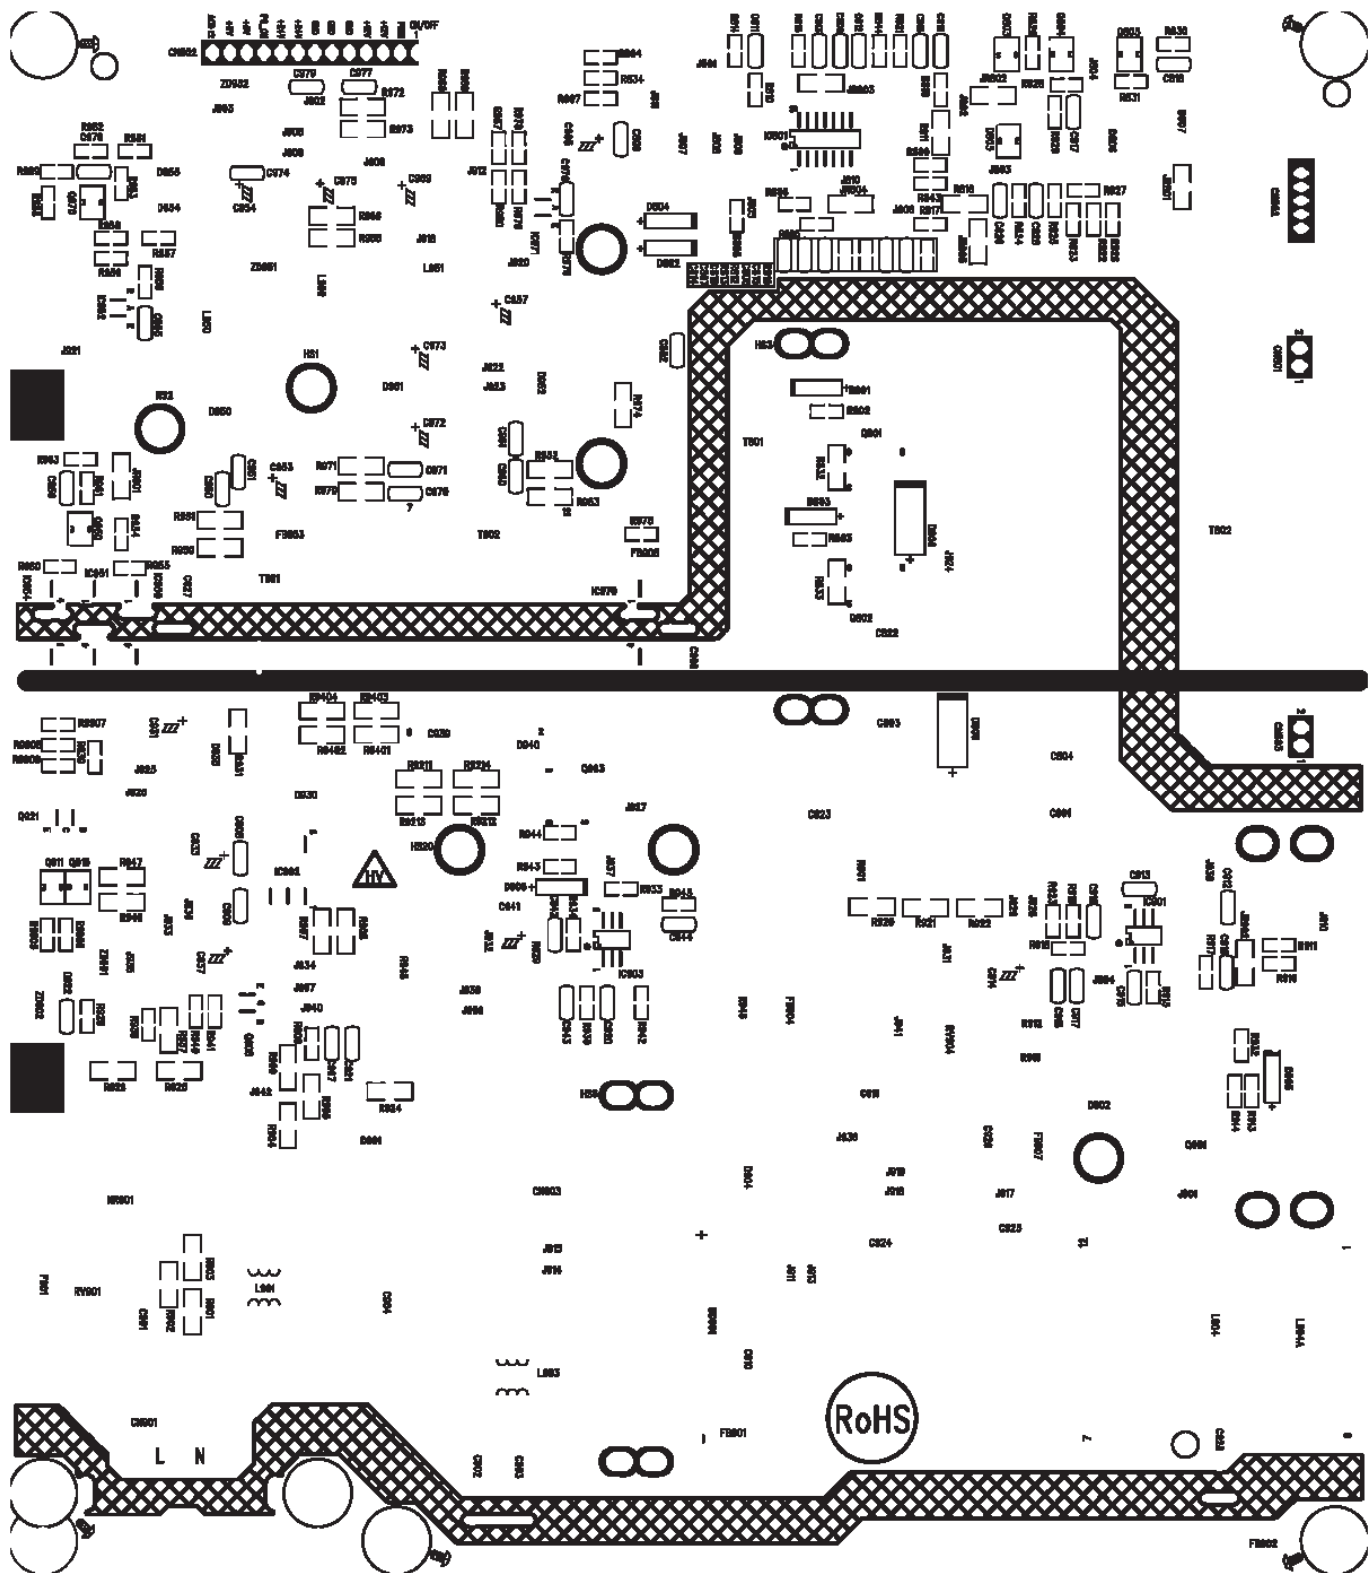


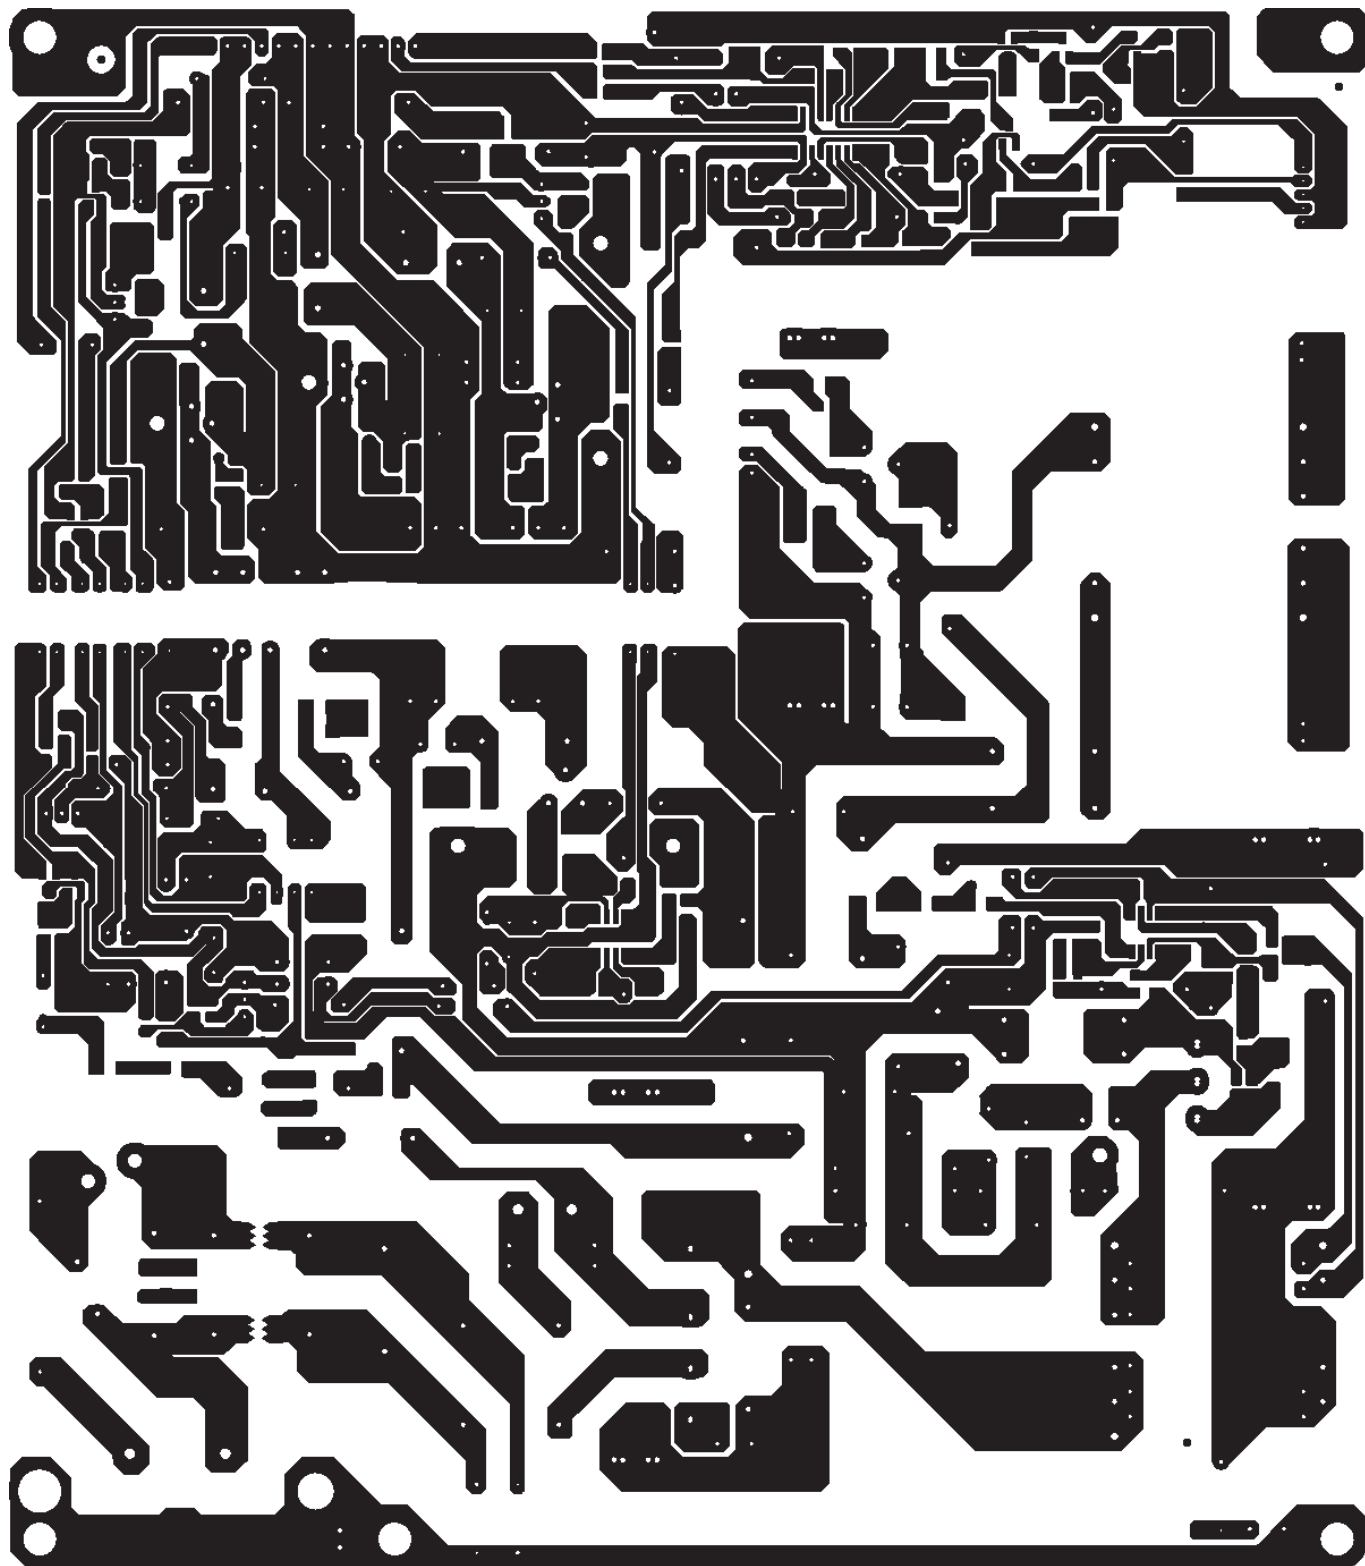


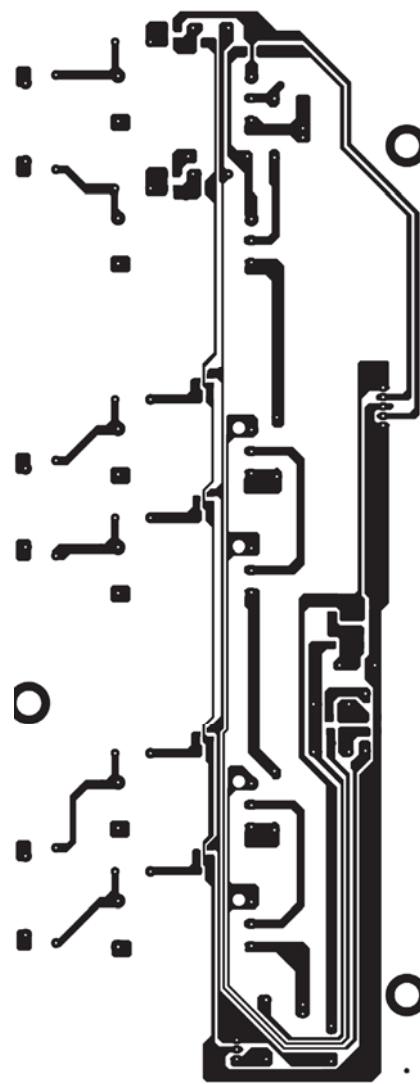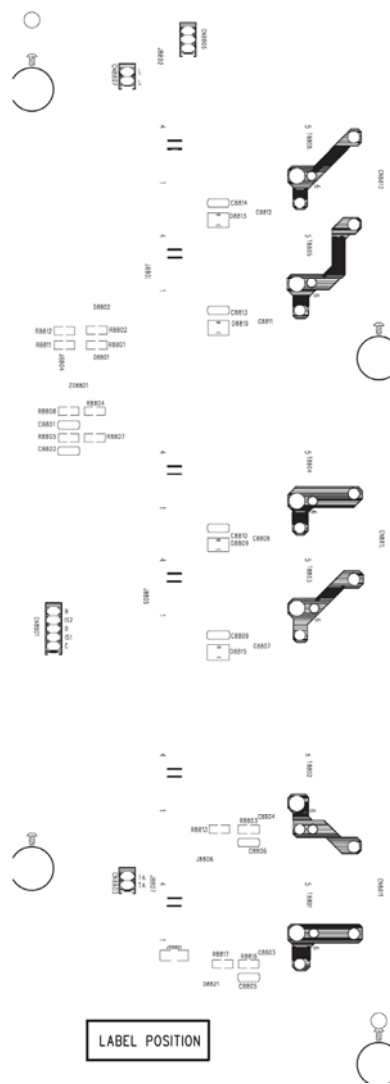


715G3967P01000003S

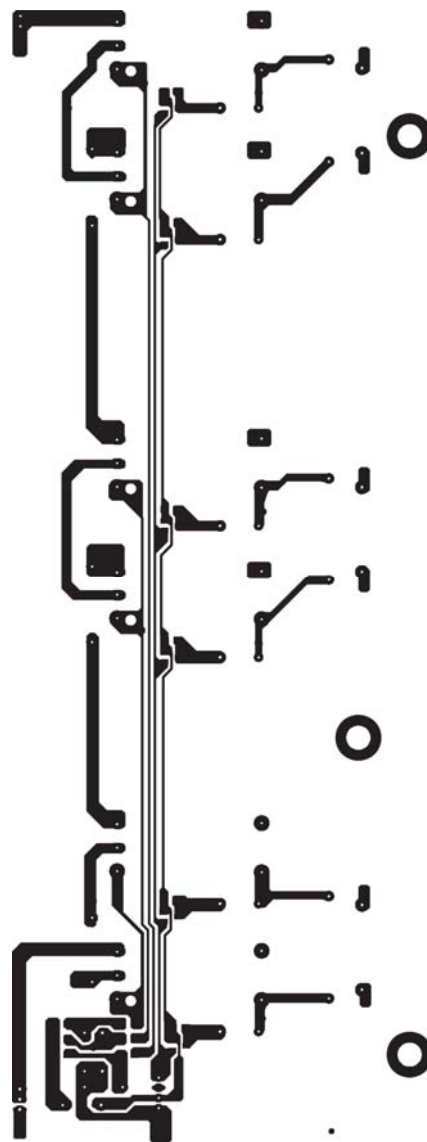
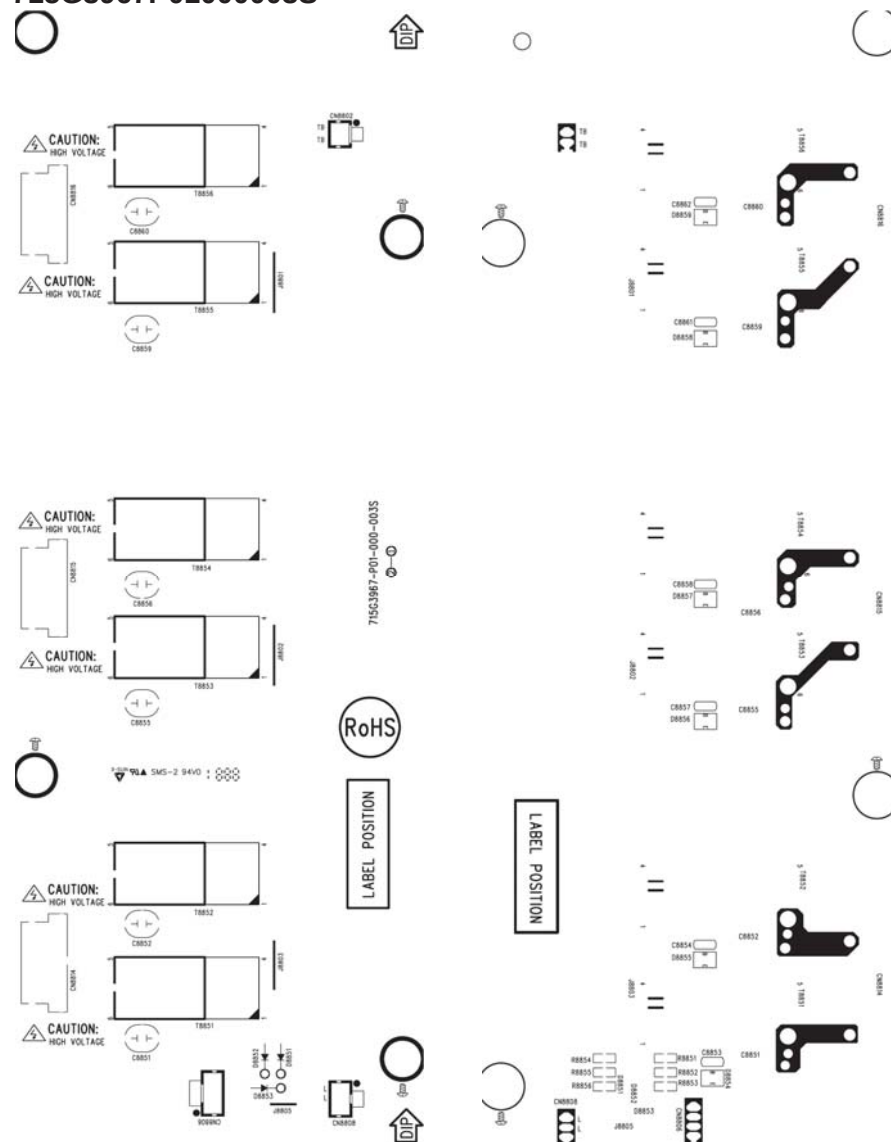


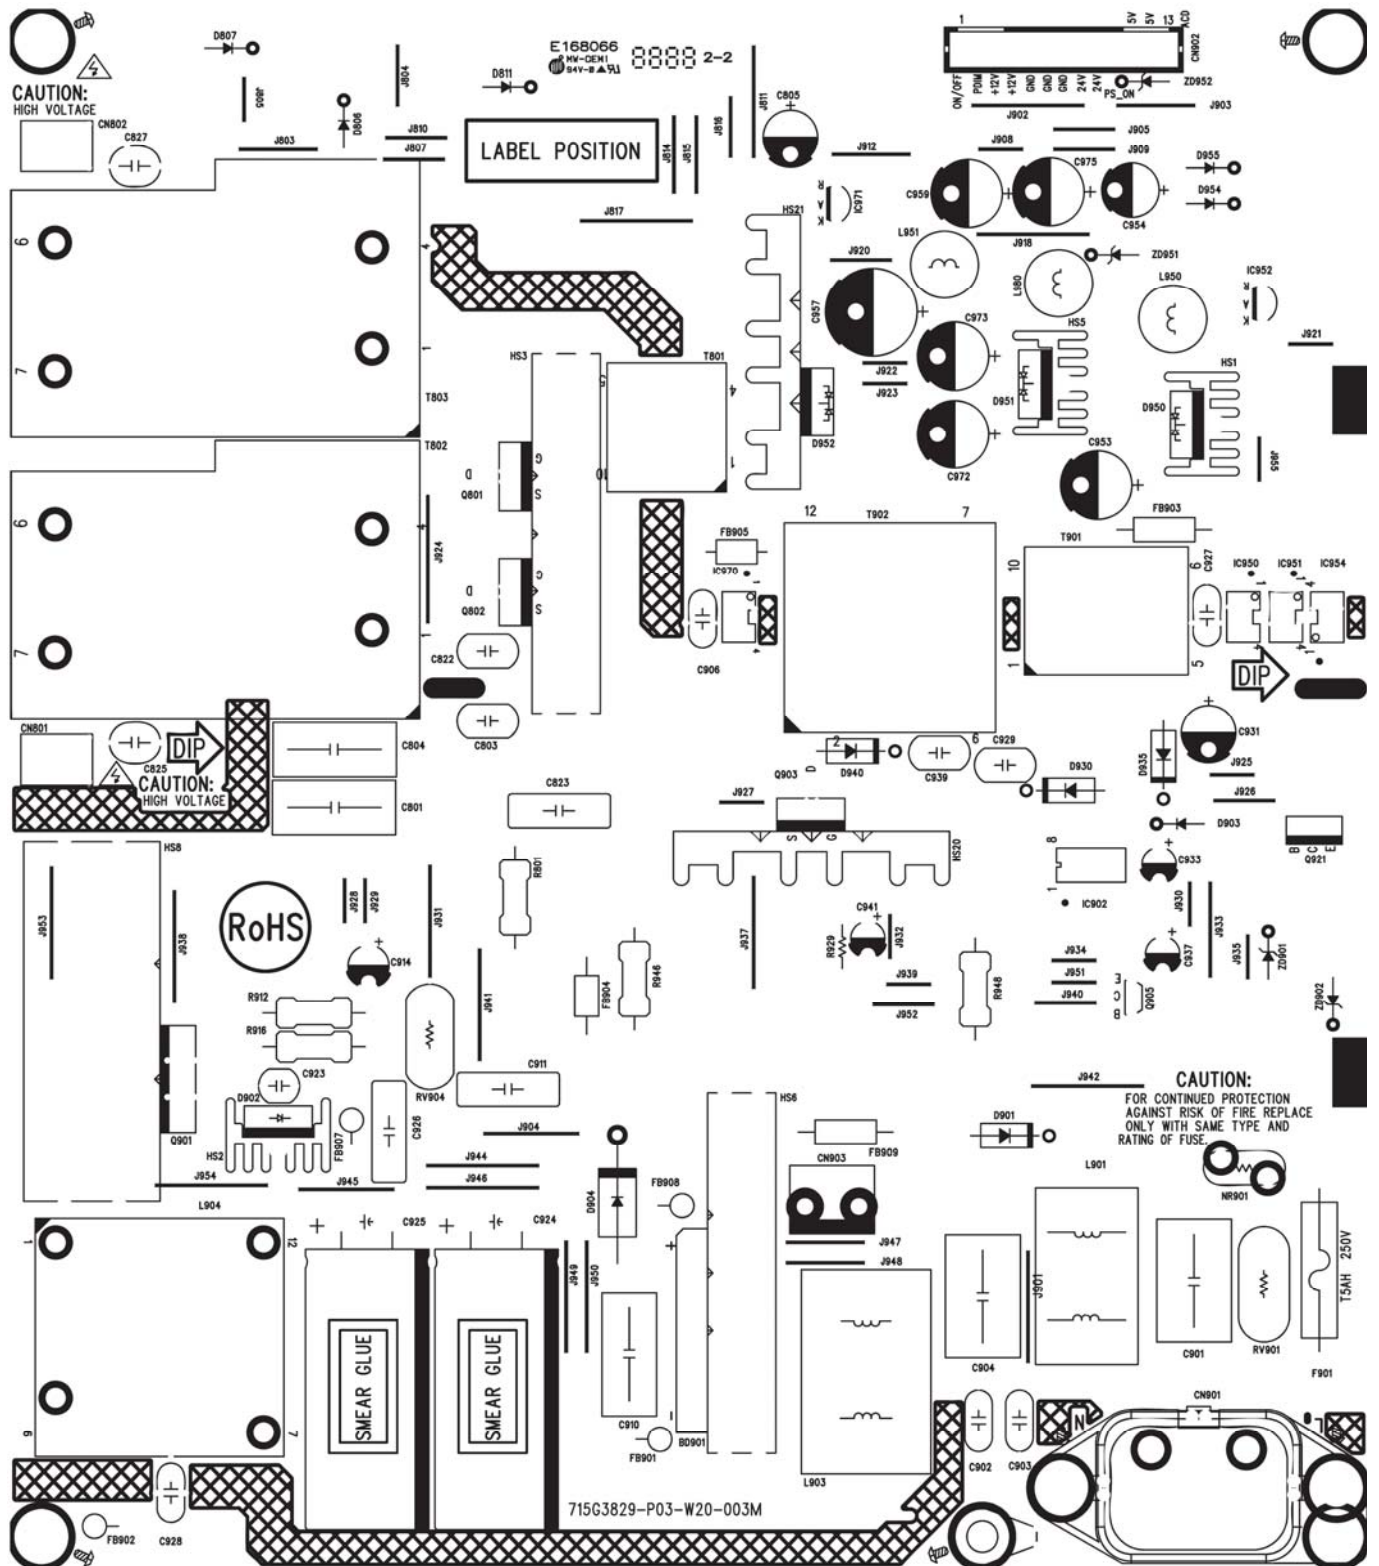


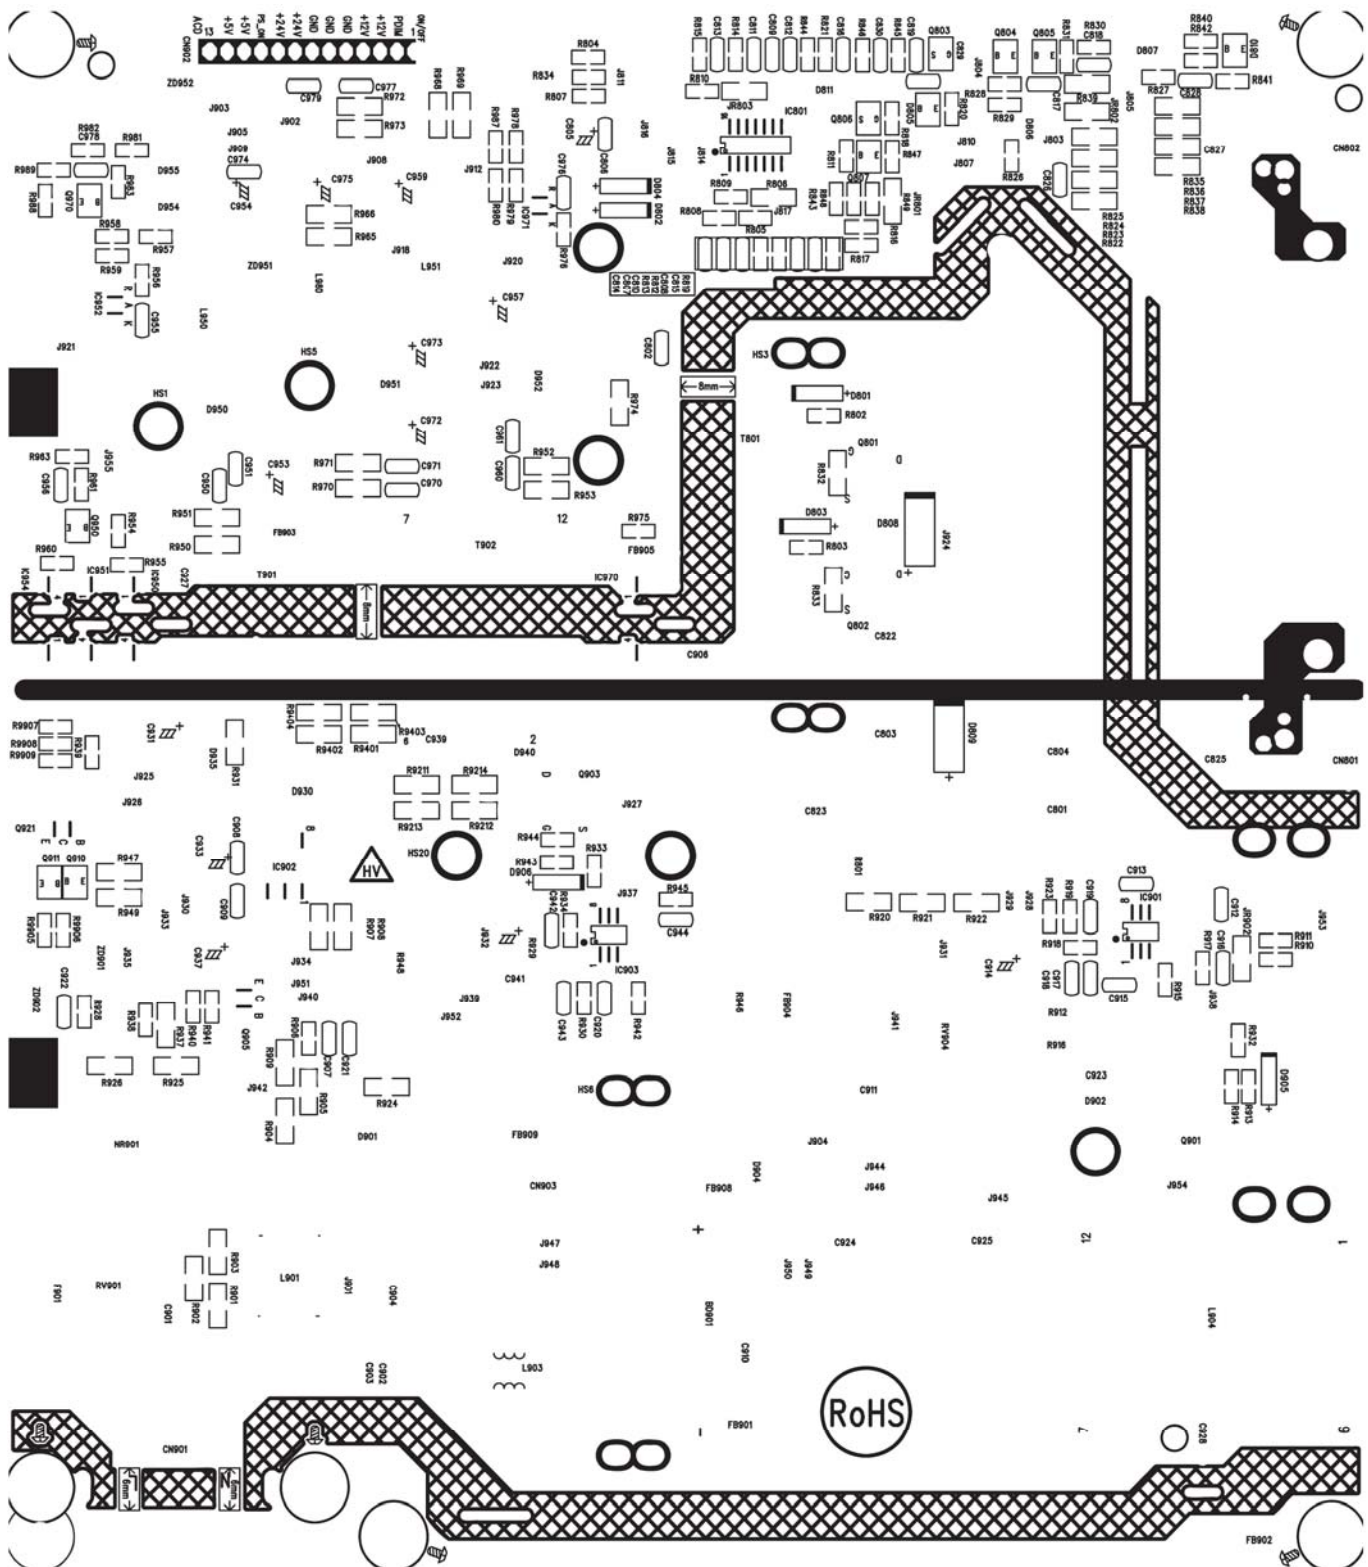


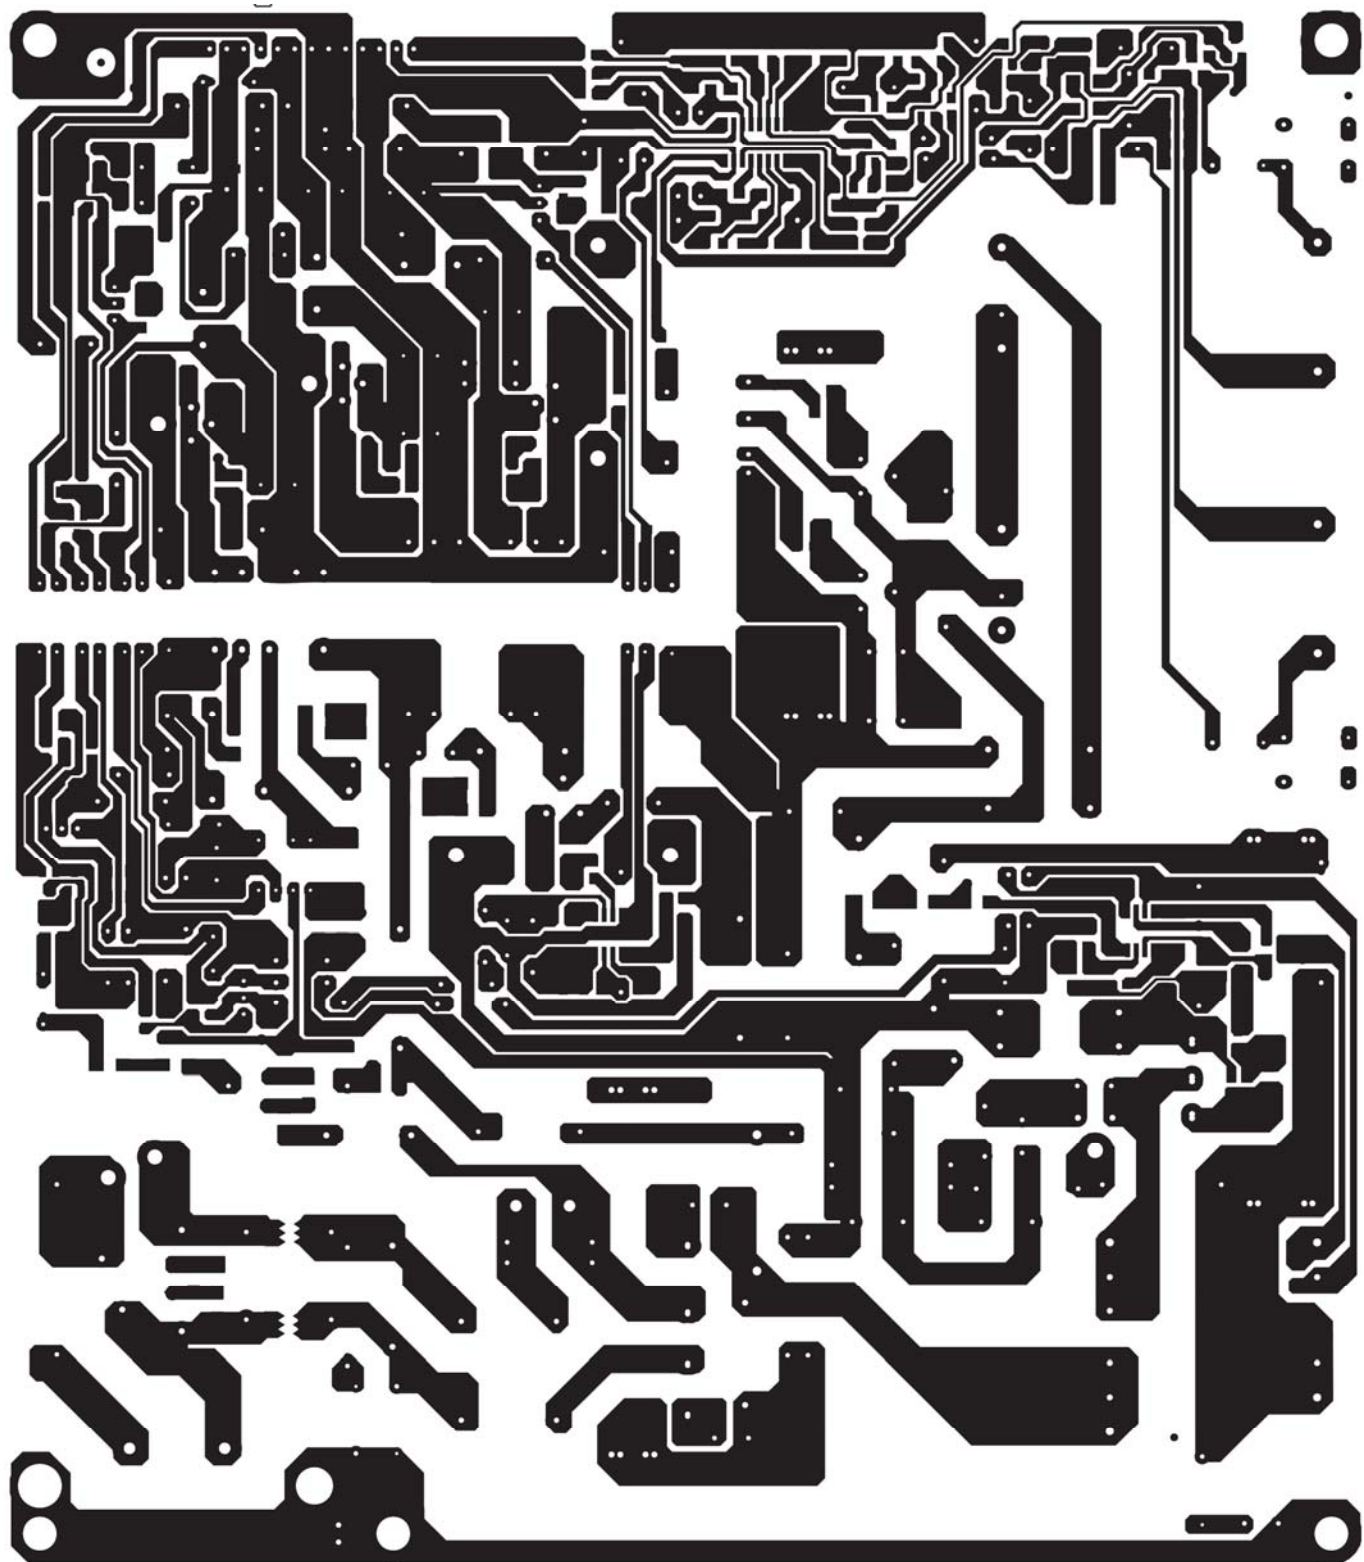

6.3 Key Board 715G3814K01004004S

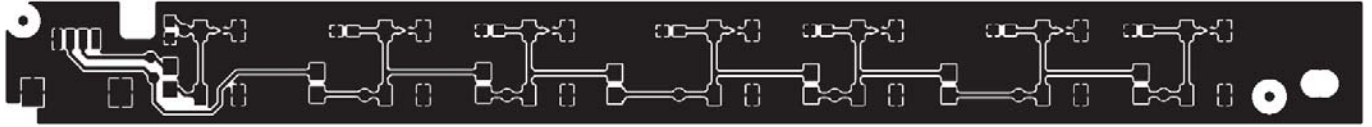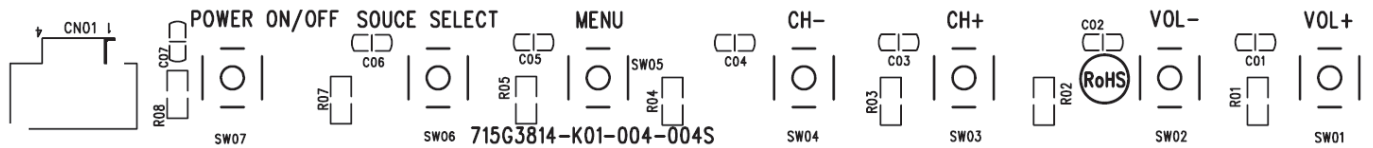

6.4 IR Board 715G3821R03000004M

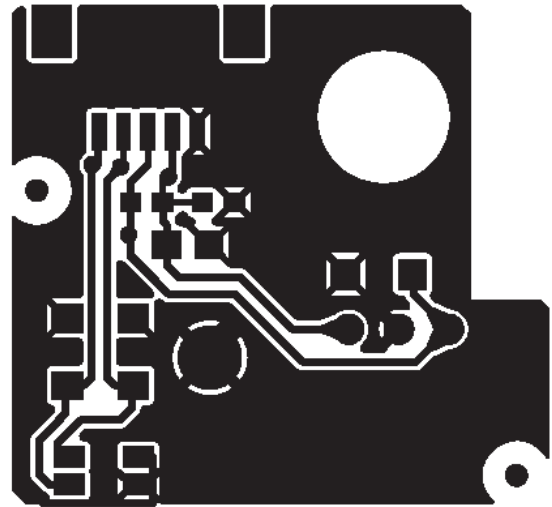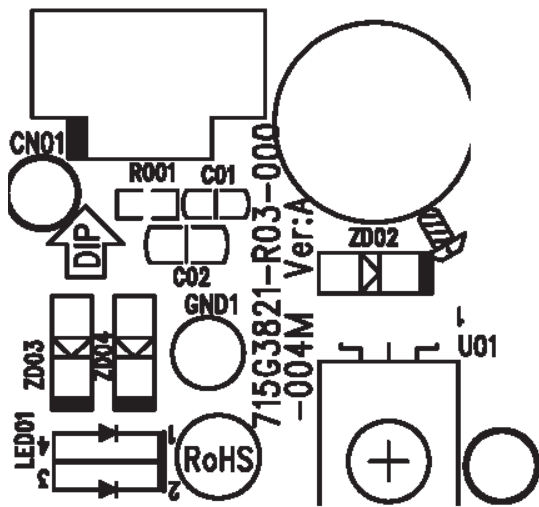

7. Adjustment

1. Factory Mode

In the TV mode adjust volume to zero, press menu key and then press number key 1 → 9 → 9 → 9. It will achieve the factory mode.

2. ADC Adjustment

In the TV mode adjust volume to zero, press menu key and then press number key 1 → 9 → 9 → 9. It will achieve the factory mode. Select the item of **White Balance** and press right key to enter it.


1. Change TV, press the item "Current Source" to Component mode and change signal to Component TIMING **311(576i/50Hz)Pattern 185(COLORBAR)**, press the item "Auto Color";
2. Change TV, press the item "Current Source" to Component mode and change signal to Component TIMING **314(720P/60Hz)Pattern 185(COLORBAR)**, press the item "Auto Color";
3. Change TV, press the item "Current Source" to PC mode and change signal to PC TIMING **137(1024X768)Pattern 42 (5 MOSAIC)**, press the item "Auto Color".

3. White Balance Adjustment

1. Enter into the factory mode:(same as the above-mentioned).
2. Take an example of adjust **Ypbpr** source.
 - a. Select item"Source": Ypbpr and item "Color Temp": **Normal**, Adjust gain of RGB to meet spec in the below setting of tim\pat. (COMPONENT mode: TIM = 314; PAT = 141(80IRE))
 - b. Select item"Source": Ypbpr and item "Color Temp":**Warm**, Adjust gain of RGB to meet spec in the below setting of tim\pat. (COMPONENT mode: TIM = 314; PAT = 141(80IRE))
 - c. Select item"Source": Ypbpr and item "Color Temp": **Cool**, Adjust gain of RGB to meet spec in the below setting of tim\pat. (COMPONENT mode: TIM = 314; PAT = 141(80IRE))
3. Take an example of adjust **VGA**_Normal:
 - a. Select item"Source": Ypbpr and item "Color Temp": **Normal**, Adjust gain of RGB to meet spec in the below setting of tim\pat. (VGA mode: TIM = 137; PAT = 141(80IRE))
 - b. Select item"Source": Ypbpr and item "Color Temp": **Warm**, Adjust gain of RGB to meet spec in the below setting of tim\pat. (VGA mode: TIM = 137; PAT = 141(80IRE))
 - c. Select item"Source": Ypbpr and item "Color Temp": **Cool**, Adjust gain of RGB to meet spec in the below setting of tim\pat. (VGA mode: TIM = 137; PAT = 141(80IRE))

Source	VGA/YPbPr	VGA/YPbPr	VGA/YPbPr
Temp	Normal/(7500°K)	Warm/(6500°K)	Cool/(9300°K)
x (center)	0.285 ± 0.020	0.313 ± 0.020	0.272 ± 0.020
y (center)	0.293 ± 0.020	0.329 ± 0.020	0.278 ± 0.020




8. Block Diagram

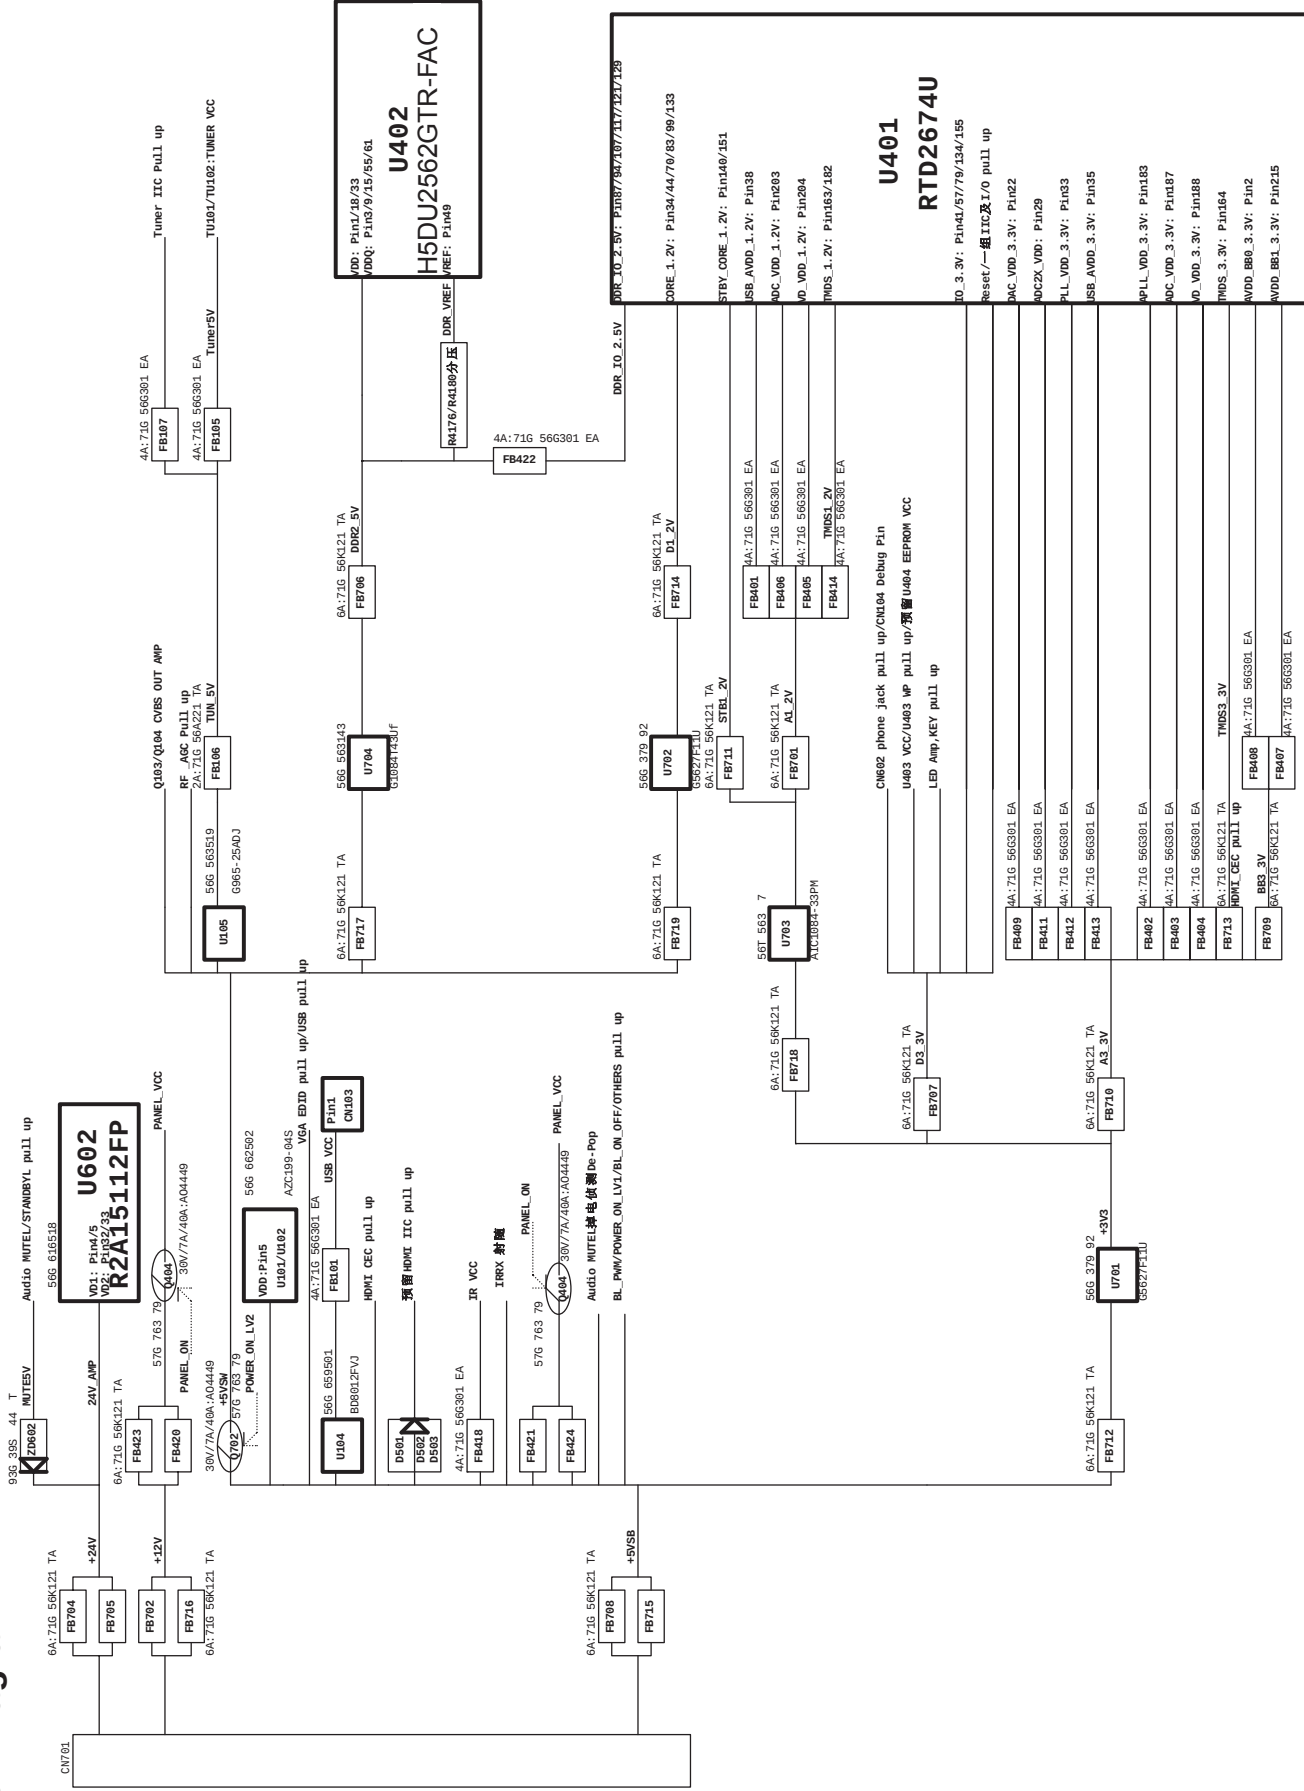

9. Schematic Diagram





9.1 Main Board

715G3934M04000004F

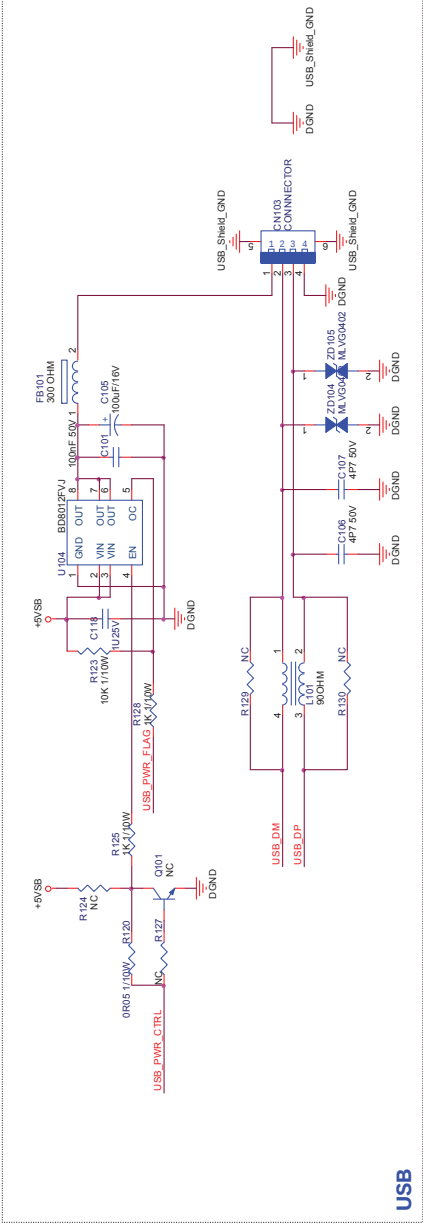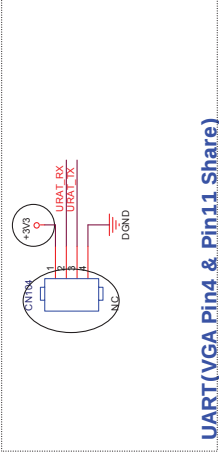
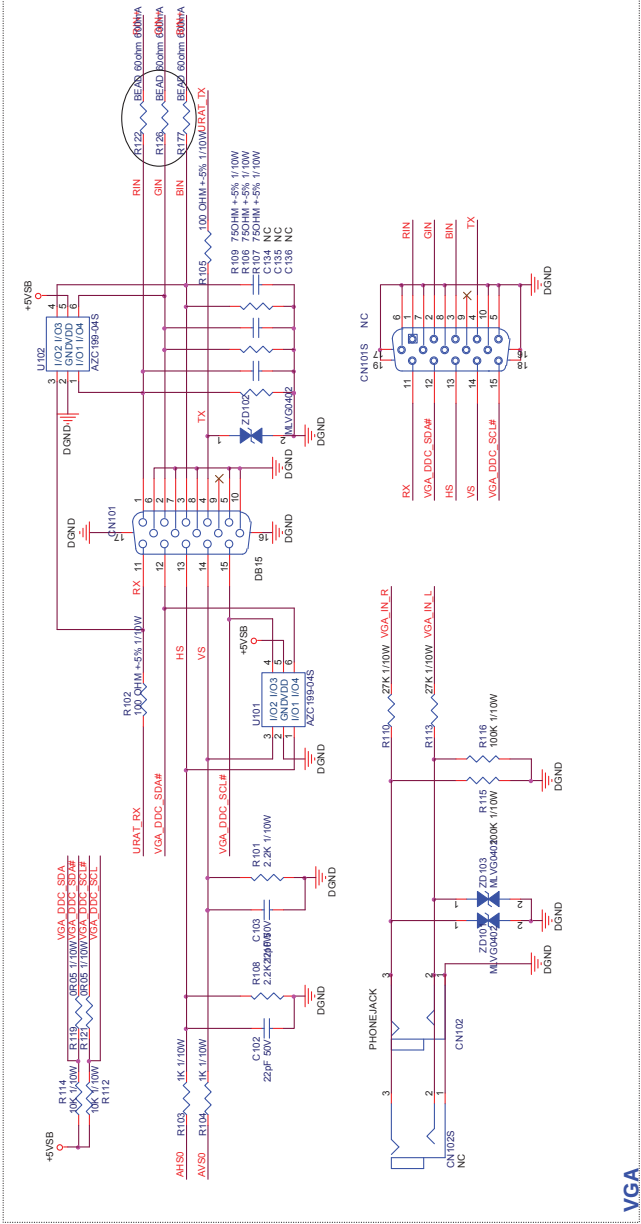


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Size	A3
威盛电子	TPV MODEL	Rev	A
Rev Component	PCB NAME	Rev	<前>
715G3934M040000040	Sheet	1 of 9	



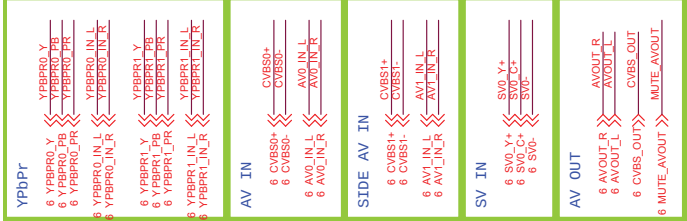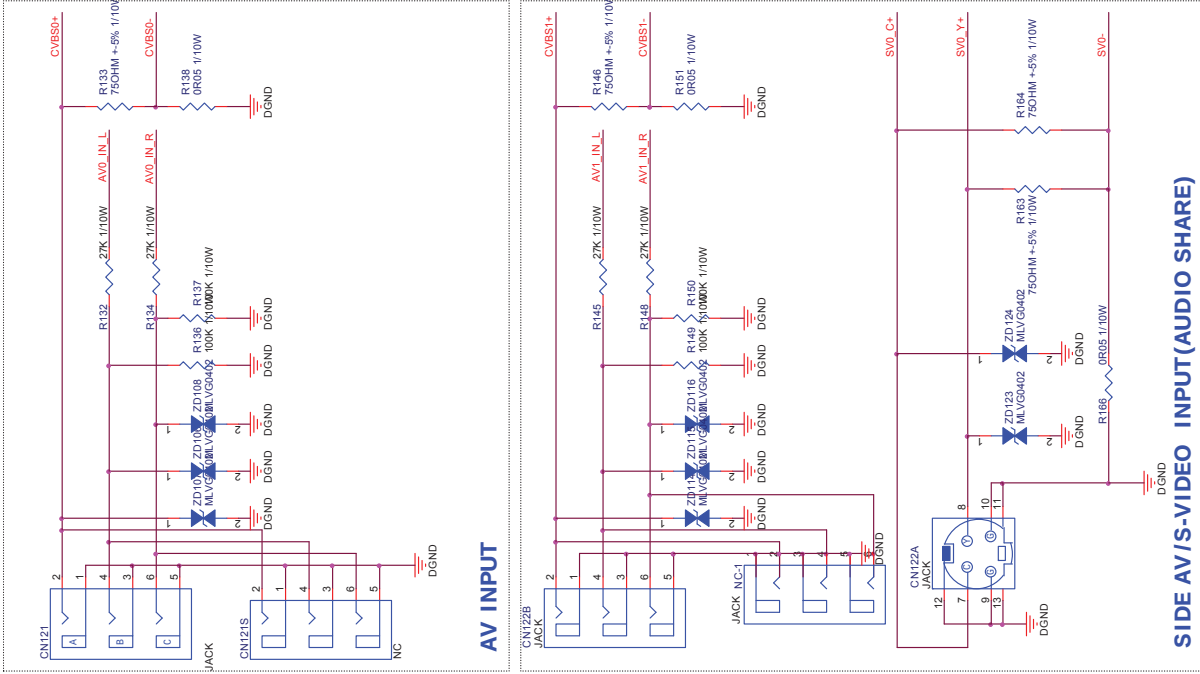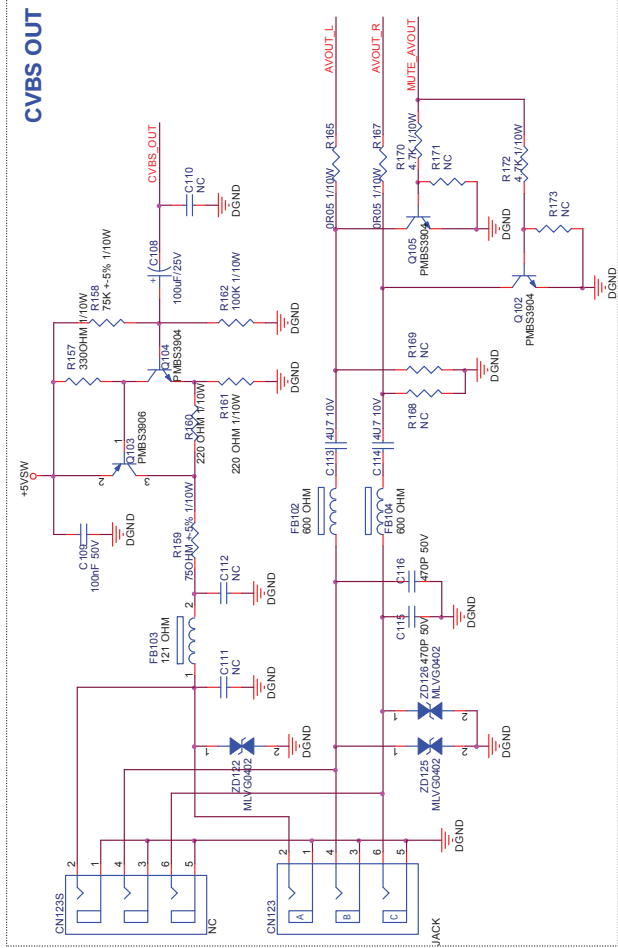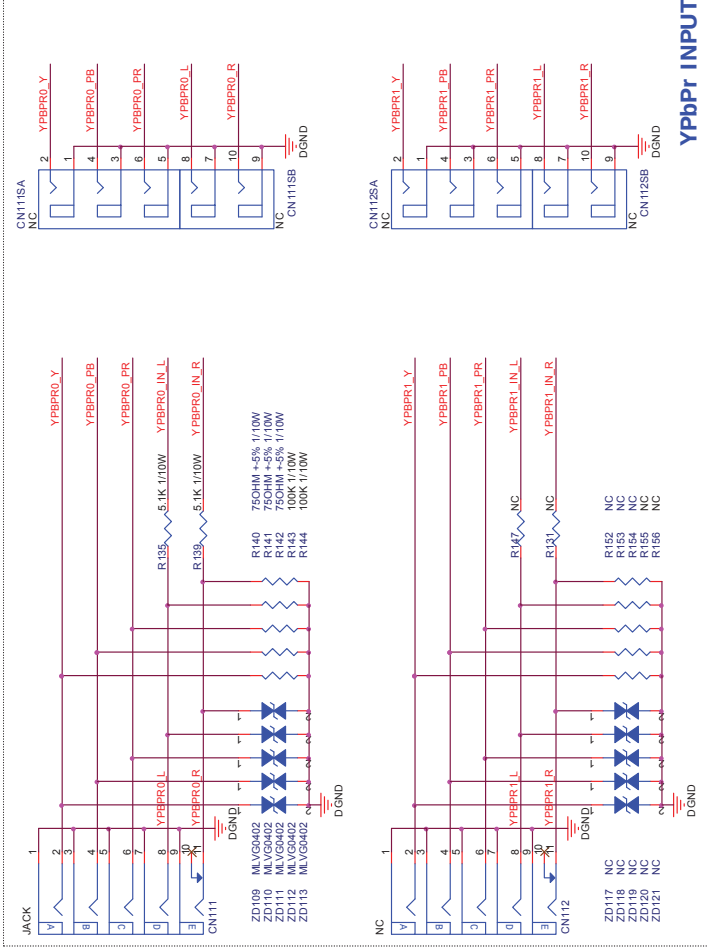




TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Size	A3
昆明瓦甸路	TPV MODEL	Rev	A
Key Component	G3834-D-X-1-100325	PCB NAME	715G3834-0A0000040
Date	Wednesday, March 24, 2010	Sheet	2 of 9

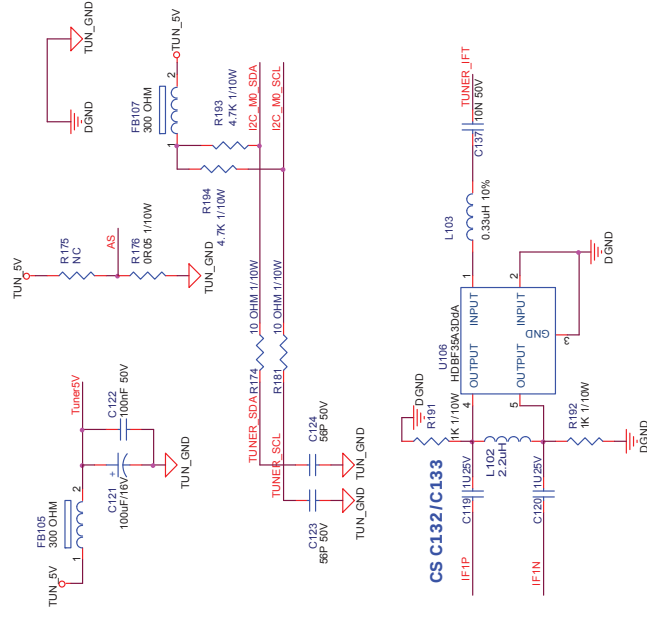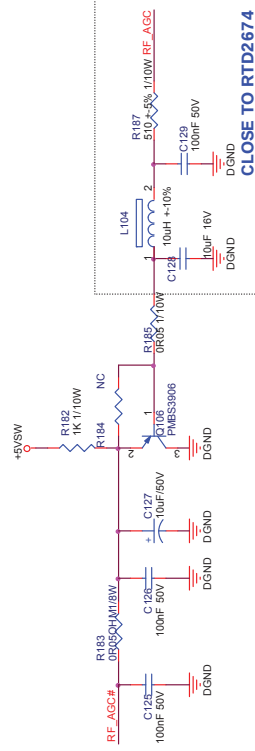69



MHDMI (HDMI MUX)








HDMI2

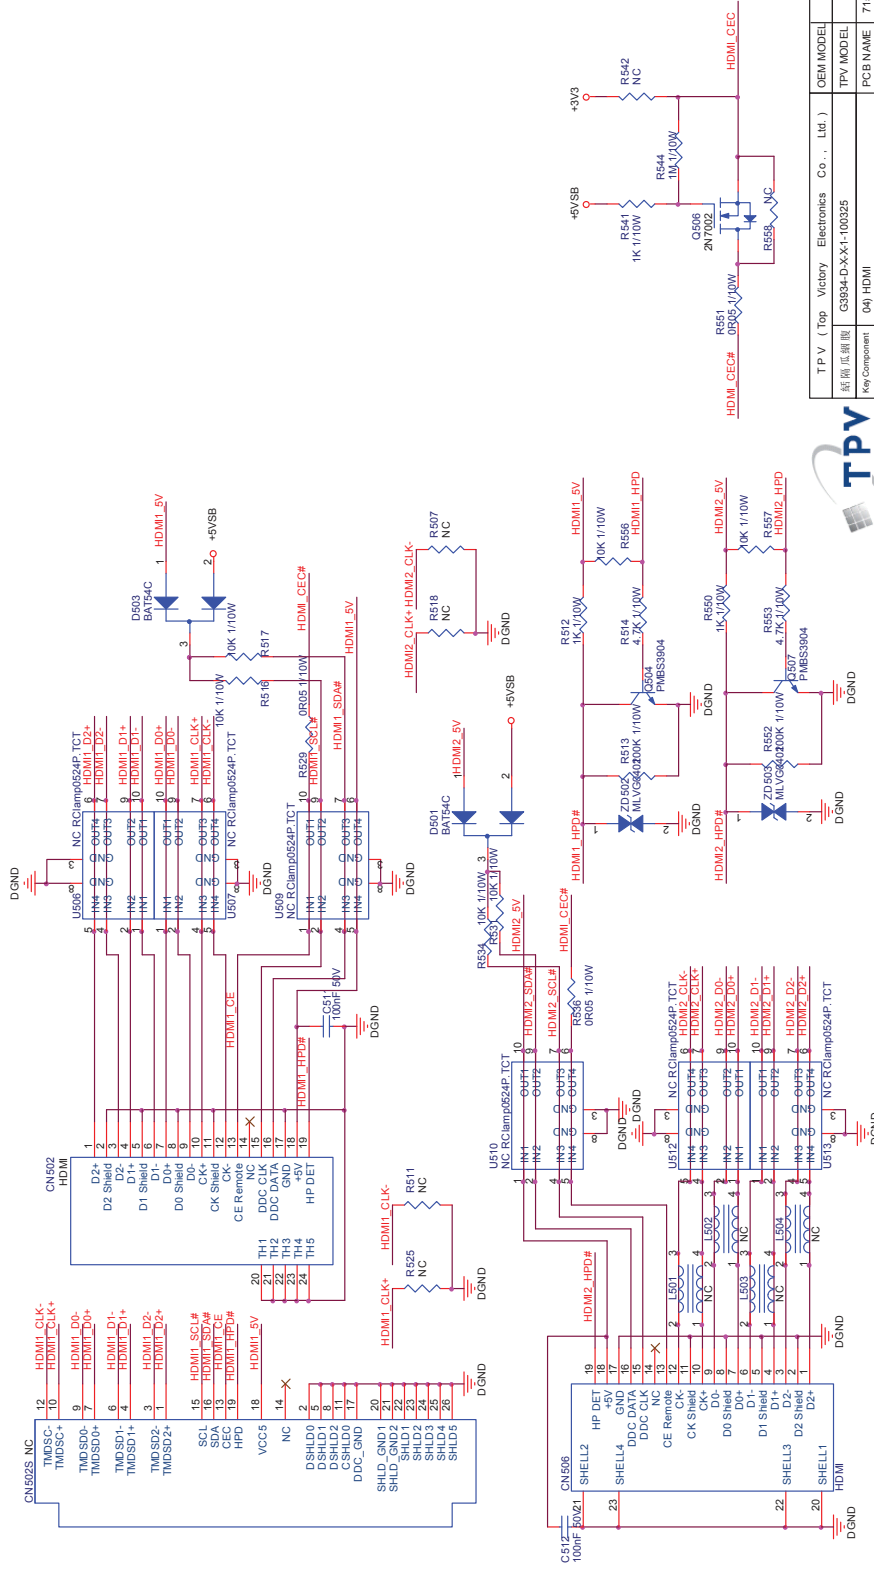


TPV (Top Victory Electronics Co., Ltd.)	TPV MODEL	Size	A3
新開瓜鎮	G3984-D-X-1-100325	Rev	A
Key Component	04) HDMI	PCE NAME	715C394DA0000040
Date	Wednesday, March 24, 2010	Sheet	4 of 9

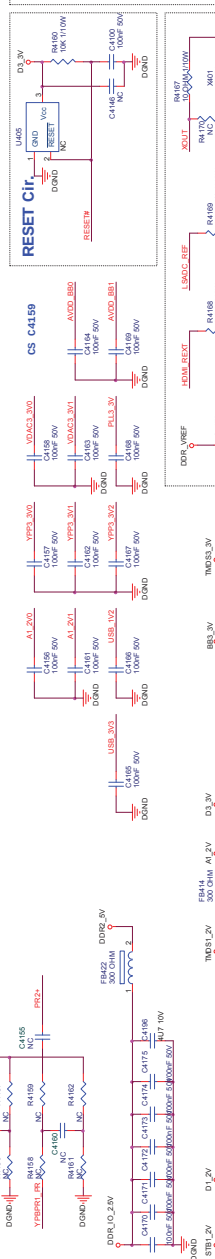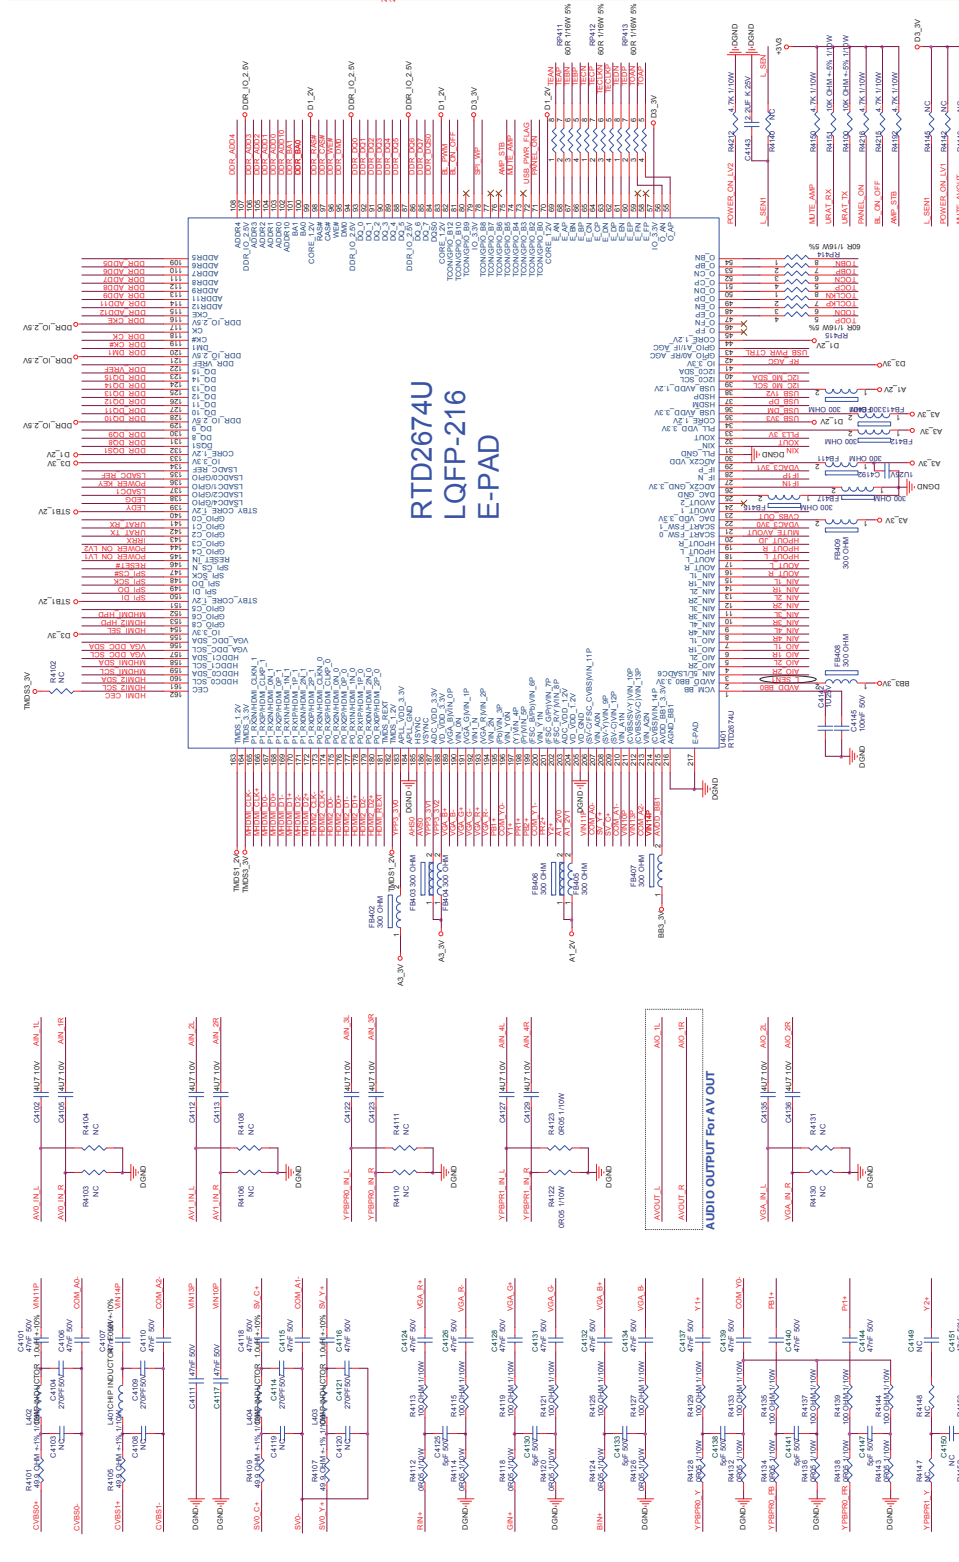[illegible]

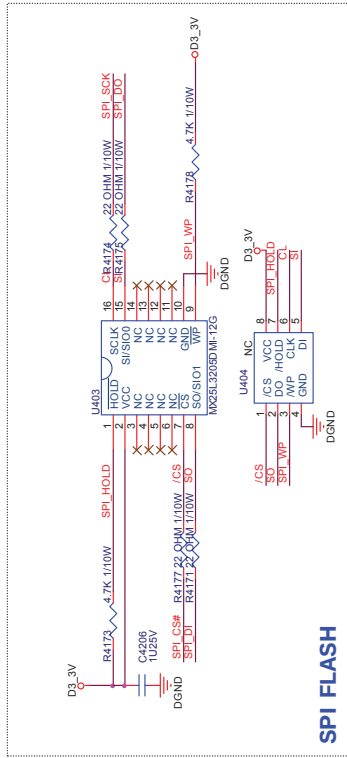

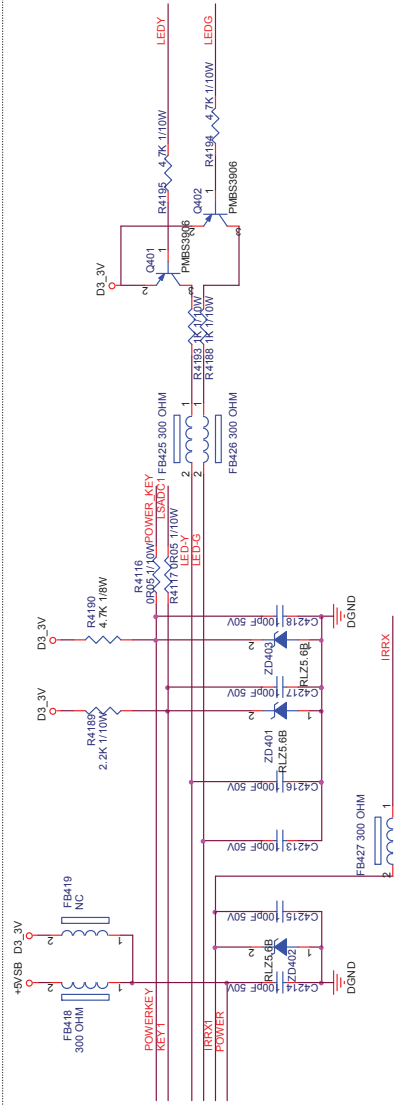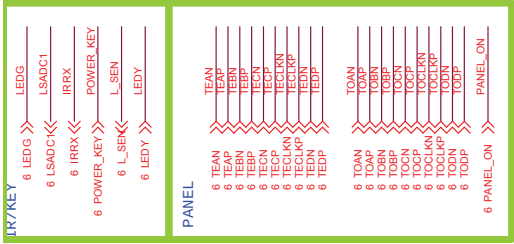



IR & KEYPAD CONNECTOR

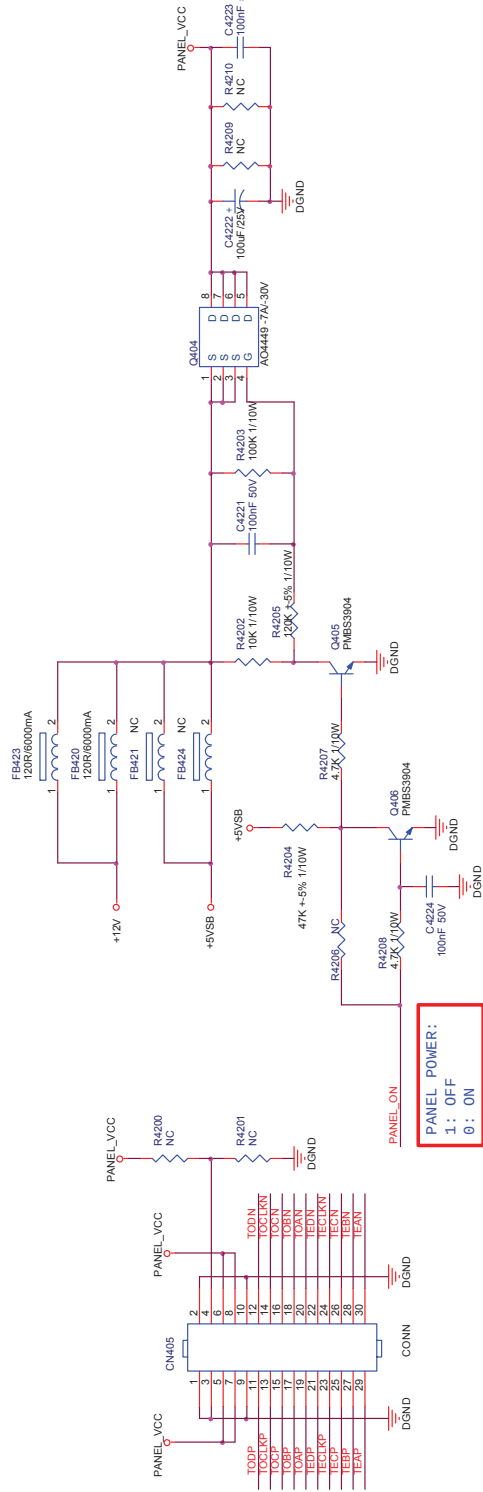





LVDS




TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Size	A3
新南瓜網膜	TPV MODEL	Rev	A
Key Component: 07) LVDS/IR/KEY	PCB NAME	Rev	
Date: Wednesday, March 24, 2010	Sheet	Rev	
	7 of 9	Rev	

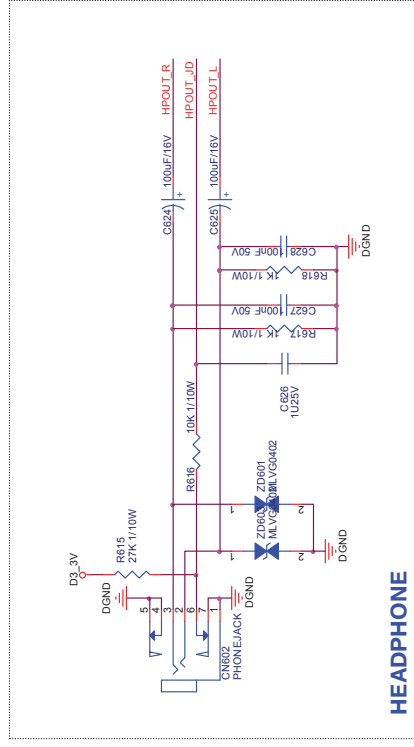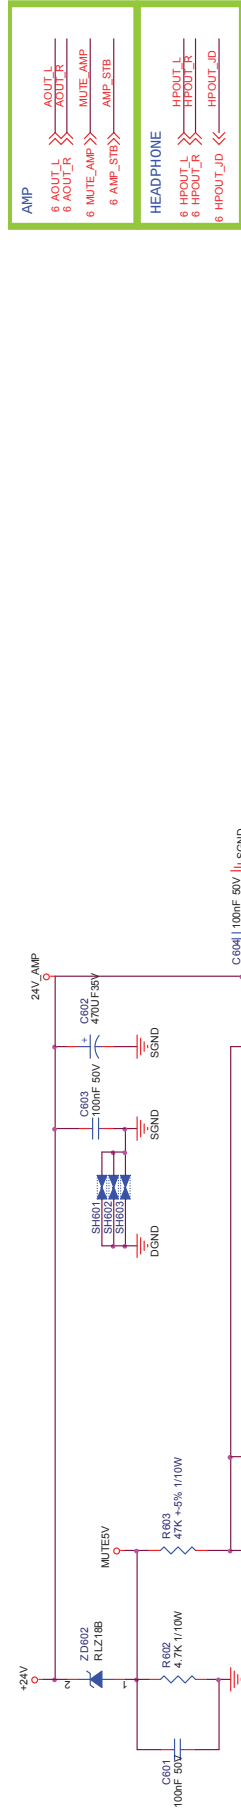


括弧内編號	TP V (Top	Victory Electronics Co., Ltd.)	OEM MODEL	Size	A3
Key Component	08/ AMP/HP	G884-D-XX-1-10025	TPV MODEL	Rev	A
Part No.	March 24, 2010		PCB NAME	数量	
	Sheet	8 of 0			

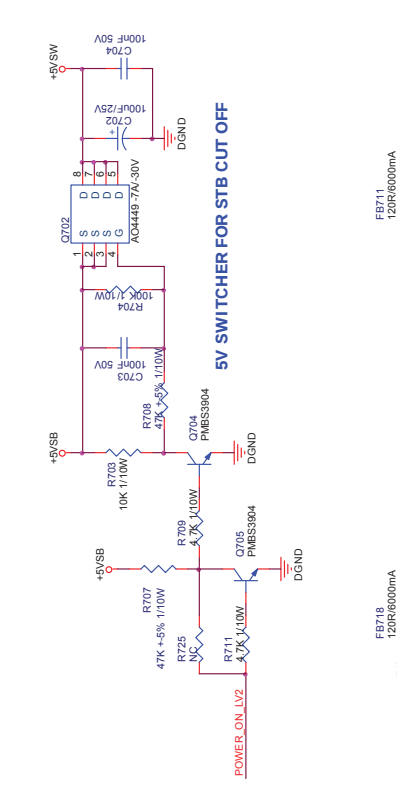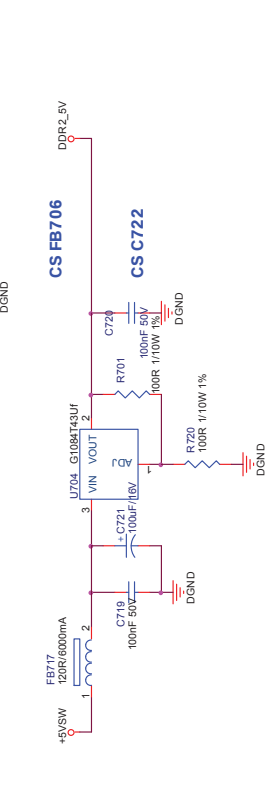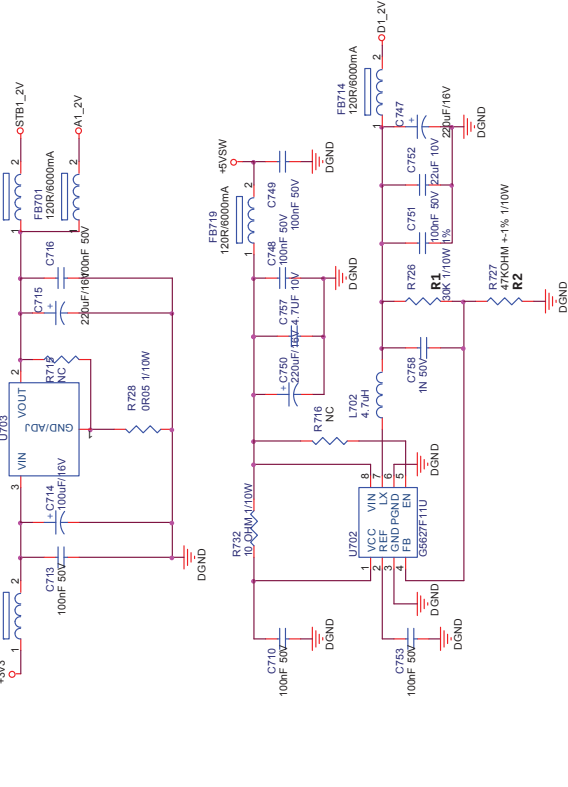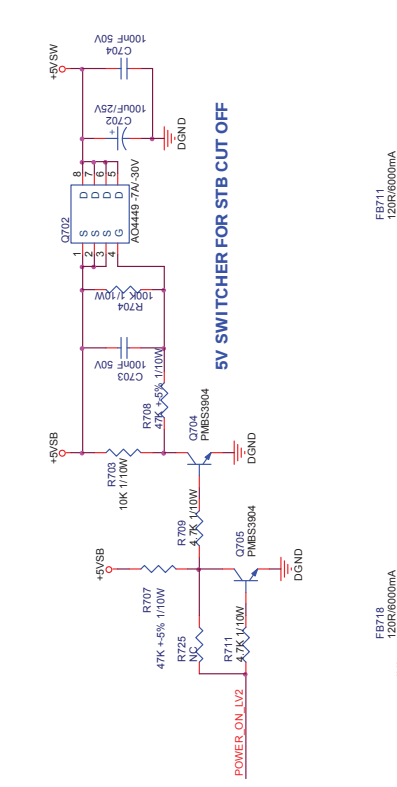

LC32W033M Power 715G3811P02H20003S





T.P.V. (Top Velocity Electronics Co., Ltd.)		QEM4000L	Size	Custom
規格品名稱		SPV MODEL	Rev	1.0
Part description		PCB NAME	数量	
Date	Wednesday, March 24, 2010	Sheet	1 of 2	<1/2>

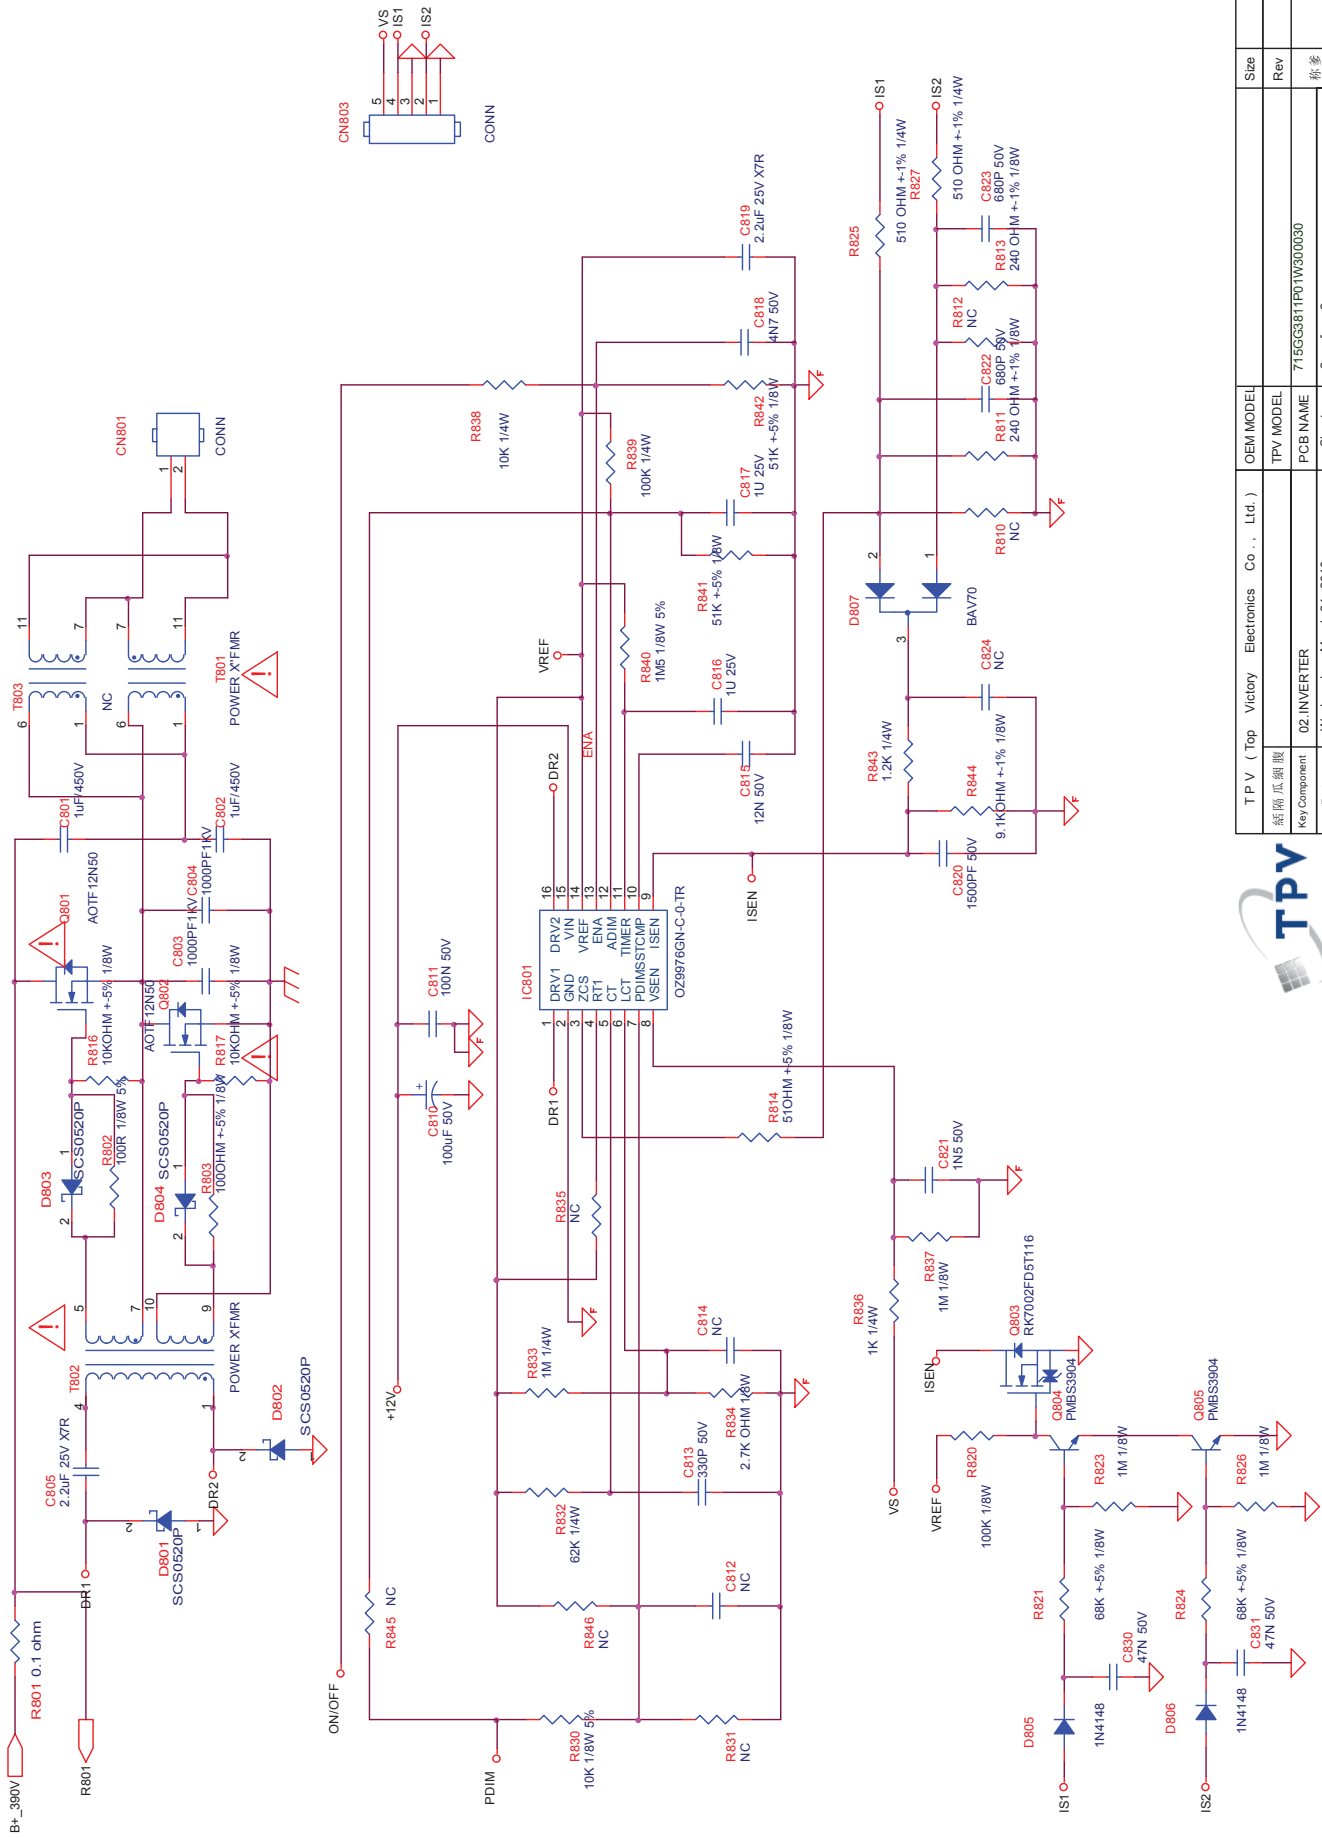


TPV (Top Victory Electronics Co., Ltd.)		OEM MODEL	Size	B
結構 瓜 細 腹		TPV MODEL	Rev	1.0
Key Component		PCB NAME	715GG3811P01W300030	
Date	Wednesday, March 24, 2010	Sheet	2 of 2	新 案


Inverter 715G3652P020000003S

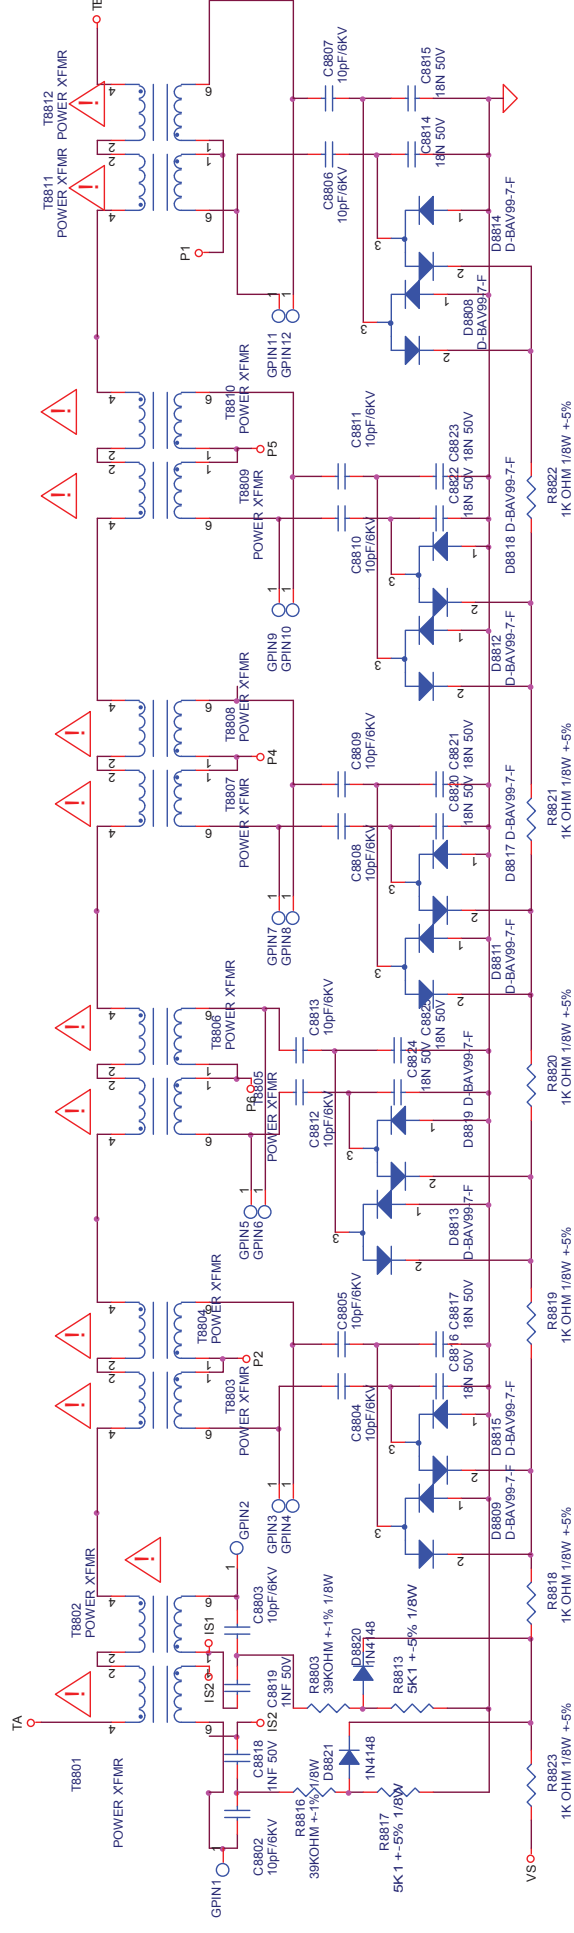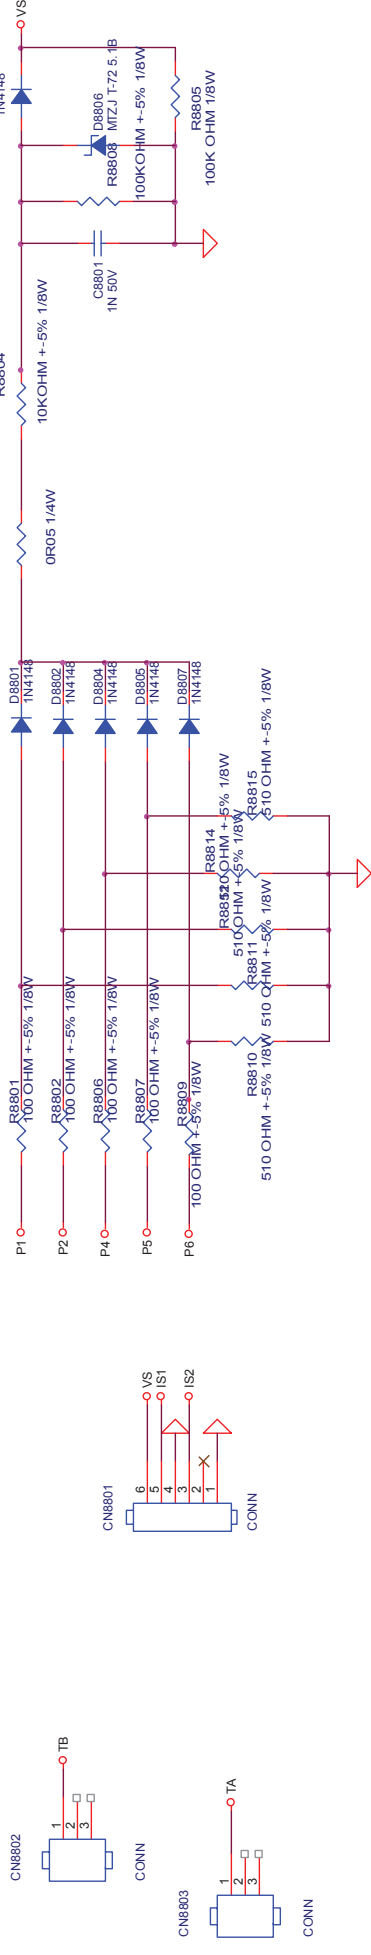

LC42H03M Power 715G3760P01W20003M

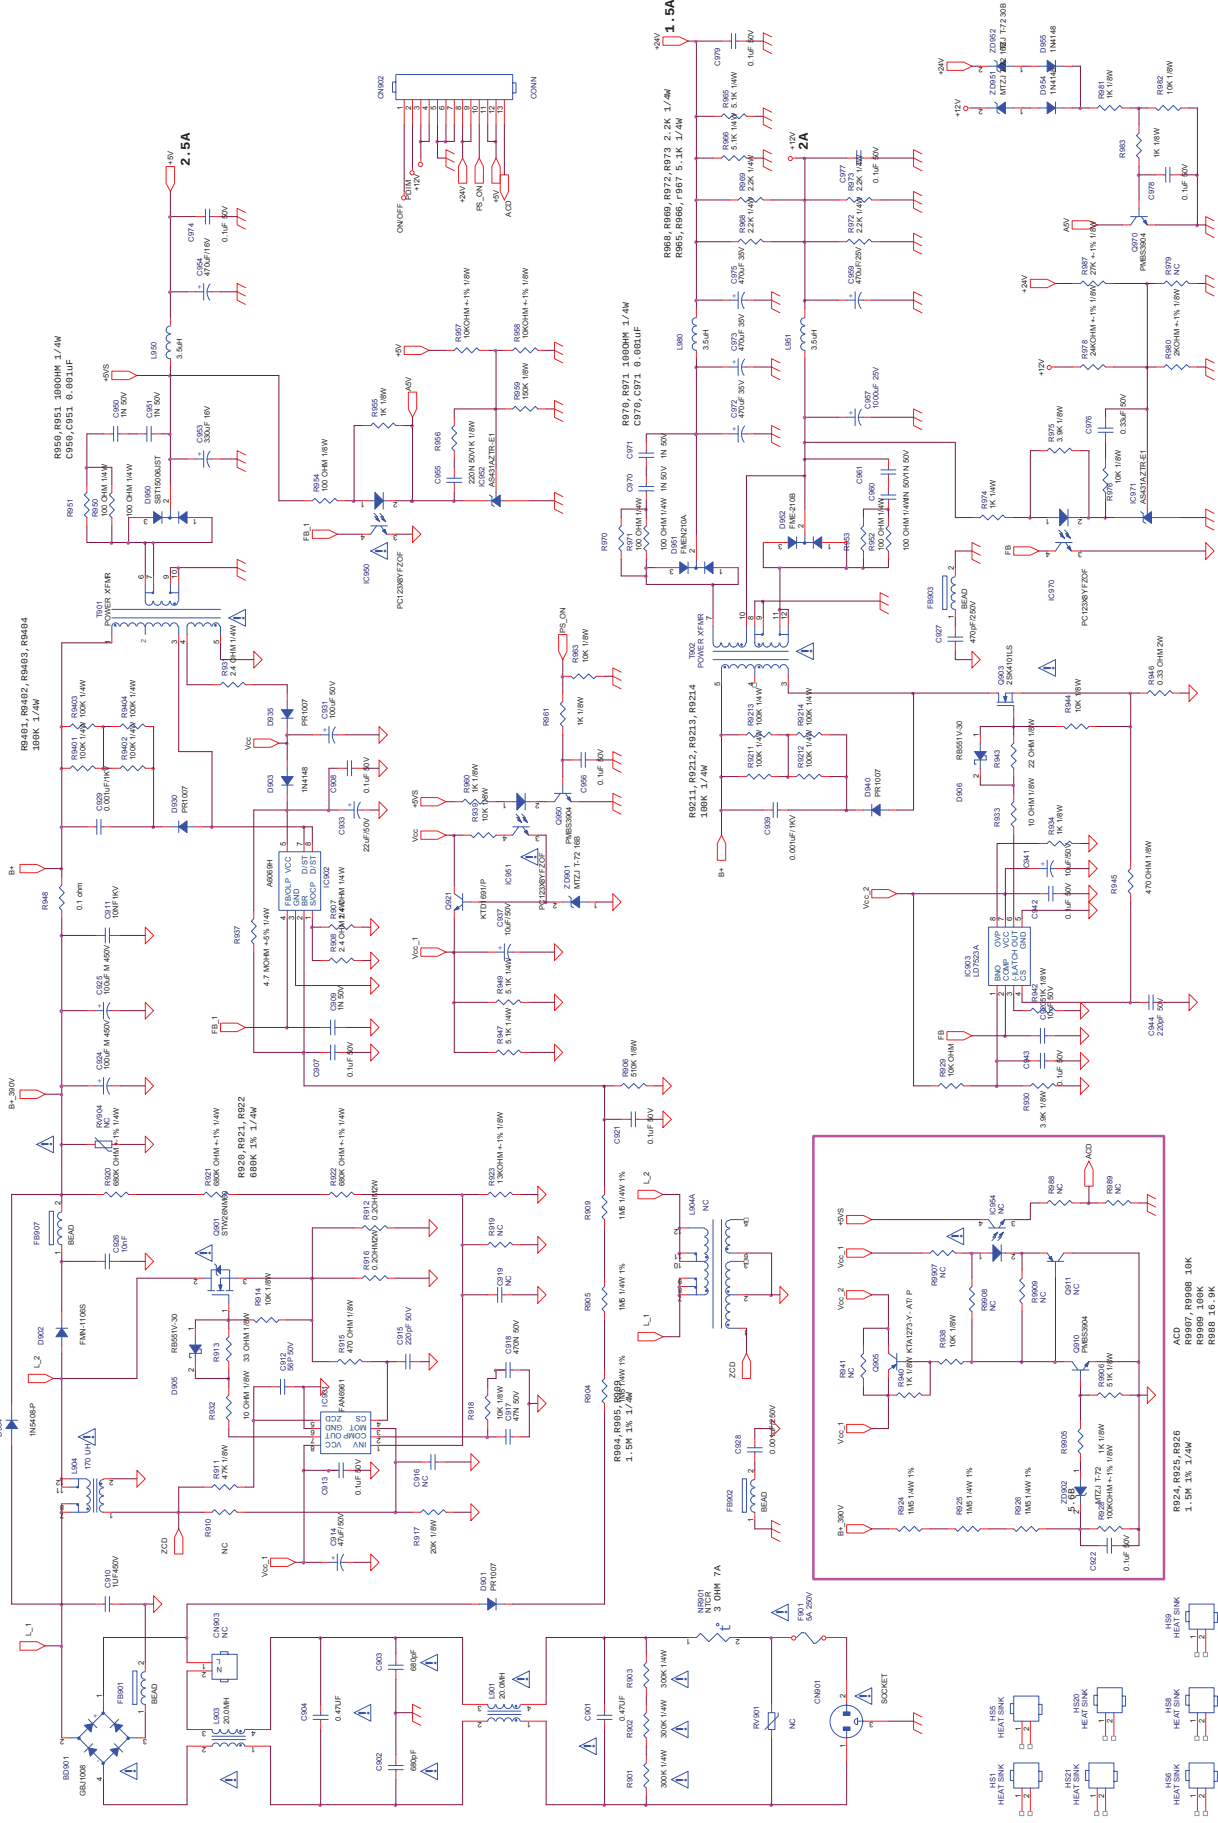


TPV (Top Victory Electronics Co., Ltd.)		OEM MODEL	Size	Custom
威爾士電腦		TPV MODEL	Rev	D
Key Component	01 POWER	PCB NAME		
Date	Monday, March 01, 2010	Sheet	1 of 2	OEM MODEL

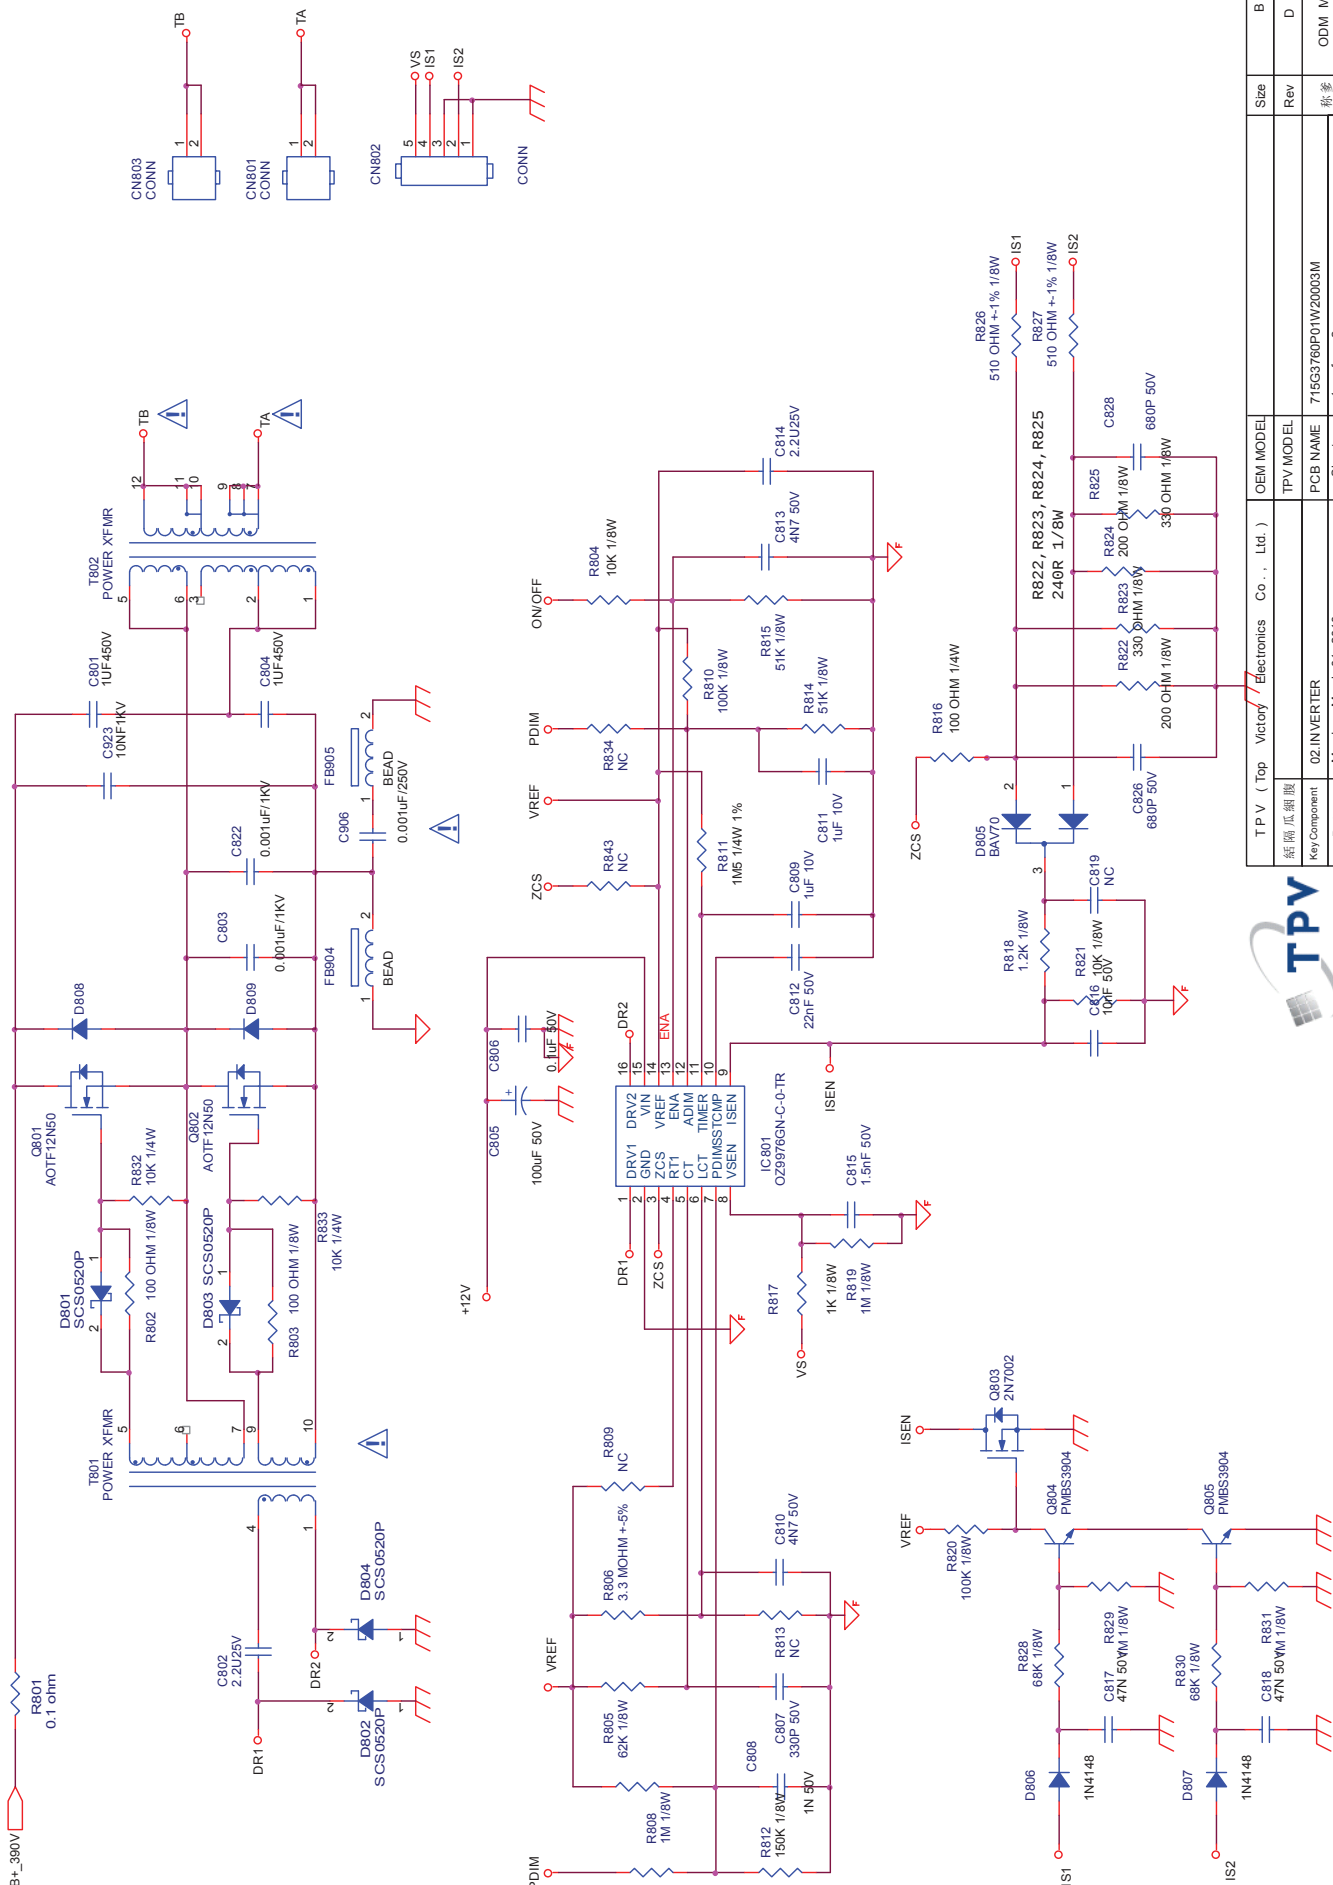

TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Size	B
結隔瓜網酸	TPV MODEL	Rev	D
Key Component	PCB NAME	稱參	ODM MODEL
Date	02 INVERTER Monday, March 01, 2010	715G3760P01W20003M	
	Sheet	1 of 2	



Inverter 715G3966P01000003H

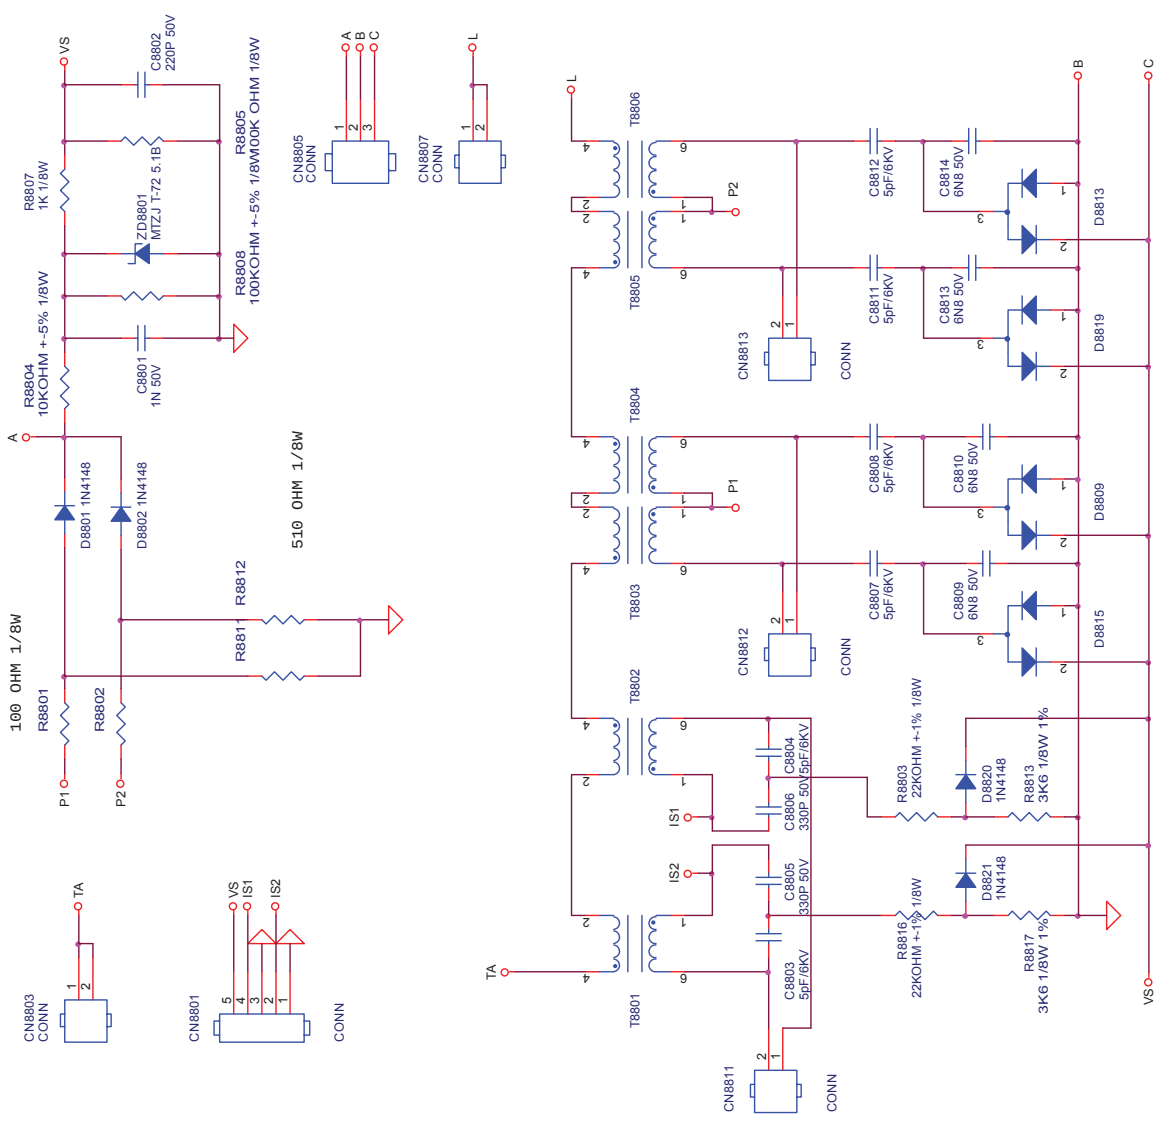


BAV99




TPV (Top Victory Electronics Co., Ltd.)		OEM MODEL		Size	B
越南瓜拉庇		TPV MODEL		Rev	C
Key Component		PCB NAME		715G3966P01000003H	BBY MODEL
Date	Wednesday, November 11, 2009	Sheet	1 of 1		

LC42H033M

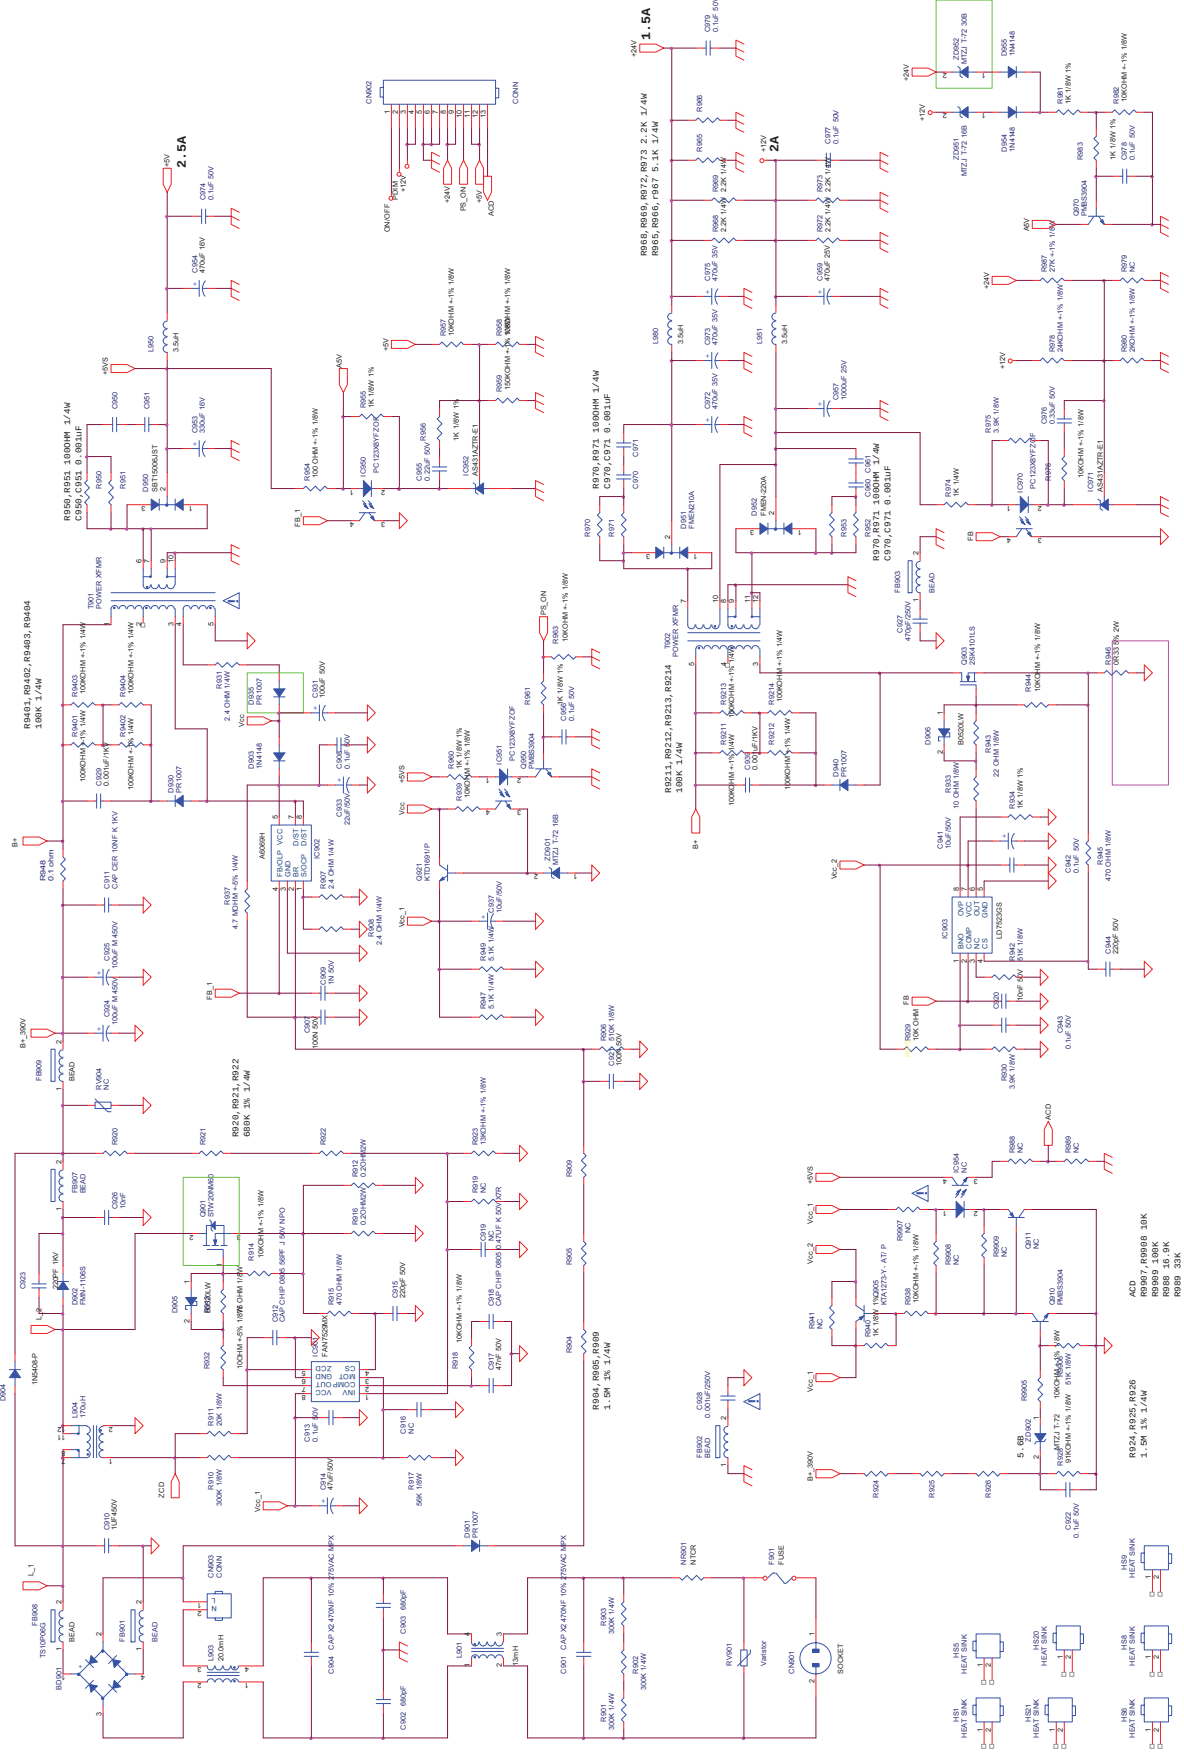


Title <Title>			
Size	Document Number	Rev	
	COMPWIV1VDEZ040	C	
Date:	Monday, October 24, 2011	Sheet	1 of 4

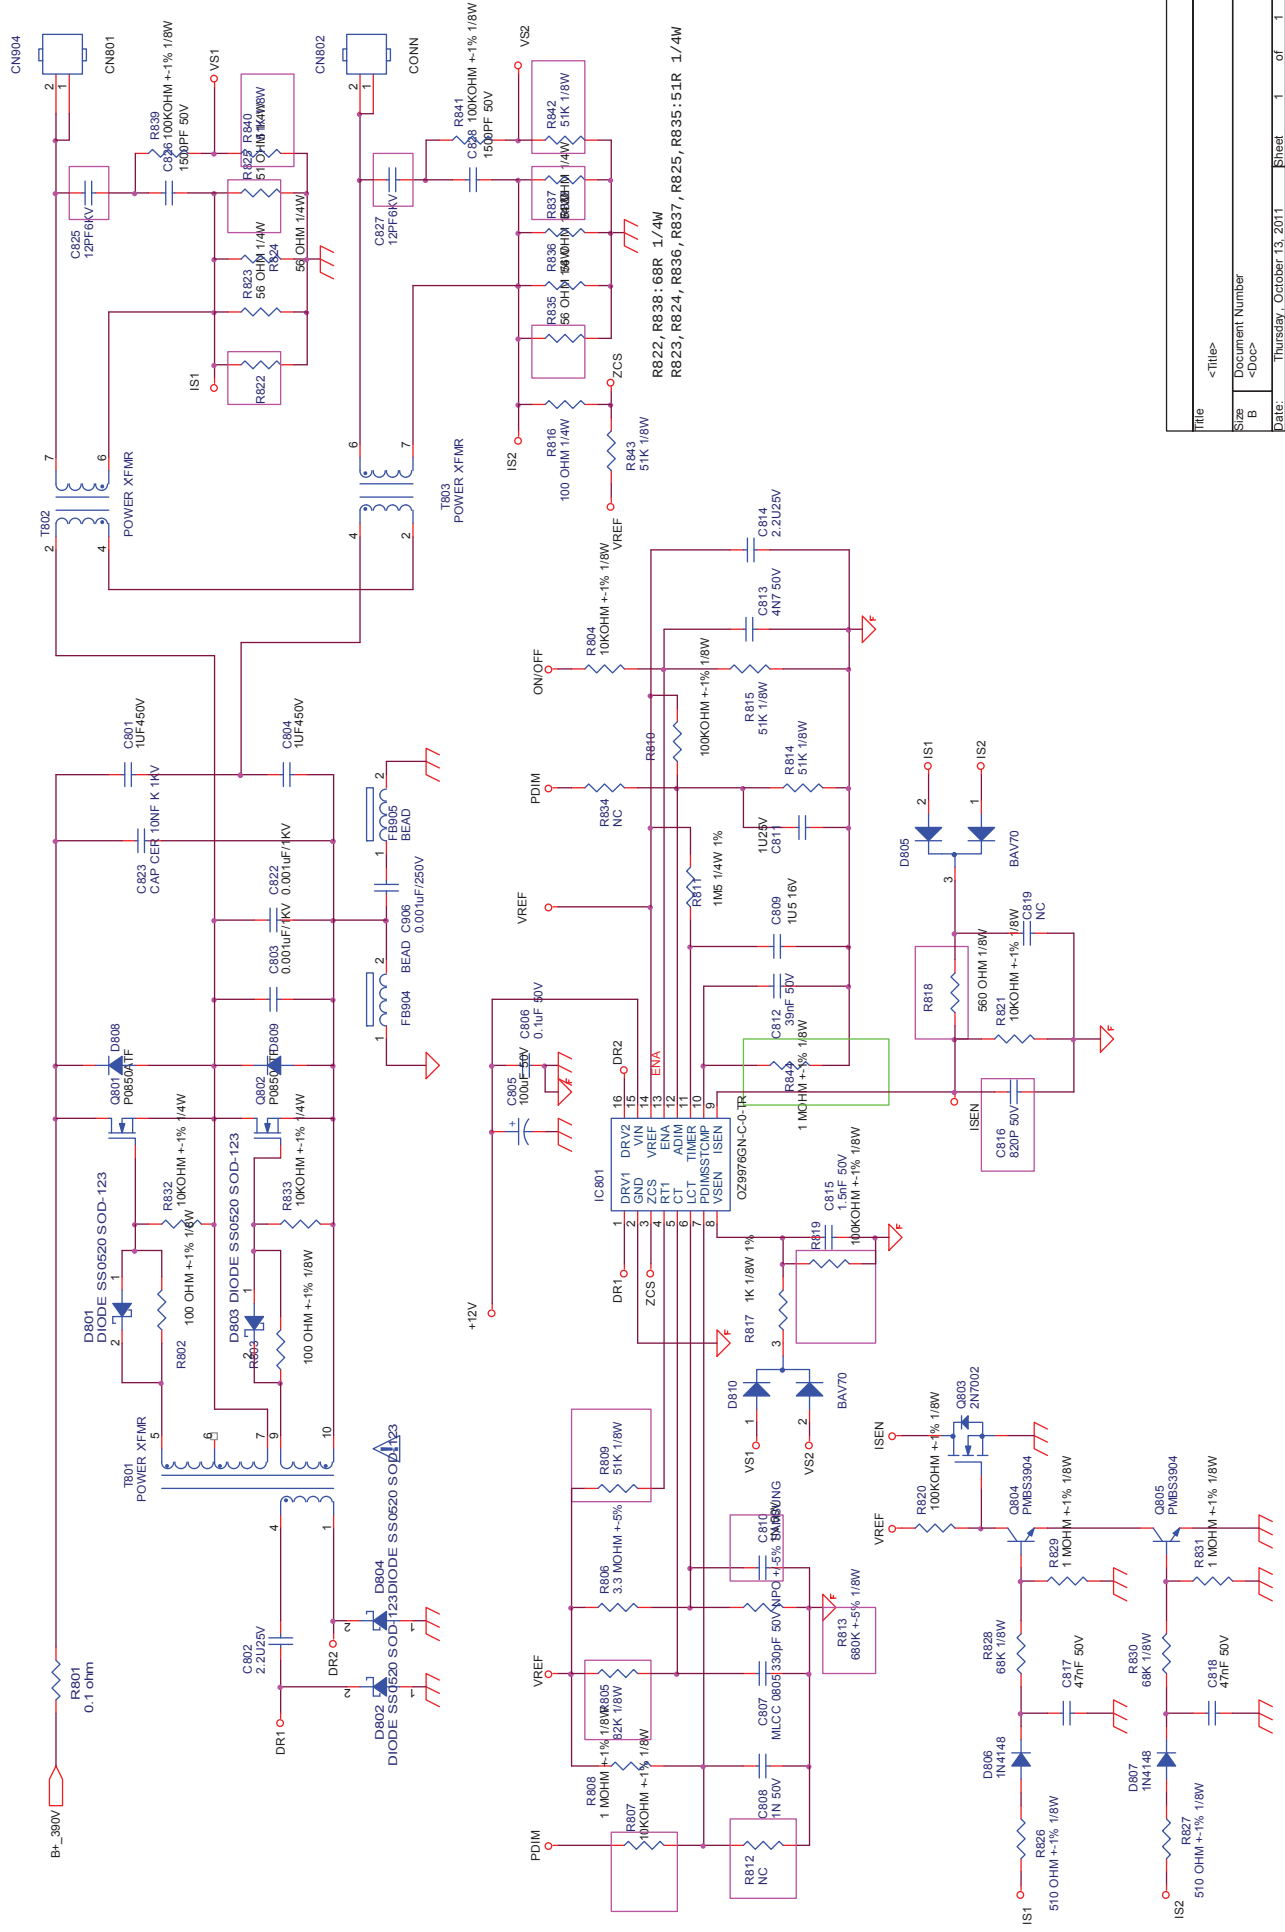



Title		<Title>	
Size	Document Number	Rev	
B	<Doc>	<Rev Code>	
Date:	Thursday, October 13, 2011	Sheet	1 of 1

9.3 Key Board
715G3814K01004004S

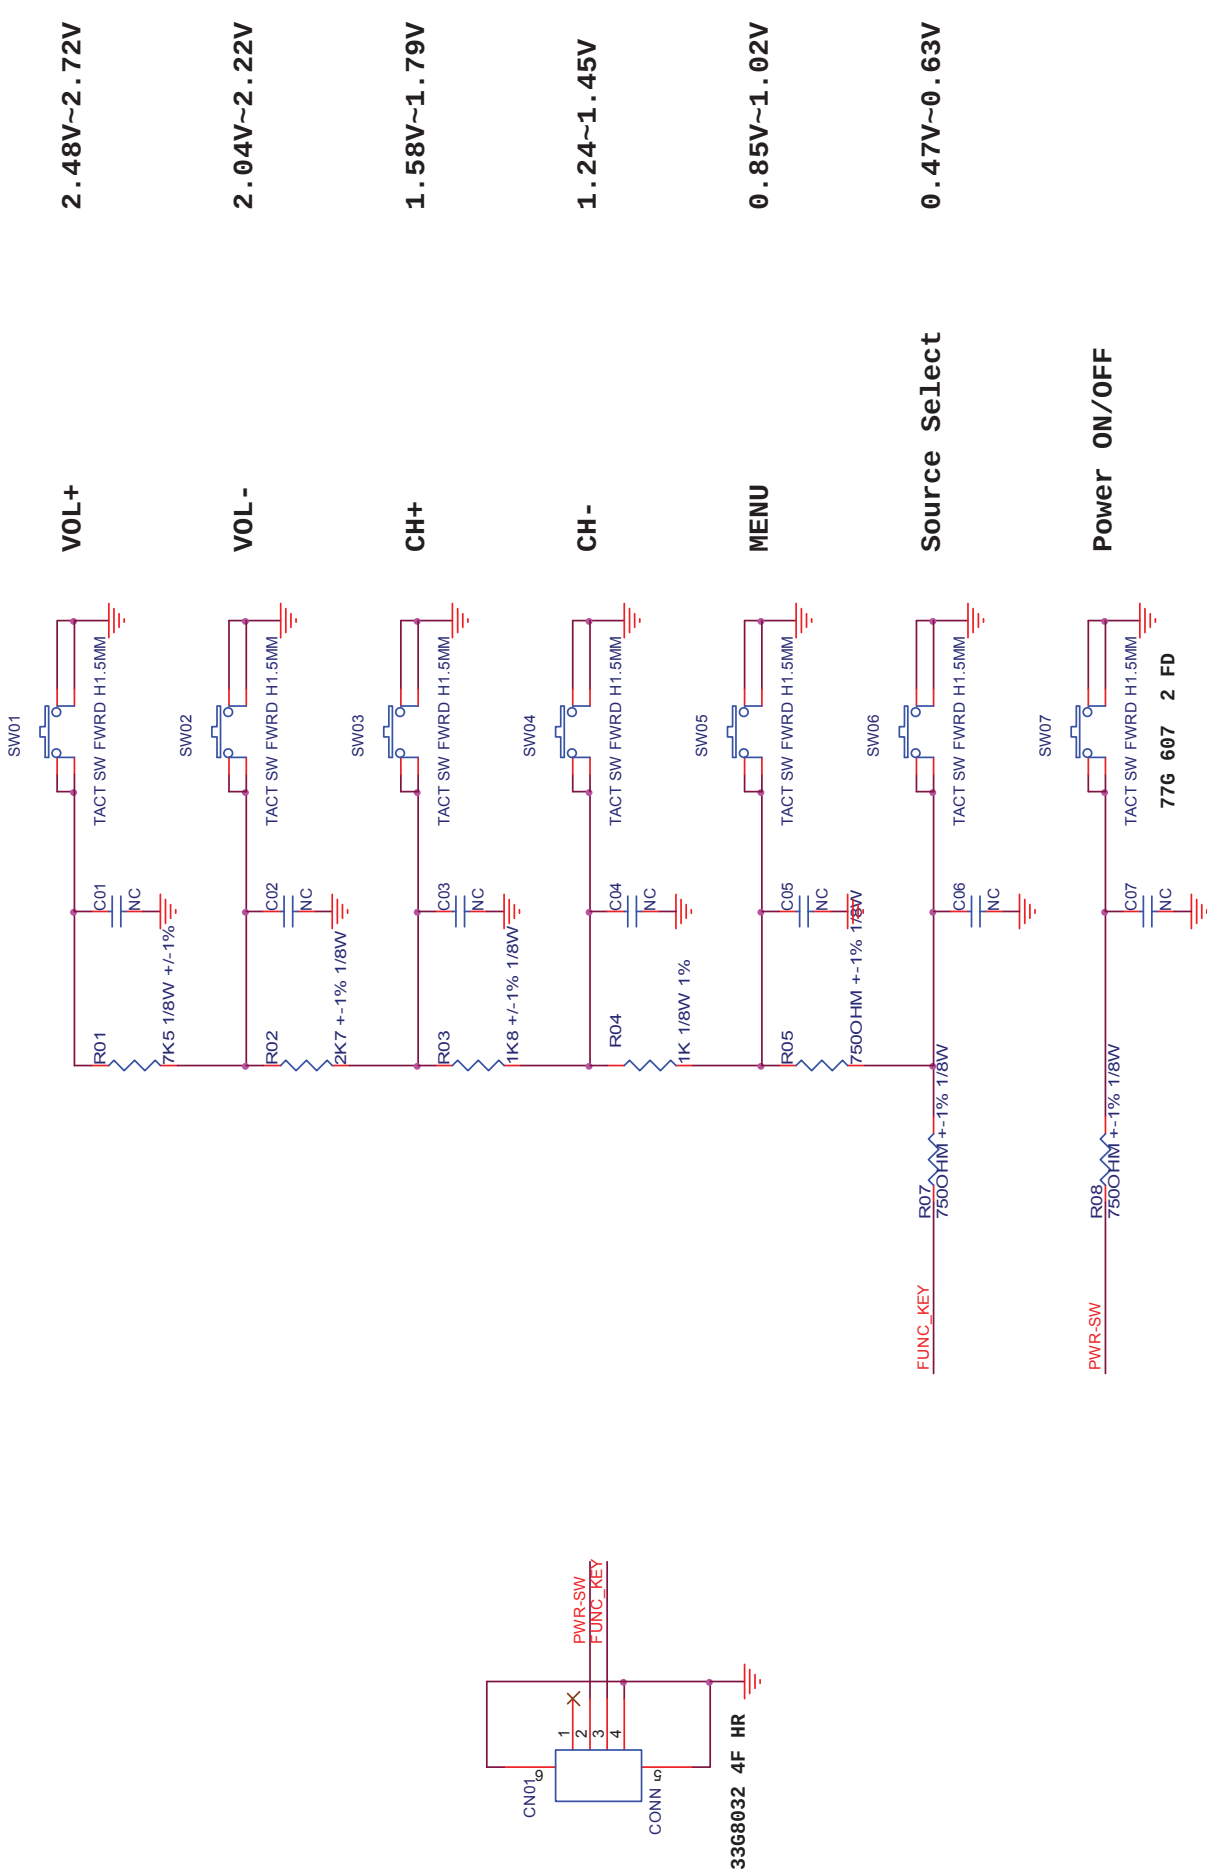

10. Exploded View
LC32W033M

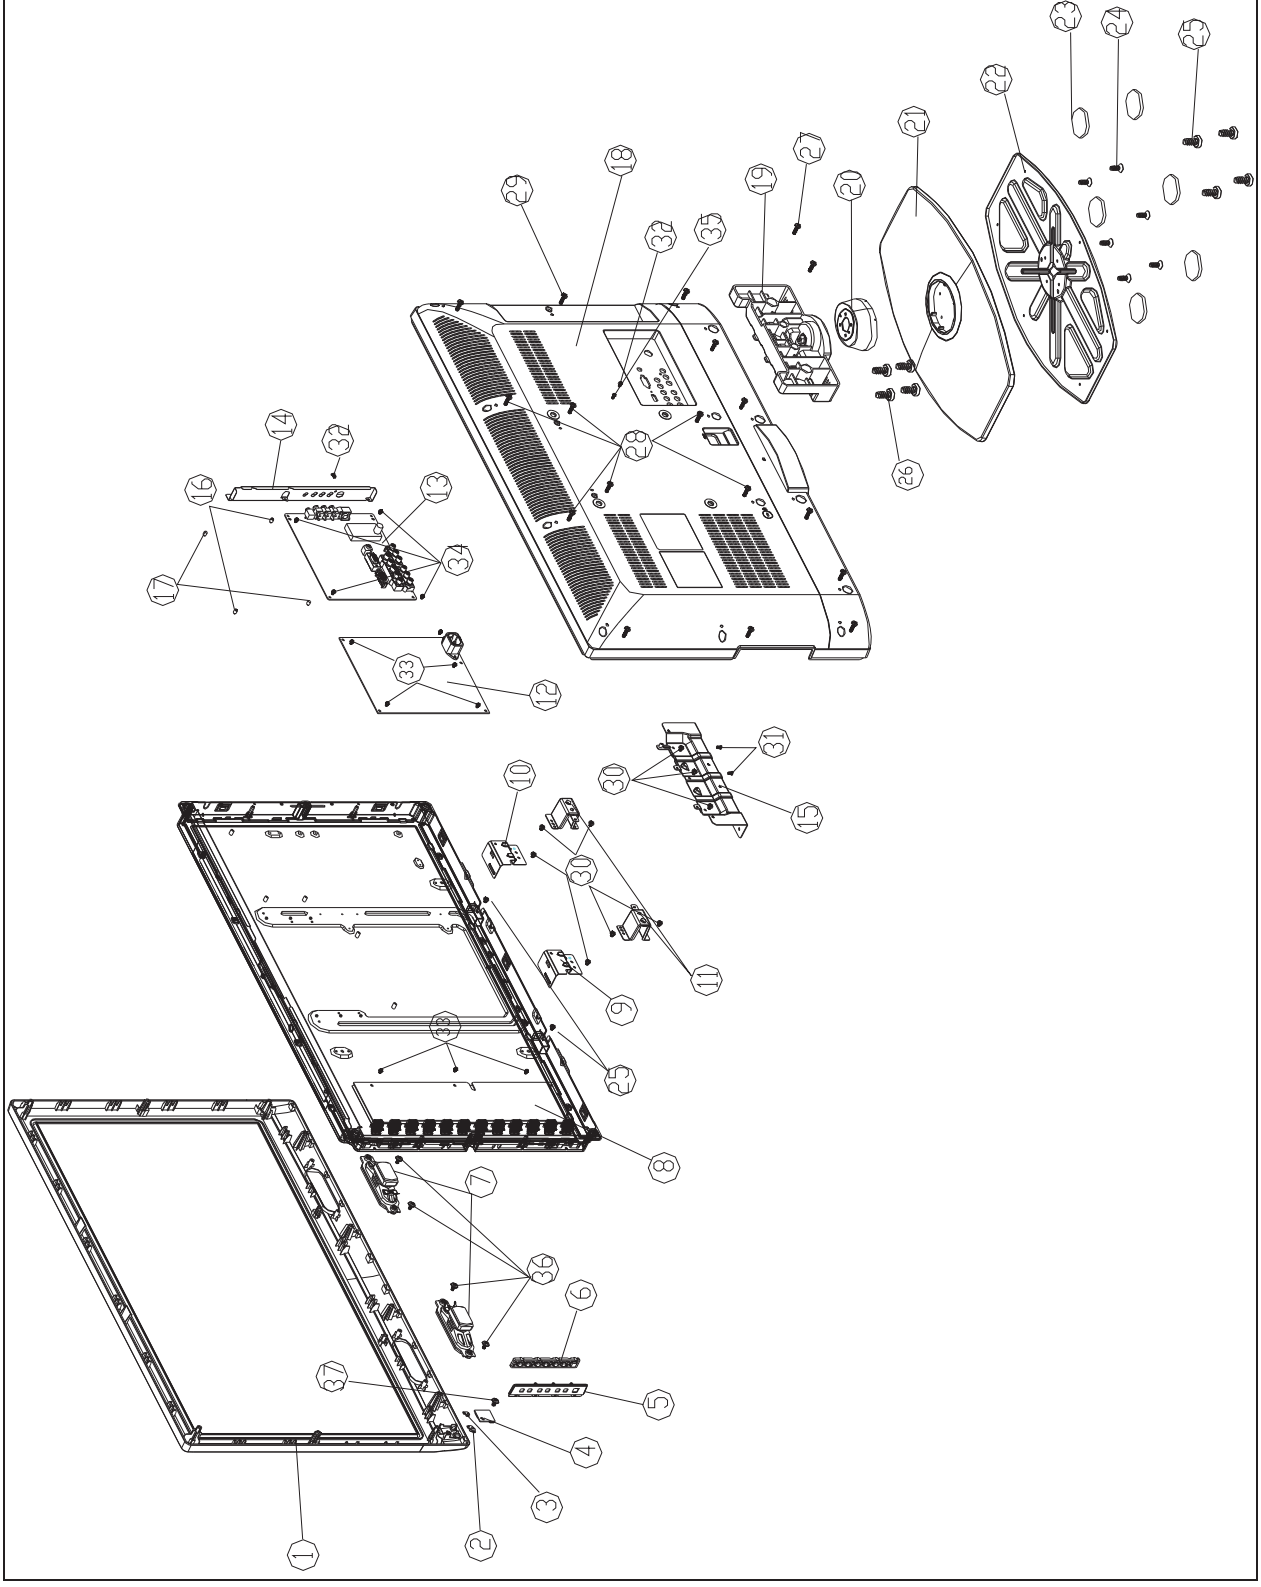

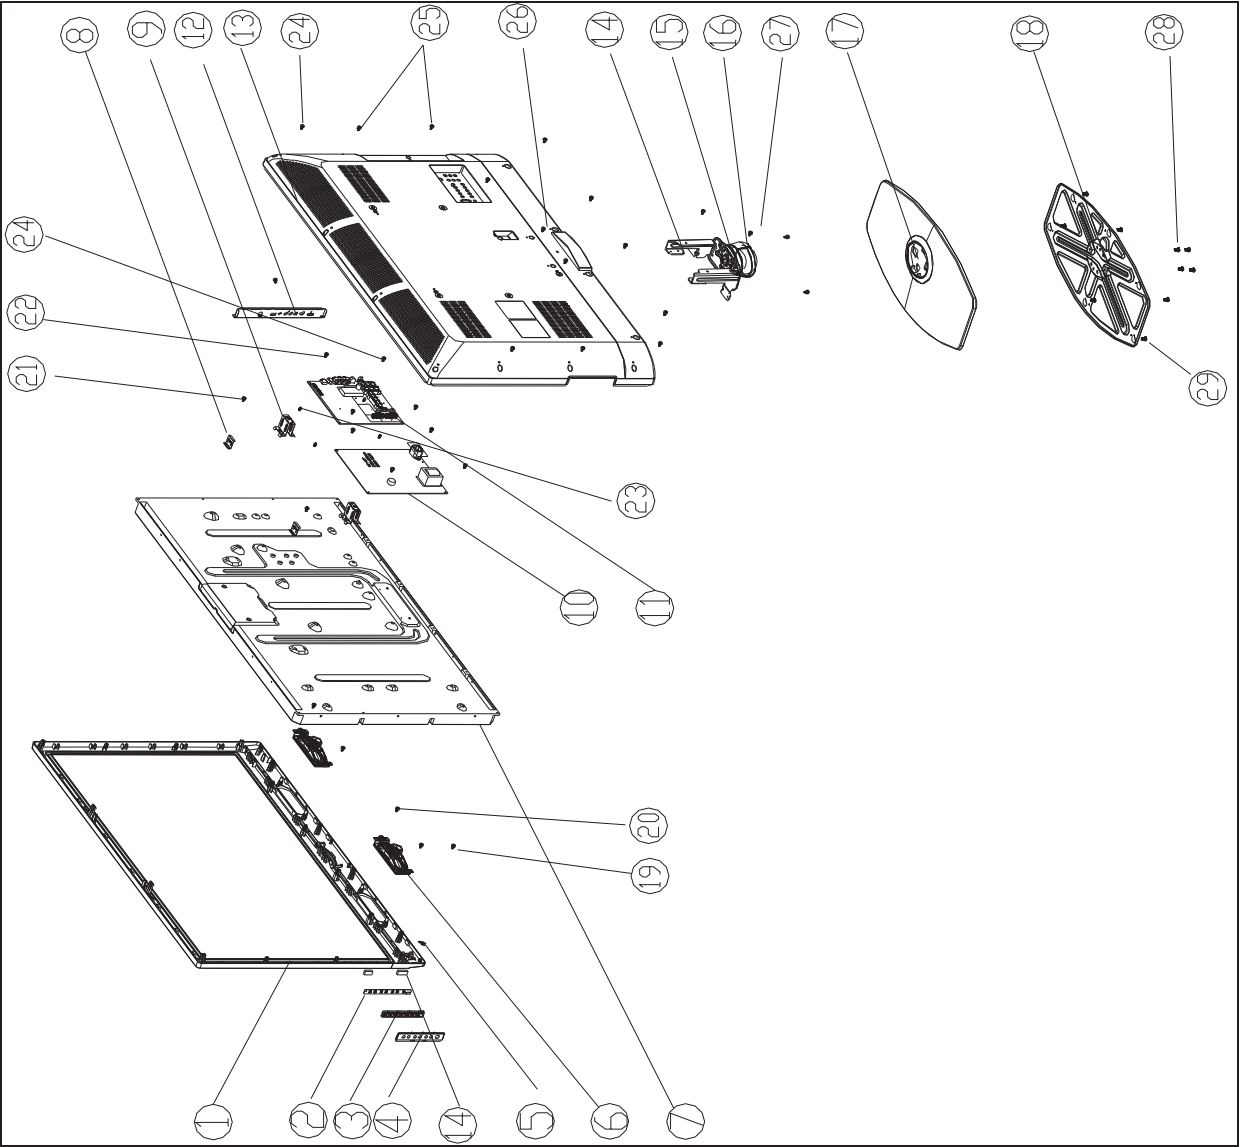

LC32W033M	
No.	Description
1	BEZEL_TV32W-10a-Cita
2	LENS IR
3	POWER LENS
4	IR BOARD
5	Key cover
6	Key button
7	SPEAKER
8	INVERTER BOARD
9	PANEL SUPPORT BKT TOP L
10	PANEL SUPPORT BKT TOP R
11	32-VESA-BKT-TOP
12	POWER BOARD
13	MAIN BOARD
14	BRACKET
15	BASE SUPPORT BKT UDM
16	BOLT
17	SCREW-STOPPER
18	REAR COVER_32"
19	2K10-32 HINGE
20	Stand-A1_32
21	BASE
22	BASE BKT
23	FOOT PAD

No.	Part No.	Description	Qty
24	0Q1G 130 8 47 CR3	SCREW FOR BASE & BASE BKT	6
25	0Q1G 940 14 47 CR3	SCREW FOR BASE & BASE BKT & PANEL & BEZEL	6
26	0M1G1740 14 47 CR3	SCREW FOR BASE & STAND & HINGE	4
27	0M1G 940 10 47 CR3	SCREW FOR REAR COVER & HINGE	2
28	0M1G 940 10 47 CR3	SCREW FOR BKT-VESA-BTM & REAR COVER & BEZEL	6
29	0Q1G 940 16 47 CR3	SCREW FOR REAR COVER & BEZEL	10
30	0M1G 940 6120	SCREW FOR BKT & PANEL	9
31	0M1G 940 6120	SCREW FOR BKT & PANEL	2
32	0Q1G 930 8 47 CR3	SCREW FOR REAR COVER & MAIN BOARD & BKT-IO-SIDE	2
33	0M1G1730 6120	SCREW FOR POWER BOARD & PANEL	4
34	0M1G1730 6120	SCREW FOR MAIN BOARD & PANEL	4
35	0M1G 930 8 47 CR3	SCREW FOR REAR COVER	1
36	001G6021 1	SCREW FOR BEZEL & SPEAKER	4
37	0Q1G1030 6120	SCREW FOR BEZEL & IR BOARD	1

LC42H033M	
No.	Description
1	BEZEL
2	KEY BOARD
3	KEY BUTTON
4	KEY COVER
5	IR LENS
6	SPK

No.	Part No.	Description	Qty
7	PANEL		
8	BKT FIX PANEL	0Q1G1030 6120 SCREW(IR BOARD/BEZEL)	1
9	BKT-VESA	0M1G1830 8120 SCREW(SPEAKER/BEZEL)	4
10	POWER BOARD	0Q1G 930 8 47 CR3 SCREW(BKT/PANEL)	2
11	MAIN BOARD	0M1G1730 6120 SCREW(MAIN BOARD/PANEL/INVERTER BOARD)	12
12	BRACKET	0M1G1740 10120 SCREW(BKT/PANEL)	4
13	REAR COVER	0Q1G 940 16 47 CR3 SCREW(BKT/PANEL/REAR COVER/BEZEL)	14
14	HINGE	0Q1G 940 30 47 CR3 SCREW(REAR COVER/BEZEL)	4
15	HINGE COVER	0M1G1740 10120 SCREW(REAR COVER/BKT)	2
16	STAND	0M1G1740 10120 SCREW(HINGE ASS'Y)	4
17	BASE	001G6021 1 SCREW(BASE/BKT)	4
18	BRACKET BASE	0Q1G 130 8 47 CR3 SCREW(BASE/BKT)	6

11. BOM List

Note: The parts information listed below are for reference only, and are subject to change without notice. Please go to <http://cs.tpv.com.cn/hello1.asp> for the latest information.

LC32W033M E32A2KNCW3A1NN

Location	Part No.	Description	Remark
	052G 1185 1	BIG TAPE(Y1200141)	
	052G 1186	SMALL TAPE	
	052G 1211 B	CONDUCTIVE TAPE 85MM *40MM *0.09MM	
	052G 2191 A	PAPER TAPE	
	089G217A18N IS	AC POWER CORD 1800MM	
ECN701	095G801313D906	HARNESS 13P-12P 100MM FQ91572I	
ECN701	095G801313X906	HARNESS 13P-12P 100MM LCDXXTF0384	2nd source
ECN601	095G8014 4D603	HARNESS 4P-B&R+B&W 750/550	
ECN405	095G8018 3XJ33	HARNESS 30P-30P(2004) 350	
	095G8021 3D904	HARNESS 3P-3P+2P 290MM FQE92155I	
	098GRABD1NEACD	REMOTE CONTROL AOC 90-364100T4418	
	0M1G 930 8 47 CR3	SCREW 3X8	
	0M1G 940 6120	SCREW 4X6	
	0M1G 940 10 47 CR3	SCREW 4.0X10	
	0M1G1730 6120	SCREW 3X6	
	0M1G1830 8120	SCREW	
	0Q1G 930 8 47 CR3	SCREW 3X8	
	0Q1G 940 14 47 CR3	SCREW	
	0Q1G 940 16 47 CR3	SCREW 4X16	
	705TQ949001	COMSUPTIVE ASS'Y-A4	
	705TQA34JA3	BEZEL ASS'Y 32"	
	001G6021 1	SCREW	
SP01	078G0120501 A	SPEAKER 6 OHM 12W 125X32 NA	
ECN401	095G801413DH21	HARNESS 13P-5P+4P 700/750	
	0Q1G1030 6120	SCREW 3X6	
	A33T0788ADTB1L0100	KEY COVER	
	A33T0789AFL 1L0100	KEY BUTTON	
	Q12G6082 1	FOOT PAD	
	Q33T0379 ED 1C0100	LENS IR	
	Q33T0380 1 1C0100	POWER LENS	
	Q34T7081AFLF2L0130	BEZEL_TV32W-10A-CITA	
	Q44T3231 21 27	EVA WASHER	
	Q44T3231 21 28	EVA WASHER	
	705TQA34JA4	REAR COVER ASS'Y 32"	
	A15T0282201	BKT-VESA-BTM	
	A34T1580ADT 6L0230	REAR COVER_32"	
	Q36T 600 35 2 GP	NONWOVEN FABRIC	
	Q40G2010 42109	BACK IO LABEL	
	Q52G6025 13 20	INSULATING SHEET	
	705TQA34JA5	STAND ASS'Y 32"	
	0Q1G 130 8 47 CR3	SCREW 3X8	
	A34T1581ADT 1L0100	STAND HINGE -A2_32	
	A34T1582AFL 1L0100	STAND-A1_32	
	Q12G6300 25 1	FOOT PAD	
	Q15T0704101	BASE BKT	
	Q34T7082AFL 1L0120	BASE	
	Q37T0203012ADT	2K10-32 HINGE	
E750	750TVV315B6138N000	PANEL TPT315B6-L01 C1C XM TPV	
	756TQACB KC006 01	MAIN BOARD-CBPAK1DY6	
U403	056T1133935	IC MX25L3205DMI-12G SOP-16	

SMTF-U403	100TARVK006C21	MCU ASS'Y-056T1133935	
	ADTV92414AAW	POWER BOARD	
	040G 45762412B	CBPC LABEL	
GND	009G6005 1	GROUND TERMINAL	
CN902	033G327813D	CONNECTOR	
CN803	033G3802 5B Y L	CONNECTOR 5P 2.0	
CN801	033G8029 3A	WAFER 3.96MM 3P (3É 2N)	
	051G 6 4503	GLUE_RTV	
IC950	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC951	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC970	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC950	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC951	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC970	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC902	056G 379121	IC STR- A6069H DIP-8	
Q921	057G 761 7	KTD1691P	
Q921	057G 761502	SMALLTRAN BTD1805AD3 5A 60V TO-126ML	
Q921	057G 761909 T	SMALLTRAN KSD1691YSTU 5A 60V TO-126	
C901	063G 10747410V	NO-SUGGEST 0.47UF 275VAC ARCO	
C904	063G 10747410V	NO-SUGGEST 0.47UF 275VAC ARCO	
C910	063G210K105BCN	CONSIGN CAP MPP 1UF 10% 520V	
C801	063G213J105GFC	CAP MPE 1UF J 450V	
C802	063G213J105GFC	CAP MPE 1UF J 450V	
C925	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5U	
C905	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C906	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C924	065G306M1022BM	Y1.CAP.001UF 250VAC MURATA	
C903	065G306M6812B3	Y1 CAP 680PF +-20% 250VAC CD SERIES	
C902	065G306M6812B3	Y1 CAP 680PF +-20% 250VAC CD SERIES	
C920	067G 42Z82015K	EC 82UF 20% 450V 18*36	
C953	067G204V331 3K	CS CAP 330UF 16V 10*12 MM	
C954	067G215A4713KV	EC 470UF 20% 16V 10*12	
C946	067G215A4714KV	EC 470UF 20% 25V 10*16	
C975	067G215A4716KV	EC 470UF 20% 35V 10*20	
C973	067G215A4716KV	EC 470UF 20% 35V 10*20	
C945	067G215A4716KV	EC 470UF 20% 35V 10*20	
L901	073G 174106 DN	LINE FILTER 13MH LK.TF032.A20	
L902	073G 174106 DN	LINE FILTER 13MH LK.TF032.A20	
L906	073G 174160 N	PFC CHOKE 253UH 5% 100UH YUVA-1253	
L950	073G 253 91 H	IND CHOKE 3.5UH+-10% DADONG	
L951	073G 253 91 H	IND CHOKE 3.5UH+-10% DADONG	
L980	073G 253 91 H	IND CHOKE 3.5UH+-10% DADONG	
T802	080GL26T 15 N	X'FMR 840UH MIN 8.4UH YUVA-1094 EE16	
T801	080GL32P 1 N	POWER X'FMR 6MH 25% YUVA-1187	
T902	080GL37T 19 N	X'FMR 550UH 5% YUVA-1089	
T901	080GL52T 5 L1	NO-SUGGEST X'FMR 1.0MH	
F901	084G 41 11 B	FUSE 5A 250V BK/S505-V-5-R	
F901	084G 41 11 C	FUSE 5A 250V UDA-A 005(PF)	
F901	084G 41 11 L	FUSE 5A 250V 0215005.MXEP	
CN901	087G 501 47 S	AC SOCKET 2PIN + 2 SCREW HOLE	
CN901	087G 501 47 DL	AC SOCKET 2PIN + 3 SCREW HOLE	
D904	093G 52 70 1	1N5408-E(SHORT PIN) 3A/1000V DO-201AD	
	0Q1G 340 8106 CR3	SCREW	
	705TQ861001	NR901 ASS'Y	
NR901	061G 58030 WL	RST NTCR 3 OHM +-20% 5A THINKING	
	Q09T 203 8	PIN FOR NR901	
	705TQ957038	Q801/Q802 ASS'Y	

	051G 200 1	OIL FOR DISAPPEAR	
Q802	057G 611903	MOSFET AOTF12N50 TO-220F	
Q801	057G 611903	MOSFET AOTF12N50 TO-220F	
Q802	057T 611901	MOSFET 12A/500V FMA12N50E TO-220F	
Q801	057T 611901	MOSFET 12A/500V FMA12N50E TO-220F	
	0M1G1730 8120	SCREW 3X8	
HS1	P90T0027201	HEAT SINK	
	705TQ957039	Q901 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
Q901	057G 667 49	FET 2SK4086LS-MG5 TO-220FI(LS)	
Q901	057T 667 59	MOSFET FQPF12N60C 12A/600V TO-220F	
	0M1G1730 8120	SCREW 3X8	
HS8	Q90T0206 1	HEAT SINK	
	705TQ957040	Q903 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
Q903	057G 667 51	MOSFET 2SK4101LS-MG5/FS 7A 650V TO-220FI	
Q903	057G 667931	MOSFET AOTF8N65 8A 650V TO-220FP	
	0M1G1730 8120	SCREW 3X8	
HS9	Q90G6084 1	HEAT SINK	
	705TQ993051	D902 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
D902	093G 52905	DIODE FMNS-1106S TO-220	
	0M1G1730 8120	SCREW 3X8	
HS7	Q90G6084 1	HEAT SINK	
	705TQ993052	BD901 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
BD901	093G 50460 34	BRIDGE KBJ608G 6A/800V KBJ	
	0M1G1730 10120	SCREW 3X10	
HS5	P90T0027301	HEAT SINK	
	705TQ993053	D950 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
D950	093G 60298	SCHOTTKY SBT15006JST 15 60 TO220ML	
D950	093G1506 2	SCHOTTKY FMW-2156 15A 60V TO-220	
	0M1G1730 8120	SCREW 3X8	
HS10	Q90G6084 1	HEAT SINK	
	705TQ993054	D972/D973 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
HS6	090G6064 1	HEAT SINK	
D972	093G 60329	DIODE FMEN-220A 20A/100V TO-220	
D973	093G 60329	DIODE FMEN-220A 20A/100V TO-220	
D973	093G 60331	SCHOTTKY YG865C10RSC 20A 100V TO-220F	
D972	093G 60331	SCHOTTKY YG865C10RSC 20A 100V TO-220F	
	0M1G1730 8120	SCREW 3X8	
IC801	056G 379122	IC OZ9976GN-C-0-TR SOP-16	
IC901	056G 379164	IC FAN6961SZ SOP-8	
IC903	056G 379175	IC LD7523GS SOP-8	
Q950	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q970	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q803	057G 759 2	RK7002FD5T116 SOT-23 BY ROHM	
Q804	057G 759 2	RK7002FD5T116 SOT-23 BY ROHM	
Q805	057G 759 2	RK7002FD5T116 SOT-23 BY ROHM	
Q803	057G 763904	TRA FET 2N7002 SOT-23 PHILIPS	
Q804	057G 763904	TRA FET 2N7002 SOT-23 PHILIPS	
Q805	057G 763904	TRA FET 2N7002 SOT-23 PHILIPS	
R943	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/8W FENGHUA	
R932	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/8W FENGHUA	
R943	061G0805100 JT	RST CHIP 10R 1/8W 5% TZAI YUAN	

R932	061G0805100 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R943	061G0805100 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R820	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R820	061G08051003FY	RST CHIP 100K 1/8W 1%	
R837	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R837	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R837	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R837	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R981	061G0805101 JF	RST 0805 100R 5% 1/8W	
R803	061G0805101 JF	RST 0805 100R 5% 1/8W	
R802	061G0805101 JF	RST 0805 100R 5% 1/8W	
R802	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R803	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R981	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R802	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R803	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R981	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R955	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R982	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R983	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R955	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R982	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R983	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R983	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R982	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R955	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R830	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R963	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R961	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R947	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R944	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R817	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R816	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R918	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R914	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R830	061G0805103 JI	RST 0805 10K 5% 1/8W	
R918	061G0805103 JI	RST 0805 10K 5% 1/8W	
R914	061G0805103 JI	RST 0805 10K 5% 1/8W	
R830	061G0805103 JT	RST 0805 10K 5% 1/8W	
R963	061G0805103 JT	RST 0805 10K 5% 1/8W	
R961	061G0805103 JT	RST 0805 10K 5% 1/8W	
R947	061G0805103 JT	RST 0805 10K 5% 1/8W	
R944	061G0805103 JT	RST 0805 10K 5% 1/8W	
R918	061G0805103 JT	RST 0805 10K 5% 1/8W	
R914	061G0805103 JT	RST 0805 10K 5% 1/8W	
R817	061G0805103 JT	RST 0805 10K 5% 1/8W	
R816	061G0805103 JT	RST 0805 10K 5% 1/8W	
R816	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R817	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R963	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R961	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R947	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R944	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R918	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R914	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R820	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R820	061G0805104 JY	RST CHIPR 100KOHM 1/8W YAGEO	

R837	061G0805105 JT	RST CHIP 1M 1/8W 5% TZAI YUAN	
R923	061G08051302FF	RST CHIPR 13KOHM +-1% 1/8W FENGHUA	
R985	061G08051302FF	RST CHIPR 13KOHM +-1% 1/8W FENGHUA	
R985	061G08051302FT	RST CHIP 13K 1/8W 1%	
R923	061G08051302FT	RST CHIP 13K 1/8W 1%	
R923	061G08051302FY	RST CHIP 13K 1/8W 1%	
R985	061G08051302FY	RST CHIP 13K 1/8W 1%	
R840	061G08051504FF	RST CHIPR 1M5 +-1% 1/8W FENGHUA	
R840	061G08051504FT	RST CHIPR 1M5 +-1% 1/8W TZAI YUAN	
R917	061G0805153 JF	RST CHIPR 15K +-5% 1/8W FENGHUA	
R917	061G0805153 JT	RST CHIP 15K 1/8W 5% TZAI YUAN	
R840	061G0805155 JW	RST CHIPR 1M5 +-5% 1/8W WALSIN	
R979	061G08052001FF	RST CHIPR 2KOHM +-1% 1/8W FENGHUA	
R979	061G08052001FT	RST CHIP 2K 1/8W 1%	
R811	061G08052400FF	RST CHIPR 240 OHM +-1% 1/8W FENGHUA	
R813	061G08052400FF	RST CHIPR 240 OHM +-1% 1/8W FENGHUA	
R813	061G08052400FT	RST CHIP R 240 OHM +-1% 1/8W	
R811	061G08052400FT	RST CHIP R 240 OHM +-1% 1/8W	
R978	061G08052402FF	RST CHIPR 24KOHM +-1% 1/8W FENGHUA	
R978	061G08052402FT	RST CHIP 24K 1/8W 1%	
R978	061G08052402FT	RST CHIP 24K 1/8W 1%	
R987	061G08052702FT	RST CHIP 27K 1/8W 1%	
R987	061G08052702FY	RST CHIP 27K 1/8W 1%	
R834	061G0805272 JF	RST CHIPR 2.7KOHM +-5% 1/8W FENGHUA	
R834	061G0805272 JT	RST CHIPR 2K7 +-5% 1/8W TZAI YUAN	
R975	061G0805392 JF	RST CHIPR 3.9KOHM +-5% 1/8W FENGHUA	
R975	061G0805392 JT	RST CHIP 3K9 1/8W 5% TZAI YUAN	
R975	061G0805392 JY	RST CHIPR 3K9 +-5% 1/8W YAGEO	
R826	061G0805474 JT	RST CHIPR 470K +-5% 1/8W TZAI YUAN	
R823	061G0805474 JT	RST CHIPR 470K +-5% 1/8W TZAI YUAN	
R824	061G0805474 JT	RST CHIPR 470K +-5% 1/8W TZAI YUAN	
R821	061G0805474 JT	RST CHIPR 470K +-5% 1/8W TZAI YUAN	
R821	061G0805474 JY	RST CHIPR 470K +-5% 1/8W YAGEO	
R824	061G0805474 JY	RST CHIPR 470K +-5% 1/8W YAGEO	
R823	061G0805474 JY	RST CHIPR 470K +-5% 1/8W YAGEO	
R826	061G0805474 JY	RST CHIPR 470K +-5% 1/8W YAGEO	
R814	061G0805510 JF	RST CHIPR 51OHM +-5% 1/8W FENGHUA	
R814	061G0805510 JF	RST CHIPR 51OHM +-5% 1/8W FENGHUA	
R814	061G0805510 JT	RST CHIPR 51OHM +-5% 1/8W TZAI YUAN	
R841	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R842	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R841	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R842	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R906	061G08055603FT	RST CHIP 560K 1/8W 1%	
R906	061G08055603FY	RST CHIP 560K 1/8W 1%	
R958	061G08057501FF	RST CHIPR 7.5KOHM +-1% 1/8W FENGHUA	
R958	061G08057501FT	RST CHIP R 7K5 1/8W +/-1%	
R957	061G08058201FF	RST CHIPR 8.2KOHM +-1% 1/8W FENGHUA	
R957	061G08058201FT	RST CHIP 8K2 1/8W 1%	
R957	061G08058201FY	RST CHIP 8K2 1/8W 1%	
R844	061G08059101FF	RST CHIPR 9.1KOHM +-1% 1/8W FENGHUA	
R844	061G08059101FY	RST CHIP 9K1 1/8W 1%	
JR905	061G1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
JR904	061G1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
JR903	061G1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
JR902	061G1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
JR902	061G1206000 Y	NO-SUGGEST RST CHIP MAX 0R05 1/4W	

		YAGE	
JR903	061G1206000 Y	NO-SUGGEST RST CHIP MAX 0R05 1/4W YAGE	
JR904	061G1206000 Y	NO-SUGGEST RST CHIP MAX 0R05 1/4W YAGE	
JR905	061G1206000 Y	NO-SUGGEST RST CHIP MAX 0R05 1/4W YAGE	
R924	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R925	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R926	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R926	061G12061004FI	RST 1206 1M 1% 1/4W	
R925	061G12061004FI	RST 1206 1M 1% 1/4W	
R924	061G12061004FI	RST 1206 1M 1% 1/4W	
R924	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R925	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R926	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R951	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R954	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R970	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R973	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R977	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R977	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R973	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R970	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R954	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R951	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R974	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R960	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R956	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R945	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R836	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R836	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R945	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R956	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R960	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R974	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R833	061G1206103 JF	RST CHIPR 10KOHM +-5% 1/4W FENGHUA	
R838	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R939	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R976	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R833	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R838	061G1206103 JY	RST CHIPR 10K +-5% 1/4W YAGEO	
R939	061G1206103 JY	RST CHIPR 10K +-5% 1/4W YAGEO	
R976	061G1206103 JY	RST CHIPR 10K +-5% 1/4W YAGEO	
R839	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R991	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R992	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R993	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R994	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R996	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R997	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R998	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R999	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R999	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R998	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R997	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R996	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	

R994	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R993	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R992	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R991	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R839	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R933	061G1206109 JT	RST CHIPR 1 OHM +-5% 1/4W TZAI YUAN	
R933	061G1206109 JW	RST CHIPR 1 OHM +-5% 1/4W WAL SIN	
R843	061G1206122 JT	RST CHIPR 1.2KOHM +-5% 1/4W TZAI YUAN	
R843	061G1206122 JW	NO-SUGGEST RST CHIPR 1.2KOHM +-5% 1/4W W	
R904	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R905	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R909	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R904	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R905	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R909	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R965	061G1206182 JI	RST CHIPR 1.8 KOHM +-5% 1/4W 1206	
R967	061G1206182 JI	RST CHIPR 1.8 KOHM +-5% 1/4W 1206	
R971	061G1206182 JI	RST CHIPR 1.8 KOHM +-5% 1/4W 1206	
R972	061G1206182 JI	RST CHIPR 1.8 KOHM +-5% 1/4W 1206	
R986	061G1206182 JI	RST CHIPR 1.8 KOHM +-5% 1/4W 1206	
R988	061G1206182 JI	RST CHIPR 1.8 KOHM +-5% 1/4W 1206	
R965	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R967	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R971	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R972	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R986	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R988	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R965	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R967	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R971	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R988	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R986	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R972	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R911	061G1206203 JI	RST 20K OHM 5% 1/4W TA-I	
R911	061G1206203 JT	RST CHIPR 20KOHM +-5% 1/4W TZAI YUAN	
R911	061G1206203 JT	RST CHIPR 20KOHM +-5% 1/4W TZAI YUAN	
R907	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA	
R908	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA	
R931	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA	
R931	061G1206229 JY	RST 1206 2.2R 5% 1/4W	
R908	061G1206229 JY	RST 1206 2.2R 5% 1/4W	
R907	061G1206229 JY	RST 1206 2.2R 5% 1/4W	
R901	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R902	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R903	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R901	061G1206334 JT	RST CHIPR 330 KOHM +-5% 1/4W TZAI YUAN	
R903	061G1206334 JT	RST CHIPR 330 KOHM +-5% 1/4W TZAI YUAN	
R902	061G1206334 JT	RST CHIPR 330 KOHM +-5% 1/4W TZAI YUAN	
R950	061G1206470 JT	RST CHIPR 47 OHM +-5% 1/4W TZAI YUAN	
R952	061G1206470 JT	RST CHIPR 47 OHM +-5% 1/4W TZAI YUAN	
R950	061G1206470 JY	RST CHIPR 47R +-5% 1/4W YAGEO	
R952	061G1206470 JY	RST CHIPR 47R +-5% 1/4W YAGEO	
R915	061G1206471 JT	RST CHIPR 470 OHM +-5% 1/4W TZAI YUAN	
R915	061G1206471 JY	RST CHIPR 470R 1/4W +-5% YAGEO	
R962	061G1206475 JF	RST CHIPR 4.7 MOHM +-5% 1/4W FENGHUA	
R962	061G1206475 JT	RST CHIPR 4.7 MOHM +-5% 1/4W TZAI YUAN	

R825	061G12065100FF		RST 1206 510R 5% 1/4W	
R827	061G12065100FF		RST 1206 510R 5% 1/4W	
R825	061G12065100FY		RST CHIPR 510 OHM +-1% 1/4W	
R827	061G12065100FY		RST CHIPR 510 OHM +-1% 1/4W	
R832	061G12066202FF		RST 1206 62K 1% 1/4W FENGHUA	
R832	061G12066202FT		RST 1206 62K 1/4W 1% TZAI YUAN	
R920	061G12066803FF		RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R921	061G12066803FF		RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R922	061G12066803FF		RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R920	061G12066803FT		RST CHIP 680K 1/4W 1%	
R921	061G12066803FT		RST CHIP 680K 1/4W 1%	
R922	061G12066803FT		RST CHIP 680K 1/4W 1%	
R966	061G1206682 JF		RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R968	061G1206682 JF		RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R969	061G1206682 JF		RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R984	061G1206682 JF		RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R984	061G1206682 JT		RST CHIPR 6.8 KOHM +-5% 1/4W TZAI YUAN	
R969	061G1206682 JT		RST CHIPR 6.8 KOHM +-5% 1/4W TZAI YUAN	
R968	061G1206682 JT		RST CHIPR 6.8 KOHM +-5% 1/4W TZAI YUAN	
R966	061G1206682 JT		RST CHIPR 6.8 KOHM +-5% 1/4W TZAI YUAN	
R810	065G080510231J	F	CAP 0805 1NF 5% 50V NPO	
R812	065G080510231J	F	CAP 0805 1NF 5% 50V NPO	
R810	065G080510231J	Y	N0-SUGGEST CAP 0805 1NF 50V NP0 +/-5%	
R812	065G080510231J	Y	N0-SUGGEST CAP 0805 1NF 50V NP0 +/-5%	
C909	065G080510232K	Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C939	065G080510332K	Y	CAP CHIP 0805 10N 50V X7R +/-10%	
C921	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R	
C913	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R	
C811	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C907	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C908	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C978	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C956	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C949	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C948	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C947	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C942	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C934	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C816	065G080510522K	3	CAP CHIP 0805 1U 25V X7R +/-10%	
C817	065G080510522K	3	CAP CHIP 0805 1U 25V X7R +/-10%	
C815	065G080512332K	Y	CAP 0805 12NF 10% 50V X7R	
C821	065G080515232K	Y	CAP CHIP 0805 1N5 50V X7R +/-10%	
C820	065G080515232K	Y	CAP CHIP 0805 1N5 50V X7R +/-10%	
C915	065G080522132K	Y	CAP CHIP 0805 220P 50V X7R +/-10%	
C944	065G080522132K	Y	CAP CHIP 0805 220P 50V X7R +/-10%	
C955	065G080522432K	Y	CAP CHIP 0805 220N 50V X7R +/-10%	
C819	065G080522522K	M	DIS-APPROVED CAP 0805 2.2UF 10% 25V X7R	
C805	065G080522522K	M	DIS-APPROVED CAP 0805 2.2UF 10% 25V X7R	
C813	065G080533131J	Y	CAP CHIP 0805 330P 50V NP0 +/-5%	
C976	065G080533432K	F	CAP 0805 330NF 10% 50V X7R	
C818	065G080547232K	Y	CAP CHIP 0805 4N7 50V X7R +/-10%	
C830	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C831	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C917	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C943	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C918	065G080547432K	Y	CAP CHIP 0805 470N 50V X7R +/-10%	
C912	065G080556031J	F	CAP CHIP 0805 56PF J 50V NPO	

C822	065G080568131J	F	CAP 0805 680PF 5% 50V NPO	
C823	065G080568131J	F	CAP 0805 680PF 5% 50V NPO	
C972	065G120610272K	Y	CAP 1206 1NF 10% 500V X7R	
C970	065G120610272K	Y	CAP 1206 1NF 10% 500V X7R	
C957	065G120610272K	Y	CAP 1206 1NF 10% 500V X7R	
C952	065G120610272K	Y	CAP 1206 1NF 10% 500V X7R	
C951	065G120610272K	Y	CAP 1206 1NF 10% 500V X7R	
C950	065G120610272K	Y	CAP 1206 1NF 10% 500V X7R	
D807	093G 64 42 PP		BAV70 SOT-23	
D801	093G 60S 5 T		SCHOTTKY SCS0520P 0.5A 20V SOD-123	
D802	093G 60S 5 T		SCHOTTKY SCS0520P 0.5A 20V SOD-123	
D803	093G 60S 5 T		SCHOTTKY SCS0520P 0.5A 20V SOD-123	
D804	093G 60S 5 T		SCHOTTKY SCS0520P 0.5A 20V SOD-123	
CN901	006G 31500	GP	EYELET	
IC952	056G 158 10 T		LDO IC AZ431AZ-AE1 TO-92 150MA 40V TO-92	
IC971	056G 158 10 T		LDO IC AZ431AZ-AE1 TO-92 150MA 40V TO-92	
IC952	056G 158 12		SHUNT REGULATOR KIA431A-AT/P TO-92	
IC971	056G 158 12		SHUNT REGULATOR KIA431A-AT/P TO-92	
R801	061G 30310852T	GP	FUSER 0.1OHM +-5% 1W	
R948	061G 30310852T	GP	FUSER 0.1OHM +-5% 1W	
R913	061G 60210052T	TZ	RST CFR 10R 1/6W 5%	
R916	061G152M12852T		RST MOFR 0.12 OHM +-5% 2WS	
R946	061G152M36852T		RST MOF 0R36 5% 2W	
C803	065G 1K10293T		CAP CER 1NF 10% 1KV R	
C804	065G 1K10293T		CAP CER 1NF 10% 1KV R	
C932	065G 2K102 2T6921		CAP CER 1000PF 2KV K Y5P	
C935	065G 2K102 2T6921		CAP CER 1000PF 2KV K Y5P	
C810	067G215A1017KT		EC 100UF 50V 8*12MM	
C931	067G215A1017KT		EC 100UF 50V 8*12MM	
C941	067G215Y1007KT		KY50VB10M-TP5 5*11.5 EG	
C937	067G215Y1007KT		KY50VB10M-TP5 5*11.5 EG	
C933	067G215Y1007KT		KY50VB10M-TP5 5*11.5 EG	
C914	067G215Y4707KT		EC 47UF 20% 50V 6.3*11MM EG	
FB902	071G 55 23		BEAD 3.5*7.5*0.8 100R 25% GBQM4.777.571	
FB902	071G 55 23 S		FERRITE BEAD LB 3.5*0.8*7.5A	
FB903	071G 55 26 S		BEAD 3.5*6MM 127R 25% LB3.5jA0.8jA6-2	
FB901	071G 55 26 S		BEAD 3.5*6MM 127R 25% LB3.5jA0.8jA6-2	
FB903	071T 55 26 H		BEAD 3.5X6.0X0.8 127R 25% BF-I35060R-796	
FB901	071T 55 26 H		BEAD 3.5X6.0X0.8 127R 25% BF-I35060R-796	
ZD952	093G 3916652T		MTZJ15B (13.89-14.62)	
ZD930	093G 3916752T		MTZJ T-72 16B	
ZD970	093G 3917152T		TZJ T-72 30B	
D901	093G 52 1552T		RECTIFIER 1N4007 1 1000 DO41	
D901	093G 5212T52T		DIODE 1N4007-AO DO-41	
D931	093G 5250S52T		DIODE AU02Z-V1 SANKEN	
D805	093G 64 1152T		SWITCHING IN4148 1A 100V DO-35	
D806	093G 64 1152T		SWITCHING IN4148 1A 100V DO-35	
D903	093G 64 1152T		SWITCHING IN4148 1A 100V DO-35	
D905	093G 64 1152T		SWITCHING IN4148 1A 100V DO-35	
D906	093G 64 1152T		SWITCHING IN4148 1A 100V DO-35	
D951	093G 64 1152T		SWITCHING IN4148 1A 100V DO-35	
D971	093G 64 1152T		SWITCHING IN4148 1A 100V DO-35	
D806	093G 64 1152T PH		SWITCHING 1N4148 0.2A 100V DO-35	
D805	093G 64 1152T PH		SWITCHING 1N4148 0.2A 100V DO-35	
D903	093G 64 1152T PH		SWITCHING 1N4148 0.2A 100V DO-35	
D905	093G 64 1152T PH		SWITCHING 1N4148 0.2A 100V DO-35	
D906	093G 64 1152T PH		SWITCHING 1N4148 0.2A 100V DO-35	

D951	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35	
D971	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35	
ZD952	093G 39G 5	DIODE MTZJ15B DO-34	
ZD970	093G 39G 9	DIODE MTZJ30B DO-34	
D930	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41	
D940	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41	
J901	095G 90 23	JUMPER WIRE	
J808	095G 90 23	JUMPER WIRE	
J807	095G 90 23	JUMPER WIRE	
J806	095G 90 23	JUMPER WIRE	
J805	095G 90 23	JUMPER WIRE	
J804	095G 90 23	JUMPER WIRE	
J907	095G 90 23	JUMPER WIRE	
J803	095G 90 23	JUMPER WIRE	
J802	095G 90 23	JUMPER WIRE	
J801	095G 90 23	JUMPER WIRE	
J906	095G 90 23	JUMPER WIRE	
J905	095G 90 23	JUMPER WIRE	
J904	095G 90 23	JUMPER WIRE	
J908	095G 90 23	JUMPER WIRE	
J910	095G 90 23	JUMPER WIRE	
J919	095G 90 23	JUMPER WIRE	
J920	095G 90 23	JUMPER WIRE	
J921	095G 90 23	JUMPER WIRE	
J922	095G 90 23	JUMPER WIRE	
J923	095G 90 23	JUMPER WIRE	
J914	095G 90 23	JUMPER WIRE	
J915	095G 90 23	JUMPER WIRE	
J917	095G 90 23	JUMPER WIRE	
J912	095G 90 23	JUMPER WIRE	
J913	095G 90 23	JUMPER WIRE	
J911	095G 90 23	JUMPER WIRE	
J903	095G 90 23	JUMPER WIRE	
J902	095G 90 23	JUMPER WIRE	
	715G3811P02H20003S	POWER BOARD PCB	
	040G 45762412B	CBPC LABEL	
CN701	033G327812D	CONN 2.5MM 12P V/T 32.5MM 6.6MM	
CN601	033G3802 4B Y	WAFER 2.0MM 4P	
CN401	033T380213B Y L	CONNECTOR 13P 2.0	
U106	053T 44501 HD	SAW FILTER HD-BF35 A3 DC	
C606	067G215P4714PV	CAP 105C 470UF M 25V	
C619	067G215P4714PV	CAP 105C 470UF M 25V	
C602	067G215P4716AV	EC 470UF 20% 35V 10*20	
C718	067G215V471 6N	CAP 105C 470UF M 35V	
L601	073G 253158 H	CHOKE COIL 22UH+/-25%	
L602	073G 253158 H	CHOKE COIL 22UH+/-25%	
CN111	088G 78 1377C	RCA JACK V/T 11P G/BL/R/W/R 1*5	
CN123	088G 78 1378C	RCA JACK 1*3 Y/W/R V/T 10.5MM	
CN121	088G 78 1378C	RCA JACK 1*3 Y/W/R V/T 10.5MM	
CN602	088G 30211K	PHONE JACK 7PIN	
CN102	088G 30269C	PHONE JACK 3.5MM 3P GREEN V/T 10.5MM	
CN103	088G 352 14 YG	USB CONN A TYPE R/A 4P BLACK H=8.5	
CN103	088G 352A03 CL	USB CONN A TYPE 6P BLACK 1*1 R/A 14.3	
CN101	088G353A15FASC	D-SUB 15PIN FEMALE VERTICAL SCREWED	
CN122	088T 78 13A39 YG	S JACK + RCA JACK 1*3 Y/W/R RCA-333S-010	
TU101	094G PALALL20L	TUNER PAL F41CT-2-E	
CN405	311GW200C30AAL	WAFER 2.0MM 2*15P	

Q107	057G 419509 T	SMALLTRAN 2SC2216 50MA 45V TO-92	
Q107	057G 419510 T	SMALLTRAN 2SC2717 50MA 30V TO-92	
C127	067G 3051007CT	EC 10UF/50V KM 5*11MM	
C4205	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C143	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C721	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C714	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C625	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C624	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C623	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C121	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C105	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C144	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C108	067G 3051014KT	EC 100UF 25V PF 6.3X11MM PF	
C4222	067G 3051014KT	EC 100UF 25V PF 6.3X11MM PF	
C702	067G 3051014KT	EC 100UF 25V PF 6.3X11MM PF	
C701	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C715	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C735	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C745	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C747	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C750	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C131	067G 3054704CT	EC 47UF 25V KM 5X11MM	
C707	067G 3054713PT	NO-SUGGEST CAP 105C 470UF M 16V 8*12	
C130	067G 5153313CT	EC 330UF 16V GF 8*12MM	
U701	056G 379 92	IC G5627F11U SOP-8(FD)	
U702	056G 379 92	IC G5627F11U SOP-8(FD)	
U401	056G 562F09	SCALER RTD2674U-GR LQFP216	
U704	056G 563143	IC G1084T43UF TO-252	
U705	056G 563153 HF	LDO AP1117DG-13 1A ADJ TO252-3L	
U703	056G 563153 HF	LDO AP1117DG-13 1A ADJ TO252-3L	
U701	056G 563344	DC/DC AT1529F11U 3.2A SOP-8	
U702	056G 563344	DC/DC AT1529F11U 3.2A SOP-8	
U105	056G 563519	IC G965-25ADJPIUF 1.8A SOP-8	
U704	056G 563531BHF	LDO BL1084-ADCY 5A ADJ TO-252	
U402	056G 615921 G	DRAM H5DU2562GTR-FAC 256M TSOPII-66	
U602	056G 616518	IC R2A15112FP HTQFP48	
U104	056G 659501	USB IC BD8012FVJ TSSOP-B8J	
U101	056G 662502	IC ESD AZC199-04S.R7G SOT23-6L	
U102	056G 662502	IC ESD AZC199-04S.R7G SOT23-6L	
U703	056T 563951	IC LD1117ADT-TR DPAK	
U403	056T1133935	IC MX25L3205DMI-12G SOP-16	
Q102	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q104	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q706	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q705	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q704	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q703	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q701	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q603	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q602	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q507	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q504	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q406	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q405	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q105	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q601	057G 417 6	PMBS3906/PHILIPS-SMT(06)	

Q402	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q401	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q103	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q106	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q702	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
Q404	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
RP405	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP404	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP403	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP402	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP401	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP406	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP407	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP408	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP409	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP410	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
R201	061G0402000 JT	RST CHIPR MAX0R05 1/16W TZAI YUAN	
R111	061G0402000 JT	RST CHIPR MAX0R05 1/16W TZAI YUAN	
R201	061G0402000 JY	RST CHIPR MAX 0R05 OHM 1/16W YAGEO	
R111	061G0402000 JY	RST CHIPR MAX 0R05 OHM 1/16W YAGEO	
R196	061G0402470 JF	RST CHIPR 47 OHM 5% 1/16W FENGHUA	
R196	061G0402470 JY	RST CHIPR 47 OHM 5% 1/16W YAGEO	
R4118	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4120	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4122	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4123	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4124	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4126	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4128	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4132	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4134	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4136	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4138	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4143	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4152	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R728	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R119	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R120	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R121	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R138	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R151	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R165	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R166	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4117	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4116	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4114	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4112	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R185	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R176	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R167	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4124	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4126	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4128	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4123	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4122	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4117	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4116	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	

R4114	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4112	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R185	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R176	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R167	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R166	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R165	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R151	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R138	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R121	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4120	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4118	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4132	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4134	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4136	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4138	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4143	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4152	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R728	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R119	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R120	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R732	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R721	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R4167	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R181	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R174	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R701	061G06031000FY	RST CHIP 100R 1% 1/10W	
R720	061G06031000FY	RST CHIP 100R 1% 1/10W	
R4135	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4137	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4139	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4144	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4153	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R522	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R523	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R524	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R526	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4133	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4129	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4127	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4125	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4121	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4119	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4115	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4113	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R105	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R102	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4115	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4113	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R105	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R102	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4133	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R526	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R524	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R523	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R522	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4153	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	

R4144	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4139	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4137	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4135	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4119	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4121	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4125	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4127	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4129	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4188	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R4193	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R512	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R550	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R604	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R617	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R618	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R710	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R712	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R4180	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R4176	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R192	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R191	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R182	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R128	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R125	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R104	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R103	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R4188	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R4193	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R103	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R104	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R125	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R128	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R182	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R191	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R192	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R4176	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R512	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R550	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R604	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R617	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R618	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R710	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R712	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R4180	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R197	061G0603102 JT	RST CHIP 1K 1/10W 5% TZAI YUAN	
R4202	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R4160	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R4151	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R4100	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R123	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R114	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R112	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R717	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R703	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R702	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R616	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	

R614	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R613	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R612	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R611	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R557	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R556	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R534	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R531	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R517	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R516	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R717	061G0603103 JI	RST 0603 10K 5% 1/10W	
R703	061G0603103 JI	RST 0603 10K 5% 1/10W	
R702	061G0603103 JI	RST 0603 10K 5% 1/10W	
R616	061G0603103 JI	RST 0603 10K 5% 1/10W	
R614	061G0603103 JI	RST 0603 10K 5% 1/10W	
R613	061G0603103 JI	RST 0603 10K 5% 1/10W	
R612	061G0603103 JI	RST 0603 10K 5% 1/10W	
R611	061G0603103 JI	RST 0603 10K 5% 1/10W	
R557	061G0603103 JI	RST 0603 10K 5% 1/10W	
R556	061G0603103 JI	RST 0603 10K 5% 1/10W	
R534	061G0603103 JI	RST 0603 10K 5% 1/10W	
R112	061G0603103 JI	RST 0603 10K 5% 1/10W	
R114	061G0603103 JI	RST 0603 10K 5% 1/10W	
R123	061G0603103 JI	RST 0603 10K 5% 1/10W	
R4100	061G0603103 JI	RST 0603 10K 5% 1/10W	
R4151	061G0603103 JI	RST 0603 10K 5% 1/10W	
R4160	061G0603103 JI	RST 0603 10K 5% 1/10W	
R4202	061G0603103 JI	RST 0603 10K 5% 1/10W	
R516	061G0603103 JI	RST 0603 10K 5% 1/10W	
R517	061G0603103 JI	RST 0603 10K 5% 1/10W	
R531	061G0603103 JI	RST 0603 10K 5% 1/10W	
R704	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R552	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R513	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R4203	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R162	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R150	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R149	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R144	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R143	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R137	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R136	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R116	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R115	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R115	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R116	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R136	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R137	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R143	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R144	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R149	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R150	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R162	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R4203	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R513	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R552	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R704	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	

R189	061G06031202FY	RST CHIP 12K 1/10W 1%	
R4179	061G0603121 JT	RST CHIPR 120OHM 1/10W TZAI YUAN	
R180	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R198	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R180	061G0603122 JT	RST CHIP 1K2 1/10W 5% TZAI YUAN	
R198	061G0603122 JT	RST CHIP 1K2 1/10W 5% TZAI YUAN	
R4205	061G0603124 JF	RST CHIPR 120KOHM 5% 1/10W FENGHUA	
R4169	061G06031502FF	RST CHIPR 15KOHM +-1% 1/10W FENGHUA	
R724	061G06031622FF	RST CHIPR 16.2KOHM +-1% 1/10W FENGHUA	
R608	061G06031622FF	RST CHIPR 16.2KOHM +-1% 1/10W FENGHUA	
R606	061G06031622FF	RST CHIPR 16.2KOHM +-1% 1/10W FENGHUA	
R4175	061G0603220 JF	ST CHIPR 22 OHM +-5% 1/10W FENGHUA	
R4174	061G0603220 JF	ST CHIPR 22 OHM +-5% 1/10W FENGHUA	
R4171	061G0603220 JF	ST CHIPR 22 OHM +-5% 1/10W FENGHUA	
R4177	061G0603220 JF	ST CHIPR 22 OHM +-5% 1/10W FENGHUA	
R160	061G0603221 JF	ST CHIPR 220 OHM +-5% 1/10W FENGHUA	
R161	061G0603221 JF	ST CHIPR 220 OHM +-5% 1/10W FENGHUA	
R118	061G0603221 JI	RST 0603 220R 5% 1/16W TA-I	
R118	061G0603221 JT	RST CHIPR 220OHM 1/10W TZAI YUAN	
R101	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R108	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R4189	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R101	061G0603222 JI	RST 0603 2.2K 5% 1/10W	
R4189	061G0603222 JI	RST 0603 2.2K 5% 1/10W	
R108	061G0603222 JI	RST 0603 2.2K 5% 1/10W	
R190	061G0603229 JF	RST CHIPR 2.2 OHM 5% 1/10W FENGHUA	
R145	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R148	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R615	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R110	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R113	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R132	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R134	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R132	061G0603273 JI	RST 0603 27K 5% 1/10W	
R113	061G0603273 JI	RST 0603 27K 5% 1/10W	
R110	061G0603273 JI	RST 0603 27K 5% 1/10W	
R615	061G0603273 JI	RST 0603 27K 5% 1/10W	
R148	061G0603273 JI	RST 0603 27K 5% 1/10W	
R145	061G0603273 JI	RST 0603 27K 5% 1/10W	
R134	061G0603273 JI	RST 0603 27K 5% 1/10W	
R601	061G0603274 JF	RST CHIPR 270KOHM 5% 1/10W FENGHUA	
R726	061G06033002FY	RST CHIP 30K 1/10W 1%	
R186	061G0603301 JI	RST 0603 300R 5% 1/10W TA-I	
R186	061G0603301 JT	RST 0603 300R 5% 1/10W TZAI YUAN	
R157	061G0603331 JT	RST 0603 330R 5% 1/10W	
R607	061G0603333 JF	RST CHIPR 33KOHM 1/10W FENGHUA	
R607	061G0603333 JI	RST 0603 33K 5% 1/10W	
R727	061G06034702FF	RST CHIPR 47KOHM +-1% 1/10W FENGHUA	
R4194	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R719	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R170	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R172	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R193	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R194	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4150	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4163	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4164	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	

R4165	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4166	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4173	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4178	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4192	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4195	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4207	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4208	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4212	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4215	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4216	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R514	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R553	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R602	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R706	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R709	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R711	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R714	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4215	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4216	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R514	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R553	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R602	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R706	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R709	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R711	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R716	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4194	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4192	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4178	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4173	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4166	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R714	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4165	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4164	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4163	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4150	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R194	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R719	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4195	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R170	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R172	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R193	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4207	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4208	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4212	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R716	061G0603472 JT	RST CHIP 4K7 1/10W 5% TZAI YUAN	
R4204	061G0603473 JF	RST CHIPR 47KOHM +-5% 1/10W FENGHUA	
R603	061G0603473 JF	RST CHIPR 47KOHM +-5% 1/10W FENGHUA	
R610	061G0603473 JF	RST CHIPR 47KOHM +-5% 1/10W FENGHUA	
R707	061G0603473 JF	RST CHIPR 47KOHM +-5% 1/10W FENGHUA	
R708	061G0603473 JF	RST CHIPR 47KOHM +-5% 1/10W FENGHUA	
R4101	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R4105	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R4107	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R4109	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R4172	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	

R4182	061G06034999FF		RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R187	061G0603511 JY		RST CHIPR 510OHM +-5% 1/10W YAGEO	
R135	061G0603512 JY		RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R139	061G0603512 JY		RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R723	061G0603513 JF		RST CHIPR 51K OHM +-5% 1/10W FENGHUA	
R4168	061G0603622 JF		RST CHIPR 6.2KOHM +-5% 1/10W FENGHUA	
R199	061G0603681 JI		RST 0603 680R 5% 1/10W	
R199	061G0603681 JT		RST CHIPR 680OHM +-5% 1/10W TZAI YUAN	
R195	061G0603682 JF		RST CHIPR 6.8KOHM +-5% 1/10W FENGHUA	
R195	061G0603682 JT		RST CHIP 6K8 1/10W 5% TZAI YUAN	
R106	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R107	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R109	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R133	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R140	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R141	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R142	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R146	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R159	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R163	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R164	061G0603750 JF		RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R106	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R107	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R109	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R133	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R140	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R141	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R142	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R146	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R159	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R163	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R164	061G0603750 JI		RST 0603 75R 5% 1/16W TA-I	
R158	061G0603753 JY		RST CHIPR 75KOHM +-5% 1/10W YAGEO	
FB714	061G0805000 JF		RST CHIPR 0 OHM +-5% 1/8W FENGHUA	
FB711	061G0805000 JF		RST CHIPR 0 OHM +-5% 1/8W FENGHUA	
R183	061G0805000 JF		RST CHIPR 0 OHM +-5% 1/8W FENGHUA	
R183	061G0805000 JI		RST 0805 MAX0.05R 5% 1/8W TA-I	
R4052	061G0805000 JI		RST 0805 MAX0.05R 5% 1/8W TA-I	
FB711	061G0805000 JT		RST 0805 0.05R MAX 1/8W	
FB714	061G0805000 JT		RST 0805 0.05R MAX 1/8W	
R4052	061G0805000 JT		RST 0805 0.05R MAX 1/8W	
R188	061G08053832FF		RST CHIPR 38.3KOHM +-1% 1/8W FENGHUA	
R4190	061G0805472 JF		RST CHIPR 4.7KOHM +-5% 1/8W FENGHUA	
R100	061G1206000 JI		RST 1206 MAX0R05 5% 1/4W	
R100	061G1206000 JT		RST CHIPR MAX0R05 1/4W TZAI YUAN	
R200	061G1206629 JI		RST 1206 6.2R 5% 1/4W	
R200	061G1206629 JT		RST CHIPR 6.2 OHM +-5% 1/4W TZAI YUAN	
C4213	065G060310131J A		CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C4214	065G060310131J A		CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C4215	065G060310131J A		CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C4216	065G060310131J A		CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C4217	065G060310131J A		CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C4218	065G060310131J A		CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C741	065G060310232K Y		CAP CHIP 0603 1N 50V X7R +/-10%	
C758	065G060310232K Y		CAP CHIP 0603 1N 50V X7R +/-10%	
C137	065G060310332K Y		CAP CHIP 0603 10N 50V X7R +/-10%	
C139	065G060310332K Y		CAP CHIP 0603 10N 50V X7R +/-10%	

C4223	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C4224	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C511	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C512	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C4157	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C753	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C751	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C749	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C748	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C743	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C742	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C738	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C736	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C734	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C725	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C723	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C4156	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C4153	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C4145	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C4100	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C129	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C126	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C125	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C122	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C109	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C101	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C4184	065G060310522K	A	0603 1UF 25V X7R	
C4183	065G060310522K	A	0603 1UF 25V X7R	
C4182	065G060310522K	A	0603 1UF 25V X7R	
C4181	065G060310522K	A	0603 1UF 25V X7R	
C4180	065G060310522K	A	0603 1UF 25V X7R	
C4179	065G060310522K	A	0603 1UF 25V X7R	
C4178	065G060310522K	A	0603 1UF 25V X7R	
C4177	065G060310522K	A	0603 1UF 25V X7R	
C4195	065G060322031J	F	CAP CHIP 0603 22PF J 50V NPO	
C4194	065G060322031J	F	CAP CHIP 0603 22PF J 50V NPO	
C103	065G060322031J	F	CAP CHIP 0603 22PF J 50V NPO	
C102	065G060322031J	F	CAP CHIP 0603 22PF J 50V NPO	
C4104	065G060327131J	F	CAP CHIP 0603 270PF J 50V NPO	
C4109	065G060327131J	F	CAP CHIP 0603 270PF J 50V NPO	
C4114	065G060327131J	F	CAP CHIP 0603 270PF J 50V NPO	
C4121	065G060327131J	F	CAP CHIP 0603 270PF J 50V NPO	
C116	065G060347131J	Y	CAP CHIP 0603 470P 50V NP0 +/-5%	
C115	065G060347131J	Y	CAP CHIP 0603 470P 50V NP0 +/-5%	
C4126	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4128	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4131	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4132	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4134	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4137	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4139	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4151	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4144	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4140	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4124	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4118	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4117	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	

C4116	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4115	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4111	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4110	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4107	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4106	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4101	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C106	065G060347931C	Y	CAP 0603 4.7PF 0.25PF 50V NPO	
C107	065G060347931C	Y	CAP 0603 4.7PF 0.25PF 50V NPO	
C4147	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C4141	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C4138	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C4133	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C4130	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C4125	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C123	065G060356031J	Y	CAP CHIP 0603 56P 50V NP0 +/-5%	
C124	065G060356031J	Y	CAP CHIP 0603 56P 50V NP0 +/-5%	
C118	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C119	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C120	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C4142	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C4191	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C4192	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C4206	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C608	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C618	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C626	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C138	065G080510522K	T	CAP 0805 1UF 10% 25V X7R	
C4143	065G080522522K	T	CAP 0805 2.2UF 10% 25V X7R	
C621	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C607	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C4135	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4129	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4127	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4123	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4122	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4113	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4112	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4105	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4102	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C114	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C113	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4136	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4196	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C737	065G0805475A7Z	Y	CAP CHIP 4.7UF 10V Y5V -20%~+80%	
C757	065G0805475A7Z	Y	CAP CHIP 4.7UF 10V Y5V -20%~+80%	
C616	065G120610532K	3	CAP 1206 1UF 10% 50V X7R	
C732	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C726	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C4210	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C4209	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C4187	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C128	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C615	065G120610625K	3	CAP CHIP 1206 10UF K 25V X5R	
C614	065G120610625K	3	CAP CHIP 1206 10UF K 25V X5R	
C610	065G120610625K	3	CAP CHIP 1206 10UF K 25V X5R	
C609	065G120610625K	3	CAP CHIP 1206 10UF K 25V X5R	

C744	065G1206226A5K T	CAP CHIP1206 22UF K 10V X5R	
C752	065G1206226A5K T	CAP CHIP1206 22UF K 10V X5R	
U403	070GHDCP500HDC	HDCP CODE	
FB106	071G 56A221 TA	IND FXD 0805 EMI 100MHZ 220R R	
FB427	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB426	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB425	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB422	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB418	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB417	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB416	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB415	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB414	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB413	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB412	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB411	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB409	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB408	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB407	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB406	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB405	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB404	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB403	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB402	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB401	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB107	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB101	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB406	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB405	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB404	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB403	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB402	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB401	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB107	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB101	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB411	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB427	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB426	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB425	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB422	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB418	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB417	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB412	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB413	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB414	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB415	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB416	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB407	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB408	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB409	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB719	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB718	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB717	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB716	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB715	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB713	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB712	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	

FB710	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB709	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB708	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB707	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB705	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB704	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB702	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB701	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB423	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB420	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
RP415	071G 57U600 M	CHIP BEAD ARRAY 1206 60 OHM	
RP414	071G 57U600 M	CHIP BEAD ARRAY 1206 60 OHM	
RP413	071G 57U600 M	CHIP BEAD ARRAY 1206 60 OHM	
RP412	071G 57U600 M	CHIP BEAD ARRAY 1206 60 OHM	
RP411	071G 57U600 M	CHIP BEAD ARRAY 1206 60 OHM	
FB103	071G 59B121 J	CHIP BEAD 0603 120R 25% GB160808H121TT	
FB104	071G 59B601 MA	CHIP BEAD	
FB102	071G 59B601 MA	CHIP BEAD	
R177	071G 59C600 TA	CHIP BEAD 0603 60R 25% 600MA	
R126	071G 59C600 TA	CHIP BEAD 0603 60R 25% 600MA	
R122	071G 59C600 TA	CHIP BEAD 0603 60R 25% 600MA	
L401	073G 6310910M	CHIP INDUCTOR 1UH 10% 0.6R 25MA	
L402	073G 6310910M	CHIP INDUCTOR 1UH 10% 0.6R 25MA	
L403	073G 6310910M	CHIP INDUCTOR 1UH 10% 0.6R 25MA	
L404	073G 6310910M	CHIP INDUCTOR 1UH 10% 0.6R 25MA	
L105	073G 63159GKM	CHIP INDUCTOR 1.5UH 10% 0.7R 50MA	
L102	073G 6322910K	NO-SUGGEST CHIP INDUCTOR 2.2UH 10% - -	
L103	073G 6333810M	CHIP INDUCTOR 0.33UH 10% 0.75R 100MA	
L701	073G253S 46 H	SMD CHOKE 4.7UH 20% 0.06R SPI65C-4R7,HF	
L702	073G253S 46 H	SMD CHOKE 4.7UH 20% 0.06R SPI65C-4R7,HF	
L104	073T 6310010M	CHIP INDUCTOR 10UH 10% 2.55R 15MA	
L101	073T253S505 Y	SMD COMMON CHOKE 0504 90 OHM	
CN506	088G 34019E AT	DMI HEADER 19P H:11.38MM	
CN506	088G 34019E AV	HDMI HEADER 19P BLACK -	
CN506	088G 34019E VD	HDMI HEADER 19P BLACK -	
CN502	088G 34019H VT	HDMI HEADER 19P BLACK -	
D501	093G 60505	SCHOTTKY BAT54C 0.2A 30V SOT-23	
D503	093G 60505	SCHOTTKY BAT54C 0.2A 30V SOT-23	
X401	093G 22S515 YC	CRYSTAL 27MHZ 27MHZ 30PPM 20PF	
X401	093G 22S920 C	CRYSTAL 27MHZ 27M 30PPM 20PF	
ZD401	093G 39S 24 T	RLZ 5.6B LLDS	
ZD402	093G 39S 24 T	RLZ 5.6B LLDS	
ZD403	093G 39S 24 T	RLZ 5.6B LLDS	
ZD602	093G 39S 44 T	ZENER RLZ18B TE11 15.25V 0.5W LL-34	
ZD113	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD114	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD115	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD116	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD122	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD123	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD124	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD125	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD126	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD502	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD503	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD601	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD101	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	

ZD102	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD103	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD104	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD105	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD106	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD107	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD108	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD109	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD110	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD111	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD112	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD603	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
E715	715G3934M04000004F	MAIN BOARD PCB	
	P90T0051301	HEAT SINK FOR U401	
	INTV9LCCXAA9	INVERTER BOARD	
	040G 45762412B	CBPC LABEL	
CN8803	033G3802 2B Y	CONNECTOR	
CN8803	033G3802 2B Y W	CONNECTOR	
CN8802	033G3802 3B Y L	CONNECTOR 3P 2.0PITCH	
CN8802	033G3802 3B Y W	CONNECTOR	
CN8802	033T3802 3B Y	CONNECTOR	
C8813	065G 6J1006ET	10PF 5% SL 6KV	
C8812	065G 6J1006ET	10PF 5% SL 6KV	
C8811	065G 6J1006ET	10PF 5% SL 6KV	
C8810	065G 6J1006ET	10PF 5% SL 6KV	
C8809	065G 6J1006ET	10PF 5% SL 6KV	
C8808	065G 6J1006ET	10PF 5% SL 6KV	
C8807	065G 6J1006ET	10PF 5% SL 6KV	
C8806	065G 6J1006ET	10PF 5% SL 6KV	
C8805	065G 6J1006ET	10PF 5% SL 6KV	
C8804	065G 6J1006ET	10PF 5% SL 6KV	
C8803	065G 6J1006ET	10PF 5% SL 6KV	
C8802	065G 6J1006ET	10PF 5% SL 6KV	
CN8801	095G 825 6D901	HARNESS 6P(SCN)-5P 300MM FQE092368HY	
R8805	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R8808	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R8805	061G08051003FI	RST 0805 100K 1% 1/8W	
R8808	061G08051003FI	RST 0805 100K 1% 1/8W	
R8805	061G08051003FY	RST CHIP 100K 1/8W 1%	
R8808	061G08051003FY	RST CHIP 100K 1/8W 1%	
R8809	061G0805101 JF	RST 0805 100R 5% 1/8W	
R8807	061G0805101 JF	RST 0805 100R 5% 1/8W	
R8806	061G0805101 JF	RST 0805 100R 5% 1/8W	
R8802	061G0805101 JF	RST 0805 100R 5% 1/8W	
R8801	061G0805101 JF	RST 0805 100R 5% 1/8W	
R8801	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8802	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8806	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8807	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8809	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8823	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8822	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8821	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8820	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8819	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8818	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8818	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	

R8819	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W	TZAI YUAN	
R8820	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W	TZAI YUAN	
R8821	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W	TZAI YUAN	
R8822	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W	TZAI YUAN	
R8823	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W	TZAI YUAN	
R8804	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W	FENGHUA	
R8804	061G0805103 JT	RST 0805 10K 5% 1/8W		
R8805	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W	TZAI YUAN	
R8808	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W	TZAI YUAN	
R8803	061G08053902FT	RST CHIP 39K 1/8W 1%		
R8816	061G08053902FT	RST CHIP 39K 1/8W 1%		
R8803	061G08053902FY	RST CHIP 39K 1/8W 1%		
R8816	061G08053902FY	RST CHIP 39K 1/8W 1%		
R8810	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W	FENGHUA	
R8811	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W	FENGHUA	
R8812	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W	FENGHUA	
R8814	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W	FENGHUA	
R8815	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W	FENGHUA	
R8810	061G0805511 JT	RST CHIPR 510OHM +-5% 1/8W	TZAI YUAN	
R8811	061G0805511 JT	RST CHIPR 510OHM +-5% 1/8W	TZAI YUAN	
R8812	061G0805511 JT	RST CHIPR 510OHM +-5% 1/8W	TZAI YUAN	
R8814	061G0805511 JT	RST CHIPR 510OHM +-5% 1/8W	TZAI YUAN	
R8815	061G0805511 JT	RST CHIPR 510OHM +-5% 1/8W	TZAI YUAN	
R8815	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W	YAGEO	
R8814	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W	YAGEO	
R8812	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W	YAGEO	
R8811	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W	YAGEO	
R8810	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W	YAGEO	
R8817	061G0805512 JF	RST CHIPR 5.1KOHM +-5% 1/8W	FENGHUA	
R8813	061G0805512 JF	RST CHIPR 5.1KOHM +-5% 1/8W	FENGHUA	
R8817	061G0805512 JI	RST 0805 5.1K 5% 1/8W		
R8813	061G0805512 JI	RST 0805 5.1K 5% 1/8W		
RJ8801	061G1206000 JF	RST CHIPR MAX0R05 1/4W	FENGHUA	
RJ8801	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W		
RJ8801	061G1206000 JT	RST CHIPR MAX0R05 1/4W	TZAI YUAN	
C8819	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%		
C8818	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%		
C8801	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%		
C8814	065G080518332K Y	CAP CHIP 0805 18NF K 50V X7R		
C8815	065G080518332K Y	CAP CHIP 0805 18NF K 50V X7R		
C8816	065G080518332K Y	CAP CHIP 0805 18NF K 50V X7R		
C8817	065G080518332K Y	CAP CHIP 0805 18NF K 50V X7R		
C8820	065G080518332K Y	CAP CHIP 0805 18NF K 50V X7R		
C8821	065G080518332K Y	CAP CHIP 0805 18NF K 50V X7R		
C8822	065G080518332K Y	CAP CHIP 0805 18NF K 50V X7R		
C8823	065G080518332K Y	CAP CHIP 0805 18NF K 50V X7R		
C8824	065G080518332K Y	CAP CHIP 0805 18NF K 50V X7R		
C8825	065G080518332K Y	CAP CHIP 0805 18NF K 50V X7R		
D8819	093G 64 33	SWITCHING BAV99 0.2A 85V SOT-23		
D8818	093G 64 33	SWITCHING BAV99 0.2A 85V SOT-23		
D8817	093G 64 33	SWITCHING BAV99 0.2A 85V SOT-23		
D8815	093G 64 33	SWITCHING BAV99 0.2A 85V SOT-23		
D8814	093G 64 33	SWITCHING BAV99 0.2A 85V SOT-23		
D8813	093G 64 33	SWITCHING BAV99 0.2A 85V SOT-23		
D8812	093G 64 33	SWITCHING BAV99 0.2A 85V SOT-23		
D8811	093G 64 33	SWITCHING BAV99 0.2A 85V SOT-23		
D8809	093G 64 33	SWITCHING BAV99 0.2A 85V SOT-23		

D8808	093G 64 33	SWITCHING BAV99 0.2A 85V SOT-23	
D8819	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8818	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8817	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8815	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8814	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8813	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8812	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8811	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8809	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8808	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8813	093G 6433S	BAV99_SOT-23	
D8814	093G 6433S	BAV99_SOT-23	
D8812	093G 6433S	BAV99_SOT-23	
D8808	093G 6433S	BAV99_SOT-23	
D8815	093G 6433S	BAV99_SOT-23	
D8817	093G 6433S	BAV99_SOT-23	
D8818	093G 6433S	BAV99_SOT-23	
D8819	093G 6433S	BAV99_SOT-23	
D8811	093G 6433S	BAV99_SOT-23	
D8809	093G 6433S	BAV99_SOT-23	
D8806	093G 3919552T	ZENER MTZJT-725.1B 5.1V 0.5W DO-34	
D8802	093G 64 1152T	SWITCHING IN4148 1A 100V DO-35	
D8801	093G 64 1152T	SWITCHING IN4148 1A 100V DO-35	
D8820	093G 64 1152T	SWITCHING IN4148 1A 100V DO-35	
D8821	093G 64 1152T	SWITCHING IN4148 1A 100V DO-35	
D8822	093G 64 1152T	SWITCHING IN4148 1A 100V DO-35	
D8805	093G 64 1152T	SWITCHING IN4148 1A 100V DO-35	
D8807	093G 64 1152T	SWITCHING IN4148 1A 100V DO-35	
D8804	093G 64 1152T	SWITCHING IN4148 1A 100V DO-35	
D8802	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35	
D8804	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35	
D8805	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35	
D8807	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35	
D8820	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35	
D8821	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35	
D8822	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35	
D8801	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35	
J8814	095G 90 23	JUMPER WIRE	
J8813	095G 90 23	JUMPER WIRE	
J8812	095G 90 23	JUMPER WIRE	
J8811	095G 90 23	JUMPER WIRE	
J8810	095G 90 23	JUMPER WIRE	
J8801	095G 90 23	JUMPER WIRE	
J8802	095G 90 23	JUMPER WIRE	
J8803	095G 90 23	JUMPER WIRE	
J8804	095G 90 23	JUMPER WIRE	
J8805	095G 90 23	JUMPER WIRE	
J8806	095G 90 23	JUMPER WIRE	
J8807	095G 90 23	JUMPER WIRE	
J8808	095G 90 23	JUMPER WIRE	
J8809	095G 90 23	JUMPER WIRE	
	715G3652P02000003S	INVERTER BOARD PCB	
T8802	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8801	S80GL32T14V	TRANSFORMER ASS'Y	

	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8803	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8806	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8805	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8808	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8807	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8810	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8812	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8809	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8811	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
T8804	S80GL32T14V	TRANSFORMER ASS'Y	
	071FPE13101 05	FP2 EEL13	
	S80GL32T14VZ	TRANSFORMER ASS'Y	
	IRPFAQH8	IR BOARD	
U01	056G 627911	IR 38KHZ KSM-603TM2M	
CN01	033G8032 5F HR	CONNECTOR	
R001	061G0603153 JY	RST CHIPR 15KOHM 1/10W YAGEO	
C01	065G060310432K Y	CAP 0603 100NF 10% 50V X7R	
LED01	081G 14 6 GP	LED GPTD1210RGC GUANGPU	
ZD02	093G 39S 24 T	RLZ 5.6B LLDS	
ZD03	093G 39S 24 T	RLZ 5.6B LLDS	
E715	715G3821R03000004M	IR BOARD PCB	
	KEPFAAA2	KEY BOARD	
CN01	033G8032 4F HR	CONNECTOR 4P 1.25	
R04	061G08051001FT	RST CHIP 1K 1/8W 1%	
R03	061G08051801FY	RST CHIP R 1K8 +/-1% 1/8W	
R02	061G08052701FY	RST CHIP 2K7 1/8W 1%	
R08	061G08057500FF	RST CHIPR 750 OHM +/-1% 1/8W FENGHUA	
R07	061G08057500FF	RST CHIPR 750 OHM +/-1% 1/8W FENGHUA	
R05	061G08057500FF	RST CHIPR 750 OHM +/-1% 1/8W FENGHUA	
R01	061G08057501FF	RST CHIPR 7.5KOHM +/-1% 1/8W FENGHUA	
SW04	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW03	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW02	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW01	077G 607 2 FD	CHIP TACT SW BY FORWARD	

		SFKQGMA2125T-PL	
SW06	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW05	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW07	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
	715G3814K01004004S	KEY BOARD PCB	
	Q02G7021 2	BOLT	
	Q02G7022 3	SCREW-STOPPER	
	Q11G5061 1	PCB SUPPORT	
	Q12G6300 26 1	RUBBER PAD	
	Q40G0003615B79	POS STICKER LABEL LC32W033M	
	Q40G0003615B90	LABEL WARRANTY STICKER LABEL	
	Q44GJ061102	32 TV EPS	
	Q44GJ061201	CUSHION-TR EPS	
	Q44GJ061302	CUSHION EPS	
	Q44GJ061401	CUSHION-BR EPS	
	Q44GJ061615 4C	32" AOC CARTON LC32W033M	
	Q45G 77 5	PE PACKING (Y1900241)	
	Q45G 99626 36	PE BAG	
	Q45G9901 TV010	P.E. BAG 1000 680 0.02+0.3 0.02	
	Q50G 4 10	TIE (Y1900221)	
	Q50G 500523	CABLE TIE	
	Q52G1501150523 W	INSULATING PLATE	
E750	TPT315B6L01A110	PANEL TPT315B6-L01 C1C FQ TPV	2nd source
	092GB1JX1A3EGC	BATTERY 1.5V BATTERY LR03	
	0Q1G 940 14 47 CR3	SCREW	
	Q41G32MV61539B	USER MANUAL	
	Q41G78DV615 6B	WARRANTY CARD	
	Q45G 76 28NV2 R	PE BAG FOR BASE SCREW SZ02742	
	Q45G2010M0201A	P.E. BAG (INSTR. BOOK)	
	040G 58162435A	PN LABEL FOR MANUAL PE BAG	
	Q26G 800504 3B	BARCODE LABEL FOR 4	
	Q40G 32061595A	RATING LABEL	
	0M1G 930 8 47 CR3	SCREW 3X8	
	0Q1G 930 8 47 CR3	SCREW 3X8	
	A15T1023101	BRACKET	
	Q40G2010 42014	SIDE IO LABEL	
	0M1G1740 14 47 CR3	SCREW	
	Q15T0715101	PANEL SUPPORT BKT TOP L	
	Q15T0716101	PANEL SUPPORT BKT TOP R	
	Q15T0717101	BASE SUPPORT BKT UDM	
	Q15T0720101	32-VESA-BKT-TOP	
	Q52G1801 TV019	INSULATING SHEET	
	Q52G1801 TV020	INSULATING SHEET	

LC42H033M E42AMKNCW3A1NN

Location	Part No.	Description	Remark
	036T 600 18117	HEMIRON	
	052G 1185 1	BIG TAPE(Y1200141)	
	052G 1186	SMALL TAPE	
	052G 2191 A	PAPER TAPE	
	089G217A18N IS	AC POWER CORD 1800MM	
ECN701	095G801312D665	HARNESS 12P-12P 230	2nd source
ECN701	095G801312X665	HARNESS 12P-12P 230	
ECN801	095G8014 2D908	HARNESS 2P-2P 400MM FQE92064I	
ECN803	095G8014 2D908	HARNESS 2P-2P 400MM FQE92064I	
ECN803	095G8014 2X908	HARNESS 2P-2P 400MM LCDXXTF0418	2nd source
ECN801	095G8014 2X908	HARNESS 2P-2P 400MM LCDXXTF0418	2nd source
ECN601	095G8014 4X 54	HARNESS 4P 850/550MM	
ECN802	095G8014 5D924	HARNESS 5P-5P 400MM FQE92063I	
ECN802	095G8014 5X924	HARNESS 5P-5P 400MM LCDXXTF0419	2nd source
ECN405	095G801851D542	HARNESS 51P-30P 570	
	098GRABD1NEACD	REMOTE CONTROL AOC 90-364100T4418	
	0M1G 930 6 47 CR3	SCREW	
	0M1G 940 8 47 CR3	SCREW 4X8	
	0M1G 940 8 47 CR3	SCREW 4X8	
	0M1G 940 10 47 CR3	SCREW 4.0X10	
	0M1G1730 6120	SCREW 3X6	
	0M1G1730 6120	SCREW 3X6	
	0M1G1740 10120	SCREW 42A9940008	
	0M1G1740 10120	SCREW 42A9940008	
	0M1G1830 8120	SCREW	
	0Q1G 930 8 47 CR3	SCREW	
	0Q1G 930 8 47 CR3	SCREW	
	0Q1G 940 16 47 CR3	SCREW	
	0Q1G 940 16 47 CR3	SCREW	
	0Q1G 940 30 47 CR3	SCREW	
	705TQ949001	COMSUPTIVE ASS'Y-A4	
E750	750TVM4202N113N000	PANEL V420H2-LN1 NH CMO	
	756TQACB KC007 00	MAIN BOARD-CBPFK1CQ2	
U403	056T1133935	IC MX25L3205DMI-12G SOP-16	
SMTF-U403	100TARVM001C11	MCU ASS'Y-056T1133935	
	A15T0944101	42-BKT-VESA	
M037	A37T0142031	HINGE 42	
	040G 45762412B	CBPC LABEL	
CN701	033G327812D	WAFER 12P PLUG	
CN601	033G3802 4B Y	WAFER 2.0MM 4P	
CN401	033T380213B Y L	CONNECTOR 13P 2.0	
U106	053T 44501 HD	SAW FILTER HD-BF35 A3 DC	
C619	067G215P4714PV	CAP 105C 470UF M 25V	
C606	067G215P4714PV	CAP 105C 470UF M 25V	
C602	067G215P4716AV	CAP 105C 470UF M 35V	
C718	067G215V471 6N	CAP 105C 470UF M 35V	
L601	073G 253158 H	CHOKE COIL 22UH+/-25%	
L602	073G 253158 H	CHOKE COIL 22UH+/-25%	
CN111	088G 78 1377C	RCA JACK V/T 11P G/BL/R/W/R 1*5	
CN123	088G 78 1378C	RCA JACK 1*3 Y/W/R V/T 10.5MM	
CN121	088G 78 1378C	RCA JACK 1*3 Y/W/R V/T 10.5MM	

CN602	088G 30211K	PHONE JACK 7PIN	
CN102	088G 30269C	PHONE JACK 3.5MM 3P GREEN V/T 10.5MM	
CN103	088G 352 14 YG	USB CONN A TYPE R/A 4P BLACK H=8.5	
CN103	088G 352A03 CL	USB CONN A TYPE 6P BLACK 1*1 R/A 14.3	
CN101	088G353A15FASC	D-SUB 15PIN FEMALE VERTICAL SCREWED	
CN122	088T 78 13A39 YG	S JACK + RCA JACK 1*3 Y/W/R RCA-333S-010	
TU101	094G PALALL20L	TUNER PAL F41CT-2-E	
CN405	311GW200C30AAL	WAFER 2.0MM 2*15P	
Q107	057G 419509 T	SMALLTRAN 2SC2216 50MA 45V TO-92	
Q107	057G 419510 T	SMALLTRAN 2SC2717 50MA 30V TO-92	
C127	067G 3051007CT	EC 10UF/50V KM 5*11MM	
C121	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C623	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C625	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C624	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C143	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C721	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C714	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C144	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C4205	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C105	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C108	067G 3051014KT	EC 100UF 25V PF 6.3X11MM	
C4222	067G 3051014KT	EC 100UF 25V PF 6.3X11MM	
C702	067G 3051014KT	EC 100UF 25V PF 6.3X11MM	
C750	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C747	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C745	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C735	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C715	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C701	067G 3052213PT	EC 220UF 16V 6.3 μ *11MM	
C131	067G 3054704CT	EC 47UF 25V KM 5X11MM	
C707	067G 3054713PT	NO-SUGGEST CAP 105C 470UF M 16V 8*12	
C130	067G 5153313CT	EC 330UF 16V GF 8*12MM	
U701	056G 379 92	IC G5627F11U SOP-8(FD)	
U702	056G 379 92	IC G5627F11U SOP-8(FD)	
U401	056G 562F09	SCALER RTD2674U-GR LQFP216	
U704	056G 563143	IC G1084T43UF TO-252	
U705	056G 563153	LDO AP1117DL-13 1A/ADJ TO252-3L	
U105	056G 563519	IC G965-25ADJPIUF 1.8A SOP-8	
U402	056G 615921 G	DRAM H5DU2562GTR-FAC 256M TSOPII-66	
U602	056G 616518	IC R2A15112FP HTQFP48	
U104	056G 659501	USB IC BD8012FVJ TSSOP-B8J	
U102	056G 662502	IC ESD AZC199-04S.R7G SOT23-6L	
U101	056G 662502	IC ESD AZC199-04S.R7G SOT23-6L	
U703	056T 563951	IC LD1117ADT-TR DPAK	
U403	056T1133935	IC MX25L3205DMI-12G SOP-16	
Q706	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q705	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q704	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q703	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q701	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q603	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q602	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q102	057G 417 4	PMBS3904/PHILIPS-SMT(04)	

Q104	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q105	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q405	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q406	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q504	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q507	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q103	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q106	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q401	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q402	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q601	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q404	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
Q702	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
RP401	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP410	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP409	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP408	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP407	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP406	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP405	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP404	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP403	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP402	061G 1262208JY	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
R201	061G0402000 JT	RST CHIPR MAX0R05 1/16W TZAI YUAN	
R111	061G0402000 JT	RST CHIPR MAX0R05 1/16W TZAI YUAN	
R111	061G0402000 JY	RST CHIPR MAX 0R05 OHM 1/16W YAGEO	
R201	061G0402000 JY	RST CHIPR MAX 0R05 OHM 1/16W YAGEO	
R196	061G0402470 JF	RST CHIPR 47 OHM 5% 1/16W FENGHUA	
R196	061G0402470 JY	RST CHIPR 47 OHM 5% 1/16W YAGEO	
R4112	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4114	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4116	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4117	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4118	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4120	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4122	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4123	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4124	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R185	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R176	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R167	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R166	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R165	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R151	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R138	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R121	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R120	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R119	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4126	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R728	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4152	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4143	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4138	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4136	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	

R4134	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4132	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R4128	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R119	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R120	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R121	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R138	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R151	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R165	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R166	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R167	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R176	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R185	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4112	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4114	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4116	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4117	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4124	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4126	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4128	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4123	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4122	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4120	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4118	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4132	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4134	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4136	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4138	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4143	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R4152	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R728	061G0603000 JI	RST 0603 0.05R MAX 1/10W TA-I	
R732	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R721	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R4167	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R181	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R174	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R701	061G06031000FY	RST CHIP 100R 1% 1/10W	
R720	061G06031000FY	RST CHIP 100R 1% 1/10W	
R4135	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4137	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4139	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4144	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4153	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R522	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R523	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R524	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R526	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4133	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R102	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R105	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4113	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4115	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4119	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4121	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	

R4125	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4127	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4129	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R4135	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4137	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4139	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4144	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4153	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R522	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R523	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4129	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4127	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4125	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4121	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4119	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4115	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4113	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R105	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R102	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4133	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R526	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R524	061G0603101 JI	RST 0603 100R 5% 1/10W TA-I	
R4188	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R4193	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R512	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R550	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R604	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R617	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R618	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R710	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R712	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R103	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R104	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R125	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R128	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R182	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R191	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R192	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R4176	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R4180	061G0603102 JF	RST CHIPR 1K OHM +-5% 1/10W FENGHUA	
R4180	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R4176	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R192	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R191	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R182	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R128	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R125	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R104	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R103	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R712	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R710	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R618	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R617	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R604	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	

R550	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R512	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R4193	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R4188	061G0603102 JI	TEST ONLY RST 0603 1K 5% 1/10W TA-I	
R197	061G0603102 JT	RST CHIP 1K 1/10W 5% TZAI YUAN	
R717	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R703	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R702	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R616	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R614	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R613	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R612	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R611	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R557	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R556	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R534	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R531	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R517	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R516	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R4202	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R4160	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R4151	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R4100	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R123	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R114	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R112	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R717	061G0603103 JI	RST 0603 10K 5% 1/10W	
R703	061G0603103 JI	RST 0603 10K 5% 1/10W	
R702	061G0603103 JI	RST 0603 10K 5% 1/10W	
R616	061G0603103 JI	RST 0603 10K 5% 1/10W	
R614	061G0603103 JI	RST 0603 10K 5% 1/10W	
R613	061G0603103 JI	RST 0603 10K 5% 1/10W	
R612	061G0603103 JI	RST 0603 10K 5% 1/10W	
R611	061G0603103 JI	RST 0603 10K 5% 1/10W	
R557	061G0603103 JI	RST 0603 10K 5% 1/10W	
R556	061G0603103 JI	RST 0603 10K 5% 1/10W	
R534	061G0603103 JI	RST 0603 10K 5% 1/10W	
R112	061G0603103 JI	RST 0603 10K 5% 1/10W	
R114	061G0603103 JI	RST 0603 10K 5% 1/10W	
R123	061G0603103 JI	RST 0603 10K 5% 1/10W	
R4100	061G0603103 JI	RST 0603 10K 5% 1/10W	
R4151	061G0603103 JI	RST 0603 10K 5% 1/10W	
R4160	061G0603103 JI	RST 0603 10K 5% 1/10W	
R4202	061G0603103 JI	RST 0603 10K 5% 1/10W	
R516	061G0603103 JI	RST 0603 10K 5% 1/10W	
R517	061G0603103 JI	RST 0603 10K 5% 1/10W	
R531	061G0603103 JI	RST 0603 10K 5% 1/10W	
R704	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R552	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R513	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R4203	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R162	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R150	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R149	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	

R115	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R116	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R136	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R137	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R143	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R144	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R115	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R116	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R136	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R137	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R143	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R144	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R149	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R150	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R162	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R4203	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R513	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R552	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R704	061G0603104 JI	TEST ONLY RST 0603 100K 5% 1/16W TA-I	
R189	061G06031202FY	RST CHIP 12K 1/10W 1%	
R4179	061G0603121 JT	RST CHIPR 120OHM 1/10W TZAI YUAN	
R180	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R198	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R198	061G0603122 JT	RST CHIP 1K2 1/10W 5% TZAI YUAN	
R180	061G0603122 JT	RST CHIP 1K2 1/10W 5% TZAI YUAN	
R4205	061G0603124 JF	RST CHIPR 120KOHM 5% 1/10W FENGHUA	
R4169	061G06031502FF	RST CHIPR 15KOHM +-1% 1/10W FENGHUA	
R724	061G06031622FF	RST CHIPR 16.2KOHM +-1% 1/10W FENGHUA	
R608	061G06031622FF	RST CHIPR 16.2KOHM +-1% 1/10W FENGHUA	
R606	061G06031622FF	RST CHIPR 16.2KOHM +-1% 1/10W FENGHUA	
R4171	061G0603220 JF	ST CHIPR 22 OHM +-5% 1/10W FENGHUA	
R4174	061G0603220 JF	ST CHIPR 22 OHM +-5% 1/10W FENGHUA	
R4175	061G0603220 JF	ST CHIPR 22 OHM +-5% 1/10W FENGHUA	
R4177	061G0603220 JF	ST CHIPR 22 OHM +-5% 1/10W FENGHUA	
R160	061G0603221 JF	ST CHIPR 220 OHM +-5% 1/10W FENGHUA	
R161	061G0603221 JF	ST CHIPR 220 OHM +-5% 1/10W FENGHUA	
R118	061G0603221 JI	RST 0603 220R 5% 1/16W TA-I	
R118	061G0603221 JT	RST CHIPR 220OHM 1/10W TZAI YUAN	
R4189	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R108	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R101	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R101	061G0603222 JI	RST 0603 2.2K 5% 1/10W	
R108	061G0603222 JI	RST 0603 2.2K 5% 1/10W	
R4189	061G0603222 JI	RST 0603 2.2K 5% 1/10W	
R190	061G0603229 JF	RST CHIPR 2.2 OHM 5% 1/10W FENGHUA	
R615	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R148	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R145	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R134	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R132	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R113	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R110	061G0603273 JF	RST CHIPR 27KOHM 5% 1/10W FENGHUA	
R615	061G0603273 JI	RST 0603 27K 5% 1/10W	
R148	061G0603273 JI	RST 0603 27K 5% 1/10W	

R145	061G0603273 JI	RST 0603 27K 5% 1/10W	
R134	061G0603273 JI	RST 0603 27K 5% 1/10W	
R132	061G0603273 JI	RST 0603 27K 5% 1/10W	
R113	061G0603273 JI	RST 0603 27K 5% 1/10W	
R110	061G0603273 JI	RST 0603 27K 5% 1/10W	
R601	061G0603274 JF	RST CHIPR 270KOHM 5% 1/10W FENGHUA	
R726	061G06033002FY	RST CHIP 30K 1/10W 1%	
R186	061G0603301 JI	RST 0603 300R 5% 1/10W TA-I	
R186	061G0603301 JT	RST 0603 300R 5% 1/10W TZAI YUAN	
R157	061G0603331 JT	RST 0603 330R 5% 1/10W	
R607	061G0603333 JF	RST CHIPR 33KOHM 1/10W FENGHUA	
R607	061G0603333 JI	RST 0603 33K 5% 1/10W	
R727	061G06034702FF	RST CHIPR 47KOHM +-1% 1/10W FENGHUA	
R4207	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4208	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4212	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4215	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4216	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R514	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R553	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R602	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R706	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R709	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R711	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R714	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R719	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4195	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R170	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R172	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R193	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R194	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4150	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4163	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4164	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4165	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4166	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4173	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4178	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4192	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4194	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R4207	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4208	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4212	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R172	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R193	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R194	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4150	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4163	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4164	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4165	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4166	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4173	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4178	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4192	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	

R4194	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4215	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4216	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R514	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R553	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R602	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R706	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R709	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R711	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R714	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R719	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4195	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R170	061G0603472 JI	RST 0603 4.7K 5% 1/10W TA-I	
R4204	061G0603473 JF	RST CHIPR 47KOHM +-5% 1/10W FENGHUA	
R603	061G0603473 JF	RST CHIPR 47KOHM +-5% 1/10W FENGHUA	
R610	061G0603473 JF	RST CHIPR 47KOHM +-5% 1/10W FENGHUA	
R707	061G0603473 JF	RST CHIPR 47KOHM +-5% 1/10W FENGHUA	
R708	061G0603473 JF	RST CHIPR 47KOHM +-5% 1/10W FENGHUA	
R4182	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R4172	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R4109	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R4107	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R4105	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R4101	061G06034999FF	RST CHIPR 49.9 OHM +-1% 1/10W FENGHUA	
R187	061G0603511 JY	RST CHIPR 510OHM +-5% 1/10W YAGEO	
R135	061G0603512 JY	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R139	061G0603512 JY	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R723	061G0603513 JF	RST CHIPR 51K OHM +-5% 1/10W FENGHUA	
R4168	061G0603622 JF	RST CHIPR 6.2KOHM +-5% 1/10W FENGHUA	
R199	061G0603681 JI	RST 0603 680R 5% 1/10W	
R199	061G0603681 JT	RST CHIPR 680OHM +-5% 1/10W TZAI YUAN	
R195	061G0603682 JF	RST CHIPR 6.8KOHM +-5% 1/10W FENGHUA	
R195	061G0603682 JT	RST CHIP 6K8 1/10W 5% TZAI YUAN	
R164	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R163	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R159	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R146	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R142	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R141	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R140	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R133	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R109	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R107	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R106	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R106	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	
R107	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	
R109	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	
R133	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	
R140	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	
R141	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	
R142	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	
R146	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	
R159	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	
R163	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	

R164	061G0603750 JI	RST 0603 75R 5% 1/16W TA-I	
R158	061G0603753 JY	RST CHIPR 75KOHM +-5% 1/10W YAGEO	
FB714	061G0805000 JF	RST CHIPR 0 OHM +-5% 1/8W FENGHUA	
FB711	061G0805000 JF	RST CHIPR 0 OHM +-5% 1/8W FENGHUA	
R183	061G0805000 JF	RST CHIPR 0 OHM +-5% 1/8W FENGHUA	
R183	061G0805000 JI	RST 0805 MAX0.05R 5% 1/8W TA-I	
FB714	061G0805000 JT	RST 0805 0.05R MAX 1/8W	
FB711	061G0805000 JT	RST 0805 0.05R MAX 1/8W	
R188	061G08053832FF	RST CHIPR 38.3KOHM +-1% 1/8W FENGHUA	
R4190	061G0805472 JF	RST CHIPR 4.7KOHM +-5% 1/8W FENGHUA	
R100	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W	
R100	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
R200	061G1206629 JI	RST 1206 6.2R 5% 1/4W	
R200	061G1206629 JT	RST CHIPR 6.2 OHM +-5% 1/4W TZAI YUAN	
C4218	065G060310131J A	CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C4217	065G060310131J A	CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C4216	065G060310131J A	CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C4215	065G060310131J A	CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C4214	065G060310131J A	CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C4213	065G060310131J A	CAP CHIP 0603 100PF J 50V NPO SAMSUNG	
C741	065G060310232K Y	CAP CHIP 0603 1N 50V X7R +/-10%	
C758	065G060310232K Y	CAP CHIP 0603 1N 50V X7R +/-10%	
C137	065G060310332K Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C139	065G060310332K Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C140	065G060310332K Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C142	065G060310332K Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C4167	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4168	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4169	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4170	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4171	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4172	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4173	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4174	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4175	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4176	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C749	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C748	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C743	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C742	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C734	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C736	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C738	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4166	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4100	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C129	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C126	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C125	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C122	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C109	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C101	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4145	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4153	065G060310432K A	CAP 0603 100NF 10% 50V X7R	
C4156	065G060310432K A	CAP 0603 100NF 10% 50V X7R	

C627	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C622	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C620	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C617	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C611	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C605	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C604	065G060310432K	A	CAP 0603 100NF 10% 50V X7R	
C4195	065G060322031J	F	CAP CHIP 0603 22PF J 50V NPO	
C4194	065G060322031J	F	CAP CHIP 0603 22PF J 50V NPO	
C103	065G060322031J	F	CAP CHIP 0603 22PF J 50V NPO	
C102	065G060322031J	F	CAP CHIP 0603 22PF J 50V NPO	
C4121	065G060327131J	F	CAP CHIP 0603 270PF J 50V NPO	
C4114	065G060327131J	F	CAP CHIP 0603 270PF J 50V NPO	
C4104	065G060327131J	F	CAP CHIP 0603 270PF J 50V NPO	
C4109	065G060327131J	F	CAP CHIP 0603 270PF J 50V NPO	
C115	065G060347131J	Y	CAP CHIP 0603 470P 50V NP0 +/-5%	
C116	065G060347131J	Y	CAP CHIP 0603 470P 50V NP0 +/-5%	
C4118	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4117	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4116	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4115	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4111	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4110	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4107	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4106	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4101	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4124	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4126	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4128	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4131	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4132	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4134	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4137	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4139	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4140	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4144	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C4151	065G060347332K	F	CAP CHIP 0603 47NF K 50V X7R	
C106	065G060347931C	Y	CAP 0603 4.7PF 0.25PF 50V NPO	
C107	065G060347931C	Y	CAP 0603 4.7PF 0.25PF 50V NPO	
C4147	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C4141	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C4138	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C4133	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C4130	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C4125	065G060350931D	F	NO-SUGGEST 0603 5PF D 50V NPO	
C123	065G060356031J	Y	CAP CHIP 0603 56P 50V NP0 +/-5%	
C124	065G060356031J	Y	CAP CHIP 0603 56P 50V NP0 +/-5%	
C618	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C626	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C608	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C4206	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C4192	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C119	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C118	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	

C120	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C4191	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C4142	065G080510522K	M	CAP 0805 1UF 10% 25V X7R	
C138	065G080510522K	T	CAP 0805 1UF 10% 25V X7R	
C4143	065G080522522K	T	CAP 0805 2.2UF 10% 25V X7R	
C706	065G080522522K	Y	CAP CHIP 0805 2U2 25V X7R +/-10%	
C607	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C621	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C4196	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4136	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4135	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4129	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4127	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4123	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4122	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4113	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4112	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4105	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C4102	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C114	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C113	065G0805475A2K	Y	CAP 0805 4U7 10V X7R +/-10%	
C737	065G0805475A7Z	Y	CAP CHIP 4.7UF 10V Y5V -20%~+80%	
C757	065G0805475A7Z	Y	CAP CHIP 4.7UF 10V Y5V -20%~+80%	
C616	065G120610532K	3	CAP 1206 1UF 10% 50V X7R	
C128	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C4187	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C4209	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C4210	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C726	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C732	065G120610612K	T	CAP 1206 10UF 10% 16V X7R	
C609	065G120610625K	T	CAP CHIP 1206 10UF K 25V X5R	
C610	065G120610625K	T	CAP CHIP 1206 10UF K 25V X5R	
C614	065G120610625K	T	CAP CHIP 1206 10UF K 25V X5R	
C615	065G120610625K	T	CAP CHIP 1206 10UF K 25V X5R	
C752	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
C744	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
U403	070GHDCP500HDC		HDCP CODE	
FB106	071G 56A221 TA		IND FXD 0805 EMI 100MHZ 220R R	
FB412	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB413	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB414	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB415	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB416	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB417	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB418	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB422	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB425	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB426	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB427	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB411	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB101	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB107	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB401	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	
FB402	071G 56G301 EA		CHIP BEAD 0805 300R 25% 4000MA	

FB403	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB404	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB405	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB406	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB407	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB408	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB409	071G 56G301 EA	CHIP BEAD 0805 300R 25% 4000MA	
FB101	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB107	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB401	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB402	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB403	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB404	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB405	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB406	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB407	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB408	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB409	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB411	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB412	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB413	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB414	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB415	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB416	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB417	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB418	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB422	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB425	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB426	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB427	071G 56G301 MA	CHIP BEAD 0805 300OHM 4A	
FB707	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB705	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB704	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB702	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB701	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB423	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB420	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB719	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB718	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB717	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB716	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB715	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB713	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB712	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB710	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB709	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
FB708	071G 56K121 TA	CHIP BEAD 120R/6000MA HCB2012KF-121T60	
RP415	071G 57U600 M	CHIP BEAD ARRAY 1206 60 OHM	
RP414	071G 57U600 M	CHIP BEAD ARRAY 1206 60 OHM	
RP413	071G 57U600 M	CHIP BEAD ARRAY 1206 60 OHM	
RP412	071G 57U600 M	CHIP BEAD ARRAY 1206 60 OHM	
RP411	071G 57U600 M	CHIP BEAD ARRAY 1206 60 OHM	
FB103	071G 59B121 J	CHIP BEAD 0603 120R 25% GB160808H121TT	
FB104	071G 59B601 MA	CHIP BEAD	

FB102	071G 59B601 MA	CHIP BEAD	
R122	071G 59C600 TA	CHIP BEAD 60OHM 600MA FCM1608CF-600T06	
R126	071G 59C600 TA	CHIP BEAD 60OHM 600MA FCM1608CF-600T06	
R177	071G 59C600 TA	CHIP BEAD 60OHM 600MA FCM1608CF-600T06	
L105	073G 63159GKM	CHIP INDUCTOR 1.5UH 10% 0.7R 50MA	
L103	073G 6333810M	CHIP INDUCTOR 0603 0.33UH +-10% 35MA	
L701	073G253S 46 H	SMD CHOKE 4.7UH	
L702	073G253S 46 H	SMD CHOKE 4.7UH	
L104	073T 6310010M	CHIP INDUCTOR 10UH +-10% MICROGATE	
L401	073T 6310910M	CHIP INDUCTOR 1.0UH +-10% 25MA	
L402	073T 6310910M	CHIP INDUCTOR 1.0UH +-10% 25MA	
L403	073T 6310910M	CHIP INDUCTOR 1.0UH +-10% 25MA	
L404	073T 6310910M	CHIP INDUCTOR 1.0UH +-10% 25MA	
L102	073T 6322910K	CHIP INDUCTOR 0603 2.2UH 10%	
L101	073T253S505 Y	SMD COMMON CHOKE 0504 90 OHM	
CN506	088G 34019E AT	DMI HEADER 19P H:11.38MM	
CN506	088G 34019E AV	HDMI HEADER 19P BLACK -	
CN506	088G 34019E VD	HDMI HEADER 19P BLACK -	
CN502	088G 34019H VT	HDMI HEADER 19P BLACK -	
D501	093G 60505	SCHOTTKY BAT54C 0.2A 30V SOT-23	
D503	093G 60505	SCHOTTKY BAT54C 0.2A 30V SOT-23	
X401	093G 22S515 YC	CRYSTAL 27MHZ 27MHZ 30PPM 20PF	
ZD403	093G 39S 24 T	RLZ 5.6B LLDS	
ZD402	093G 39S 24 T	RLZ 5.6B LLDS	
ZD401	093G 39S 24 T	RLZ 5.6B LLDS	
ZD602	093G 39S 44 T	RLZ18B LLDS	
ZD114	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD115	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD116	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD122	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD123	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD124	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD125	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD126	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD502	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD503	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD601	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD603	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD113	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD101	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD102	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD103	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD104	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD105	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD106	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD107	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD108	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD109	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD110	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD111	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD112	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
X401	093T 22S920 C	CRYSTAL 27MHZ 20P SMD-49	
E715	715G3934M3A000004I	MAIN BOARD PCB	
	P90T0051301	HEAT SINK FOR U401	

	INTV9QCCMAN4	INVERTER BOARD	
	040G 45762412B	CBPC LABEL	
CN8807	033G3802 2B Y	CONNECTOR	
CN8803	033G3802 2B Y	CONNECTOR	
CN8807	033G3802 2B Y W	CONNECTOR	
CN8803	033G3802 2B Y W	CONNECTOR	
CN8805	033G3802 3B Y L	CONNECTOR 3P 2.0PITCH	
CN8805	033G3802 3B Y W	CONNECTOR	
CN8801	033G3802 5B Y L	CONNECTOR 5P 2.0	
CN8801	033G3802 5B Y W	WEAFER	
CN8811	033G8021 2A F	INVTER CONN. 13MM 2P	
CN8812	033G8021 2A F	INVTER CONN. 13MM 2P	
CN8813	033G8021 2A F	INVTER CONN. 13MM 2P	
CN8805	033T3802 3B Y	CONNECTOR	
CN8811	033T8021 2A U	CONN 13.0MM 2P R/A	
CN8812	033T8021 2A U	CONN 13.0MM 2P R/A	
CN8813	033T8021 2A U	CONN 13.0MM 2P R/A	
C8811	065G 6J5096ET	CAP CER 5PF J 6KV	
C8812	065G 6J5096ET	CAP CER 5PF J 6KV	
C8804	065G 6J5096ET	CAP CER 5PF J 6KV	
C8803	065G 6J5096ET	CAP CER 5PF J 6KV	
C8807	065G 6J5096ET	CAP CER 5PF J 6KV	
C8808	065G 6J5096ET	CAP CER 5PF J 6KV	
T8806	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
T8801	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
T8802	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
T8803	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
T8804	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
T8805	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
R8804	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA	
R8804	061G08051002FT	RST CHIP 10K 1/8W 1%	
R8804	061G08051002FY	RST CHIP 10K 1/8W 1%	
R8805	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R8808	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R8805	061G08051003FI	RST 0805 100K 1% 1/8W	
R8808	061G08051003FI	RST 0805 100K 1% 1/8W	
R8808	061G08051003FY	RST CHIP 100K 1/8W 1%	
R8805	061G08051003FY	RST CHIP 100K 1/8W 1%	
R8801	061G0805101 Y	RST CHIPR 100 OHM +-5% 1/8W YAGEO	
R8802	061G0805101 Y	RST CHIPR 100 OHM +-5% 1/8W YAGEO	
R8802	061G0805101 JF	RST 0805 100R 5% 1/8W	
R8801	061G0805101 JF	RST 0805 100R 5% 1/8W	
R8801	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R8802	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R8807	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8807	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8807	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R8804	061G0805103 Y	NO-SUGGEST RST CHIPR 10KOHM +-5% 1/8W YA	
R8803	061G08052202FF	RST CHIPR 22KOHM +-1% 1/8W FENGHUA	
R8816	061G08052202FF	RST CHIPR 22KOHM +-1% 1/8W FENGHUA	
R8803	061G08052202FT	RST CHIP 22K 1/8W 1%	
R8816	061G08052202FT	RST CHIP 22K 1/8W 1%	
R8816	061G08052202FY	RST CHIPR 22 KOHM +-1% 1/8W	

R8803	061G08052202FY	RST CHIPR 22 KOHM +-1% 1/8W	
R8813	061G08053601FF	RST CHIPR 3.6KOHM +-1% 1/8W FENGHUA	
R8817	061G08053601FF	RST CHIPR 3.6KOHM +-1% 1/8W FENGHUA	
R8813	061G08053601FT	RST CHIP 3K6 1/8W 1%	
R8817	061G08053601FT	RST CHIP 3K6 1/8W 1%	
R8811	061G0805511 T	RST CHIP 510R 1/8W 5%	
R8812	061G0805511 T	RST CHIP 510R 1/8W 5%	
R8811	061G0805511 Y	NO-SUGGEST RST CHIPR 510 OHM +-5% 1/8W Y	
R8812	061G0805511 Y	NO-SUGGEST RST CHIPR 510 OHM +-5% 1/8W Y	
JR8801	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR8801	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR8801	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO	
C8802	065G080522131J F	CAP CHIP 0805 220PF J 50V NPO	
C8801	065G080522432K Y	CAP CHIP 0805 220N 50V X7R +/-10%	
C8805	065G080533131J Y	CAP CHIP 0805 330P 50V NP0 +/-5%	
C8806	065G080533131J Y	CAP CHIP 0805 330P 50V NP0 +/-5%	
C8809	065G080568231J F	NO-SUGGEST CAP CHIP 0805 6.8NF 50V J NP	
C8810	065G080568231J F	NO-SUGGEST CAP CHIP 0805 6.8NF 50V J NP	
C8813	065G080568231J F	NO-SUGGEST CAP CHIP 0805 6.8NF 50V J NP	
C8814	065G080568231J F	NO-SUGGEST CAP CHIP 0805 6.8NF 50V J NP	
D8819	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8815	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8813	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8809	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8809	093G 6433P	BAV99	
D8813	093G 6433P	BAV99	
D8815	093G 6433P	BAV99	
D8819	093G 6433P	BAV99	
D8809	093G 64S 5 1	D-BAV99-7-F SOT-23	
D8813	093G 64S 5 1	D-BAV99-7-F SOT-23	
D8819	093G 64S 5 1	D-BAV99-7-F SOT-23	
D8815	093G 64S 5 1	D-BAV99-7-F SOT-23	
ZD8801	093G 3919552T	ZENER MTZJT-725.1B 5.1V 0.5W DO-34	
D8801	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D8802	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D8820	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D8821	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D8801	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D8802	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D8820	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D8821	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D8801	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
D8802	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
D8821	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
D8820	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
J8805	095G 90 23	JUMPER WIRE	
J8804	095G 90 23	JUMPER WIRE	
J8803	095G 90 23	JUMPER WIRE	
J8802	095G 90 23	JUMPER WIRE	
J8801	095G 90 23	JUMPER WIRE	
J8807	095G 90 23	JUMPER WIRE	
J8806	095G 90 23	JUMPER WIRE	
E715	715G3966P01000003D	INVERTER BOARD PCB	2nd source
E715	715G3966P01000003H	INVERTER BOARD PCB	

	INTV9QCCMAN5	INVERTER BOARD	
	040G 45762412B	CBPC LABEL	
CN8802	033G3802 2B Y	CONNECTOR	
CN8802	033G3802 2B Y W	CONNECTOR	
CN8815	033G8021 2A F	INVTER CONN. 13MM 2P	
CN8814	033G8021 2A F	INVTER CONN. 13MM 2P	
CN8816	033G8021 2A F	INVTER CONN. 13MM 2P	
CN8814	033T8021 2A U	CONN 13.0MM 2P R/A	
CN8815	033T8021 2A U	CONN 13.0MM 2P R/A	
CN8816	033T8021 2A U	CONN 13.0MM 2P R/A	
C8855	065G 6J5096ET	CAP CER 5PF J 6KV	
C8856	065G 6J5096ET	CAP CER 5PF J 6KV	
C8859	065G 6J5096ET	CAP CER 5PF J 6KV	
C8860	065G 6J5096ET	CAP CER 5PF J 6KV	
C8852	065G 6J5096ET	CAP CER 5PF J 6KV	
C8851	065G 6J5096ET	CAP CER 5PF J 6KV	
T8851	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
T8854	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
T8853	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
T8852	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
T8855	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
T8856	080GL52T 8 DN	INVERTER 141UH 12% 350MH TK.6514J.101	
CN8808	095G 820 3D901	HARNESS 3P(SAN)-2P 60MM FQE92062I	
CN8808	095G 820 3X901	HARNESS 3P(SAN)-2P 60MM LCDXXTF0422	2nd source
CN8806	095G 820 4D901	HARNESS 4P(SAN)-3P 60MM FQE91658I	
CN8806	095G 820 4X901	HARNESS 4P(SAN)-3P 60MM LCDXXTF0421	2nd source
R8851	061G0805101 Y	RST CHIPR 100 OHM +-5% 1/8W YAGEO	
R8852	061G0805101 Y	RST CHIPR 100 OHM +-5% 1/8W YAGEO	
R8853	061G0805101 Y	RST CHIPR 100 OHM +-5% 1/8W YAGEO	
R8854	061G0805511 T	RST CHIP 510R 1/8W 5%	
R8855	061G0805511 T	RST CHIP 510R 1/8W 5%	
R8856	061G0805511 T	RST CHIP 510R 1/8W 5%	
R8854	061G0805511 Y	NO-SUGGEST RST CHIPR 510 OHM +-5% 1/8W Y	
R8855	061G0805511 Y	NO-SUGGEST RST CHIPR 510 OHM +-5% 1/8W Y	
R8856	061G0805511 Y	NO-SUGGEST RST CHIPR 510 OHM +-5% 1/8W Y	
C8858	065G080568231J F	NO-SUGGEST CAP CHIP 0805 6.8NF 50V J NP	
C8861	065G080568231J F	NO-SUGGEST CAP CHIP 0805 6.8NF 50V J NP	
C8862	065G080568231J F	NO-SUGGEST CAP CHIP 0805 6.8NF 50V J NP	
C8857	065G080568231J F	NO-SUGGEST CAP CHIP 0805 6.8NF 50V J NP	
C8854	065G080568231J F	NO-SUGGEST CAP CHIP 0805 6.8NF 50V J NP	
C8853	065G080568231J F	NO-SUGGEST CAP CHIP 0805 6.8NF 50V J NP	
D8858	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8857	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8856	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8855	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8854	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8859	093G 6433L	DIODE LBAV99LT1G SOT-23 LRC	
D8854	093G 6433P	BAV99	
D8855	093G 6433P	BAV99	
D8856	093G 6433P	BAV99	
D8857	093G 6433P	BAV99	
D8858	093G 6433P	BAV99	
D8859	093G 6433P	BAV99	
D8854	093G 64S 5 1	D-BAV99-7-F SOT-23	

D8855	093G 64S 5 1	D-BAV99-7-F SOT-23	
D8856	093G 64S 5 1	D-BAV99-7-F SOT-23	
D8857	093G 64S 5 1	D-BAV99-7-F SOT-23	
D8859	093G 64S 5 1	D-BAV99-7-F SOT-23	
D8858	093G 64S 5 1	D-BAV99-7-F SOT-23	
D8852	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D8851	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D8853	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D8853	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D8851	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D8852	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D8853	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
D8851	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
D8852	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
J8801	095G 90 23	JUMPER WIRE	
J8802	095G 90 23	JUMPER WIRE	
J8803	095G 90 23	JUMPER WIRE	
J8805	095G 90 23	JUMPER WIRE	
E715	715G3967P01000003D	INVERTER BOARD PCB	2nd source
E715	715G3967P01000003S	INVERTER BOARD PCB	
	IRPFAQH8	IR BOARD	
U01	056G 627911	IR 38KHZ KSM-603TM2M	
CN01	033G8032 5F HR	CONNECTOR	
R001	061G0603153 JY	RST CHIPR 15KOHM 1/10W YAGEO	
C01	065G060310432K Y	CAP 0603 100NF 10% 50V X7R	
LED01	081G 14 6 GP	LED GPTD1210RGC GUANGPU	
ZD02	093G 39S 24 T	RLZ 5.6B LLDS	
ZD03	093G 39S 24 T	RLZ 5.6B LLDS	
E715	715G3821R03000004M	IR BOARD PCB	
	PWTV9QCCMAAN	POWER BOARD	
	040G 45762412B	CBPC LABEL	
	009G6005 1 GP	GROUND TERMINAL	
CN902	033G327812D	WAFER 12P PLUG	
CN801	033G3802 2B Y	CONNECTOR	
CN803	033G3802 2B Y	CONNECTOR	
CN803	033G3802 2B Y W	CONNECTOR	
CN801	033G3802 2B Y W	CONNECTOR	
CN802	033G3802 5B Y L	CONNECTOR 5P 2.0	
CN802	033G3802 5B Y W	WEAFER	
	051G 6 4503	GLUE_RTV	
IC950	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC951	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC970	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC950	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC951	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC970	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC970	056G 139 3B	IC PC123Y82FZ0F	
IC951	056G 139 3B	IC PC123Y82FZ0F	
IC950	056G 139 3B	IC PC123Y82FZ0F	
IC902	056G 379121	IC STR- A6069H DIP-8	
Q921	057G 761 7	KTD1691P	
Q921	057G 761502	SMALLTRAN BTD1805AD3 5A 60V TO-126ML	
Q921	057G 761909 T	SMALLTRAN KSD1691YSTU 5A 60V TO-126	
C901	063G107K474 6S	0.47UF +-10%	

C904	063G107K474 6S	0.47UF +-10%	
C801	063G213J105GFA	CAP MPF 1UF 5% 450V	
C804	063G213J105GFA	CAP MPF 1UF 5% 450V	
C910	063G213J105GFA	CAP MPF 1UF 5% 450V	
C803	065G 1K1021AT GP	CK45-R3AD102K-NR? 1000PF?/ 1KV	
C822	065G 1K1021AT GP	CK45-R3AD102K-NR? 1000PF?/ 1KV	
C929	065G 1K1021AT GP	CK45-R3AD102K-NR? 1000PF?/ 1KV	
C939	065G 1K1021AT GP	CK45-R3AD102K-NR? 1000PF?/ 1KV	
C911	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5U	
C823	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5U	
C927	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C928	065G306M1022B3	Y1 CAP 1000PF M 250VAC TDK	
C906	065G306M1022B3	Y1 CAP 1000PF M 250VAC TDK	
C903	065G306M6812B3	Y1 CAP 680PF +-20% 250VAC CD SERIES	
C902	065G306M6812B3	Y1 CAP 680PF +-20% 250VAC CD SERIES	
C924	067G 42Z10115H	EC 100UF 20% 450V 18*40	
C925	067G 42Z10115H	EC 100UF 20% 450V 18*40	
C953	067G204V331 3K	CS CAP 330UF 16V 10*12 MM	
C954	067G215A4713KV	EC 470UF 20% 16V 10*12	
C957	067G215D1024KV	LOW ESR EC 1000UF 25V M 12.5*20MM	
C959	067G215P471 4K	LOW ESR EC 470UF 25V	
C972	067G215P4716KV	EC 470UF 20% 35V 10*20	
C973	067G215P4716KV	EC 470UF 20% 35V 10*20	
C975	067G215P4716KV	EC 470UF 20% 35V 10*20	
L904	073G 174161 N	PFC CHOKE 170UH 5% YUVA-1234	
L980	073G 253 91 HP	CHOKE COIL 3.5UH VOC	
L951	073G 253 91 HP	CHOKE COIL 3.5UH VOC	
L950	073G 253 91 HP	CHOKE COIL 3.5UH VOC	
L901	073L 174 49 LG	LINE FILTER 20.0MH MIN	
L903	073L 174 49 LG	LINE FILTER 20.0MH MIN	
T801	080GL26T 15 N	X'FMR 840UH MIN 8.4UH YUVA-1094	
T902	080GL52P 5 L	X'FMR 500UH 10% 6UH PT-012612-1	
T802	080GL52P 15 N	X'FMR 1.9MH 7% YUVA-1395	
T901	080GL52T 5 N2	X'FMR 1.0MH 10%	
F901	084G 41 11 B	FUSE 5A 250V BK/S505-V-5-R	
F901	084G 41 11 L	FUSE 5A 250V 0215005.MXEP	
CN901	087G 501 47 S	AC SOCKET 2PIN + 2 SCREW HOLE	
CN901	087G 501 47 DL	AC SOCKET 2PIN + 3 SCREW HOLE	
D904	093G 52 70	RECTIFIER 1N5408-P 3A 1000V DO-201AD	
	0Q1G 340 8106 CR3	SCREW	
	705TQ861011	NR901 ASS'Y	
NR901	061G 58030 WL	RST NTCR 3 OHM +-20% 5A THINKING	
	Q09T 203 8	PIN FOR NR901	
	705TQ957074	Q801/Q802 ASS'Y	
Q802	057G 611901	MOSFET 12A/500V FMA12N50E TO-220F	
Q801	057G 611901	MOSFET 12A/500V FMA12N50E TO-220F	
Q802	057G 611903	MOSFET AOTF12N50 TO-220F	
Q801	057G 611903	MOSFET AOTF12N50 TO-220F	
	0M1G1730 8120	SCREW 3X8	
HS3	Q90T0095 2	HEAT SINK	
	705TQ957075	Q903 ASS'Y	
Q903	057G 667 51	MOSFET 2SK4101LS-MG5/FS 7A 650V TO-220FI	
Q903	057G 724 11	MOSFET STP9NK65ZFP 6.4A 650V TO-220FP	
HS20	090G6064 1	HEAT SINK	

	0M1G1730 8120	SCREW 3X8	
	705TQ957076	Q901 ASS'Y	
Q901	057G 667925	MOSFET STW26NM60N 20A 600V TO-247	
	0M1G1730 12120	SCREW	
	Q12G 372 8	SILICON	
HS8	Q90T0087 2	HEAT SINK	
	705TQ993096	BD901 ASS'Y	
BD901	093G 50460 35	BRIDGE GBJ1008 10A/800V GBJ	
	0M1G1730 10120	SCREW 42A9930016	
HS6	Q90T0095 2	HEAT SINK	
	705TQ993097	D951 ASS'Y	
HS1	090G6084 1	HEAT SINK	
D951	093G 60250	FCH10U10	
D951	093G 60500	FMEN210A TO-220 SANKEN	
	0M1G1730 8120	SCREW 3X8	
	705TQ993098	D902 ASS'Y	
HS5	090G6084 1	HEAT SINK	
D902	093G 52 56	DIODE FMN-1106S 10A/600V TO-220	
	0M1G1730 8120	SCREW 3X8	
	705TQ993106	D952 ASS'Y	
HS21	090G6064 1	HEAT SINK	
D952	093G 60300	SCHOTTKY SBR20010JST 20A 100V TO-220ML	
D952	093G 60329	DIODE FMEN-220A 20A/100V TO-220	
D952	093G 60331	SCHOTTKY YG865C10RSC 20A 100V TO-220F	
	0M1G1730 8120	SCREW 3X8	
	705TQ993107	D950 ASS'Y	
HS2	090G6084 1	HEAT SINK	
D950	093G 60298	SCHOTTKY SBT15006JST 15 60 TO220ML	
D950	093G1506 2	SCHOTTKY FMW-2156 15A 60V TO-220	
	0M1G1730 8120	SCREW 3X8	
IC901	056G 379164	IC FAN6961SZ SOP-8	
IC903	056G 379175	IC LD7523GS SOP-8	
IC801	056T 379122	IC OZ9976GN-C-0-TR SOP-16	
Q804	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q805	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q910	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q950	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q970	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q970	057G 417 12 T	KEC 2N3904S-RTK/PS	
Q950	057G 417 12 T	KEC 2N3904S-RTK/PS	
Q910	057G 417 12 T	KEC 2N3904S-RTK/PS	
Q805	057G 417 12 T	KEC 2N3904S-RTK/PS	
Q804	057G 417 12 T	KEC 2N3904S-RTK/PS	
Q804	057G 417518	TRA LMBT3904LT1G 200MA/40V SOT-23 LRC	
Q805	057G 417518	TRA LMBT3904LT1G 200MA/40V SOT-23 LRC	
Q910	057G 417518	TRA LMBT3904LT1G 200MA/40V SOT-23 LRC	
Q950	057G 417518	TRA LMBT3904LT1G 200MA/40V SOT-23 LRC	
Q970	057G 417518	TRA LMBT3904LT1G 200MA/40V SOT-23 LRC	
Q803	057G 759 2A	TANSISTOR 2N7002 SOT-23	
Q803	057G 763904	TRA FET 2N7002 SOT-23 PHILIPS	
R932	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/8W FENGHUA	
R933	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/8W FENGHUA	
R932	061G0805100 JI	RST 0805 10R 5% 1/8W TA-I	
R933	061G0805100 JI	RST 0805 10R 5% 1/8W TA-I	

R932	061G0805100 JT	RST CHIP 10R 1/8W 5% TZAI YUAN	
R933	061G0805100 JT	RST CHIP 10R 1/8W 5% TZAI YUAN	
R932	061G0805100 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R933	061G0805100 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R958	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA	
R957	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA	
R958	061G08051002FT	RST CHIP 10K 1/8W 1%	
R957	061G08051002FT	RST CHIP 10K 1/8W 1%	
R958	061G08051002FY	RST CHIP 10K 1/8W 1%	
R957	061G08051002FY	RST CHIP 10K 1/8W 1%	
R928	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R820	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R810	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R928	061G08051003FI	RST 0805 100K 1% 1/8W	
R928	061G08051003FT	RST CHIP 100K 1/8W 1%	
R810	061G08051003FY	RST CHIP 100K 1/8W 1%	
R820	061G08051003FY	RST CHIP 100K 1/8W 1%	
R928	061G08051003FY	RST CHIP 100K 1/8W 1%	
R808	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R829	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R831	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R808	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R829	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R831	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R831	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R829	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R808	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R831	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R829	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R808	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R802	061G0805101 JF	RST 0805 100R 5% 1/8W	
R803	061G0805101 JF	RST 0805 100R 5% 1/8W	
R954	061G0805101 JF	RST 0805 100R 5% 1/8W	
R802	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R803	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R954	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R954	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R803	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R802	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R9905	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R983	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R981	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R961	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R960	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R956	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R955	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R940	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R934	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R817	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R981	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R961	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R960	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R956	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R955	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	

R940	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R934	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R817	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R983	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R9905	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R9905	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R983	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R981	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R961	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R960	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R956	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R955	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R940	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R934	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R817	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R982	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R976	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R963	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R944	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R939	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R938	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R918	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R914	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R821	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R804	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R804	061G0805103 JI	RST 0805 10K 5% 1/8W	
R821	061G0805103 JI	RST 0805 10K 5% 1/8W	
R914	061G0805103 JI	RST 0805 10K 5% 1/8W	
R918	061G0805103 JI	RST 0805 10K 5% 1/8W	
R938	061G0805103 JI	RST 0805 10K 5% 1/8W	
R939	061G0805103 JI	RST 0805 10K 5% 1/8W	
R944	061G0805103 JI	RST 0805 10K 5% 1/8W	
R963	061G0805103 JI	RST 0805 10K 5% 1/8W	
R976	061G0805103 JI	RST 0805 10K 5% 1/8W	
R982	061G0805103 JI	RST 0805 10K 5% 1/8W	
R982	061G0805103 JT	RST 0805 10K 5% 1/8W	
R976	061G0805103 JT	RST 0805 10K 5% 1/8W	
R963	061G0805103 JT	RST 0805 10K 5% 1/8W	
R944	061G0805103 JT	RST 0805 10K 5% 1/8W	
R939	061G0805103 JT	RST 0805 10K 5% 1/8W	
R938	061G0805103 JT	RST 0805 10K 5% 1/8W	
R918	061G0805103 JT	RST 0805 10K 5% 1/8W	
R914	061G0805103 JT	RST 0805 10K 5% 1/8W	
R821	061G0805103 JT	RST 0805 10K 5% 1/8W	
R804	061G0805103 JT	RST 0805 10K 5% 1/8W	
R982	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R976	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R963	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R944	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R939	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R938	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R918	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R914	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R821	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	

R804	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R810	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R820	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R810	061G0805104 JY	RST CHIPR 100KOHM 1/8W YAGEO	
R820	061G0805104 JY	RST CHIPR 100KOHM 1/8W YAGEO	
R831	061G0805105 JT	RST CHIP 1M 1/8W 5% TZAI YUAN	
R829	061G0805105 JT	RST CHIP 1M 1/8W 5% TZAI YUAN	
R808	061G0805105 JT	RST CHIP 1M 1/8W 5% TZAI YUAN	
R923	061G08051302FF	RST CHIPR 13KOHM +-1% 1/8W FENGHUA	
R923	061G08051302FT	RST CHIP 13K 1/8W 1%	
R923	061G08051302FY	RST CHIP 13K 1/8W 1%	
R812	061G0805154 JF	RST CHIPR 150KOHM +-5% 1/8W FENGHUA	
R959	061G0805154 JF	RST CHIPR 150KOHM +-5% 1/8W FENGHUA	
R812	061G0805154 JT	RST CHIP 150K 1/8W 5% TZAI YUAN	
R959	061G0805154 JT	RST CHIP 150K 1/8W 5% TZAI YUAN	
R812	061G0805154 JW	RST CHIPR 150K +-5% 1/8W WALSIN	
R959	061G0805154 JW	RST CHIPR 150K +-5% 1/8W WALSIN	
R980	061G08052001FF	RST CHIPR 2KOHM +-1% 1/8W FENGHUA	
R818	061G08052001FF	RST CHIPR 2KOHM +-1% 1/8W FENGHUA	
R980	061G08052001FT	RST CHIP 2K 1/8W 1%	
R818	061G08052001FT	RST CHIP 2K 1/8W 1%	
R980	061G08052001FY	RST CHIP 2K 1/8W 1%	
R818	061G08052001FY	RST CHIP 2K 1/8W 1%	
R824	061G0805201 JF	RST CHIPR 200OHM +-5% 1/8W FENGHUA	
R822	061G0805201 JF	RST CHIPR 200OHM +-5% 1/8W FENGHUA	
R822	061G0805201 JT	RST CHIPR 200OHM +-5% 1/8W TZAI YUAN	
R824	061G0805201 JT	RST CHIPR 200OHM +-5% 1/8W TZAI YUAN	
R822	061G0805201 JY	RST CHIPR 200R +-5% 1/8W YAGEO	
R824	061G0805201 JY	RST CHIPR 200R +-5% 1/8W YAGEO	
R917	061G0805203 JF	RST CHIPR 20KOHM +-5% 1/8W FENGHUA	
R917	061G0805203 JT	RST CHIPR 20K +-5% 1/8W TZAI YUAN	
R819	061G0805204 JF	RST CHIPR 200KOHM +-5% 1/8W FENGHUA	
R819	061G0805204 JT	RST CHIP R 200KOHM 1/8W +/-5% TZAI YUAN	
R943	061G0805220 JF	RST CHIPR 22 OHM +-5% 1/8W FENGHUA	
R943	061G0805220 JI	RST 0805 22R 5% 1/8W	
R943	061G0805220 JT	RST CHIPR 22OHM +-5% 1/8W TZAI YUAN	
R943	061G0805220 JY	RST CHIPR 22R +-5% 1/8W YAGEO	
R978	061G08052402FF	RST CHIPR 24KOHM +-1% 1/8W FENGHUA	
R978	061G08052402FT	RST CHIP 24K 1/8W 1%	
R978	061G08052402FT	RST CHIP 24K 1/8W 1%	
R807	061G0805244 JF	RST CHIPR 240KOHM +-5% 1/8W FENGHUA	
R807	061G0805244 JT	RST CHIP 240K 1/8W 5% TZAI YUAN	
R807	061G0805244 JW	RST CHIPR 240K +-5% 1/8W WALSIN	
R987	061G08052702FF	RST CHIPR 27KOHM +-1% 1/8W FENGHUA	
R987	061G08052702FT	RST CHIP 27K 1/8W 1%	
R987	061G08052702FY	RST CHIP 27K 1/8W 1%	
R823	061G0805302 JF	RST CHIPR 3KOHM +-5% 1/8W FENGHUA	
R825	061G0805302 JF	RST CHIPR 3KOHM +-5% 1/8W FENGHUA	
R825	061G0805302 JI	RST CHIPR 3K OHM +-5% 1/8W	
R823	061G0805302 JI	RST CHIPR 3K OHM +-5% 1/8W	
R823	061G0805302 JT	RST CHIP 3K 1/8W 5% TZAI YUAN	
R825	061G0805302 JT	RST CHIP 3K 1/8W 5% TZAI YUAN	
R823	061G0805302 JY	RST CHIPR 3K +-5% 1/8W YAGEO	
R825	061G0805302 JY	RST CHIPR 3K +-5% 1/8W YAGEO	

R913	061G0805330 JF	RST CHIPR 33 OHM +-5% 1/8W FENGHUA	
R913	061G0805330 JT	RST CHIP 33R 1/8W 5% TZAI YUAN	
R913	061G0805330 JY	RST CHIPR 33OHM +-5% 1/8W YAGEO	
R806	061G0805335 JF	RST CHIPR 3.3 MOHM +-5% 1/8W	
R806	061G0805335 JT	RST CHIPR 3M3 +-5% 1/8W TZAI YUAN	
R930	061G0805392 JF	RST CHIPR 3.9KOHM +-5% 1/8W FENGHUA	
R975	061G0805392 JF	RST CHIPR 3.9KOHM +-5% 1/8W FENGHUA	
R930	061G0805392 JT	RST CHIP 3K9 1/8W 5% TZAI YUAN	
R975	061G0805392 JT	RST CHIP 3K9 1/8W 5% TZAI YUAN	
R930	061G0805392 JY	RST CHIPR 3K9 +-5% 1/8W YAGEO	
R975	061G0805392 JY	RST CHIPR 3K9 +-5% 1/8W YAGEO	
R945	061G0805471 JF	RST CHIPR 470 OHM +-5% 1/8W FENGHUA	
R915	061G0805471 JF	RST CHIPR 470 OHM +-5% 1/8W FENGHUA	
R915	061G0805471 JI	RST 0805 470R 5% 1/8W	
R945	061G0805471 JI	RST 0805 470R 5% 1/8W	
R915	061G0805471 JT	RST CHIPR 470OHM +-5% 1/8W TZAI YUAN	
R945	061G0805471 JT	RST CHIPR 470OHM +-5% 1/8W TZAI YUAN	
R915	061G0805471 JY	RST CHIPR 470OHM +-5% 1/8W YAGEO	
R945	061G0805471 JY	RST CHIPR 470OHM +-5% 1/8W YAGEO	
R911	061G0805473 JF	RST CHIPR 47K OHM +-5% 1/8W FENGHUA	
R911	061G0805473 JY	RST CHIPR 47K +-5% 1/8W YAGEO	
R826	061G08055100FF	RST CHIPR 510 OHM +-1% 1/8W FENGHUA	
R827	061G08055100FF	RST CHIPR 510 OHM +-1% 1/8W FENGHUA	
R826	061G08055100FT	RST CHIP R 510 OHM +-1% 1/8W	
R827	061G08055100FT	RST CHIP R 510 OHM +-1% 1/8W	
R814	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R815	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R942	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R9906	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R814	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN	
R815	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN	
R942	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN	
R9906	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN	
R814	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R815	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R942	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R9906	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R906	061G0805514 JF	RST CHIPR 510KOHM +-5% 1/8W FENGHUA	
R906	061G0805514 JY	RST CHIPR 510K +-5% 1/8W YAGEO	
R805	061G08056202FF	RST CHIPR 62KOHM +-1% 1/8W FENGHUA	
R805	061G08056202FT	RST CHIP 62K 1/8W 1%	
R830	061G0805683 JF	RST CHIPR 68KOHM +-5% 1/8W FENGHUA	
R828	061G0805683 JF	RST CHIPR 68KOHM +-5% 1/8W FENGHUA	
R830	061G0805683 JI	RST 0805 68K 5% 1/8W	
R828	061G0805683 JI	RST 0805 68K 5% 1/8W	
R830	061G0805683 JT	RST CHIPR 68K +-5% 1/8W TZAI YUAN	
R828	061G0805683 JT	RST CHIPR 68K +-5% 1/8W TZAI YUAN	
JR801	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR802	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR902	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR901	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR805	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR804	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR803	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	

JR803	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR804	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR805	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR901	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR902	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR801	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR802	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR803	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO	
JR804	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO	
JR805	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO	
JR901	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO	
JR902	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO	
JR802	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO	
JR801	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO	
R971	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R970	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R953	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R952	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R951	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R950	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R816	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R971	061G1206101 JI	RST 1206 100R 5% 1/4W	
R970	061G1206101 JI	RST 1206 100R 5% 1/4W	
R953	061G1206101 JI	RST 1206 100R 5% 1/4W	
R952	061G1206101 JI	RST 1206 100R 5% 1/4W	
R951	061G1206101 JI	RST 1206 100R 5% 1/4W	
R950	061G1206101 JI	RST 1206 100R 5% 1/4W	
R816	061G1206101 JI	RST 1206 100R 5% 1/4W	
R816	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R950	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R951	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R952	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R953	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R970	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R971	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R816	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R950	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R951	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R952	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R953	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R970	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R971	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R974	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R974	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R974	061G1206102 JY	RST CHIPR 1KOHM 5% 1/4W YAGEO	
R833	061G1206103 JF	RST CHIPR 10KOHM +-5% 1/4W FENGHUA	
R832	061G1206103 JF	RST CHIPR 10KOHM +-5% 1/4W FENGHUA	
R833	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R832	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R833	061G1206103 JY	RST CHIPR 10K +-5% 1/4W YAGEO	
R832	061G1206103 JY	RST CHIPR 10K +-5% 1/4W YAGEO	
R9211	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R9212	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R9213	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	

R9214	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R9401	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R9402	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R9403	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R9404	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R9211	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R9212	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R9213	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R9214	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R9401	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R9404	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R9402	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R9403	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R9214	061G1206104 JY	RST CHIPR 100KOHM 5% 1/4W YAGEO	
R9213	061G1206104 JY	RST CHIPR 100KOHM 5% 1/4W YAGEO	
R9402	061G1206104 JY	RST CHIPR 100KOHM 5% 1/4W YAGEO	
R9401	061G1206104 JY	RST CHIPR 100KOHM 5% 1/4W YAGEO	
R9212	061G1206104 JY	RST CHIPR 100KOHM 5% 1/4W YAGEO	
R9211	061G1206104 JY	RST CHIPR 100KOHM 5% 1/4W YAGEO	
R9404	061G1206104 JY	RST CHIPR 100KOHM 5% 1/4W YAGEO	
R9403	061G1206104 JY	RST CHIPR 100KOHM 5% 1/4W YAGEO	
R905	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA	
R926	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA	
R925	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA	
R924	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA	
R909	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA	
R811	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA	
R904	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA	
R904	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R811	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R926	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R925	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R924	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R909	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R905	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R926	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R925	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R924	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R909	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R905	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R904	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R811	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R973	061G1206222 JT	RST CHIPR 2.2KOHM +-5% 1/4W TZAI YUAN	
R972	061G1206222 JT	RST CHIPR 2.2KOHM +-5% 1/4W TZAI YUAN	
R969	061G1206222 JT	RST CHIPR 2.2KOHM +-5% 1/4W TZAI YUAN	
R968	061G1206222 JT	RST CHIPR 2.2KOHM +-5% 1/4W TZAI YUAN	
R907	061G1206249 JT	RST CHIPR 2.4 OHM +-5% 1/4W TZAI YUAN	
R908	061G1206249 JT	RST CHIPR 2.4 OHM +-5% 1/4W TZAI YUAN	
R931	061G1206249 JT	RST CHIPR 2.4 OHM +-5% 1/4W TZAI YUAN	
R907	061G1206249 JW	NO-SUGGEST RST CHIPR 2.4 OHM +-5% 1/4W W	
R908	061G1206249 JW	NO-SUGGEST RST CHIPR 2.4 OHM +-5% 1/4W W	
R931	061G1206249 JW	NO-SUGGEST RST CHIPR 2.4 OHM +-5% 1/4W W	
R903	061G1206304 JF	RST CHIPR 300KOHM +-5% 1/4W FENGHUA	
R902	061G1206304 JF	RST CHIPR 300KOHM +-5% 1/4W FENGHUA	

R901	061G1206304 JF	RST CHIPR 300KOHM +-5% 1/4W FENGHUA	
R901	061G1206304 JI	RST 1206 300K 5% 1/4W	
R902	061G1206304 JI	RST 1206 300K 5% 1/4W	
R903	061G1206304 JI	RST 1206 300K 5% 1/4W	
R903	061G1206304 JT	RST CHIPR 300 KOHM +-5% 1/4W TZAI YUAN	
R902	061G1206304 JT	RST CHIPR 300 KOHM +-5% 1/4W TZAI YUAN	
R901	061G1206304 JT	RST CHIPR 300 KOHM +-5% 1/4W TZAI YUAN	
R937	061G1206475 JF	RST CHIPR 4.7 MOHM +-5% 1/4W FENGHUA	
R937	061G1206475 JT	RST CHIPR 4.7 MOHM +-5% 1/4W TZAI YUAN	
R937	061G1206475 JY	RST CHIPR 4M7 +-5% 1/4W YAGEO	
R947	061G1206512 JF	RST CHIPR 5.1KOHM +-5% 1/4W FENGHUA	
R949	061G1206512 JF	RST CHIPR 5.1KOHM +-5% 1/4W FENGHUA	
R965	061G1206512 JF	RST CHIPR 5.1KOHM +-5% 1/4W FENGHUA	
R966	061G1206512 JF	RST CHIPR 5.1KOHM +-5% 1/4W FENGHUA	
R966	061G1206512 JT	RST CHIPR 5.1 KOHM +-5% 1/4W TZAI YUAN	
R965	061G1206512 JT	RST CHIPR 5.1 KOHM +-5% 1/4W TZAI YUAN	
R949	061G1206512 JT	RST CHIPR 5.1 KOHM +-5% 1/4W TZAI YUAN	
R947	061G1206512 JT	RST CHIPR 5.1 KOHM +-5% 1/4W TZAI YUAN	
R947	061G1206512 JY	RST CHIPR 5.1 KOHM +-5% 1/4W YAGEO	
R949	061G1206512 JY	RST CHIPR 5.1 KOHM +-5% 1/4W YAGEO	
R965	061G1206512 JY	RST CHIPR 5.1 KOHM +-5% 1/4W YAGEO	
R966	061G1206512 JY	RST CHIPR 5.1 KOHM +-5% 1/4W YAGEO	
R920	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R921	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R922	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R920	061G12066803FT	RST CHIP 680K 1/4W 1%	
R921	061G12066803FT	RST CHIP 680K 1/4W 1%	
R922	061G12066803FT	RST CHIP 680K 1/4W 1%	
R920	061G12066803FY	RST CHIPR 680KOHM +-1% 1/4W YAGEO	
R921	061G12066803FY	RST CHIPR 680KOHM +-1% 1/4W YAGEO	
R922	061G12066803FY	RST CHIPR 680KOHM +-1% 1/4W YAGEO	
C808	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C909	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C950	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C951	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C960	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C961	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C970	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C971	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C816	065G080510332K Y	CAP CHIP 0805 10N 50V X7R +/-10%	
C920	065G080510332K Y	CAP CHIP 0805 10N 50V X7R +/-10%	
C979	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C978	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C977	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C974	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C956	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C943	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C942	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C922	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C921	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C913	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C908	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C907	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C806	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	

C811	065G080510512K	T	CAP CHIP 0805 1UF K 16V X7R	
C809	065G080510512K	T	CAP CHIP 0805 1UF K 16V X7R	
C815	065G080515232K	A	NO-SUGGEST 0805 1500PF K 50V X7R	
C915	065G080522131J	F	CAP CHIP 0805 220PF J 50V NPO	
C944	065G080522131J	F	CAP CHIP 0805 220PF J 50V NPO	
C826	065G080522231J	F	NO-SUGGEST 0805 2.2NF J 50V NPO	
C828	065G080522231J	F	NO-SUGGEST 0805 2.2NF J 50V NPO	
C812	065G080522332K	Y	CAP CHIP 0805 22N 50V X7R +/-10%	
C955	065G080522432K	Y	CAP CHIP 0805 220N 50V X7R +/-10%	
C814	065G080522522K	M	CAP 0805 2.2UF 10% 25V X7R	
C802	065G080522522K	M	CAP 0805 2.2UF 10% 25V X7R	
C807	065G080533131G	A	NO-SUGGEST 0805 330PF J 50V NPO	
C976	065G080533432K	M	CAP 0805 330NF 10% 50V X7R	
C810	065G080547232K	Y	CAP CHIP 0805 4N7 50V X7R +/-10%	
C813	065G080547232K	Y	CAP CHIP 0805 4N7 50V X7R +/-10%	
C818	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C917	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C817	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C918	065G080547437Z	Y	CAP CHIP 0805 0.47UF Z 50V Y5V	
C912	065G080556031J	F	CAP CHIP 0805 56PF J 50V NPO	
D805	093G 64 42	L	DIODE LBAV70LT1G SOT-23 LRC	
D805	093G 64 42	P	BAV70 SOT23 BY PAN JIT	
D805	093G 64 42	PP	BAV70 SOT-23	
D801	093G 60S931	T	SCHOTTKY B0520 5A 20V SOD-123	
D802	093G 60S931	T	SCHOTTKY B0520 5A 20V SOD-123	
D803	093G 60S931	T	SCHOTTKY B0520 5A 20V SOD-123	
D804	093G 60S931	T	SCHOTTKY B0520 5A 20V SOD-123	
D905	093G 60S931	T	SCHOTTKY B0520 5A 20V SOD-123	
D906	093G 60S931	T	SCHOTTKY B0520 5A 20V SOD-123	
D801	093G 60S934	T	DIODE SS0520 SOD-123	
D802	093G 60S934	T	DIODE SS0520 SOD-123	
D803	093G 60S934	T	DIODE SS0520 SOD-123	
D804	093G 60S934	T	DIODE SS0520 SOD-123	
D905	093G 60S934	T	DIODE SS0520 SOD-123	
D906	093G 60S934	T	DIODE SS0520 SOD-123	
CN901	006G 31500		EYELET	
T802	006G 31502		1.5MM RIVET	
L904	006G 31502		1.5MM RIVET	
IC952	056G 158 10	T	LDO IC AZ431AZ-AE1 TO-92 150MA 40V TO-92	
IC971	056G 158 10	T	LDO IC AZ431AZ-AE1 TO-92 150MA 40V TO-92	
IC971	056G 158 12		SHUNT REGULATOR KIA431A-AT/P TO-92	
IC952	056G 158 12		SHUNT REGULATOR KIA431A-AT/P TO-92	
IC952	056G 158900		TL431CZ-AP 0.1A ADJ TO92	
IC971	056G 158900		TL431CZ-AP 0.1A ADJ TO92	
Q905	057G 420 3	T	TRA KTA1273-Y- AT/ P_TO-92L KEC	
R801	061G 30310852T	GP	FUSER 0.1OHM +/-5% 1W	
R948	061G 30310852T	GP	FUSER 0.1OHM +/-5% 1W	
R929	061G 60210352T		CFR 10KOHM +/-5% 1/6W	
R912	061G152M20852T		RST MOFR 0.2 OHM +/-5% 2WS	
R916	061G152M20852T		RST MOFR 0.2 OHM +/-5% 2WS	
R946	061G152M33852T		RST MOFR 0.33 OHM +/-5% 2WS	
C805	067G215A1017KT		EC 100UF 50V 8*12MM	
C931	067G215A1017KT		EC 100UF 50V 8*12MM	
C937	067G215Y1007KT		KY50VB10M-TP5 5*11.5	

C941	067G215Y1007KT	KY50VB10M-TP5 5*11.5	
C933	067G215Y2207KT	CAP 105℃ 22UF M 50V KINGNICH	
C914	067G215Y4707KT	EC 47UF 20% 50V 6.3*11MM	
FB904	071G 55 9 T	BEAD 3.5*0.8*6.0MM 110R HF	
FB901	071G 55 26 S	BEAD 3.5*6MM 127 OHM 25% LB3.5jÁ0.8jÁ6-2	
FB902	071G 55 26 S	BEAD 3.5*6MM 127 OHM 25% LB3.5jÁ0.8jÁ6-2	
FB907	071G 55 26 S	BEAD 3.5*6MM 127 OHM 25% LB3.5jÁ0.8jÁ6-2	
FB903	071G 55 29	FERRITE BEAD	
FB905	071G 55 29	FERRITE BEAD	
FB901	071T 55 26 H	BEAD 3.5X6.0X0.8 127R 25% BF-I35060R-796	
FB902	071T 55 26 H	BEAD 3.5X6.0X0.8 127R 25% BF-I35060R-796	
FB907	071T 55 26 H	BEAD 3.5X6.0X0.8 127R 25% BF-I35060R-796	
ZD901	093G 3916752T	MTZJ T-72 16B	
ZD951	093G 3916752T	MTZJ T-72 16B	
ZD952	093G 3917152T	TZJ T-72 30B	
ZD902	093G 3919652T	ZENER MTZJT-725.6B 5.6V 0.5W DO-34	
D901	093G 6026T52T	CTIFIER DIODE FR107	
D940	093G 6026T52T	CTIFIER DIODE FR107	
D935	093G 6026T52T	CTIFIER DIODE FR107	
D930	093G 6026T52T	CTIFIER DIODE FR107	
D955	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D954	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D903	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D807	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D806	093G 64 1152T PH	SWITCH DIODE 1N4148 BY NXP	
D955	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D954	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D903	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D807	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D806	093G 64 1152T RE	SWITCH DIODE 1N4148 BY RENESAS	
D955	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
D954	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
D903	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
D807	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
D806	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35	
ZD952	093G 39G 9	DIODE MTZJ30B DO-34	
D901	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41	
D940	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41	
D935	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41	
D930	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41	
J811	095G 90 23	JUMPER WIRE	
J804	095G 90 23	JUMPER WIRE	
J803	095G 90 23	JUMPER WIRE	
J802	095G 90 23	JUMPER WIRE	
J801	095G 90 23	JUMPER WIRE	
J807	095G 90 23	JUMPER WIRE	
J806	095G 90 23	JUMPER WIRE	
J805	095G 90 23	JUMPER WIRE	
J936	095G 90 23	JUMPER WIRE	
J904	095G 90 23	JUMPER WIRE	
J942	095G 90 23	JUMPER WIRE	
J906	095G 90 23	JUMPER WIRE	
J907	095G 90 23	JUMPER WIRE	
J910	095G 90 23	JUMPER WIRE	

J911	095G 90 23	JUMPER WIRE	
J901	095G 90 23	JUMPER WIRE	
J902	095G 90 23	JUMPER WIRE	
J927	095G 90 23	JUMPER WIRE	
J928	095G 90 23	JUMPER WIRE	
J929	095G 90 23	JUMPER WIRE	
J930	095G 90 23	JUMPER WIRE	
J932	095G 90 23	JUMPER WIRE	
J933	095G 90 23	JUMPER WIRE	
J934	095G 90 23	JUMPER WIRE	
J935	095G 90 23	JUMPER WIRE	
J937	095G 90 23	JUMPER WIRE	
J938	095G 90 23	JUMPER WIRE	
J939	095G 90 23	JUMPER WIRE	
J940	095G 90 23	JUMPER WIRE	
J941	095G 90 23	JUMPER WIRE	
J903	095G 90 23	JUMPER WIRE	
J905	095G 90 23	JUMPER WIRE	
J908	095G 90 23	JUMPER WIRE	
J909	095G 90 23	JUMPER WIRE	
J912	095G 90 23	JUMPER WIRE	
J918	095G 90 23	JUMPER WIRE	
J920	095G 90 23	JUMPER WIRE	
J921	095G 90 23	JUMPER WIRE	
J922	095G 90 23	JUMPER WIRE	
J923	095G 90 23	JUMPER WIRE	
J924	095G 90 23	JUMPER WIRE	
J925	095G 90 23	JUMPER WIRE	
J926	095G 90 23	JUMPER WIRE	
J808	095G 90 23	JUMPER WIRE	
J913	095G 90 23	JUMPER WIRE	
J914	095G 90 23	JUMPER WIRE	
J915	095G 90 23	JUMPER WIRE	
J916	095G 90 23	JUMPER WIRE	
J919	095G 90 23	JUMPER WIRE	
J917	095G 90 23	JUMPER WIRE	
J810	095G 90 23	JUMPER WIRE	
J809	095G 90 23	JUMPER WIRE	
E715	715G3760P01W20003H	POWER BOARD PCB	2nd source
E715	715G3760P01W20003M	POWER BOARD PCB	
	071FPQ32207 04	MAGNETIC CORE NH2C PQ3225 A117	
	071FPC28101 00	MAGNETIC CORE DMR40 EC28	
	071FPC28101 17	MAGNETIC CORE PC40 EER28 A260	
	Q02G7021 2	BOLT	
	Q02G7022 3	SCREW-STOPPER	
	Q11G5061 1	PCB SUPPORT	
	Q15T0419101	BKT FIX PANEL	
	Q16G0002 20 10	GASKET	
	Q26G 800504 3B	BARCODE LABEL FOR 4	
	Q36T 600 35 3 GP	NONWOVEN FABRIC	
	Q36T 600 37 24 GP	NONWOVEN FABRIC	
	Q40G 42061557B	RATING LABEL	
	Q40G0003615B90	LABEL WARRANTY STICKER LABEL	
	Q40G000461510A	POP LABEL	

	Q44GN041103	CUSHION-TL EPS	
	Q44GN041203	CUSHION-TR EPS	
	Q44GN041303	CUSHION-BL EPS	
	Q44GN041403	CUSHION-BR EPS	
	Q44GN041503	CUSHION-TM EPS	
	Q44GN041603	CUSHION-BM EPS	
	Q44GN041615 3B	CARTON 42 LC42H033M	
	Q45G 77 5	PE PACKING (Y1900241)	
	Q45G 99626 36	PE BAG	
	Q45G9901 TV012	P.E. BAGX1200X900X0.02+0.5 0.02	
	Q50G 4 10	TIE (Y1900221)	
	Q50T 500523	CABLE TIE	
	Q52G 1150523	TAPE_INSULATING	
	Q52G1501 TV 7	INSULATING SHEET	
ECN401	S95G801413686	HARNESS 13P-5P+4P 850/900	2nd source
	033F206H13PH06	A2006H13P	
	033F206H05P253	A1253HA-5P	
	033F206H04P253	A1253HA-4P	
	033F206T 24	DF11-2428SCF/A2211-T	
	033F206THR2253	A1253TPE-A	
ECN405	S95G801851542	LVDS CABLE 51P-30P 570MM	2nd source
	033F 30351EJAE	FI-RE51HL	
	033F204H 30	A2004H-2*15P	
	033F303TR3AJAE	FI-RC3A-1-15000	
	033F303TR3BJAE	FI-RC3B-1-15000	
	033F204T 24	A2004-T	
M037	SA37T0142031	HINGE ASS'Y	
	015F0142040	BRACKET	
	015F0142020	BRACKET	
	015F0142030	BRACKET	
	028F1030120	SHAFT	
	002F0910100	NUTS	
	034F1575 GM 1A	PLASTIC	
	034F1576AFL 1L	PLASTIC	
	020F0142010	CASTINGS	
	0M1F1030 10225	SCREW	
	0M1F 330 6120	SCREW	
	0M1F4040 10125	SCREW	
	004F102112T 00	WASHER	
	004F102215M 00	LEVEL UP	
	092GB1JX1A3EGC	BATTERY LR03 (KA) 2S/G	
	Q01G6145 1	SCREW	
	Q41G32MV61539A	USER MANUAL	
	Q41G78DV615 6B	WARRANTY CARD	
	Q45G 76 28NV2 R	PE BAG FOR BASE SCREW SZ02742	
	Q45G2010M0201A	P.E. BAG (INSTR. BOOK)	
	040G 58162435A	P/N LABEL FOR MANUAL PE BAG	
	0M1G 930 6 47 CR3	SCREW	
	0Q1G 930 8 47 CR3	SCREW	
	A15T1023101	BRACKET	
	Q40G2010 42014	SIDE IO LABEL	
	001G6021 1	SCREW	
SP01	078G0120502 A	SPK 6 OHM 12W 160X42.5 ASI	
ECN401	095G801413X686	HARNESS 13P-5P+4P 850+900	

	0Q1G 130 8 47 CR3	SCREW 3X8	
	0Q1G1030 6120	SCREW 3X6	
	A15T0282201	BKT--BTM	
	A15T1022201	BRACKET BASE	
	A33T0788ADTB1L0100	KEY COVER	
	A33T0789AFL 1L0100	KEY BUTTON	
	A33T1030 ED 1C0100	IR LENS	
	A34T1574ADT 2L0130	REAR COVER_42	
	A34T1575 GM 1A0100	HINGE COVER-A2_42	
	A34T1576AFL 1L0100	STAND-A1_42 42 A1	
	A34T1614AFLC2L0130	BEZEL TV42W	
	A34T1615AFL 1L0120	BASE-A2_42	
	KEPFAAA2	KEY BOARD	
CN01	033G8032 4F HR	CONNECTOR 4P 1.25	
R04	061G08051001FT	RST CHIP 1K 1/8W 1%	
R03	061G08051801FY	RST CHIP R 1K8 +/-1% 1/8W	
R02	061G08052701FY	RST CHIP 2K7 1/8W 1%	
R08	061G08057500FF	RST CHIPR 750 OHM +/-1% 1/8W FENGHUA	
R07	061G08057500FF	RST CHIPR 750 OHM +/-1% 1/8W FENGHUA	
R05	061G08057500FF	RST CHIPR 750 OHM +/-1% 1/8W FENGHUA	
R01	061G08057501FF	RST CHIPR 7.5KOHM +/-1% 1/8W FENGHUA	
SW07	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW06	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW05	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW04	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW03	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW02	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW01	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
	715G3814K01004004S	KEY BOARD PCB	
	Q12G6300 25 1	RUBBER FOOT	
	Q12G7057 1	RUBBER	
	Q16G0001 10 4	EVA WASHER	
	Q16G0001 10 7	EVA	
	Q40G2010 42109	BACK IO LABEL	

LC32W033M E32BKKNCW3A1NNX ADTVA2412XZ1

Location	Part No.	Description
	040G 45762412B	CBPC LABEL
	009G6005 1	GND TERMINAL
CN902	033T327813D	CONNECTOR
CN904	033T327813D	CONNECTOR
IC950	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4
IC951	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4
IC9101	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4
IC9101	056G 139 3B	PC123Y82FZOF SHARP
IC951	056G 139 3B	PC123Y82FZOF SHARP
IC950	056G 139 3B	PC123Y82FZOF SHARP
IC902	056T 379121	IC STR- A6069H DIP-8
Q921	057G 761 7	KTD1691P
Q921	057G 761502	SMALLTRAN BTD1805AD3 5A 60V TO-126ML
C901	063G 10747410V	NO-SUGGEST 0.47UF 275VAC ARCO
C904	063G 10747410V	NO-SUGGEST 0.47UF 275VAC ARCO
C901	063G107K474 EM	CAP X2 470NF 10% 305V
C904	063G107K474 EM	CAP X2 470NF 10% 305V
C904	063G107K474 UM	CAP X2 470NF 10% 275V
C901	063G107K474 UM	CAP X2 470NF 10% 275V
C910	063G210K105BCN	CONSIGN CAP MPP 1UF 10% 520V
C9110	063G211J333 5C C	CAP MPP 0.033UF 5% 1KV xÓÓ
C9110	063G211J333 5C 10	CONSIGN CAP MPP 0.033UF 5% 1KV
C925	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5U
C9111	065G 3J1006ET GP	10PF 5% SL 3KV TDK
C905	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES
C906	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES
C906	065G306K4712BM	Y1 CAP 470PF +-10% 250V AC KX
C905	065G306K4712BM	Y1 CAP 470PF +-10% 250V AC KX
C924	065G306M1022BM	Y1.CAP.001UF 250VAC MURATA
C902	065G306M6812B3	Y1 CAP 680PF +-20% 250VAC CD SERIES
C903	065G306M6812B3	Y1 CAP 680PF +-20% 250VAC CD SERIES
C920	067G 42Z10115H	EC 100UF 20% 450V 18*40
C920	067G 42Z10115K	EC 100UF 20% 450V 18*40
C953	067G204V331 3K	CS CAP 330UF 16V 10*12 MM
C953	067G204V331 3L	EC 330UF 20% 16V 10*12.5 2000 HR
C954	067G215A4713HV	EC 470UF 20% 16V 10*13 2000 HR
C954	067G215A4713KV	EC 470UF 20% 16V 10*12
C9125	067G215A4714HV	EC 470UF 20% 25V 10*16 2000 HR
C9125	067G215A4714KV	EC 470UF 20% 25V 10*16
C9124	067G215P1024KV	EC 1000UF 20% 25V 12.5*20
C9120	067G215P1026KV	EC 1000UF 20% 35V 12.5*25
C9121	067G215P1026KV	EC 1000UF 20% 35V 12.5*25
C9122	067G215P4716KV	EC 470UF 20% 35V 10*20
L901	073G 174106 L	LINE FILTER 13MH LF-1008108
L902	073G 174106 L	LINE FILTER 13MH LF-1008108
L902	073G 174106 DN	LINE FILTER 13MH LK.TF032.A20
L901	073G 174106 DN	LINE FILTER 13MH LK.TF032.A20
L906	073G 174165 L	PFC CHOKE 310UH 5% CC-012978
L906	073G 174165 N	PFC CHOKE 310UH 5% YUVA-1303
L9102	073G 253 91 H	IND CHOKE 3.5UH+-10% DADONG
L950	073G 253 91 H	IND CHOKE 3.5UH+-10% DADONG
L9102	073G 253 91 L	CHOKE COIL 3.5UH 10% CC-015367HF,VOC,HF

L950	073G 253 91 L	CHOKE COIL 3.5UH 10% CC-015367HF,VOC,HF
L9101	073G 253150 L	CHOKE COIL 3.0UH +-10%
T903	080GL32P 26 N	X'FMR 530UH 6% 69UH YUVA-1366 ETD34
T901	080GL52T 5 L2	X'FMR 1.0MH
T901	080GL52T 5 N2	X'FMR 1.0MH 10%
F901	084G 41 11 B	FUSE 5A 250V BK/S505-V-5-R
F901	084G 41 11 C	FUSE 5A 250V UDA-A 005(PF)
F901	084G 41 11 L	FUSE 5A 250V 0215005.MXEP
CN901	087G 501 47 S	AC SOCKET 2PIN + 2 SCREW HOLE
CN901	087G 501 47 DL	AC SOCKET 2PIN + 3 SCREW HOLE
D904	093G 52 70 1	1N5408-E(SHORT PIN) 3A/1000V DO-201AD
	0Q1G 340 8140	SCREW Q1-SELF TAPING SCREW :Q X8.0
	705TXA57005	Q9102 ASS'Y
Q9102	057G 667 52	FET 2SK4100LS-T 7A/650V TO-220FI(LS)
Q9102	057G 667914	MOSFET TK10A50D TO220
	0M1G1730 8120	SCREW 3X8
	Q90G6084 1	HEAT SINK
	705TXA57006	Q9101 ASS'Y
Q9101	057G 667 52	FET 2SK4100LS-T 7A/650V TO-220FI(LS)
Q9101	057G 667914	MOSFET TK10A50D TO220
	0M1G1730 8120	SCREW 3X8
	Q90G6084 1	HEAT SINK
	705TXA57007	Q901 ASS'Y
Q901	057G 611904	MOSFET AOTF12N60 TO-220F
Q901	057G 667 49	FET 2SK4086LS-MG5 TO-220FI(LS)
	0M1G1730 10120	SCREW 3X10
	Q90T0125 2	HEAT SINK
	705TXA61002	NR901 ASS'Y
NR901	061G 58030 WL	RST NTCR 3 OHM +-20% 5A THINKING
	Q09T 203 8	PIN FOR NR901
	705TXA93006	BD901 ASS'Y
BD901	093G 50460 34	BRIDGE KBJ608G 6A/800V KBJ
BD901	093G 50460925	BRIDGE TS6B06G-01 6A 800V KBJ
	0M1G1730 10120	SCREW 3X10
	Q90T0125 2	HEAT SINK
	705TXA93007	D9111 ASS'Y
D9111	093G 60298	SCHOTTKY SBT15006JST 15 60 TO220ML
D9111	093G 60931	DIODE MBRF1560CT ITO-220AB
	0M1G1730 8120	SCREW 3X8
	Q90G6084 1	HEAT SINK
	705TXA93008	D902 ASS'Y
D902	093G 52905	DIODE FMNS-1106S TO-220
	0M1G1730 8120	SCREW 3X8
	Q90G6084 1	HEAT SINK
	705TXA93009	D950 ASS'Y
D950	093G 60298	SCHOTTKY SBT15006JST 15 60 TO220ML
D950	093G 60931	DIODE MBRF1560CT ITO-220AB
	0M1G1730 8120	SCREW 3X8
	Q90G6084 1	HEAT SINK
	705TXA93010	D9110 ASSY
D9110	093G 60324	SCHOTTKY FMWN-2308 30A 80V TO-220
	0M1G1730 8120	SCREW 3X8
	Q90T0125 2	HEAT SINK
	709T4088 XM001	COMSUPTIVE ASS'Y

	055G 23520	IPA
	055G 23524	WELDING FLUX WITHOUT PB
	Q49G 51100	CLEANER
	Q55G 100625	TIN STICK_LOW ARGENTUM
IC901	056G 379172	IC LD7591GS SOP-8
IC970	056G 379176	IC SSC9512S-TL SOP-18
Q950	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q970	057G 417 4	PMBS3904/PHILIPS-SMT(04)
R913	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/8W FENGHUA
R9120	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/8W FENGHUA
R9120	061G0805100 JY	RST CHIPR 10OHM +- 5% 1/8W YEGAO
R913	061G0805100 JY	RST CHIPR 10OHM +- 5% 1/8W YEGAO
R981	061G08051000FT	RST CHIPR 100 OHM +-1% 1/8W
R981	061G08051000FY	RST CHIPR 100 OHM +-1% 1/8W YAGEO
R983	061G08051001FT	RST CHIP 1K 1/8W 1%
R982	061G08051001FT	RST CHIP 1K 1/8W 1%
R956	061G08051001FT	RST CHIP 1K 1/8W 1%
R955	061G08051001FT	RST CHIP 1K 1/8W 1%
R9108	061G08051001FT	RST CHIP 1K 1/8W 1%
R9108	061G08051001FY	RST CHIP 1K 1/8W 1%
R955	061G08051001FY	RST CHIP 1K 1/8W 1%
R956	061G08051001FY	RST CHIP 1K 1/8W 1%
R982	061G08051001FY	RST CHIP 1K 1/8W 1%
R983	061G08051001FY	RST CHIP 1K 1/8W 1%
R963	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R918	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R914	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R9124	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R9123	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R963	061G08051002FY	RST CHIP 10K 1/8W 1%
R918	061G08051002FY	RST CHIP 10K 1/8W 1%
R914	061G08051002FY	RST CHIP 10K 1/8W 1%
R9124	061G08051002FY	RST CHIP 10K 1/8W 1%
R9123	061G08051002FY	RST CHIP 10K 1/8W 1%
R9133	061G08051201FF	RST CHIPR 1.2KOHM +-1% 1/8W FENGHUA
R9133	061G08051201FT	RST CHIP R 1K2 1/8W +/-1%
R923	061G08051302FF	RST CHIPR 13KOHM +-1% 1/8W FENGHUA
R923	061G08051302FY	RST CHIP 13K 1/8W 1%
R9139	061G08051961FF	RST CHIPR 1.96KOHM +-1% 1/8W FENGHUA
R9139	061G08051961FY	RST CHIP 1K96 1/8W 1%
R912	061G0805202 JF	RST CHIPR 2KOHM +-5% 1/8W FENGHUA
R9134	061G0805202 JF	RST CHIPR 2KOHM +-5% 1/8W FENGHUA
R912	061G0805202 JT	RST CHIP 2K 1/8W 5% TZAI YUAN
R9134	061G0805202 JT	RST CHIP 2K 1/8W 5% TZAI YUAN
R9137	061G08052052FF	RST CHIPR 20.5KOHM +-1% 1/8W FENGHUA
R9137	061G08052052FT	RST CHIP 20K5 1/8W 1%
R9105	061G08052702FF	RST CHIPR 27KOHM +-1% 1/8W FENGHUA
R9105	061G08052702FY	RST CHIP 27K 1/8W 1%
R9109	061G0805331 JT	RST CHIP 330R 1/8W 5% TZAI YUAN
R9109	061G0805331 JY	RST CHIPR 330OHM +-5% 1/8W YAGEO
R917	061G0805433 JF	RST CHIPR 43KOHM +-5% 1/8W FENGHUA
R917	061G0805433 JT	RST CHIPR 43K +-5% 1/8W TZAI YUAN
R917	061G0805433 JY	RST CHIPR 43KOHM +-5% 1/8W YAGEO
R9121	061G0805470 JF	RST CHIPR 47OHM +-5% 1/8W FENGHUA

R9122	061G0805470 JF	RST CHIPR 470OHM +-5% 1/8W FENGHUA
R9121	061G0805470 JT	RST CHIPR 470OHM +-5% 1/8W TZAI YUAN
R9122	061G0805470 JT	RST CHIPR 470OHM +-5% 1/8W TZAI YUAN
R9135	061G08054701FF	RST CHIPR 4.7KOHM +-1% 1/8W FENGHUA
R9135	061G08054701FT	RST CHIP 4K7 1/8W 1%
R9136	061G08055101FF	RST CHIPR 5.1KOHM +-1% 1/8W FENGHUA
R9138	061G08055102FF	RST CHIPR 51KOHM +-1% 1/8W FENGHUA
R906	061G08055603FF	RST CHIPR 560KOHM +-1% 1/8W FENGHUA
R906	061G08055603FY	RST CHIP 560K 1/8W 1%
R958	061G08057501FY	RST CHIP R 7K5 1/8W +/-1%
R957	061G08058201FF	RST CHIPR 8.2KOHM +-1% 1/8W FENGHUA
R957	061G08058201FY	RST CHIP 8K2 1/8W 1%
JR901	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR902	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR903	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR904	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR905	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR906	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR907	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR907	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN
JR906	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN
JR905	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN
JR904	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN
JR903	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN
JR902	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN
JR901	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN
R932	061G1206100 JF	RST CHIPR 10 OHM +-5% 1/4W FENGHUA
R932	061G1206100 JY	RST CHIPR 10 OHM +-5% 1/4W YAGEO
R960	061G12061001FF	RST CHIPR 1KOHM +-1% 1/4W FENGHUA
R939	061G12061002FF	RST CHIPR 10KOHM +-1% 1/4W FENGHUA
R961	061G12061002FF	RST CHIPR 10KOHM +-1% 1/4W FENGHUA
R939	061G12061002FT	RST CHIPR 10KOHM +-1% 1/4W 1206
R961	061G12061002FT	RST CHIPR 10KOHM +-1% 1/4W 1206
R994	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R993	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R992	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R991	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R994	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R993	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R992	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R991	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R954	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA
R954	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN
R904	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA
R905	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA
R909	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA
R909	061G12061504FY	RST CHIP 1M5 1/4W 1%
R905	061G12061504FY	RST CHIP 1M5 1/4W 1%
R904	061G12061504FY	RST CHIP 1M5 1/4W 1%
R9102	061G12062004FF	RST CHIPR 2MOHM 1% 1/4W FENGHUA
R9103	061G12062004FF	RST CHIPR 2MOHM 1% 1/4W FENGHUA
R9104	061G12062004FF	RST CHIPR 2MOHM 1% 1/4W FENGHUA
R9104	061G12062004FY	RST CHIP R 2MOHM 1/4W +/-1%
R9103	061G12062004FY	RST CHIP R 2MOHM 1/4W +/-1%

R9102	061G12062004FY	RST CHIP R 2MOHM 1/4W +/-1%
R911	061G1206203 JF	RST CHIPR 20KOHM +-5% 1/4W FENGHUA
R911	061G1206203 JT	RST CHIPR 20KOHM +-5% 1/4W TZAI YUAN
R907	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA
R908	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA
R931	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA
R931	061G1206229 JY	RST 1206 2.2R 5% 1/4W
R908	061G1206229 JY	RST 1206 2.2R 5% 1/4W
R907	061G1206229 JY	RST 1206 2.2R 5% 1/4W
R9106	061G12062401FF	RST CHIPR 2.4KOHM +-1% 1/4W FENGHUA
R9132	061G1206242 JF	RST CHIPR 2.4KOHM +-5% 1/4W FENGHUA
R9132	061G1206242 JT	RST CHIPR 2.4KOHM +-5% 1/4W TZAI YUAN
R901	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA
R902	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA
R903	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA
R901	061G1206334 JT	RST CHIPR 330 KOHM +-5% 1/4W TZAI YUAN
R902	061G1206334 JT	RST CHIPR 330 KOHM +-5% 1/4W TZAI YUAN
R903	061G1206334 JT	RST CHIPR 330 KOHM +-5% 1/4W TZAI YUAN
R952	061G1206470 JF	RST CHIPR 47 OHM +-5% 1/4W FENGHUA
R950	061G1206470 JF	RST CHIPR 47 OHM +-5% 1/4W FENGHUA
R950	061G1206470 JT	RST CHIPR 47 OHM +-5% 1/4W TZAI YUAN
R952	061G1206470 JT	RST CHIPR 47 OHM +-5% 1/4W TZAI YUAN
R915	061G1206471 JF	RST CHIPR 470 OHM +-5% 1/4W FENGHUA
R915	061G1206471 JT	RST CHIPR 470 OHM +-5% 1/4W TZAI YUAN
R910	061G1206475 JF	RST CHIPR 4.7 MOHM +-5% 1/4W FENGHUA
R910	061G1206475 JT	RST CHIPR 4.7 MOHM +-5% 1/4W TZAI YUAN
R9130	061G1206512 JF	RST CHIPR 5.1KOHM +-5% 1/4W FENGHUA
R9131	061G1206512 JF	RST CHIPR 5.1KOHM +-5% 1/4W FENGHUA
R9130	061G1206512 JT	RST CHIPR 5.1 KOHM +-5% 1/4W TZAI YUAN
R9131	061G1206512 JT	RST CHIPR 5.1 KOHM +-5% 1/4W TZAI YUAN
R922	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA
R921	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA
R920	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA
R920	061G12066803FY	RST CHIPR 680KOHM +-1% 1/4W YAGEO
R921	061G12066803FY	RST CHIPR 680KOHM +-1% 1/4W YAGEO
R922	061G12066803FY	RST CHIPR 680KOHM +-1% 1/4W YAGEO
C9101	065G080510231J Y	N0-SUGGEST CAP 0805 1NF 50V NP0 +/-5%
C9107	065G080510231J Y	N0-SUGGEST CAP 0805 1NF 50V NP0 +/-5%
C909	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%
C913	065G080510432K A	CAP CHIP 0805 0.1UF K 50V X7R
C913	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R
C978	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%
C956	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%
C947	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%
C934	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%
C9126	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%
C9123	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%
C9105	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%
C908	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%
C9112	065G080510522K M	CAP 0805 1UF 10% 25V X7R
C9113	065G080510522K M	CAP 0805 1UF 10% 25V X7R
C915	065G080522131J F	CAP CHIP 0805 220PF J 50V NPO
C915	065G080522131J Y	CAP CHIP 0805 220P 50V NP0 +/-5%
C9127	065G080522432K Y	CAP CHIP 0805 220N 50V X7R +/-10%

C921	065G080522432K	Y	CAP CHIP 0805 220N 50V X7R +/-10%
C955	065G080522432K	Y	CAP CHIP 0805 220N 50V X7R +/-10%
C9106	065G080522525K	T	CAP CHIP 0805 2.2UF K 25V X5R
C917	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%
C918	065G080547432K	A	CAP CHIP 0805 0.47UF K 50V X7R
C918	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R
C912	065G080556031J	F	CAP CHIP 0805 56PF J 50V NPO
C9108	065G080568131J	Y	CAP CHIP 0805 680P 50V NP0 +/-5%
C950	065G1206102B2K	3	CAP 1206 1NF 10% 630V X7R
C951	065G1206102B2K	3	CAP 1206 1NF 10% 630V X7R
C950	065G1206102B2K	T	CAP CHIP1206 1000PF K 630V X7R
C951	065G1206102B2K	T	CAP CHIP1206 1000PF K 630V X7R
C9102	065G120610432K	F	CAP CHIP 1206 0.1UF K 50V X7R
C9102	065G120610432K	Y	CER 1206 100N 50V X7R +/-10%
CN901	006G 31500	GP	EYELET
T903	006G 31502		EYELET
IC9102	056G 158 10	T	DC/DC AS431AZTR-E1 150MA 40V TO-92
IC952	056G 158 10	T	DC/DC AS431AZTR-E1 150MA 40V TO-92
R948	061G 30310852T	GP	FUSER 0.1OHM +-5% 1W
R916	061G152M10852T	SY	RST MOF 0R1 5% 2W
C9109	065G 1K101 2T6921		CAP CER 100PF 1KV K Y5P
C932	065G 2K102 2T6921		CAP CER 1000PF 2KV K Y5P
C9104	067G 3154797KT		EC 4.7UF 50V M 5*11MM
C9103	067G215A1007KT		EC 10UF 50V M 5*11MM
C931	067G215A1017KT		EC 100UF 50V 8*12MM
C933	067G215Y1007KT		KY50VB10M-TP5 5*11.5 EG
C937	067G215Y1007KT		KY50VB10M-TP5 5*11.5 EG
C914	067G215Y4707KT		EC 47UF 20% 50V 6.3*11MM EG
FB902	071G 55 23	S	FERRITE BEAD LB 3.5*0.8*7.5A
FB901	071G 55 26	S	BEAD 3.5*6MM 127R 25% LB3.5;A0.8;A6-2
ZD9101	093G 3916652T		MTZJ15B (13.89-14.62)
ZD930	093G 3916652T		MTZJ15B (13.89-14.62)
ZD951	093G 3916652T		MTZJ15B (13.89-14.62)
ZD970	093G 3917152T		TZJ T-72 30B
D901	093G 52 1552T		RECTIFIER 1N4007 1 1000 DO41
D931	093G 5250S52T		DIODE AU02Z-V1 SANKEN
D9102	093G 64 1152T		NO-SUGGEST SWITCHING 1N4148 1A 100V
D9101	093G 64 1152T		NO-SUGGEST SWITCHING 1N4148 1A 100V
D9102	093G 64 1152T	PH	SWITCHING 1N4148 0.2A 100V DO-35
D9101	093G 64 1152T	PH	SWITCHING 1N4148 0.2A 100V DO-35
D971	093G 64 1152T	PH	SWITCHING 1N4148 0.2A 100V DO-35
D951	093G 64 1152T	PH	SWITCHING 1N4148 0.2A 100V DO-35
D905	093G 64 1152T	PH	SWITCHING 1N4148 0.2A 100V DO-35
D903	093G 64 1152T	PH	SWITCHING 1N4148 0.2A 100V DO-35
D9103	093G1100 952T		UF4007
D930	093G110050152T		DIODE PR1007 1A/1000V 500NS DO-41
J913	095G 90 23		JUMP WIRE --
J912	095G 90 23		JUMP WIRE --
J911	095G 90 23		JUMP WIRE --
J910	095G 90 23		JUMP WIRE --
J909	095G 90 23		JUMP WIRE --
J908	095G 90 23		JUMP WIRE --
J907	095G 90 23		JUMP WIRE --
J906	095G 90 23		JUMP WIRE --

J905	095G 90 23	JUMP WIRE --
J904	095G 90 23	JUMP WIRE --
J903	095G 90 23	JUMP WIRE --
J914	095G 90 23	JUMP WIRE --
J927	095G 90 23	JUMP WIRE --
J926	095G 90 23	JUMP WIRE --
J925	095G 90 23	JUMP WIRE --
J924	095G 90 23	JUMP WIRE --
J923	095G 90 23	JUMP WIRE --
J922	095G 90 23	JUMP WIRE --
J921	095G 90 23	JUMP WIRE --
J920	095G 90 23	JUMP WIRE --
J919	095G 90 23	JUMP WIRE --
J918	095G 90 23	JUMP WIRE --
J917	095G 90 23	JUMP WIRE --
J916	095G 90 23	JUMP WIRE --
J915	095G 90 23	JUMP WIRE --
J902	095G 90 23	JUMP WIRE --
J901	095G 90 23	JUMP WIRE --
FB903	095G 90 23	JUMP WIRE --
	709T4088 XA001	COMSUPTIVE ASS'Y
E715	715G4088P01W20003H	POWER BOARD PCB
R913	061G0805100 JI	RST 0805 10R 5% 1/8W TA-I
R963	061G08051002FT	RST CHIP 10K 1/8W 1%
R918	061G08051002FT	RST CHIP 10K 1/8W 1%
R914	061G08051002FT	RST CHIP 10K 1/8W 1%
R9124	061G08051002FT	RST CHIP 10K 1/8W 1%
R9123	061G08051002FT	RST CHIP 10K 1/8W 1%
JR907	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
JR906	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
JR905	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
JR904	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
JR903	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
JR902	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
JR901	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
R960	061G12061001FT	RST CHIP R 1KOHM +-1% 1/4W
R994	061G12061003FI	RST 1206 100K 1% 1/4W
R993	061G12061003FI	RST 1206 100K 1% 1/4W
R992	061G12061003FI	RST 1206 100K 1% 1/4W
R991	061G12061003FI	RST 1206 100K 1% 1/4W
R922	061G12066803FI	RST 680K OHM 1% 1/4W TA-I
R921	061G12066803FI	RST 680K OHM 1% 1/4W TA-I
R920	061G12066803FI	RST 680K OHM 1% 1/4W TA-I
	709T4088 XS001	COMSUPTIVE ASS'Y
	052G 2191 A	PAPER TAPE
C9106	065G080522525K 3	CAP 0805 2.2UF 10% 25V X5R

LC42H033M E42BGKNCW3A1NNX PWTV1QE2GXZG

Location	Part No.	Description
	040G 45762412B	CBPC LABEL
	009G6005 1	GND TERMINAL
CN902	033G327813D	CONNECTOR
CN801	033G8021 2E F	CONNECTOR
CN802	033G8021 2E F	CONNECTOR
CN802	033G8021 2E U	INVERT CONNECTOR
CN801	033G8021 2E U	INVERT CONNECTOR
IC950	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4
IC951	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4
IC970	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4
IC950	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4
IC951	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4
IC970	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4
IC970	056G 139 3B	PC123Y82FZOF SHARP
IC951	056G 139 3B	PC123Y82FZOF SHARP
IC950	056G 139 3B	PC123Y82FZOF SHARP
IC902	056G 379121	IC STR- A6069H DIP-8
Q921	057G 761 7	KTD1691P
Q921	057G 761502	SMALLTRAN BTD1805AD3 5A 60V TO-126ML
Q921	057G 761909 T	SMALLTRAN KSD1691YSTU 5A 60V TO-126
C904	063G107K474 6S	0.47UF +-10%
C901	063G107K474 6S	0.47UF +-10%
C901	063G107K474 UM	CAP X2 470NF 10% 275V
C904	063G107K474 UM	CAP X2 470NF 10% 275V
C801	063G213J105GFC	CAP MPE 1UF J 450V
C804	063G213J105GFC	CAP MPE 1UF J 450V
C910	063G213J105GFC	CAP MPE 1UF J 450V
C910	063G213J105GHE	CAP MPP 1UF 5% 450V BULK (B)
C804	063G213J105GHE	CAP MPP 1UF 5% 450V BULK (B)
C801	063G213J105GHE	CAP MPP 1UF 5% 450V BULK (B)
C823	065G 1K103 2E6213	CAP CER 10NF K 1KV
C911	065G 1K103 2E6213	CAP CER 10NF K 1KV
C823	065G 1M1033ES	CAP CER 10NF 20% 1KV Y5U
C911	065G 1M1033ES	CAP CER 10NF 20% 1KV Y5U
C827	065G 6J1206ES	CAP CER 6KV 12PF J SL SEC
C825	065G 6J1206ES	CAP CER 6KV 12PF J SL SEC
C825	065G 6J1206ET	12PF 5% SL 6KV TDK
C827	065G 6J1206ET	12PF 5% SL 6KV TDK
C927	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES
C927	065G306K4712BM	Y1 CAP 470PF +-10% 250V AC KX
C902	065G306K6812BP	Y1 680PF M 250VAC
C903	065G306K6812BP	Y1 680PF M 250VAC
C928	065G306M1022B3	Y1 CAP 1000PF M 250VAC TDK
C906	065G306M1022B3	Y1 CAP 1000PF M 250VAC TDK
C906	065G306M1022BM	Y1.CAP.001UF 250VAC MURATA
C928	065G306M1022BM	Y1.CAP.001UF 250VAC MURATA
C924	067G 42Z10115H	EC 100UF 20% 450V 18*40
C925	067G 42Z10115H	EC 100UF 20% 450V 18*40
C925	067G 42Z10115K	EC 100UF 20% 450V 18*40
C924	067G 42Z10115K	EC 100UF 20% 450V 18*40
C953	067G204V331 3K	CS CAP 330UF 16V 10*12 MM
C953	067G204V331 3R	CS CAP 330UF 16V 10*12.5 MM

C957	067G215A1024HV	EC 1000UF M 25V 13*21MM
C954	067G215A4713HV	EC 470UF 20% 16V 10*13 2000 HR
C954	067G215A4713KV	EC 470UF 20% 16V 10*12
C959	067G215A4714HV	EC 470UF 20% 25V 10*16 2000 HR
C975	067G215A4716HV	EC 470UF 20% 35V 10*21 2000 HR
C973	067G215A4716HV	EC 470UF 20% 35V 10*21 2000 HR
C972	067G215A4716HV	EC 470UF 20% 35V 10*21 2000 HR
C957	067G215D1024KV	LOW ESR EC 1000UF 25V M 12.5*20MM
C959	067G215P471 4K	LOW ESR EC 470UF 25V
C959	067G215P4714KV	EC 470UF 20% 25V 10*16
C975	067G215P4716KV	EC 470UF 20% 35V 10*20
C973	067G215P4716KV	EC 470UF 20% 35V 10*20
C972	067G215P4716KV	EC 470UF 20% 35V 10*20
C924	067G215S10115N	EC 100UF 20% 450V 18*35.5
C925	067G215S10115N	EC 100UF 20% 450V 18*35.5
L901	073G 174106 DN	LINE FILTER 13MH LK.TF032.A20
L904	073G 174161 H	PFC CHOKE 170UH 5%
L904	073G 174161 N	PFC CHOKE 170UH 5% 85UH YUVA-1234
L980	073G 253 91 H	IND CHOKE 3.5UH+-10% DADONG
L951	073G 253 91 H	IND CHOKE 3.5UH+-10% DADONG
L950	073G 253 91 H	IND CHOKE 3.5UH+-10% DADONG
L950	073G 253 91 L	CHOKE COIL 3.5UH 10% CC-015367HF,VOC,HF
L951	073G 253 91 L	CHOKE COIL 3.5UH 10% CC-015367HF,VOC,HF
L980	073G 253 91 L	CHOKE COIL 3.5UH 10% CC-015367HF,VOC,HF
L980	073G 253 91 S	CHOKE COIL
L951	073G 253 91 S	CHOKE COIL
L950	073G 253 91 S	CHOKE COIL
L950	073G 253 91 V	CHOKE COIL 3.5UH+-10%
L951	073G 253 91 V	CHOKE COIL 3.5UH+-10%
L980	073G 253 91 V	CHOKE COIL 3.5UH+-10%
L903	073L 174 49 HG	LINE FILTER 20.0MH MIN
L903	073L 174 49 LG	LINE FILTER 20.0MH MIN
L903	073L 174 49 VG	LINE FILTER 20.0MH MIN
L901	073T 174106 V	LINE FILTER 13MH MIN
L901	073T 174106 LP	LINE FILTER 13MH MIN VOC
T801	080GL26T 15 L	X'FMR 840UH MIN 8.4UH EE16 PT-011699
T801	080GL26T 15 N	X'FMR 840UH MIN 8.4UH YUVA-1094 EE16
T802	080GL32T 25 YS	INVERTER X'FMR 406UH 20% YS04170437
T803	080GL32T 25 YS	INVERTER X'FMR 406UH 20% YS04170437
T902	080GL52P 5 L	X'FMR 500UH 5% 6UH ER28 PT-012612-1
T902	080GL52P 5 N	X'FMR 500UH 5% 6UH EER28 YUVA-1223
T901	080GL52T 5 L2	X'FMR 1.0MH
T901	080GL52T 5 N2	X'FMR 1.0MH 10%
F901	084G 41 11 B	FUSE 5A 250V BK/S505-V-5-R
F901	084G 41 11 L	FUSE 5A 250V 0215005.MXEP
CN901	087G 501 47 S	AC SOCKET 2PIN + 2 SCREW HOLE
CN901	087G 501 47 DL	AC SOCKET 2PIN + 3 SCREW HOLE
D904	093G 52 70	RECTIFIER 1N5408-P 3A 1000V DO-201AD
D904	093G 52 70 1	1N5408-E(SHORT PIN) 3A/1000V DO-201AD
	0Q1G 340 8140	SCREW Q1-SELF TAPING SCREW :Q X8.0
	705TXB57031	Q901 ASS'Y
Q901	057G 667 25	MOSFET STW20NM60 20A 600V TO-247
	0M1G1730 12120	SCREW 3X12
	Q12G 372 8	SILICON

	Q90T0087 2	HEAT SINK
	705TXB57032	Q903 ASS'Y
Q903	057G 667 21	MOSFET STP10NK70ZFP 8.6A 700V TO-220FP
	090G6064 1	HEAT SINK
	0M1G1730 8120	SCREW 3X8
	705TXB57033	Q801/Q802 ASS'Y
Q801	057G 611901	MOSFET 12A/500V FMA12N50E TO-220F
Q802	057G 611901	MOSFET 12A/500V FMA12N50E TO-220F
Q801	057G 611903	MOSFET AOTF12N50 TO-220F
Q802	057G 611903	MOSFET AOTF12N50 TO-220F
	0M1G1730 8120	SCREW 3X8
	Q90T0095 2	HEAT SINK
	705TXB61001	NR901 ASS'Y
NR901	061G 58030 MW	NTCR 3R 20% 7A 3.6W
NR901	061G 58309MEW	NTCR 3 OHM 7A ±20% SCK15037MMY502
	Q09T 203 8	PIN FOR NR901
	705TXB93031	BD901 ASS'Y
BD901	093G 50460 35	BRIDGE GBJ1008 10A/800V GBJ
BD901	093G 50460915	BRIDGE TS10P06G 10A 800V TS6P
	0M1G1730 10120	SCREW 3X10
	Q90T0095 2	HEAT SINK
	705TXB93032	D902 ASS'Y
D902	093G 52 56	DIODE FMN-1106S 10A/600V TO-220
	0M1G1730 8120	SCREW 3X8
	Q90G6084 1	HEAT SINK
	705TXB93033	D951 ASS'Y
D951	093G 60250	FCH10U10
D951	093G 60500	FMEN210A TO-220 SANKEN
	0M1G1730 8120	SCREW 3X8
	Q90G6084 1	HEAT SINK
	705TXB93034	D952 ASS'Y
	090G6064 1	HEAT SINK
D952	093G 60329	DIODE FMEN-220A 20A/100V TO-220
D952	093G 60331	SCHOTTKY YG865C10RSC 20A 100V TO-220F
	0M1G1730 8120	SCREW 3X8
	705TXB93035	D950 ASS'Y
D950	093G 60931	DIODE MBRF1560CT ITO-220AB
D950	093G1506 2	SCHOTTKY FMW-2156 15A 60V TO-220
	0M1G1730 8120	SCREW 3X8
	Q90G6084 1	HEAT SINK
	709T3829 XM001	COMSUMPTIVE ASS'Y
	051G 200 1	OIL FOR DISAPPEAR
	055G 23520	IPA
	055G 23524	WELDING FLUX WITHOUT PB
	Q49G 51100	CLEANER
	Q51G 6 4509	GLUE_RTV
	Q55G 100625	TIN STICK_LOW ARGENTUM
R932	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/8W FENGHUA
R932	061G0805100 JT	RST CHIP 10R 1/8W 5% TZAI YUAN
R913	061G0805470 JF	RST CHIPR 47OHM +-5% 1/8W FENGHUA
R913	061G0805470 JT	RST CHIPR 47OHM +-5% 1/8W TZAI YUAN
R805	061G08058202FT	RST CHIPR 82K +-1% 1/8W TZAI YUAN
R805	061G08058202FY	RST CHIPR 82K +-1% 1/8W YAGEO
IC901	056G 368 12	IC FAN7529MX SOP-8

IC801	056G 379122	IC OZ9976GN-C-0-TR SOP-16
IC903	056G 379175	IC LD7523GS SOP-8
Q970	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q950	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q910	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q805	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q804	057G 417 4	PMBS3904/PHILIPS-SMT(04)
Q970	057G 417 12 T	KEC 2N3904S-RTK/PS
Q950	057G 417 12 T	KEC 2N3904S-RTK/PS
Q910	057G 417 12 T	KEC 2N3904S-RTK/PS
Q805	057G 417 12 T	KEC 2N3904S-RTK/PS
Q804	057G 417 12 T	KEC 2N3904S-RTK/PS
Q970	057G 417518	TRA LMBT3904LT1G 200MA/40V SOT-23 LRC
Q950	057G 417518	TRA LMBT3904LT1G 200MA/40V SOT-23 LRC
Q910	057G 417518	TRA LMBT3904LT1G 200MA/40V SOT-23 LRC
Q805	057G 417518	TRA LMBT3904LT1G 200MA/40V SOT-23 LRC
Q804	057G 417518	TRA LMBT3904LT1G 200MA/40V SOT-23 LRC
Q803	057G 763904	TRA FET 2N7002 SOT-23 PHILIPS
Q803	057G 763907	MOSFET 2N7002LT1G 75MA 60V SOT-23
R933	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/8W FENGHUA
R933	061G0805100 JY	RST CHIPR 10OHM +- 5% 1/8W YEGAO
R954	061G08051000FF	RST CHIPR 100 OHM +-1% 1/8W FENGHUA
R816	061G08051000FF	RST CHIPR 100 OHM +-1% 1/8W FENGHUA
R803	061G08051000FF	RST CHIPR 100 OHM +-1% 1/8W FENGHUA
R802	061G08051000FF	RST CHIPR 100 OHM +-1% 1/8W FENGHUA
R802	061G08051000FT	RST CHIPR 100 OHM +-1% 1/8W
R803	061G08051000FT	RST CHIPR 100 OHM +-1% 1/8W
R954	061G08051000FT	RST CHIPR 100 OHM +-1% 1/8W
R816	061G08051000FY	RST CHIPR 100 OHM +-1% 1/8W YAGEO
R983	061G08051001FT	RST CHIP 1K 1/8W 1%
R981	061G08051001FT	RST CHIP 1K 1/8W 1%
R961	061G08051001FT	RST CHIP 1K 1/8W 1%
R960	061G08051001FT	RST CHIP 1K 1/8W 1%
R956	061G08051001FT	RST CHIP 1K 1/8W 1%
R955	061G08051001FT	RST CHIP 1K 1/8W 1%
R940	061G08051001FT	RST CHIP 1K 1/8W 1%
R934	061G08051001FT	RST CHIP 1K 1/8W 1%
R817	061G08051001FT	RST CHIP 1K 1/8W 1%
R983	061G08051001FY	RST CHIP 1K 1/8W 1%
R981	061G08051001FY	RST CHIP 1K 1/8W 1%
R961	061G08051001FY	RST CHIP 1K 1/8W 1%
R960	061G08051001FY	RST CHIP 1K 1/8W 1%
R956	061G08051001FY	RST CHIP 1K 1/8W 1%
R955	061G08051001FY	RST CHIP 1K 1/8W 1%
R940	061G08051001FY	RST CHIP 1K 1/8W 1%
R934	061G08051001FY	RST CHIP 1K 1/8W 1%
R817	061G08051001FY	RST CHIP 1K 1/8W 1%
R9905	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R982	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R976	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R963	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R958	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R957	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R944	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA

R939	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R938	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R918	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R914	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R821	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R807	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R804	061G08051002FF	RST CHIPR 10KOHM +-1% 1/8W FENGHUA
R804	061G08051002FT	RST CHIP 10K 1/8W 1%
R807	061G08051002FT	RST CHIP 10K 1/8W 1%
R821	061G08051002FT	RST CHIP 10K 1/8W 1%
R914	061G08051002FT	RST CHIP 10K 1/8W 1%
R918	061G08051002FT	RST CHIP 10K 1/8W 1%
R938	061G08051002FT	RST CHIP 10K 1/8W 1%
R939	061G08051002FT	RST CHIP 10K 1/8W 1%
R944	061G08051002FT	RST CHIP 10K 1/8W 1%
R957	061G08051002FT	RST CHIP 10K 1/8W 1%
R958	061G08051002FT	RST CHIP 10K 1/8W 1%
R963	061G08051002FT	RST CHIP 10K 1/8W 1%
R976	061G08051002FT	RST CHIP 10K 1/8W 1%
R982	061G08051002FT	RST CHIP 10K 1/8W 1%
R9905	061G08051002FT	RST CHIP 10K 1/8W 1%
R944	061G08051002FY	RST CHIP 10K 1/8W 1%
R957	061G08051002FY	RST CHIP 10K 1/8W 1%
R958	061G08051002FY	RST CHIP 10K 1/8W 1%
R963	061G08051002FY	RST CHIP 10K 1/8W 1%
R976	061G08051002FY	RST CHIP 10K 1/8W 1%
R982	061G08051002FY	RST CHIP 10K 1/8W 1%
R9905	061G08051002FY	RST CHIP 10K 1/8W 1%
R939	061G08051002FY	RST CHIP 10K 1/8W 1%
R804	061G08051002FY	RST CHIP 10K 1/8W 1%
R807	061G08051002FY	RST CHIP 10K 1/8W 1%
R821	061G08051002FY	RST CHIP 10K 1/8W 1%
R914	061G08051002FY	RST CHIP 10K 1/8W 1%
R918	061G08051002FY	RST CHIP 10K 1/8W 1%
R938	061G08051002FY	RST CHIP 10K 1/8W 1%
R810	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA
R819	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA
R820	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA
R841	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA
R841	061G08051003FY	RST CHIP 100K 1/8W 1%
R820	061G08051003FY	RST CHIP 100K 1/8W 1%
R819	061G08051003FY	RST CHIP 100K 1/8W 1%
R810	061G08051003FY	RST CHIP 100K 1/8W 1%
R808	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W
R829	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W
R831	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W
R844	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W
R844	061G08051004FY	RST CHIP 1M 1/8W 1%
R831	061G08051004FY	RST CHIP 1M 1/8W 1%
R829	061G08051004FY	RST CHIP 1M 1/8W 1%
R808	061G08051004FY	RST CHIP 1M 1/8W 1%
R923	061G08051302FF	RST CHIPR 13KOHM +-1% 1/8W FENGHUA
R923	061G08051302FY	RST CHIP 13K 1/8W 1%
R959	061G08051503FF	RST CHIPR 150KOHM +-1% 1/8W FENGHUA

R959	061G08051503FT	RST CHIP R 150K 1/8W +/-1%
R811	061G08051504FF	RST CHIPR 1M5 +-1% 1/8W FENGHUA
R811	061G08051504FT	RST CHIPR 1M5 +-1% 1/8W TZAI YUAN
R980	061G08052001FF	RST CHIPR 2KOHM +-1% 1/8W FENGHUA
R980	061G08052001FY	RST CHIP 2K 1/8W 1%
R911	061G0805203 JF	RST CHIPR 20KOHM +-5% 1/8W FENGHUA
R911	061G0805203 JT	RST CHIPR 20K +-5% 1/8W TZAI YUAN
R943	061G0805220 JF	RST CHIPR 22 OHM +-5% 1/8W FENGHUA
R943	061G0805220 JT	RST CHIPR 22OHM +-5% 1/8W TZAI YUAN
R978	061G08052402FF	RST CHIPR 24KOHM +-1% 1/8W FENGHUA
R978	061G08052402FY	RST CHIP 24K 1/8W 1%
R987	061G08052702FF	RST CHIPR 27KOHM +-1% 1/8W FENGHUA
R987	061G08052702FY	RST CHIP 27K 1/8W 1%
R910	061G0805304 JF	RST CHIPR 300KOHM +-5% 1/8W FENGHUA
R910	061G0805304 JY	RST CHIPR 300K +-5% 1/8W YAGEO
R930	061G0805392 JF	RST CHIPR 3.9KOHM +-5% 1/8W FENGHUA
R975	061G0805392 JF	RST CHIPR 3.9KOHM +-5% 1/8W FENGHUA
R930	061G0805392 JY	RST CHIPR 3K9 +-5% 1/8W YAGEO
R975	061G0805392 JY	RST CHIPR 3K9 +-5% 1/8W YAGEO
R945	061G0805471 JF	RST CHIPR 470 OHM +-5% 1/8W FENGHUA
R915	061G0805471 JF	RST CHIPR 470 OHM +-5% 1/8W FENGHUA
R915	061G0805471 JY	RST CHIPR 470OHM +-5% 1/8W YAGEO
R945	061G0805471 JY	RST CHIPR 470OHM +-5% 1/8W YAGEO
R826	061G08055100FF	RST CHIPR 510 OHM +-1% 1/8W FENGHUA
R827	061G08055100FF	RST CHIPR 510 OHM +-1% 1/8W FENGHUA
R826	061G08055100FT	RST CHIP R 510 OHM +-1% 1/8W
R827	061G08055100FT	RST CHIP R 510 OHM +-1% 1/8W
R9906	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA
R942	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA
R843	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA
R842	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA
R840	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA
R815	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA
R814	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA
R809	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA
R809	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN
R814	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN
R815	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN
R840	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN
R842	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN
R843	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN
R9906	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN
R942	061G0805513 JT	RST CHIPR 51K +-5% 1/8W TZAI YUAN
R9906	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO
R942	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO
R843	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO
R842	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO
R840	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO
R815	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO
R814	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO
R809	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO
R906	061G0805514 JF	RST CHIPR 510KOHM +-5% 1/8W FENGHUA
R906	061G0805514 JY	RST CHIPR 510K +-5% 1/8W YAGEO
R818	061G0805561 JF	RST CHIPR 560 OHM +-5% 1/8W FENGHUA

R818	061G0805561 JT	RST CHIPR 560OHM +-5% 1/8W TZAI YUAN
R917	061G0805563 JF	RST CHIPR 56KOHM +-5% 1/8W FENGHUA
R917	061G0805563 JI	RST CHIPR 56K OHM +-5% 1/8W 0805
R917	061G0805563 JT	RST CHIPR 56K +-5% 1/8W TZAI YUAN
R828	061G0805683 JF	RST CHIPR 68KOHM +-5% 1/8W FENGHUA
R830	061G0805683 JF	RST CHIPR 68KOHM +-5% 1/8W FENGHUA
R828	061G0805683 JI	RST 0805 68K 5% 1/8W
R830	061G0805683 JI	RST 0805 68K 5% 1/8W
R828	061G0805683 JT	RST CHIPR 68K +-5% 1/8W TZAI YUAN
R830	061G0805683 JT	RST CHIPR 68K +-5% 1/8W TZAI YUAN
R813	061G0805684 JF	RST CHIPR 680K +-5% 1/8W FENGHUA
R813	061G0805684 JT	RST CHIPR 680K +-5% 1/8W TZAI YUAN
R928	061G08059102FF	RST CHIPR 91KOHM +-1% 1/8W FENGHUA
R928	061G08059102FY	RST CHIP R 91KOHM +-1% 1/8W
JR801	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR802	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR902	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR803	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA
JR902	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
JR803	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
JR802	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
JR801	061G1206000 JI	RST 1206 MAX0R05 5% 1/4W
JR802	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN
JR902	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN
JR803	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN
JR803	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO
JR902	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO
JR802	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO
JR801	061G1206000 JY	RST CHIPR MAX0R05 1/4W YAGEO
R974	061G12061001FF	RST CHIPR 1KOHM +-1% 1/4W FENGHUA
R974	061G12061001FT	RST CHIP R 1KOHM +-1% 1/4W
R832	061G12061002FF	RST CHIPR 10KOHM +-1% 1/4W FENGHUA
R833	061G12061002FF	RST CHIPR 10KOHM +-1% 1/4W FENGHUA
R832	061G12061002FT	RST CHIPR 10KOHM +-1% 1/4W 1206
R833	061G12061002FT	RST CHIPR 10KOHM +-1% 1/4W 1206
R9404	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R9403	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R9402	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R9401	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R9214	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R9213	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R9212	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R9211	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R839	061G12061003FF	RST CHIPR 100KOHM +-1% 1/4W FENGHUA
R9211	061G12061003FI	RST 1206 100K 1% 1/4W
R9212	061G12061003FI	RST 1206 100K 1% 1/4W
R9213	061G12061003FI	RST 1206 100K 1% 1/4W
R9214	061G12061003FI	RST 1206 100K 1% 1/4W
R9401	061G12061003FI	RST 1206 100K 1% 1/4W
R9402	061G12061003FI	RST 1206 100K 1% 1/4W
R9403	061G12061003FI	RST 1206 100K 1% 1/4W
R9404	061G12061003FI	RST 1206 100K 1% 1/4W
R839	061G12061003FI	RST 1206 100K 1% 1/4W
R9404	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO

R9403	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R9402	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R9401	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R9214	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R9213	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R9212	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R9211	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R839	061G12061003FY	RST CHIPR 100KOHM +-1% 1/4W YAGEO
R971	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA
R970	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA
R953	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA
R952	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA
R951	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA
R950	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA
R950	061G1206101 JI	RST 1206 100R 5% 1/4W
R951	061G1206101 JI	RST 1206 100R 5% 1/4W
R952	061G1206101 JI	RST 1206 100R 5% 1/4W
R953	061G1206101 JI	RST 1206 100R 5% 1/4W
R970	061G1206101 JI	RST 1206 100R 5% 1/4W
R971	061G1206101 JI	RST 1206 100R 5% 1/4W
R971	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO
R970	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO
R953	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO
R952	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO
R951	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO
R950	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO
R904	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA
R905	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA
R909	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA
R924	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA
R925	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA
R926	061G12061504FF	RST CHIPR 1.5MOHM 1% 1/4W FENGHUA
R926	061G12061504FY	RST CHIP 1M5 1/4W 1%
R925	061G12061504FY	RST CHIP 1M5 1/4W 1%
R924	061G12061504FY	RST CHIP 1M5 1/4W 1%
R909	061G12061504FY	RST CHIP 1M5 1/4W 1%
R905	061G12061504FY	RST CHIP 1M5 1/4W 1%
R904	061G12061504FY	RST CHIP 1M5 1/4W 1%
R968	061G1206222 JT	RST CHIPR 2.2KOHM +-5% 1/4W TZAI YUAN
R969	061G1206222 JT	RST CHIPR 2.2KOHM +-5% 1/4W TZAI YUAN
R972	061G1206222 JT	RST CHIPR 2.2KOHM +-5% 1/4W TZAI YUAN
R973	061G1206222 JT	RST CHIPR 2.2KOHM +-5% 1/4W TZAI YUAN
R973	061G1206222 JY	RST CHIPR 2.2KOHM +-5% 1/4W YAGEO
R972	061G1206222 JY	RST CHIPR 2.2KOHM +-5% 1/4W YAGEO
R969	061G1206222 JY	RST CHIPR 2.2KOHM +-5% 1/4W YAGEO
R968	061G1206222 JY	RST CHIPR 2.2KOHM +-5% 1/4W YAGEO
R907	061G1206249 JF	RST CHIPR 2.4 OHM +-5% 1/4W FENGHUA
R908	061G1206249 JF	RST CHIPR 2.4 OHM +-5% 1/4W FENGHUA
R931	061G1206249 JF	RST CHIPR 2.4 OHM +-5% 1/4W FENGHUA
R931	061G1206249 JT	RST CHIPR 2.4 OHM +-5% 1/4W TZAI YUAN
R908	061G1206249 JT	RST CHIPR 2.4 OHM +-5% 1/4W TZAI YUAN
R907	061G1206249 JT	RST CHIPR 2.4 OHM +-5% 1/4W TZAI YUAN
R901	061G1206304 JF	RST CHIPR 300KOHM +-5% 1/4W FENGHUA
R902	061G1206304 JF	RST CHIPR 300KOHM +-5% 1/4W FENGHUA

R903	061G1206304 JF	RST CHIPR 300KOHM +-5% 1/4W FENGHUA
R903	061G1206304 JT	RST CHIPR 300 KOHM +-5% 1/4W TZAI YUAN
R902	061G1206304 JT	RST CHIPR 300 KOHM +-5% 1/4W TZAI YUAN
R901	061G1206304 JT	RST CHIPR 300 KOHM +-5% 1/4W TZAI YUAN
R806	061G1206335 JF	RST CHIPR 3.3M OHM +-5% 1/4W FENGHUA
R806	061G1206335 JT	RST CHIPR 3.3 MOHM +-5% 1/4W TZAI YUAN
R937	061G1206475 JF	RST CHIPR 4.7 MOHM +-5% 1/4W FENGHUA
R937	061G1206475 JT	RST CHIPR 4.7 MOHM +-5% 1/4W TZAI YUAN
R825	061G1206510 JF	RST CHIPR 51 OHM +-5% 1/4W FENGHUA
R837	061G1206510 JF	RST CHIPR 51 OHM +-5% 1/4W FENGHUA
R837	061G1206510 JT	RST CHIPR 51 OHM +-5% 1/4W TZAI YUAN
R825	061G1206510 JT	RST CHIPR 51 OHM +-5% 1/4W TZAI YUAN
R947	061G1206512 JF	RST CHIPR 5.1KOHM +-5% 1/4W FENGHUA
R949	061G1206512 JF	RST CHIPR 5.1KOHM +-5% 1/4W FENGHUA
R965	061G1206512 JF	RST CHIPR 5.1KOHM +-5% 1/4W FENGHUA
R966	061G1206512 JF	RST CHIPR 5.1KOHM +-5% 1/4W FENGHUA
R947	061G1206512 JY	RST CHIPR 5.1 KOHM +-5% 1/4W YAGEO
R949	061G1206512 JY	RST CHIPR 5.1 KOHM +-5% 1/4W YAGEO
R965	061G1206512 JY	RST CHIPR 5.1 KOHM +-5% 1/4W YAGEO
R966	061G1206512 JY	RST CHIPR 5.1 KOHM +-5% 1/4W YAGEO
R838	061G1206560 JF	RST CHIPR 56 OHM +-5% 1/4W FENGHUA
R836	061G1206560 JF	RST CHIPR 56 OHM +-5% 1/4W FENGHUA
R835	061G1206560 JF	RST CHIPR 56 OHM +-5% 1/4W FENGHUA
R824	061G1206560 JF	RST CHIPR 56 OHM +-5% 1/4W FENGHUA
R823	061G1206560 JF	RST CHIPR 56 OHM +-5% 1/4W FENGHUA
R822	061G1206560 JF	RST CHIPR 56 OHM +-5% 1/4W FENGHUA
R822	061G1206560 JT	RST CHIPR 56 OHM +-5% 1/4W TZAI YUAN
R823	061G1206560 JT	RST CHIPR 56 OHM +-5% 1/4W TZAI YUAN
R824	061G1206560 JT	RST CHIPR 56 OHM +-5% 1/4W TZAI YUAN
R835	061G1206560 JT	RST CHIPR 56 OHM +-5% 1/4W TZAI YUAN
R836	061G1206560 JT	RST CHIPR 56 OHM +-5% 1/4W TZAI YUAN
R838	061G1206560 JT	RST CHIPR 56 OHM +-5% 1/4W TZAI YUAN
R922	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA
R921	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA
R920	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA
R920	061G12066803FY	RST CHIPR 680KOHM +-1% 1/4W YAGEO
R921	061G12066803FY	RST CHIPR 680KOHM +-1% 1/4W YAGEO
R922	061G12066803FY	RST CHIPR 680KOHM +-1% 1/4W YAGEO
C971	065G080510232K F	CAP 0805 1000PF 10% 50V X7R
C970	065G080510232K F	CAP 0805 1000PF 10% 50V X7R
C961	065G080510232K F	CAP 0805 1000PF 10% 50V X7R
C960	065G080510232K F	CAP 0805 1000PF 10% 50V X7R
C951	065G080510232K F	CAP 0805 1000PF 10% 50V X7R
C950	065G080510232K F	CAP 0805 1000PF 10% 50V X7R
C909	065G080510232K F	CAP 0805 1000PF 10% 50V X7R
C810	065G080510232K F	CAP 0805 1000PF 10% 50V X7R
C808	065G080510232K F	CAP 0805 1000PF 10% 50V X7R
C971	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%
C970	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%
C961	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%
C960	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%
C951	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%
C950	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%
C909	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%

C810	065G080510232K	Y	CAP CHIP 0805 1N 50V X7R +/-10%
C808	065G080510232K	Y	CAP CHIP 0805 1N 50V X7R +/-10%
C920	065G080510332K	A	CAP CHIP 0805 10NF K 50V X7R
C920	065G080510332K	F	CAP 0805 10NF K 50V X7R
C943	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C942	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C922	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C913	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C908	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C806	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C956	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C974	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C977	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C978	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C979	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C921	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C907	065G080510432K	A	CAP CHIP 0805 0.1UF K 50V X7R
C942	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C943	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C956	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C974	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C977	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C978	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C979	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C922	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C921	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C913	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C908	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C907	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C806	065G080510432K	F	CAP CHIP 0805 0.1UF K 50V X7R
C811	065G080510522K	T	CAP 0805 1UF 10% 25V X7R
C815	065G080515232K	F	CAP 0805 1.5NF 10% 50V X7R
C826	065G080515232K	F	CAP 0805 1.5NF 10% 50V X7R
C828	065G080515232K	F	CAP 0805 1.5NF 10% 50V X7R
C815	065G080515232K	Y	CAP CHIP 0805 1N5 50V X7R +/-10%
C826	065G080515232K	Y	CAP CHIP 0805 1N5 50V X7R +/-10%
C828	065G080515232K	Y	CAP CHIP 0805 1N5 50V X7R +/-10%
C809	065G080515522K	3	NO-SUGGEST CAP 0805 1.5UF 10% 25V X7R
C944	065G080522131J	F	CAP CHIP 0805 220PF J 50V NPO
C915	065G080522131J	F	CAP CHIP 0805 220PF J 50V NPO
C915	065G080522131J	Y	CAP CHIP 0805 220P 50V NP0 +/-5%
C944	065G080522131J	Y	CAP CHIP 0805 220P 50V NP0 +/-5%
C955	065G080522432K	A	CAP 0805 220NF 10% 50V X7R
C955	065G080522432K	Y	CAP CHIP 0805 220N 50V X7R +/-10%
C814	065G080522525K	3	CAP 0805 2.2UF 10% 25V X5R
C802	065G080522525K	3	CAP 0805 2.2UF 10% 25V X5R
C802	065G080522525K	T	CAP CHIP 0805 2.2UF K 25V X5R
C814	065G080522525K	T	CAP CHIP 0805 2.2UF K 25V X5R
C807	065G080533131J	A	MLCC 0805 330PF 50V NPO +/-5% SAMSUNG
C807	065G080533131J	F	CAP CHIP 0805 330PF J 50V NPO
C976	065G080533432K	3	CAP 0805 330NF 10% 50V X7R
C976	065G080533432K	F	CAP 0805 330NF 10% 50V X7R
C976	065G080533432K	M	CAP 0805 330NF 10% 50V X7R
C812	065G080539332K	F	CAP 0805 39NF K 50V X7R

C812	065G080539332K	Y	CAP CHIP 0805 39NF 50V X7R
C813	065G080547232K	F	CAP 0805 4.7NF 10% 50V X7R
C813	065G080547232K	Y	CAP CHIP 0805 4N7 50V X7R +/-10%
C917	065G080547332K	A	CAP 0805 47NF 10% 50V X7R
C818	065G080547332K	A	CAP 0805 47NF 10% 50V X7R
C817	065G080547332K	A	CAP 0805 47NF 10% 50V X7R
C817	065G080547332K	F	CAP CHIP 0805 47NF K 50V X7R
C818	065G080547332K	F	CAP CHIP 0805 47NF K 50V X7R
C917	065G080547332K	F	CAP CHIP 0805 47NF K 50V X7R
C918	065G080547432K	M	CAP 0805 470NF 10% 50V X7R
C918	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R
C912	065G080556031J	F	CAP CHIP 0805 56PF J 50V NPO
C816	065G080582131J	Y	CAP CHIP 0805 820P 50V NPO +/-5%
D805	093G 64 42 L		DIODE LBAV70LT1G SOT-23 LRC
D810	093G 64 42 L		DIODE LBAV70LT1G SOT-23 LRC
D805	093G 64 42 PP		BAV70 SOT-23
D810	093G 64 42 PP		BAV70 SOT-23
D906	093G 60S 5 T		SCHOTTKY SCS0520P 0.5A 20V SOD-123
D905	093G 60S 5 T		SCHOTTKY SCS0520P 0.5A 20V SOD-123
D804	093G 60S 5 T		SCHOTTKY SCS0520P 0.5A 20V SOD-123
D803	093G 60S 5 T		SCHOTTKY SCS0520P 0.5A 20V SOD-123
D802	093G 60S 5 T		SCHOTTKY SCS0520P 0.5A 20V SOD-123
D801	093G 60S 5 T		SCHOTTKY SCS0520P 0.5A 20V SOD-123
D906	093G 60S931 T		SCHOTTKY B0520 5A 20V SOD-123
D905	093G 60S931 T		SCHOTTKY B0520 5A 20V SOD-123
D804	093G 60S931 T		SCHOTTKY B0520 5A 20V SOD-123
D803	093G 60S931 T		SCHOTTKY B0520 5A 20V SOD-123
D802	093G 60S931 T		SCHOTTKY B0520 5A 20V SOD-123
D801	093G 60S931 T		SCHOTTKY B0520 5A 20V SOD-123
D801	093G 60S934 T		DIODE SS0520 SOD-123
D802	093G 60S934 T		DIODE SS0520 SOD-123
D803	093G 60S934 T		DIODE SS0520 SOD-123
D804	093G 60S934 T		DIODE SS0520 SOD-123
D905	093G 60S934 T		DIODE SS0520 SOD-123
D906	093G 60S934 T		DIODE SS0520 SOD-123
	709T3829 XS001		COMSUMPTIVE ASS'Y
	Q52G 2191 A		PAPER TAPE
CN901	006G 31500		EYELET
L904	006G 31502		EYELET
T802	006G 31502		EYELET
T803	006G 31502		EYELET
IC971	056G 158 10 T		DC/DC AS431AZTR-E1 150MA 40V TO-92
IC952	056G 158 10 T		DC/DC AS431AZTR-E1 150MA 40V TO-92
IC952	056G 158 12		SHUNT REGULATOR KIA431A-AT/P TO-92
IC971	056G 158 12		SHUNT REGULATOR KIA431A-AT/P TO-92
Q905	057G 420 3 T		TRA KTA1273-Y- AT/ P_TO-92L KEC
R801	061G 30310852T GP		FUSER 0.1OHM +-5% 1W
R948	061G 30310852T GP		FUSER 0.1OHM +-5% 1W
R929	061G 60210352T TZ		RST CFR 10K 1/6W 5%
R929	061G 60210352T XZ		RST CFR 10KOHM +-5% 1/6W XIANZHENG
R916	061G152M20852T		RST MOFR 0.2 OHM +-5% 2WS
R912	061G152M20852T		RST MOFR 0.2 OHM +-5% 2WS
R946	061G152M33852T HX		RST MOF 0.33R 5% 2WS
R946	061G152M33852T SY		RST MOF 0R33 5% 2W

C803	065G 1K10293T	CAP CER 1NF 10% 1KV R
C822	065G 1K10293T	CAP CER 1NF 10% 1KV R
C929	065G 1K10293T	CAP CER 1NF 10% 1KV R
C939	065G 1K10293T	CAP CER 1NF 10% 1KV R
C923	065G 1K22123T	CAP CER 220PF 10% 1KV Y5P
C923	065G 1K2219AT	C CAP. 220PF 1KV
C937	067G 2151007NT	EC 10UF 20% 50V 5*11
C941	067G 2151007NT	EC 10UF 20% 50V 5*11
C933	067G 2152207NT	KY50VB22M-TP5 5*11
C937	067G215A1007HT	EC 10UF 20% 50V 5*11 2000 HR
C941	067G215A1007HT	EC 10UF 20% 50V 5*11 2000 HR
C805	067G215A1017HT	EC 100UF 20% 50V 8*11 2000 HR
C931	067G215A1017HT	EC 100UF 20% 50V 8*11 2000 HR
C931	067G215A1017KT	EC 100UF 50V 8*12MM
C805	067G215A1017KT	EC 100UF 50V 8*12MM
C914	067G215A4707HT	EC 47UF 20% 50V 6.3*11 2000 HR
C937	067G215Y1007KT	KY50VB10M-TP5 5*11.5 EG
C941	067G215Y1007KT	KY50VB10M-TP5 5*11.5 EG
C933	067G215Y2207KT	CAP 105°C 22UF M 50V KINGNICHIE EG
C933	067G215Y2207LT	LOW ESR EC 22UF 50V M 5*11MM
C914	067G215Y4707KT	EC 47UF 20% 50V 6.3*11MM EG
C914	067G215Y4707LT	LOW ESR EC 47UF 50V M 6.3*11MM
FB904	071G 55 9 T	BEAD 3.5*0.8*6.0MM 110R HF
FB909	071G 55 9 T	BEAD 3.5*0.8*6.0MM 110R HF
FB901	071G 55 26 S	BEAD 3.5*6MM 127R 25% LB3.5jA0.8jA6-2
FB902	071G 55 26 S	BEAD 3.5*6MM 127R 25% LB3.5jA0.8jA6-2
FB907	071G 55 26 S	BEAD 3.5*6MM 127R 25% LB3.5jA0.8jA6-2
FB908	071G 55 26 S	BEAD 3.5*6MM 127R 25% LB3.5jA0.8jA6-2
FB905	071G 55 29	FERRITE BEAD
FB903	071G 55 29	FERRITE BEAD
FB907	071T 55 26 H	BEAD 3.5X6.0X0.8 127R 25% BF-I35060R-796
FB901	071T 55 26 H	BEAD 3.5X6.0X0.8 127R 25% BF-I35060R-796
FB902	071T 55 26 H	BEAD 3.5X6.0X0.8 127R 25% BF-I35060R-796
FB908	071T 55 26 H	BEAD 3.5X6.0X0.8 127R 25% BF-I35060R-796
ZD901	093G 3916752T	MTZJ T-72 16B
ZD951	093G 3916752T	MTZJ T-72 16B
ZD952	093G 3917152T	TZJ T-72 30B
ZD902	093G 3919652T	ZENER MTZJT-725.6B 5.6V 0.5W DO-34
ZD901	093G 3954752T	DIODE MTZJ16B SEMTECH
ZD951	093G 3954752T	DIODE MTZJ16B SEMTECH
D901	093G 6026T52T	CTIFIER DIODE FR107
D930	093G 6026T52T	CTIFIER DIODE FR107
D935	093G 6026T52T	CTIFIER DIODE FR107
D940	093G 6026T52T	CTIFIER DIODE FR107
D955	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35
D954	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35
D903	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35
D807	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35
D806	093G 64 1152T PH	SWITCHING 1N4148 0.2A 100V DO-35
D806	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35
D807	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35
D903	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35
D954	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35
D955	093G 6452452T	SWITCHING 1N4148-B4006 0.2A 100V DO-35

ZD952	093G 39G 9	DIODE MTZJ30B DO-34
ZD902	093G 39GA01 T	RLZ5.6B
D940	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41
D935	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41
D930	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41
D901	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41
J946	095G 90 23	JUMP WIRE - -
J945	095G 90 23	JUMP WIRE - -
J944	095G 90 23	JUMP WIRE - -
J942	095G 90 23	JUMP WIRE - -
J941	095G 90 23	JUMP WIRE - -
J940	095G 90 23	JUMP WIRE - -
J939	095G 90 23	JUMP WIRE - -
J938	095G 90 23	JUMP WIRE - -
J937	095G 90 23	JUMP WIRE - -
J935	095G 90 23	JUMP WIRE - -
J934	095G 90 23	JUMP WIRE - -
J933	095G 90 23	JUMP WIRE - -
J932	095G 90 23	JUMP WIRE - -
J949	095G 90 23	JUMP WIRE - -
J948	095G 90 23	JUMP WIRE - -
J947	095G 90 23	JUMP WIRE - -
J931	095G 90 23	JUMP WIRE - -
J955	095G 90 23	JUMP WIRE - -
J904	095G 90 23	JUMP WIRE - -
J901	095G 90 23	JUMP WIRE - -
J805	095G 90 23	JUMP WIRE - -
J803	095G 90 23	JUMP WIRE - -
J954	095G 90 23	JUMP WIRE - -
J953	095G 90 23	JUMP WIRE - -
J952	095G 90 23	JUMP WIRE - -
J951	095G 90 23	JUMP WIRE - -
J950	095G 90 23	JUMP WIRE - -
J909	095G 90 23	JUMP WIRE - -
J908	095G 90 23	JUMP WIRE - -
J905	095G 90 23	JUMP WIRE - -
J903	095G 90 23	JUMP WIRE - -
J902	095G 90 23	JUMP WIRE - -
J817	095G 90 23	JUMP WIRE - -
J816	095G 90 23	JUMP WIRE - -
J815	095G 90 23	JUMP WIRE - -
J814	095G 90 23	JUMP WIRE - -
J811	095G 90 23	JUMP WIRE - -
J810	095G 90 23	JUMP WIRE - -
J807	095G 90 23	JUMP WIRE - -
J804	095G 90 23	JUMP WIRE - -
J930	095G 90 23	JUMP WIRE - -
J929	095G 90 23	JUMP WIRE - -
J928	095G 90 23	JUMP WIRE - -
J927	095G 90 23	JUMP WIRE - -
J926	095G 90 23	JUMP WIRE - -
J925	095G 90 23	JUMP WIRE - -
J924	095G 90 23	JUMP WIRE - -
J923	095G 90 23	JUMP WIRE - -

J922	095G 90 23	JUMP WIRE - -
J921	095G 90 23	JUMP WIRE - -
J920	095G 90 23	JUMP WIRE - -
J918	095G 90 23	JUMP WIRE - -
J912	095G 90 23	JUMP WIRE - -
	709T3829 XA001	COMSUMPTIVE ASS'Y
E715	715G3829P03W20003M	POWER BOARD PCB
	Q51G 6 4509	GLUE_RTV