



Karaoke Surround Power Amplifier
Service Manual

MODEL: HTA-502AS

CONTENTS


SPECIFICATION	4
CIRCUIT DIAGRAM	5
EXPLODED VIEW	9
PART LIST	10

SPECIFICATION




Power	~220 – 240V 50Hz/60Hz
Power consumption	300W
Main channel output power	2 x 100W (4Ω /1KHz /THD=10%)
Center /surround output	25W + 25W x 2
Frequency response	20Hz ~ 20KHz (±2dB)
Input sensitivity	250 mV
Weight	6Kg
Dimension	430 x 350 x 115 (mm)

- ❑ Specification subject to change without prior notice.
- ❑ Weight and dimensions are approximate.


CIRCUIT DIAGRAM

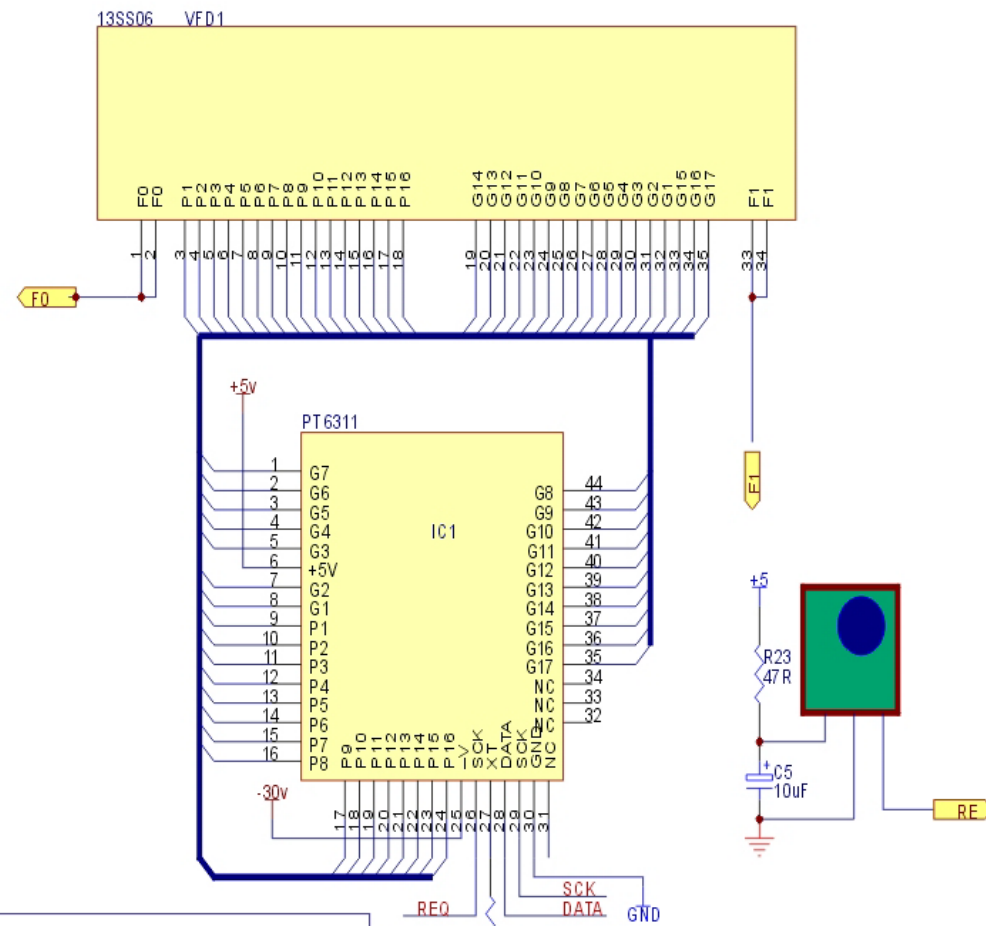


PIC6-1

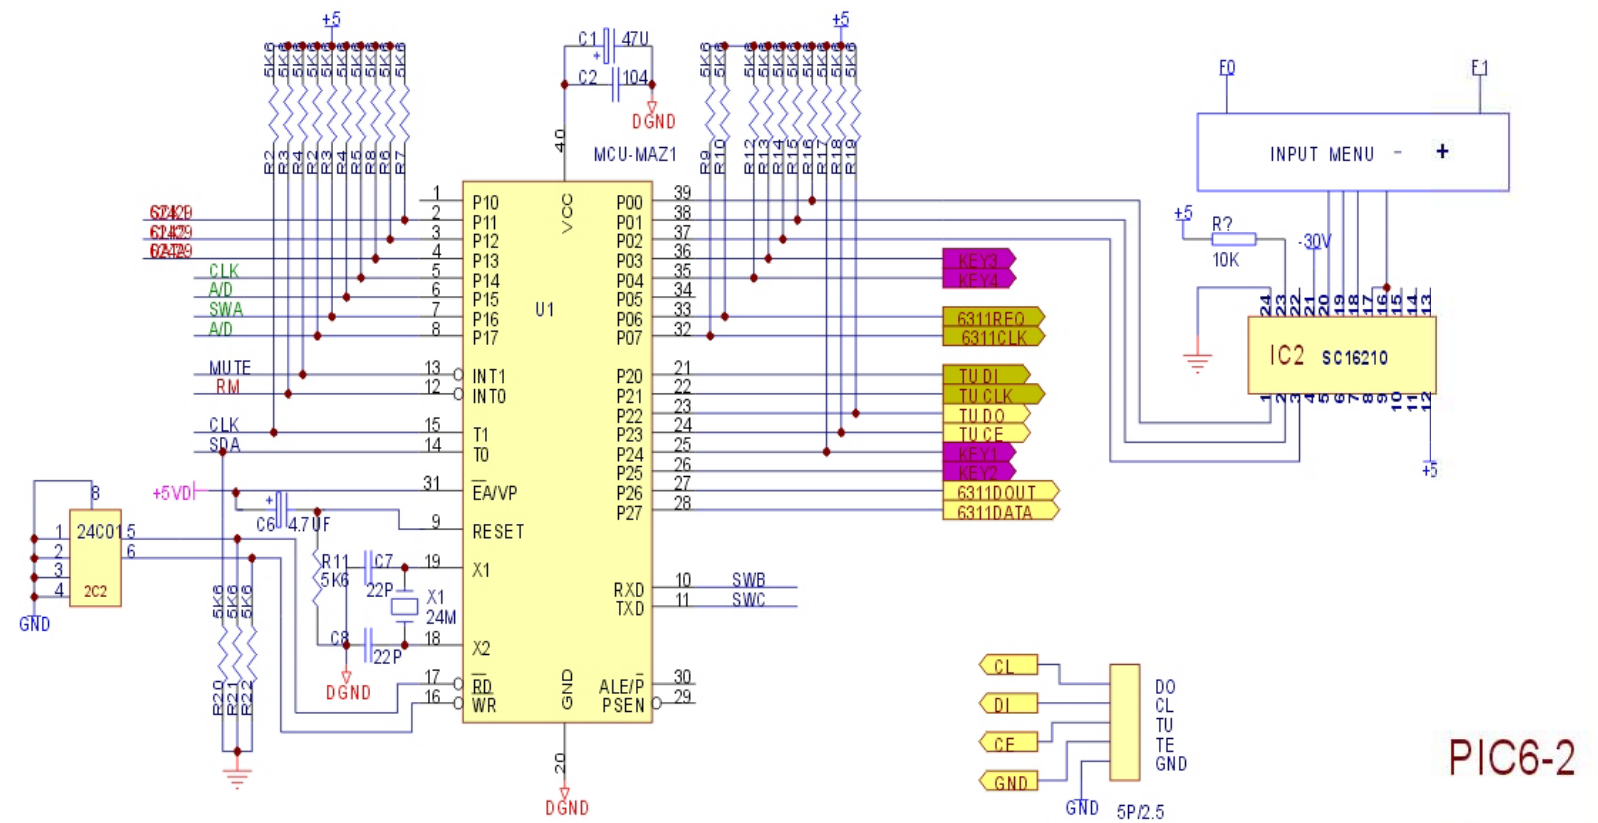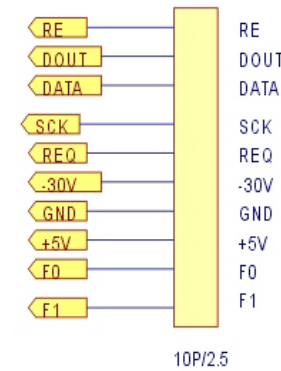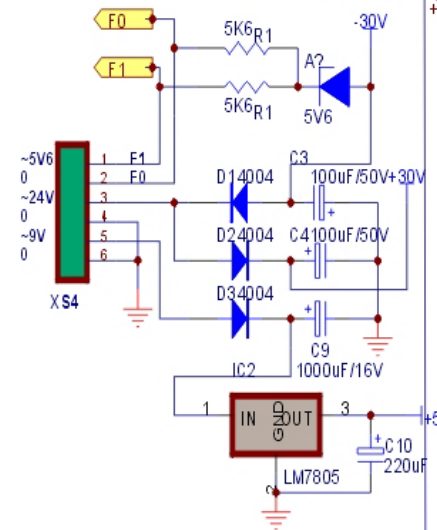



PIC6-2

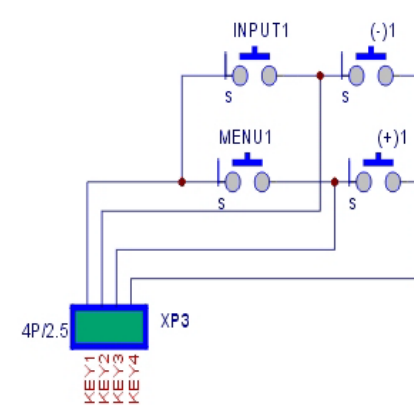


PIC6

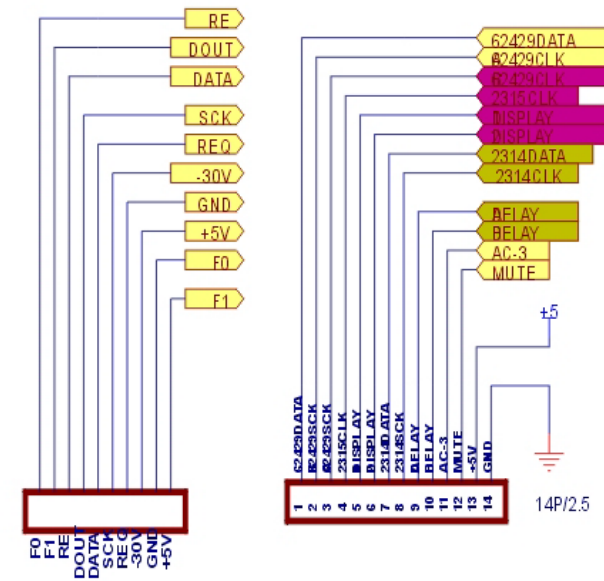

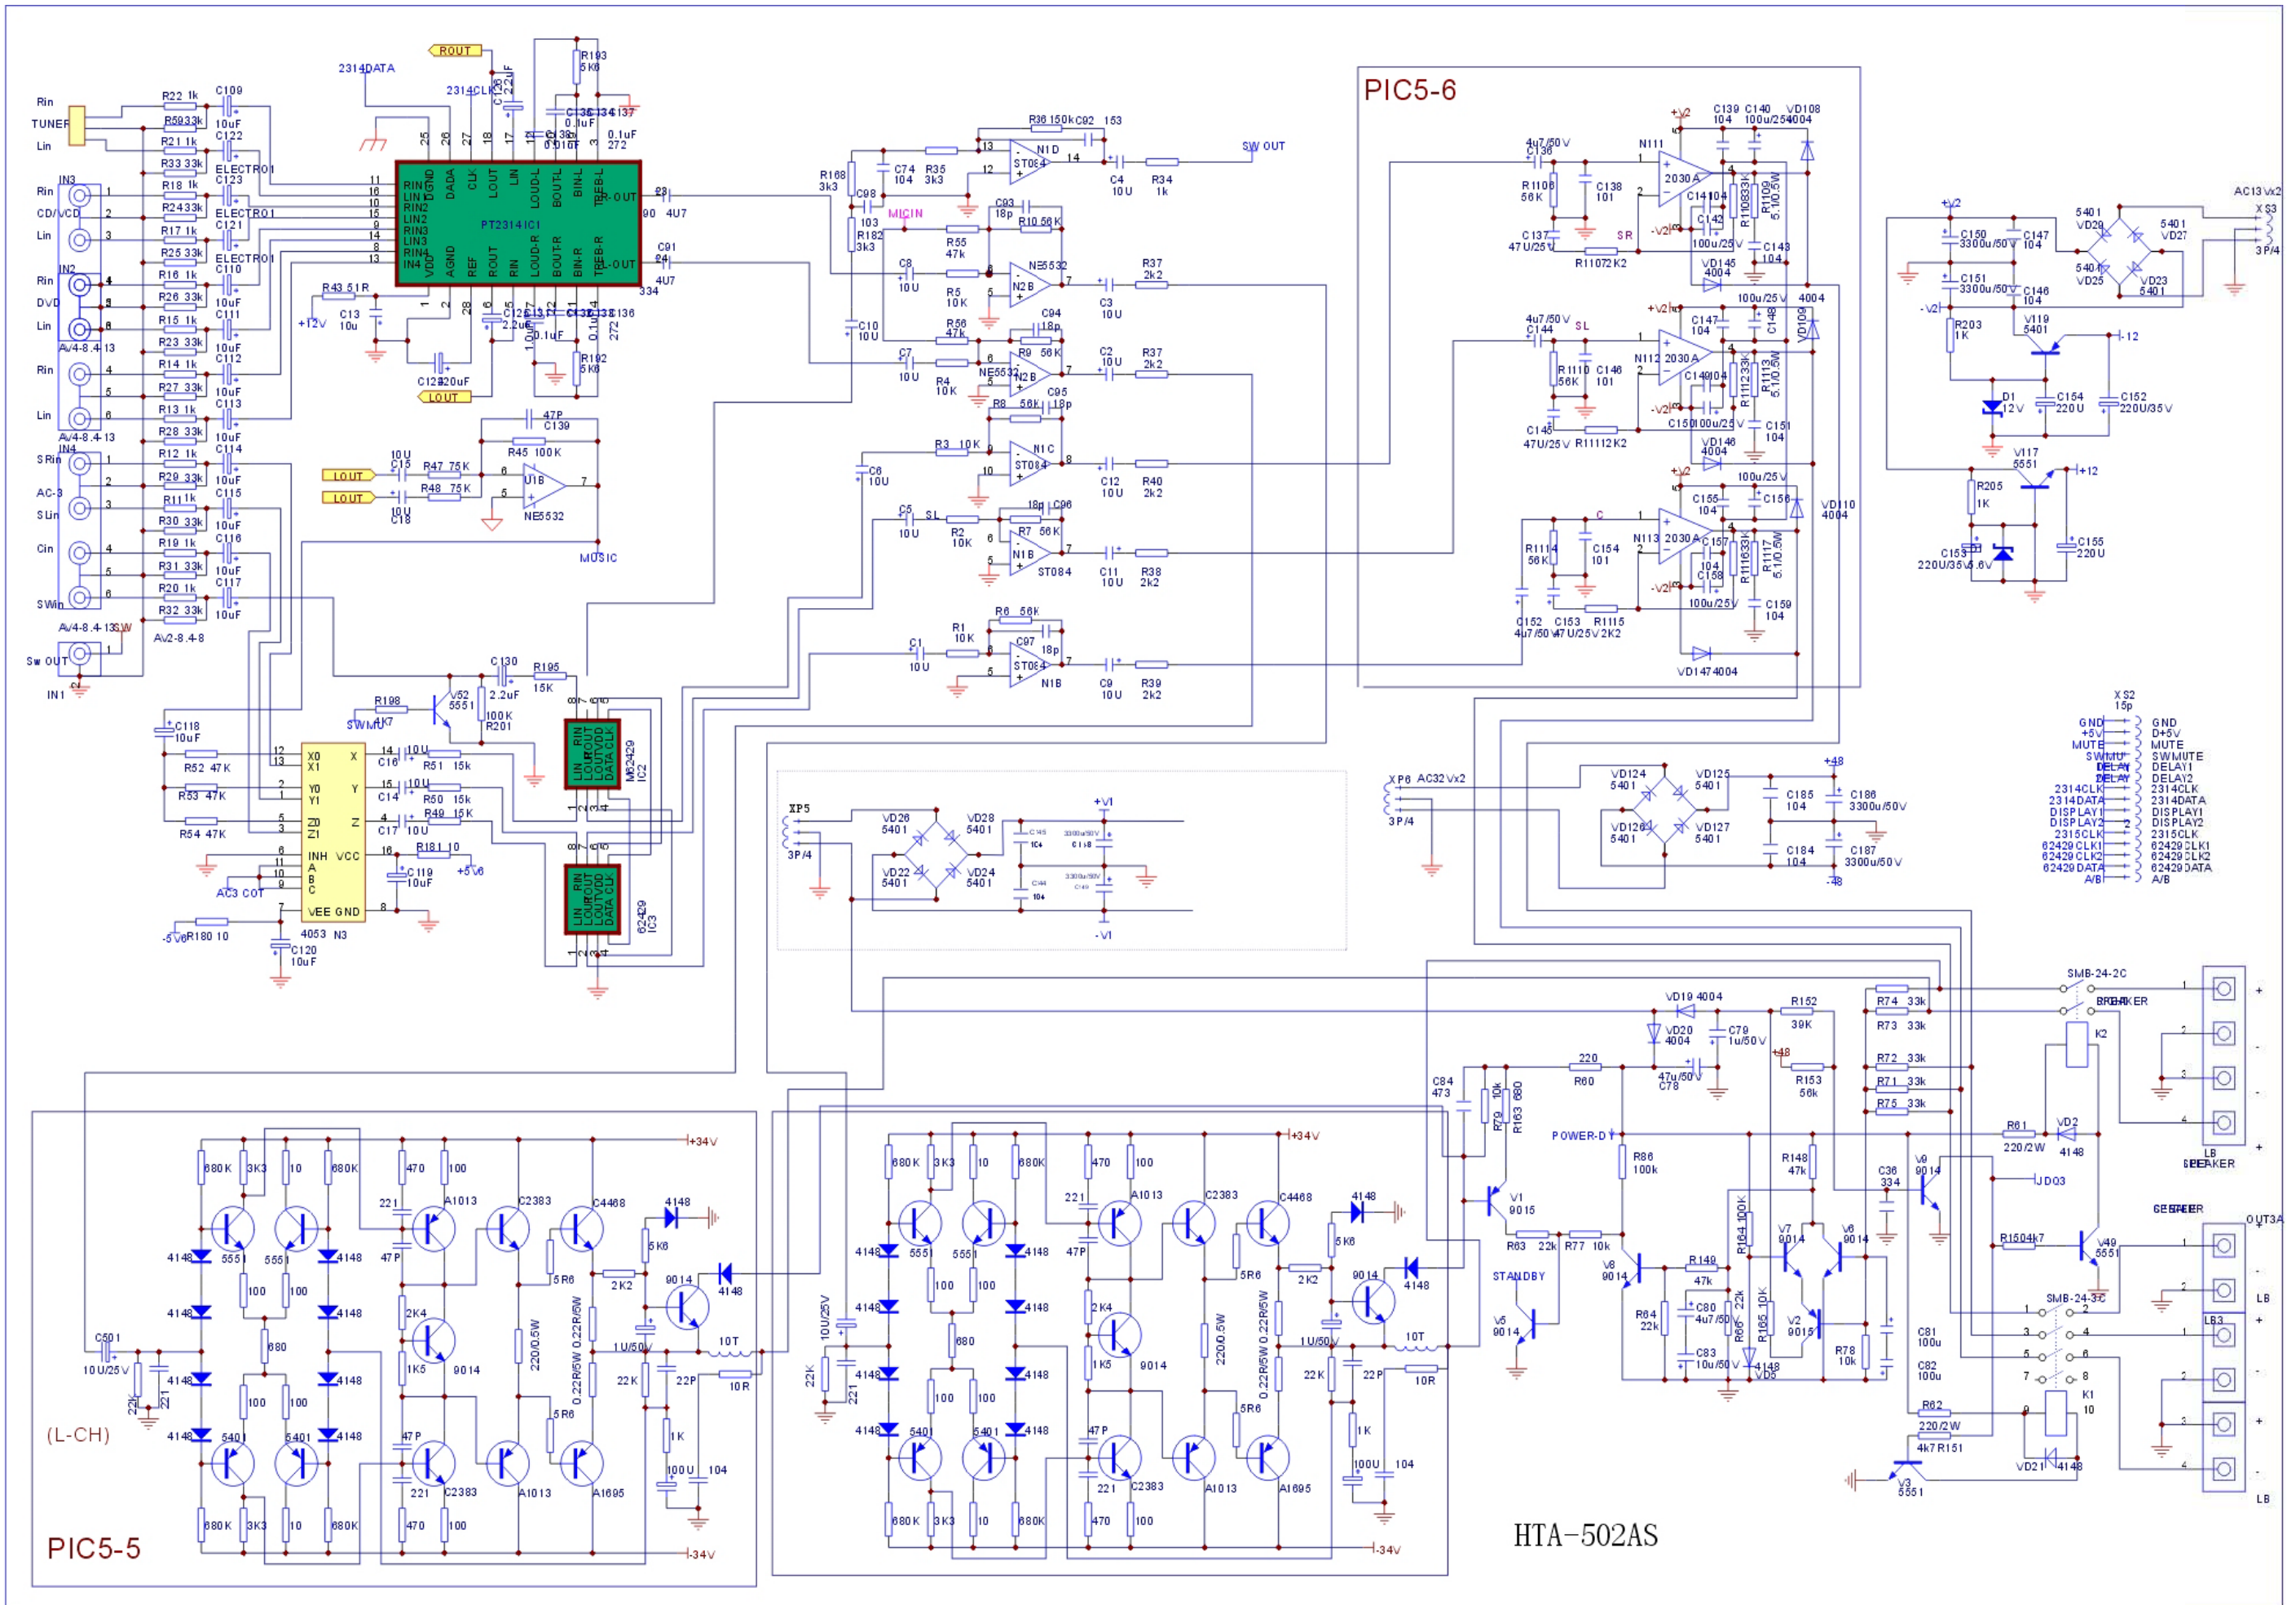


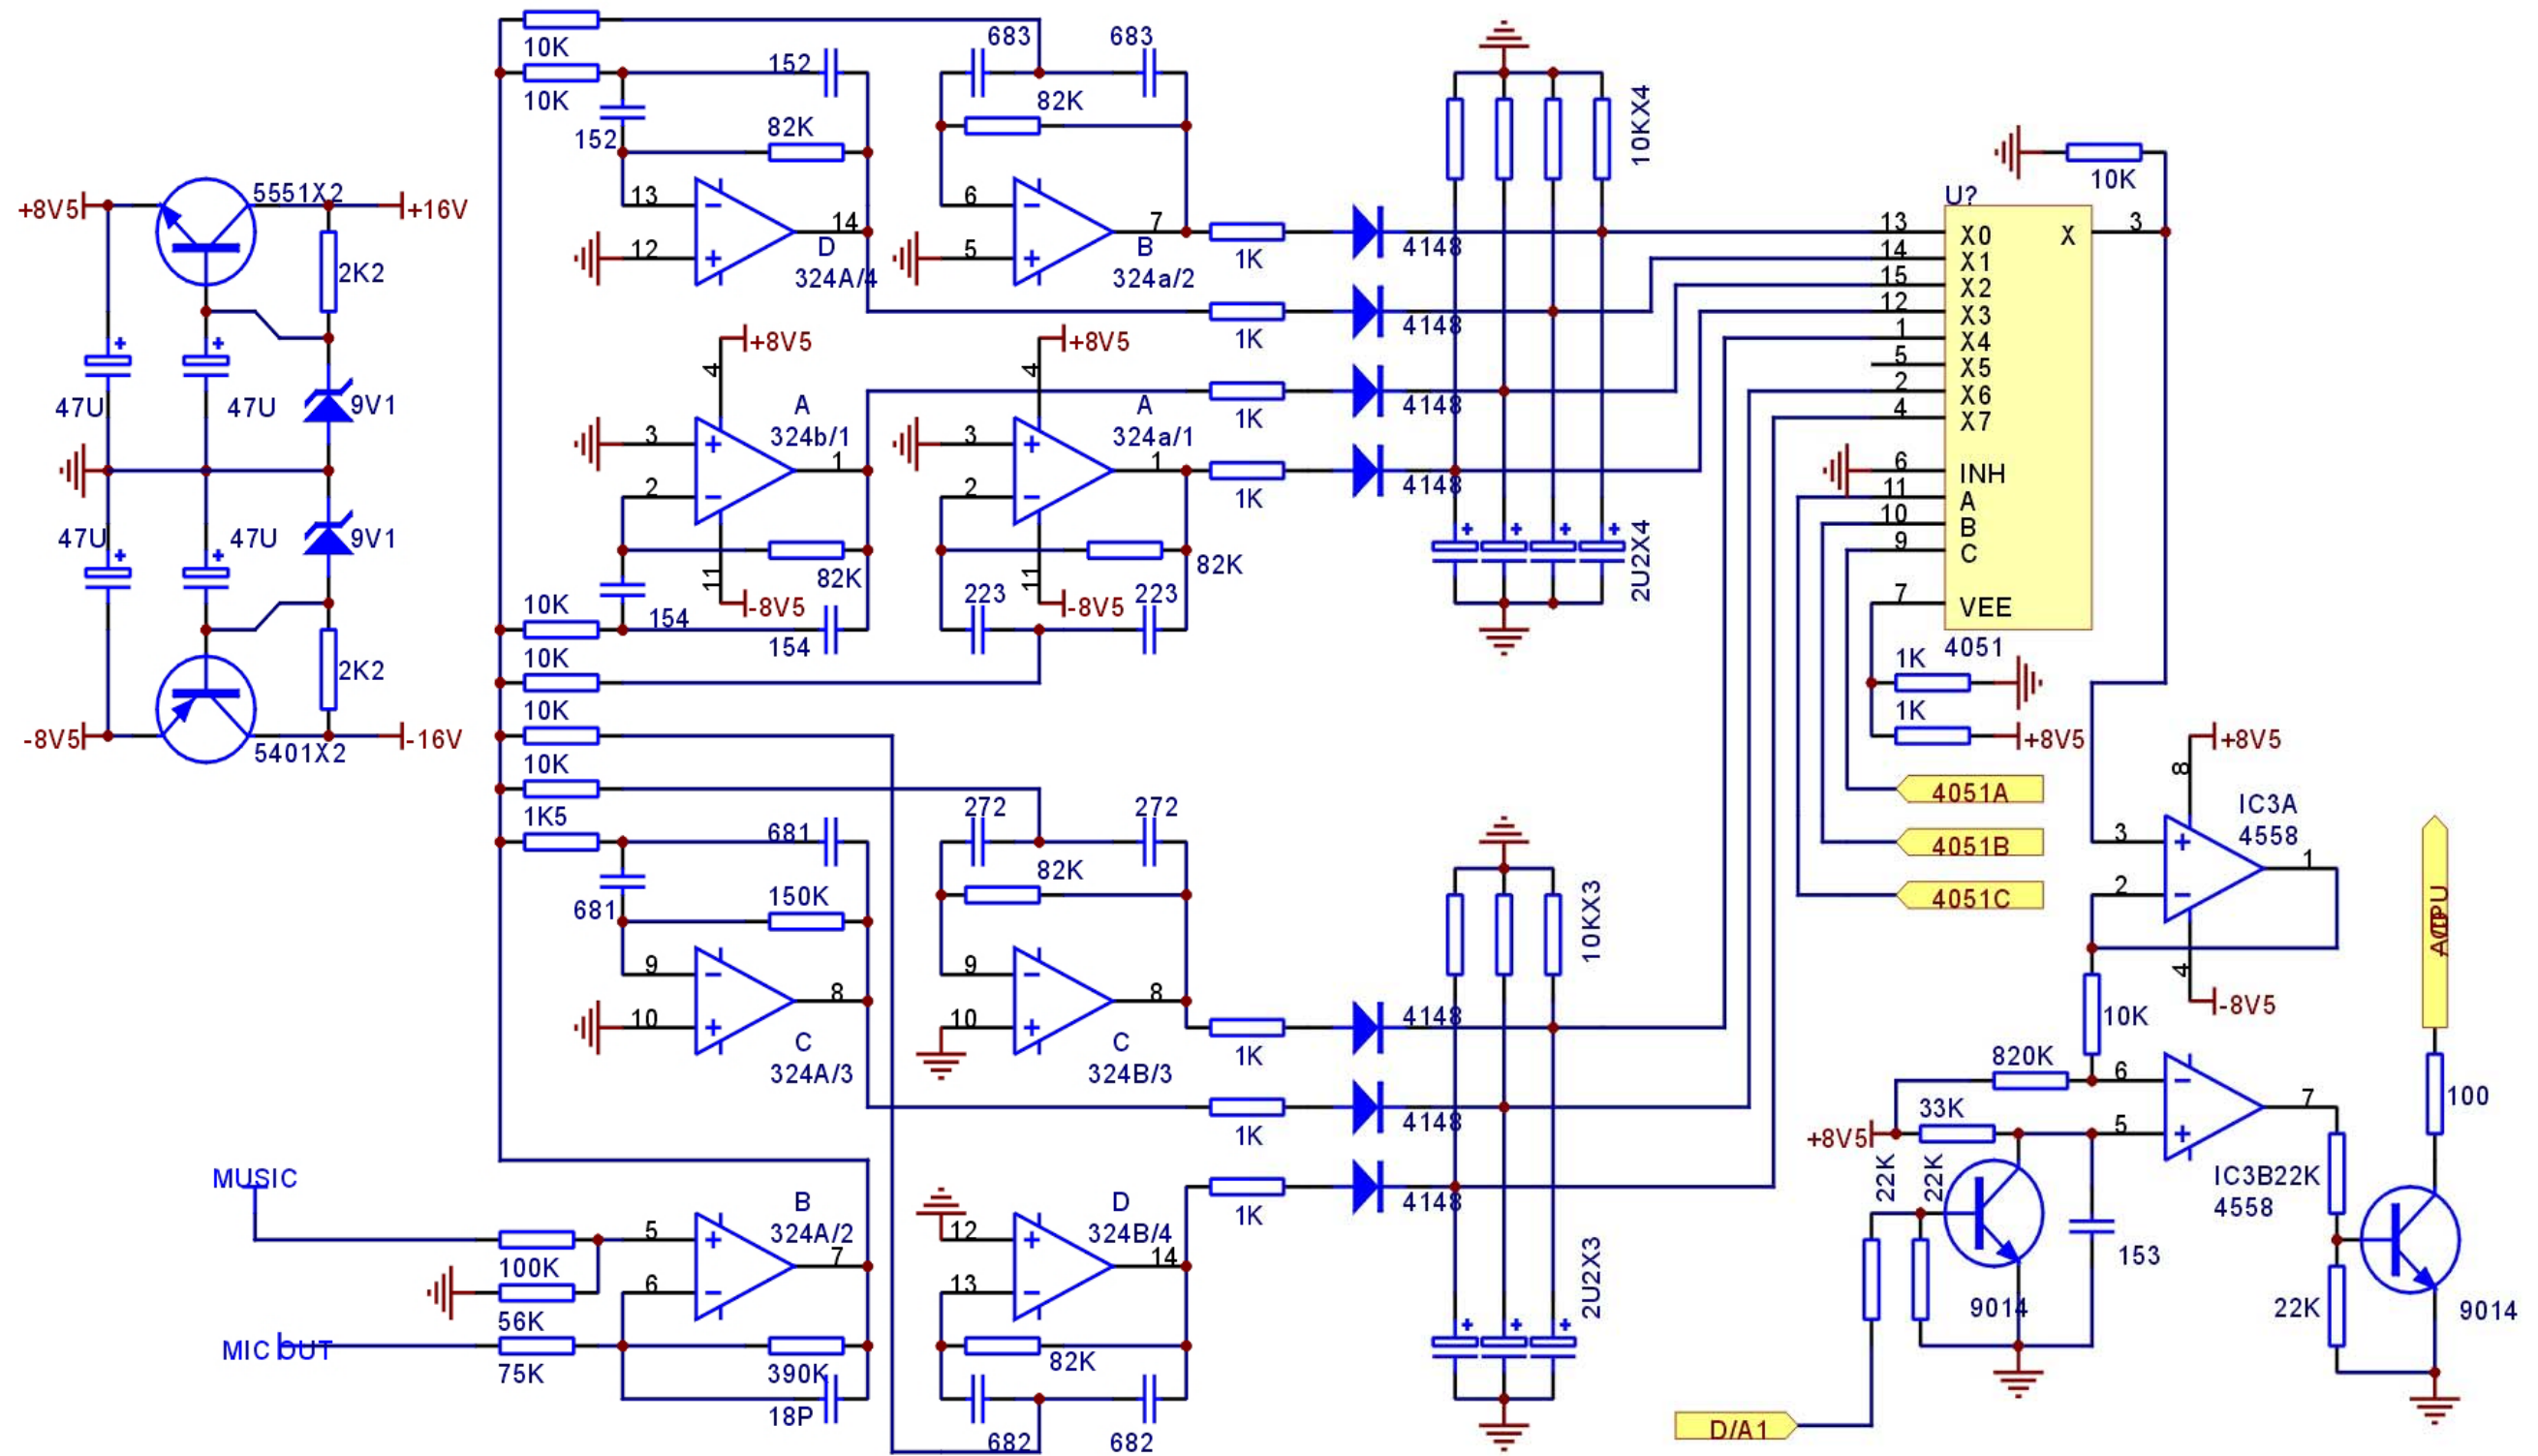

HTA-502AS

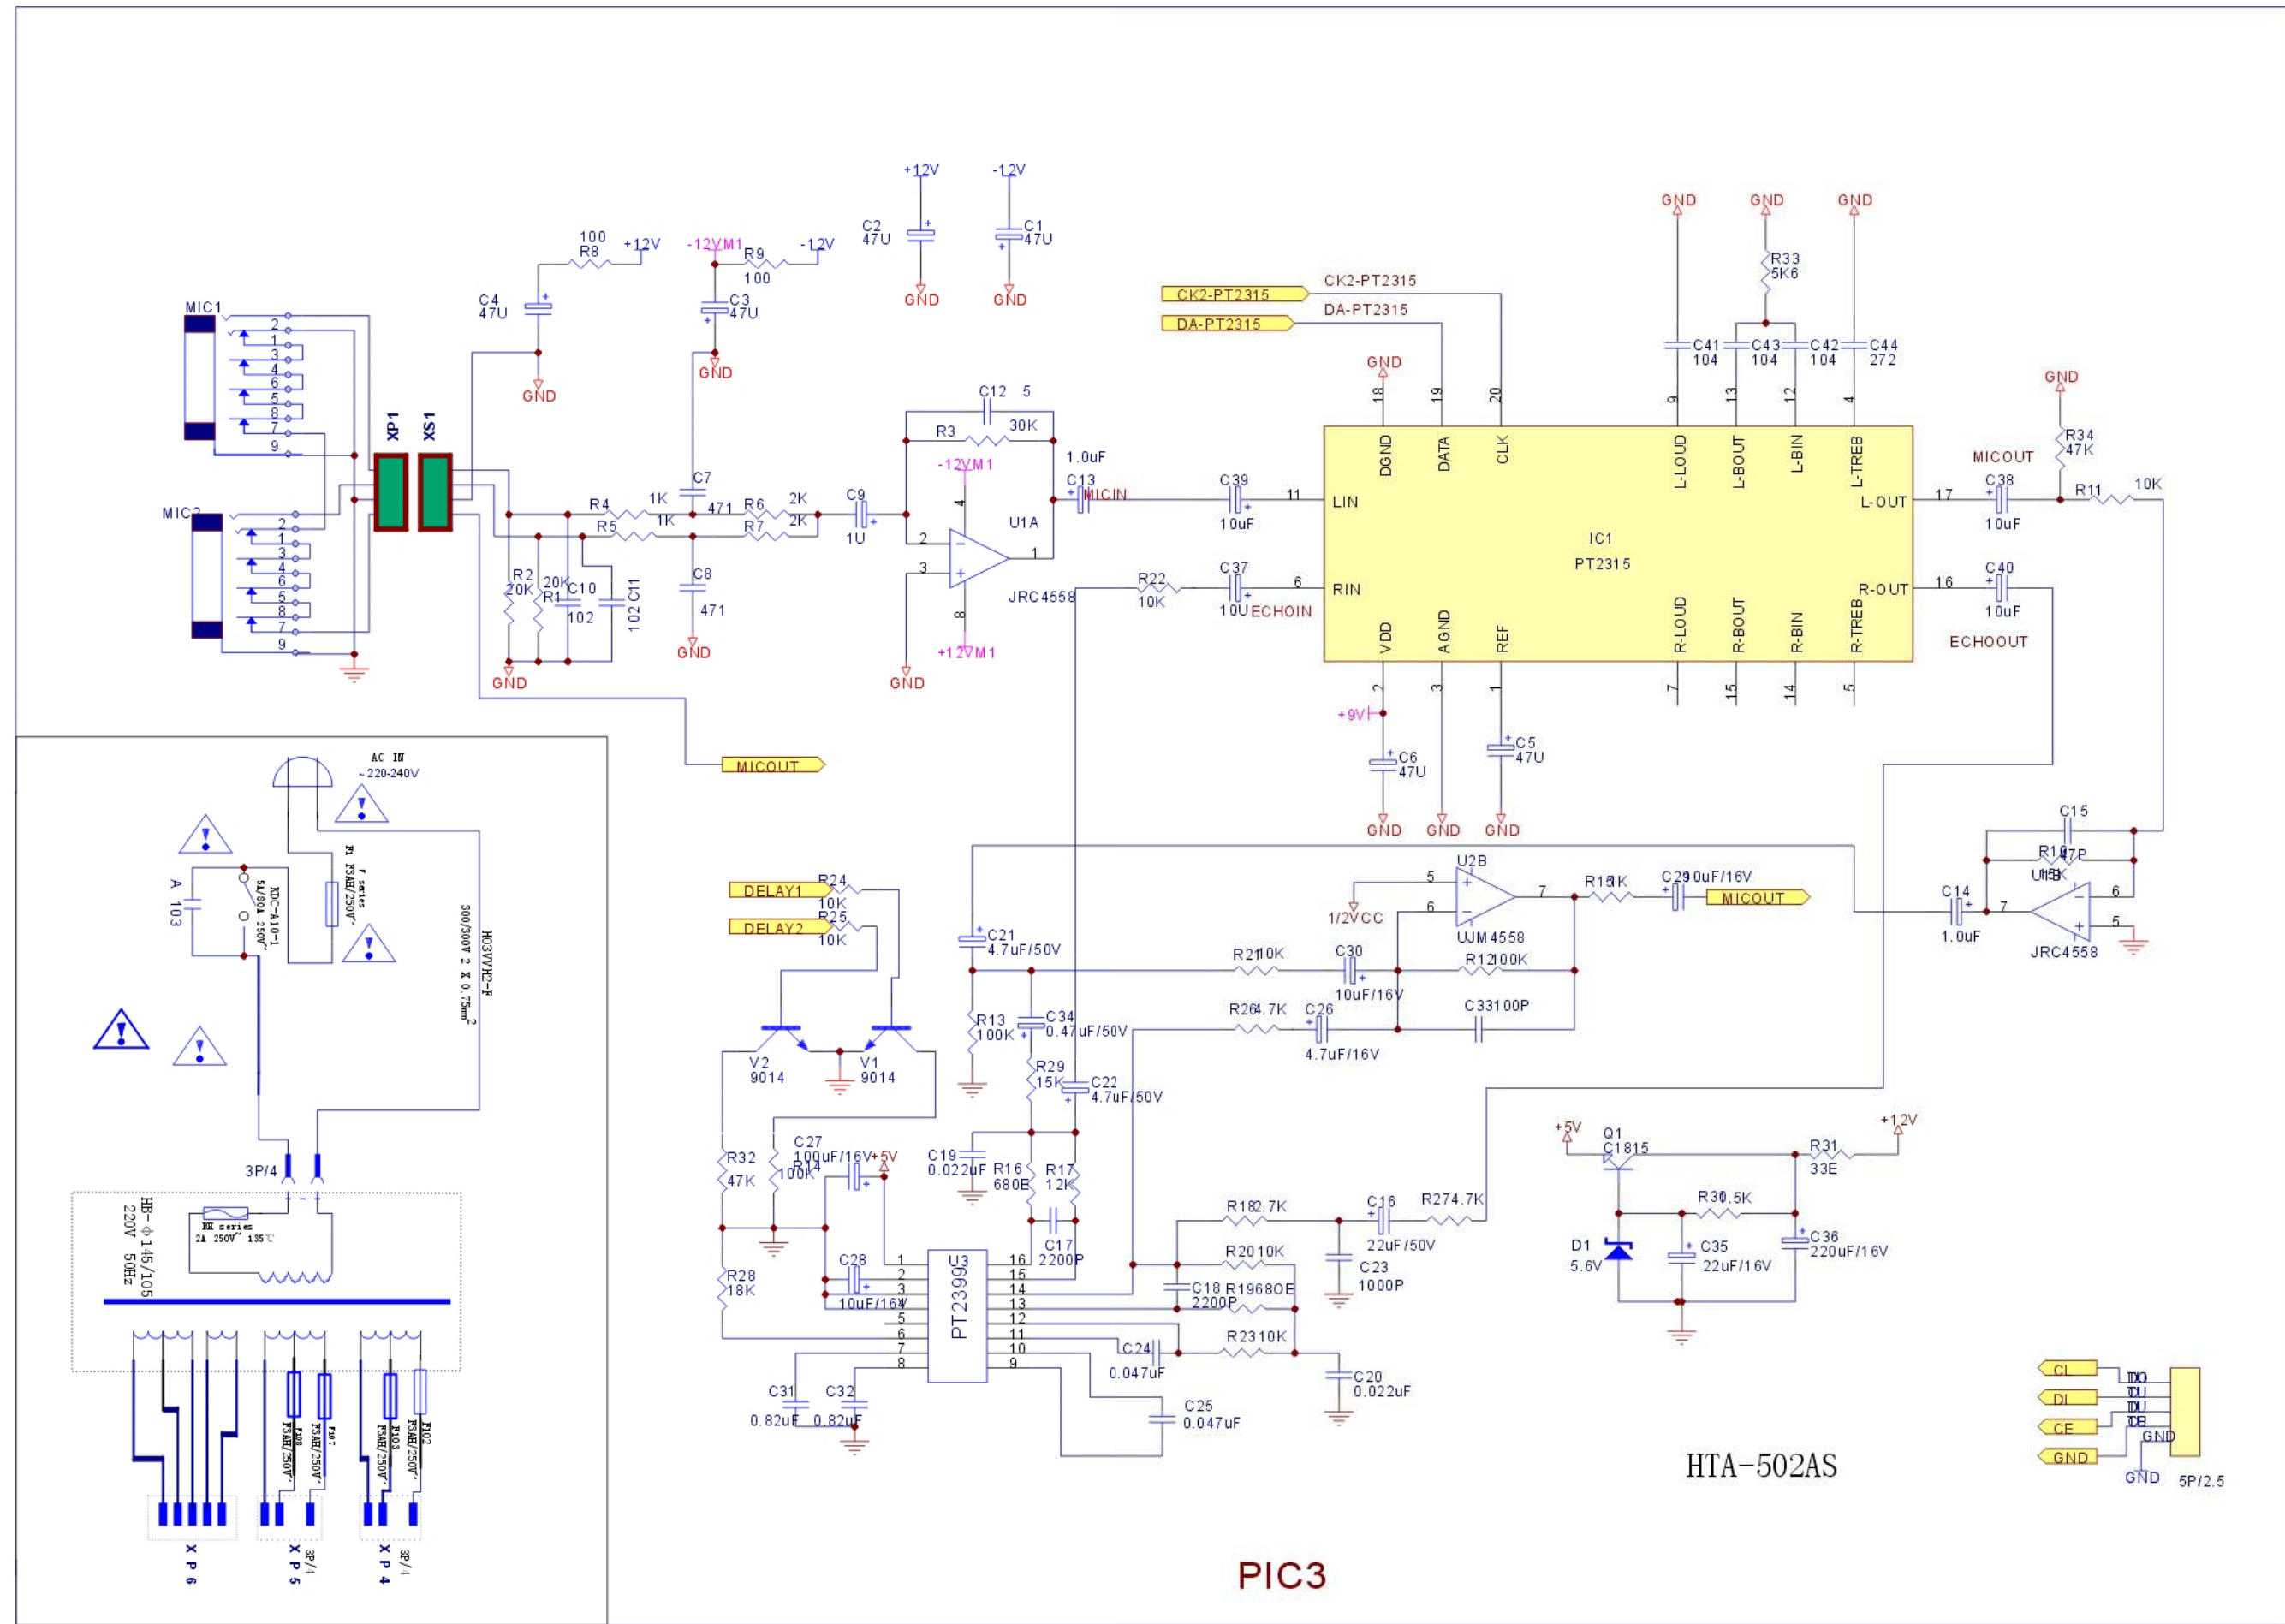

EXPLODED VIEW

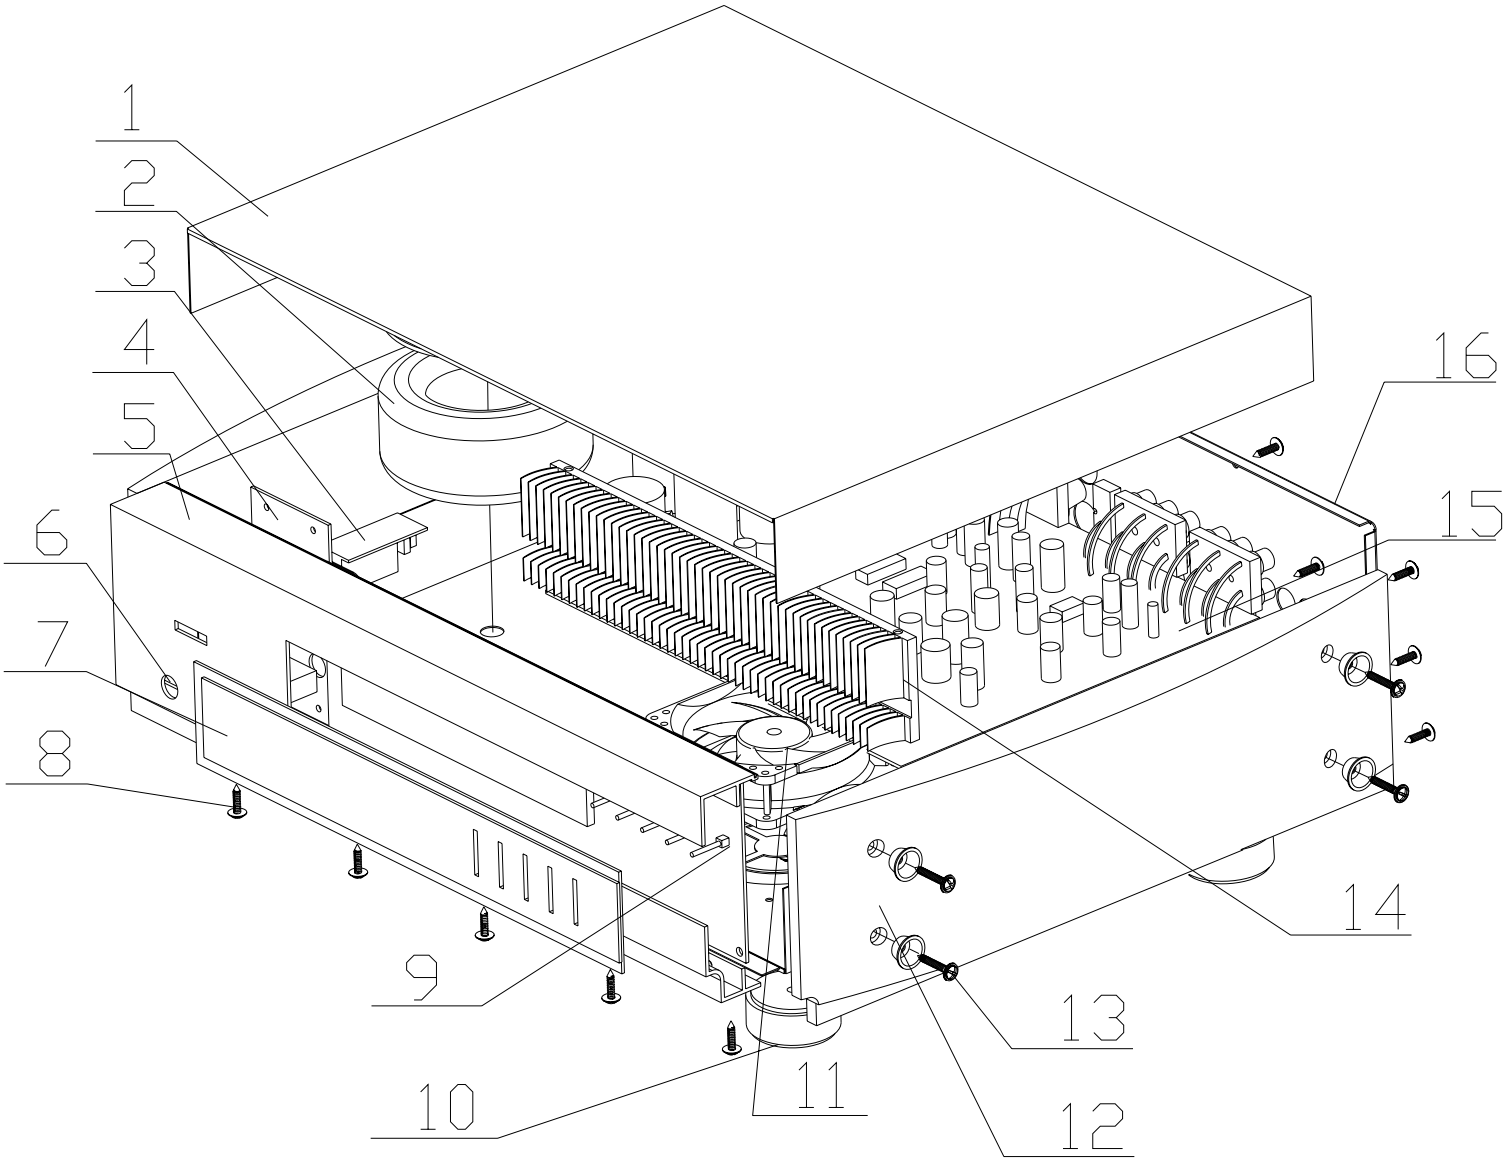

PART LIST

No	Part name
1	Cabinet cover
2	Transformer
3	Power switch
4	Switch bracket
5	Front panel
6	Microphone connector jack
7	Mirror
8	Screw
9	Front circuit panel
10	Foot
11	Screw
12	Amplifier board
13	Side wood board
14	Back panel
15	Radiator

