



Service Manual



STEREO AMPLIFIER

A-110

MODEL A-110 COMES IN THREE VERSIONS DISTINGUISHED AS FOLLOWS:

Type	Power requirement	Export destination
HE	AC220V, 240V (switchable)	European continent
HB	AC220V, 240V (switchable)	United Kingdom
HEZ	AC220V, 240V (switchable)	West Germany

- This service manual is applicable to the HE, HB and HEZ types.
- As to the HB and HEZ types, please refer to pages 12–16.

CONTENTS

1. EXPLODED VIEWS AND PARTS LIST	2	6. FOR HB AND HEZ TYPES	12
2. P.C. BOARDS CONNECTION DIAGRAM	5	7. P.C. BOARDS PATTERN (For HEZ type)	13
3. SCHEMATIC DIAGRAM	7	8. SCHEMATIC DIAGRAM (For HEZ type)	15
4. ELECTRICAL PARTS LIST	9	9. SPECIFICATIONS	18
5. PACKING	11	10. FRONT PANEL FACILITIES	19


1. EXPLODED VIEWS AND PARTS LIST

NOTES:

- Parts without part number cannot be supplied.
- The  mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
- For your parts Stock Control, the fast moving items are indicated with the marks ★ ★ and ★.
- ★ ★ **GENERALLY MOVES FASTER THAN ★**
This classification shall be adjusted by each distributor because it depends on model number, temperature, humidity, etc.
- Parts marked by "●" are not always kept in stock. Their delivery time may be longer than usual or they may be unavailable.

Parts List


Mark	No.	Part No.	Description	Mark	No.	Part No.	Description
	1	AZN1371	Front panel		26	CKDYF473Z50	Capacitor (C728)
	2	AZN1373	Volume knob	★★	27	AZE1032	Fuse (FU1, T800mA/250V)
	3	AZN1380	Rotary knob			(AEK-031)	
	4	AZN1068	Badge			(AEK-507)	
		(AAM-030)		 ★★	28	AZE1030	Fuse (FU2, FU3, 2A/250V)
	5	AZN1376	Power escutcheon			(AEK-035)	
	6	AZN1372	Knob escutcheon		29		
	7	AZN1377	Power knob		30	AZE1020	Cord fixer
	8	AZN1378	Push knob "A"		31		
	9	AZN1379	Push knob		32	AZB1119	Screw
	10	AZN1369	Foot			(BBZ30P080FMC)	
	11	AZN1366	Bonnet case		33	AZW1024	AF sub assembly
	12	AZN1370	Strain relief bushing				
	13	AZN1390	AC power cord				
		(ADG-041)					
	14	AZB1111	Nut		101		Earth terminal
		(ABN-093)			102		Side frame
	15	AZB1112	Washer		103		Panel stay
					104		Bottom plate
	16	AZB1109	Nut boss		105		Rear panel
	17	AZN1384	Indicator lens				
	18	AZT1028	Power transformer		106		LED assembly
	19	AZB1110	Nut		107		Volume assembly
		(NK70FUC)			108		Headphone jack assembly
	20	AZB1113	Screw 3 x 8		109		Power switch assembly
		(BBZ30P080FZK)			110		Heat sink brket
	21	AZB1114	Screw 3 x 8				
		(VBZ30P080FZK)					
	22	AZB1115	Screw 4 x 8				
		(VBZ40P080FMC)					
	23	AZB1116	Screw 3 x 8				
		(VBZ30P080FMC)					
	24	AZB1117	Screw 3 x 8				
		(PMZ30P080FMC)					
 ★★	25	AZC1035	Line across capacitor (C108) (0.01/400V)				

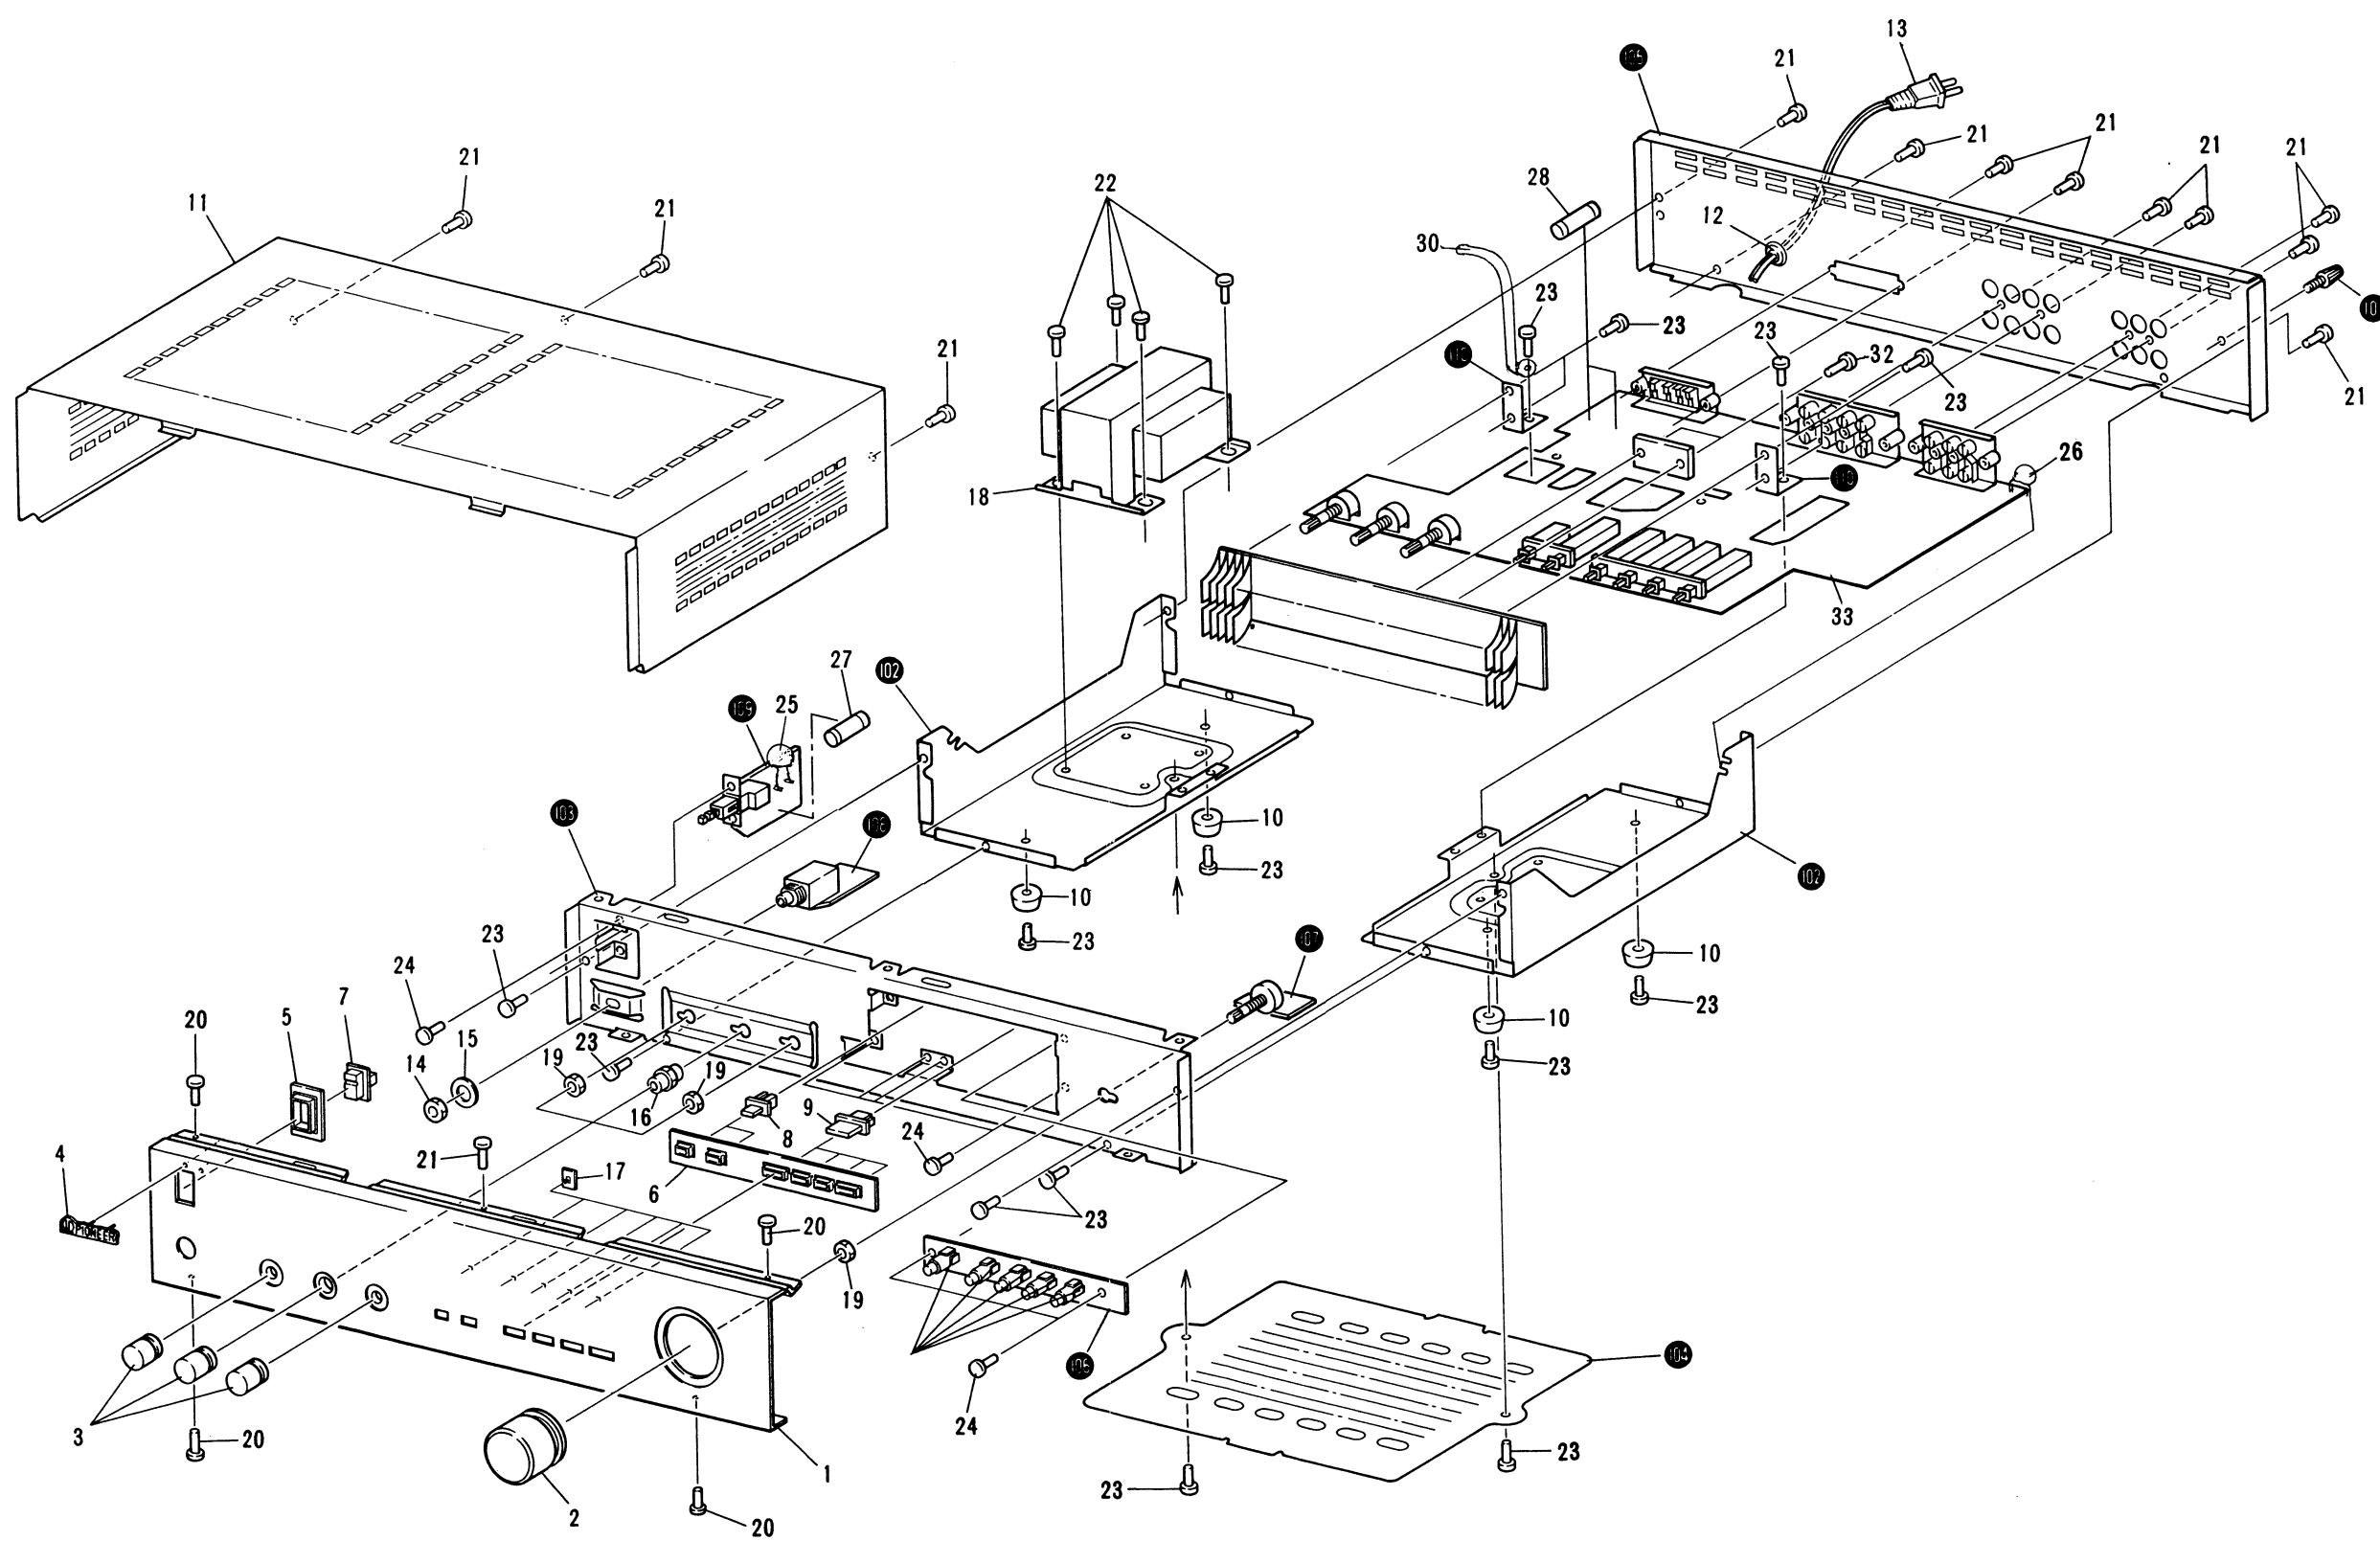

2. P.C.BOARDS CONNECTION DIAGRAM

AF SUB ASSEMBLY

AZW1024

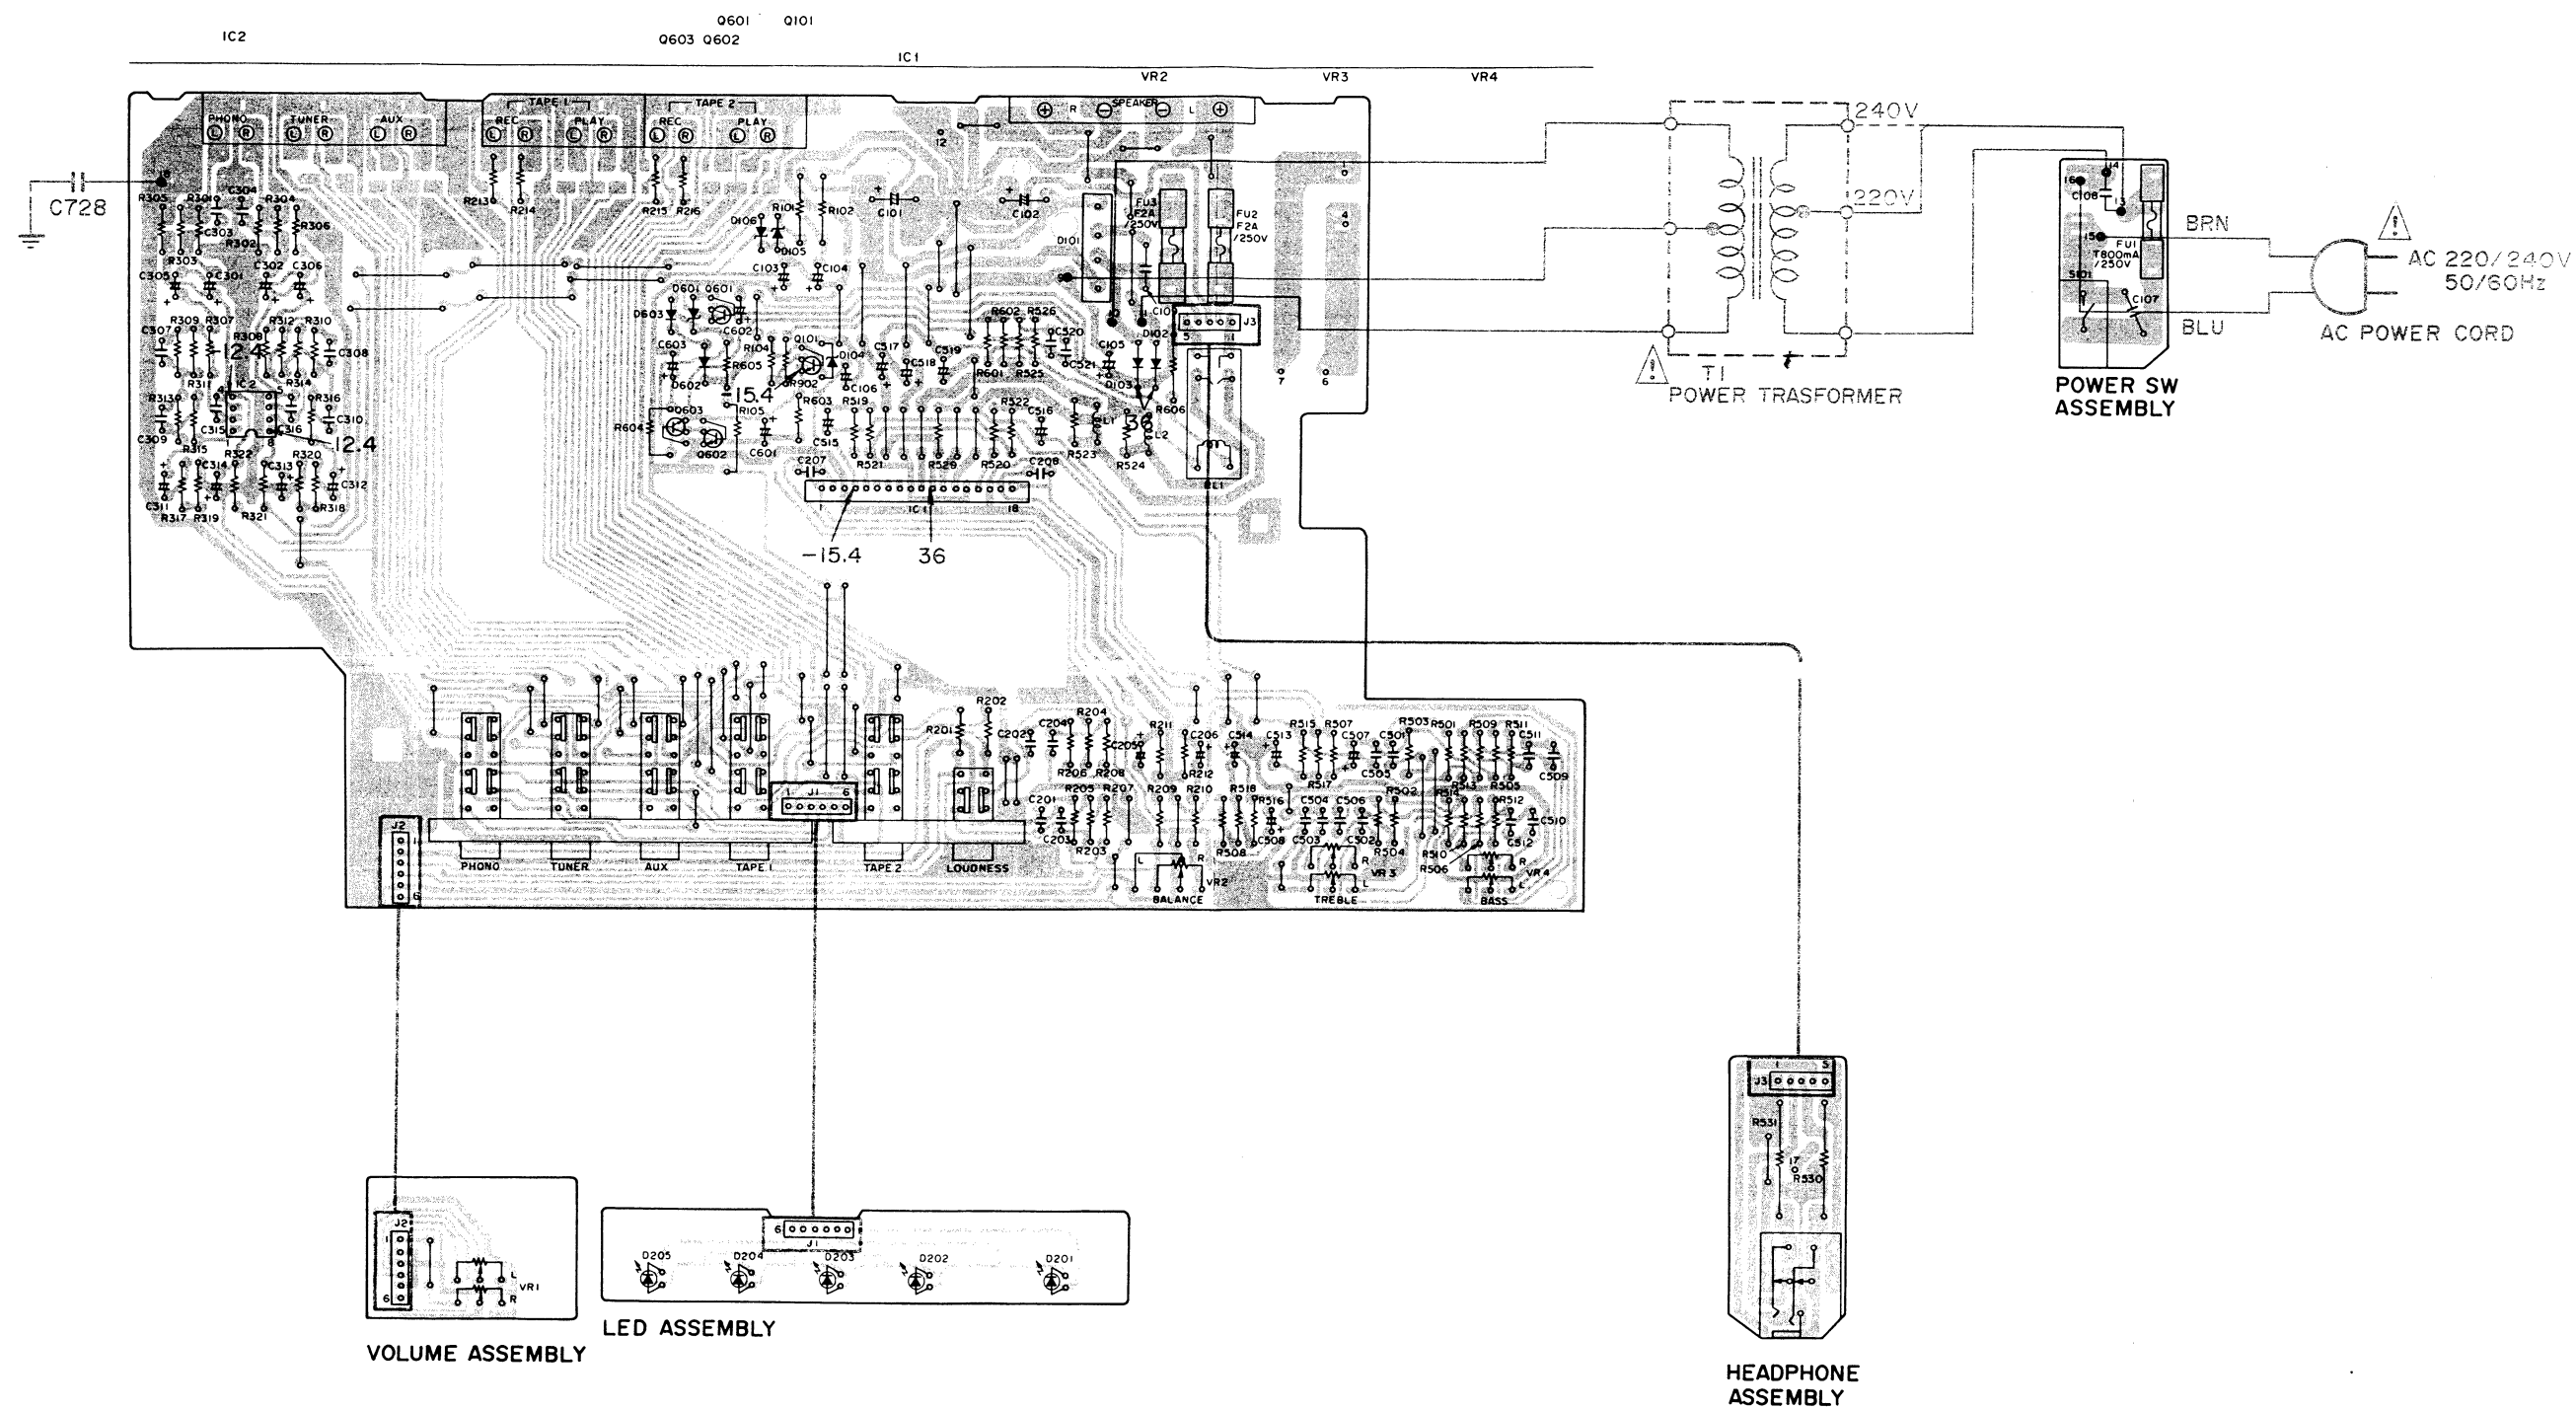


3. SCHEMATIC DIAGRAM

NOTE:


The indicated semiconductors are representative ones only. Other alternative semiconductors may be used and are listed in the parts list.

External Appearance of Transistors and ICs


STK4142 II
STK4141 II




MC4558C
UPC4558D




2SA933S




2SC3245




2SC1740S



KTC1627A



KTC1815Y
KTA970GR



1. RESISTORS:
Indicated in Ω , $\frac{1}{2}W$, $\frac{1}{4}W$, $\pm 5\%$ tolerance unless otherwise noted k: k Ω , M: M Ω , (F): $\pm 1\%$, (G): $\pm 2\%$, (K): $\pm 10\%$, (M): $\pm 20\%$ tolerance

2. CAPACITORS:
Indicated in capacity (μF)/voltage (V) unless otherwise noted p: pF
Indication without voltage is 50V except electrolytic capacitor.

3. VOLTAGE, CURRENT:
Signal voltage at (30W + 30W/8 ohm) out (1kHz)
DC voltage (V) at no input signal
Value in () is DC voltage at rated power.
mA: DC current at no input signal

4. OTHERS:
Signal route
Adjusting point
The Δ mark found on some component parts indicates the importance of the safety factor of the part. Therefore, when replacing, be sure to use parts of identical designation.
 Δ marked capacitors and resistors have parts numbers.

This is the basic schematic diagram, but the actual circuit may vary due to improvements in design.


SWITCHES

S1-1 FUNCTION (PHONO) ON-OFF
S1-2 FUNCTION (TUNER) ON-OFF
S1-3 FUNCTION (AUX) ON-OFF
S1-4 FUNCTION (TAPE I) ON-OFF
S2-1 TAPE 2 ON-OFF
S2-2 LOUDNESS ON-OFF

The underlined indication the switch position

IC1 STK4142 II (STK4141 II)
IC2 MC4558C (UPC4558D)
Q101 KTA970GR (2SA933S)
Q601 KTC1627A (2SC3245)
Q602, Q603 KTC1815Y (2SC1740S)
D101 RS403L (4D4844)
D102, D103 IN4003 (11E2)
D104 IN966 (RD16EB)
D105, D106, D601 IN964 (RD13EB)
D602, D603 IS2473
D201-D205 AZA1066

L1,2 AZT1027 (ATH-133)

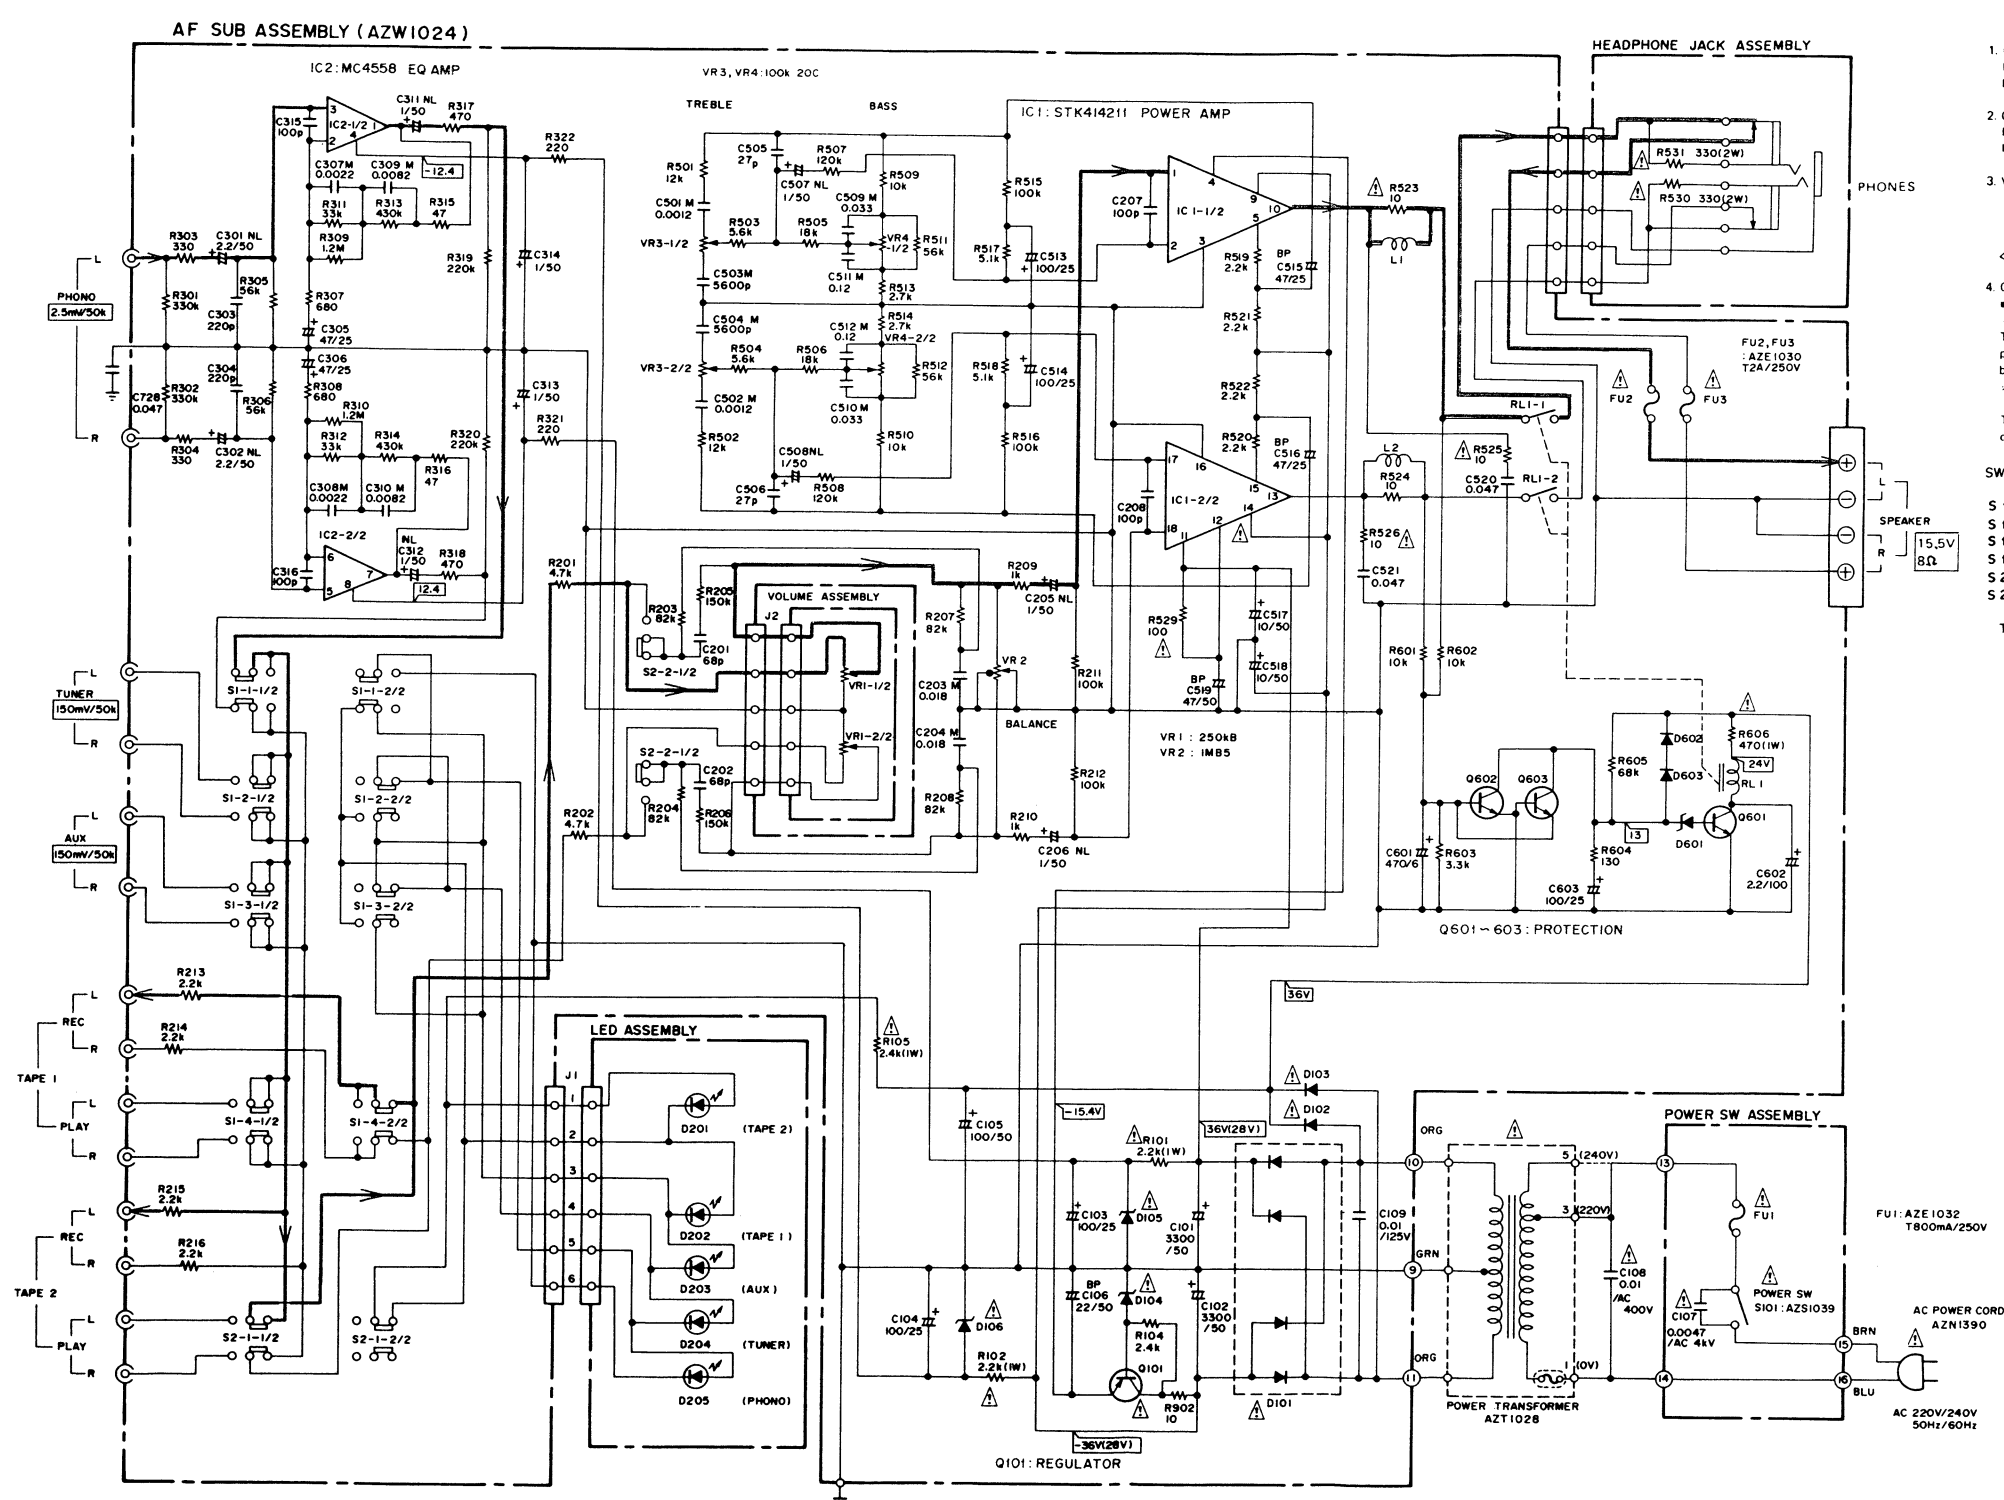

COILS

Mark	Symbol & Description	Part No.
	L1, L2 Chork coil (1μH)	AZT1027 (ATH-133)

CAPACITORS

Mark	Symbol & Description	Part No.
⚠	C101, C102 (3300μF/50V)	AZC1038 (ACH1017)
	C103, C104, C513, C514, C603	CEAS101M25
	C105	CEAS101M50
	C106	CEAS220M50
	C109	AZC1034
	C201, C202	CCDSL680J50
	C203, C204	CQMA183K50
	C205, C206, C311, C312, C507, C508	CEANL010M50
	C207, C208, C315, C316	CCDSL101J50
	C301, C302	CEANL2R2M50
	C303, C304	CCDSL221J50
	C305, C306	CEAS470M25
	C307, C308	CQMA222K50
	C309, C310	CQMA822K50
	C313, C314	CEAS010M50
	C501, C502	CQMA122K50
	C503, C504	CQMA562K50
	C505, C506	CCDSL270J50
	C509, C510	CQMA333K50
	C511, C512	CQMA124K50
	C515, C516	CEANP470M25
	C517, C518	CEAS100M50
	C519	CEANP470M50
	C520, C521	CKDYF473Z50
	C601	CEAS471M6
	C602	CEAS2R2M100

RESISTORS

Mark	Symbol & Description	Part No.
★	VR2 Variable resistor (BAL)	AZC1032
★	VR3, VR4 Variable resistor (BASS, TREBLE)	AZC1031
⚠	R101, R102	RS1LMF222J
⚠	R105	RS1LMF242J
⚠	R606	RS1LMF471J
⚠	R523—R526, R902	RD1/4PMFL100J
⚠	R529	RD1/4PMFL101J
	Other resistors	RD1/4PM□□□J

OTHERS

Mark	Symbol & Description	Part No.
	Push terminal (SPEAKERS)	AZK1048
	Ceramic pipe	AZE1034

LED Assembly

SEMICONDUCTORS

Mark	Symbol & Description	Part No.
★	D201—D205	AZA1066

OTHERS

Mark	Symbol & Description	Part No.
	LED holder	AZN1363

Headphone Jack Assembly

RESISTORS

Mark	Symbol & Description	Part No.
⚠	R530, R531	RS2LF331J

OTHER

Mark	Symbol & Description	Part No.
	Headphone jack (PHONES)	AZK1045 (AKN-058)

Volume Assembly

RESISTOR

Mark	Symbol & Description	Part No.
★	VR1 Volume Variable resistor	AZC1030

Power Switch Assembly


SWITCH

Mark	Symbol & Description	Part No.
⚠ ★★	S101 Push switch (POWER)	AZS1039

CAPACITOR

Mark	Symbol & Description	Part No.
⚠	C107 Line across capacitor (0.0047/AC4kV)	AZC1033

5. PACKING

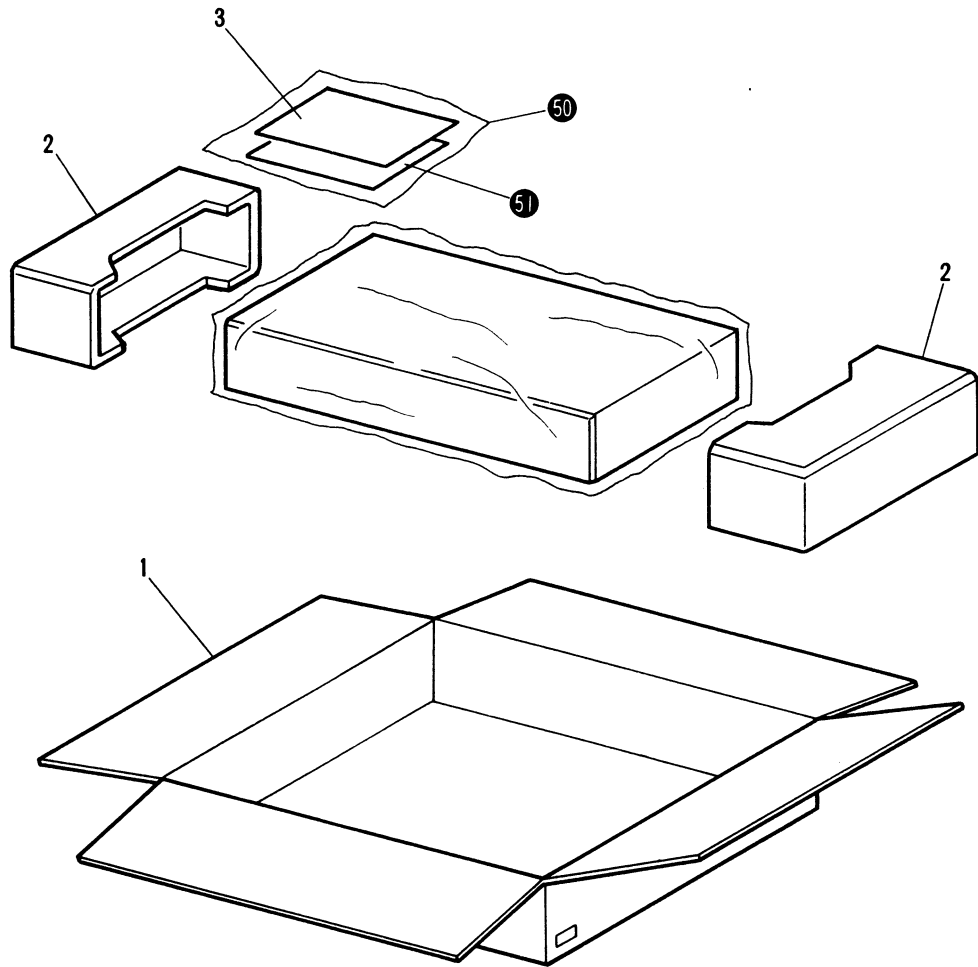

Parts List of Packing

Mark	No.	Part No.	Description
	1	AZH1026	Packing case
	2	AZH1029	Side pad
	3	AZQ1011	Operating instructions
	50		Catalog bag
	51		Warranty card

6. FOR HB AND HEZ TYPES

CONTRAST OF MISCELLANEOUS PARTS

The A-110/HB and HEZ types is the same as the A-110/HE type with the exception of the following sections:

Mark	Symbol & Description	Part No.			Remarks
		A-110/ HE type	A-110/ HB type	A-110/ HEZ type	
⚠ ★★	AF sub assembly	AZW1024	AZW1024	AZW1030	
	Headphone jack assembly	Non supply	Non supply	Non supply	
	Fuse (800mA/250V)	AZE1032		AZE1032	
	Fuse (630mA/250V)		AZE1031		
	C108 Line across capacitor (0.01/400V)	AZC1035	AZC1035		
	C728 Capacitor	CKDYF473Z50	CKDYF473Z50		
	R709, R710 Carbon F resistor			RD1/4PM100J	
	C729 Ceramic capacitor			CKDYF223Z50	
	Operating instructions (English/German/French/Italian)	AZQ1011			
	Operating instructions (English)		AZQ1008		
⚠	Operating instructions (German)			AZQ1012	
	Side pad	AZH1029	AZH1028	AZH1029	
	AC power cord	AZN1390	AZN1383	AZN1390	
	Power switch assembly*	Non supply	Non supply	Non supply	

* Marked P.C. board assemblies:

Regard less differences on parts numbers, the P.C. board assemblies for the additional types are identical with the HE type.

AF SUB ASSEMBLY (AWZ1030)

The AF Sub assembly (AWZ1030) is the same as the AF Sub assembly (AWZ1024) with the exception of the following sections.

Mark	Symbol & Description	Part No.		Remarks
		AWZ1024	AWZ1030	
⚠	R303, R304 Carbon resistor	RD1/4PM331J	RD1/4PM221J	
	R701—R708 Carbon resistor		RD1/8PM331J	
	C108 Line across capacitor (0.01/400V)		AZC1035	
	C723, C724 Ceramic capacitor		CKDYB472J50	
	C315, C316, C701—C722		CKDYB331J50	


HEADPHONE JACK ASSEMBLY

The Headphone Jack assembly HEZ type is the same as the Headphone Jack assembly HE and HB type with the exception of following sections:

Mark	Symbol & Description	Part No.			Remarks
		HE type	HB type	HEZ type	
	C725—C727 Ceramic capacitor			CKDYB472K50	

L1,2 ATZ1027
(ATH-133)

- For HB type

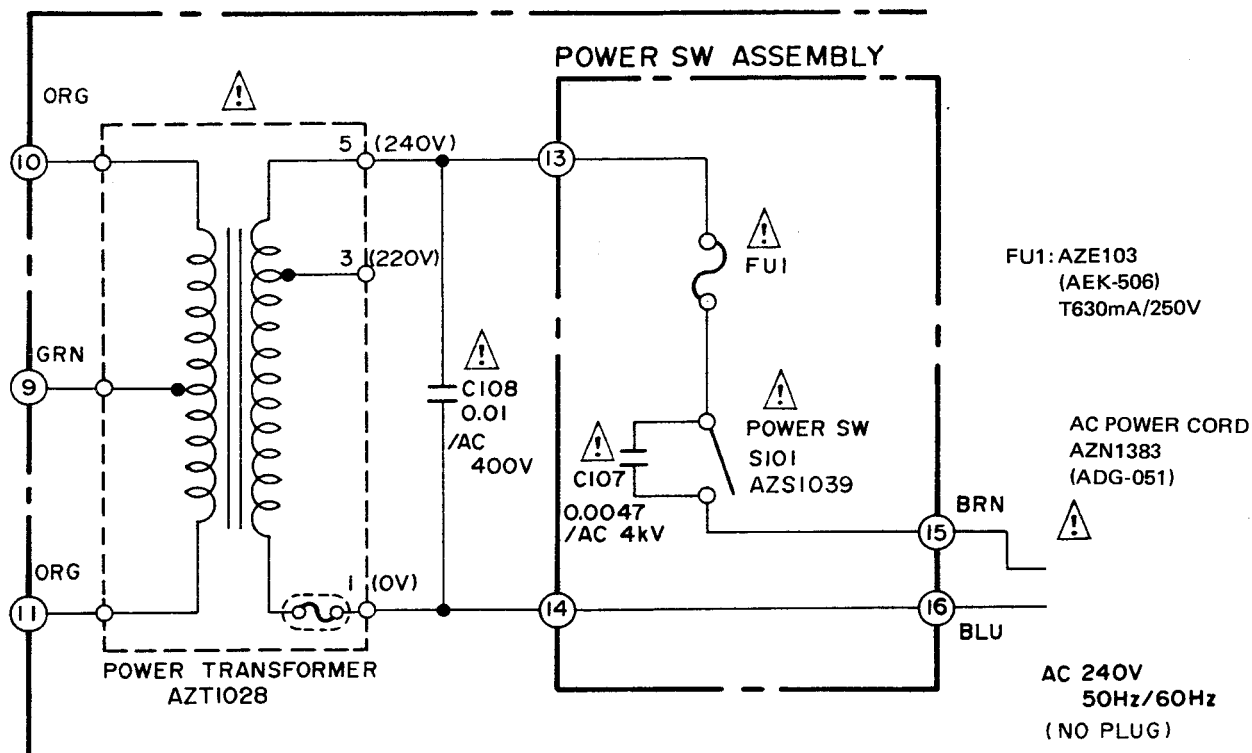


LINE VOLTAGE SELECTION

Line voltage can be changed with the following steps.

1. Disconnect the AC power cord.
2. Remove the top cover.
3. Change the connection of the power transformer primary taps.
4. Stick the line voltage label on the rear panel.

Part No.	Description
AAX-193	220V label
AAX-192	240V label

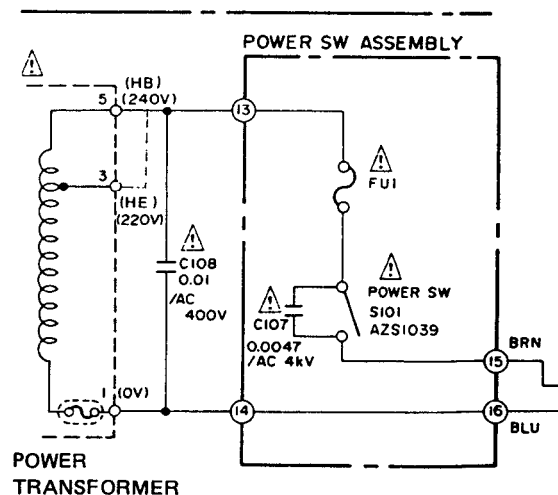

9. SPECIFICATIONS

Amplifier Section

- Continuous average power output (both channels driven)
30 Hz ~ 20kHz
(T.H.D. 0.2%, 8 Ω) 25 W + 25 W
1kHz
(T.H.D. 1%, 8 Ω , DIN) 30 W + 30 W
- Total harmonic distortion
(30 Hz ~ 20 kHz, 8 Ω , AUX) 0.2%
- Input sensitivity/impedance
PHONO 2.5 mV/50 K Ω
TUNER, AUX, TAPE 1, TAPE 2 150 mV/50 K Ω
- Output level impedance
TAPE REC, TAPE 2/ADAPTOR OUT 150 mV
SPEAKER 8 Ω
- Frequency response
PHONO
(RIAA EQUALIZATION) 30 Hz ~ 20 kHz $\pm$ 1.5 dB
TUNER, CD/AUX, TAPE PLAY, TAPE 2/ADAPTOR
. 10 Hz ~ 50 kHz $\pm$ 3 dB
- TONE control
BASS $\pm$ 10 dB (100 Hz)
TREBLE $\pm$ 10 dB (10 kHz)
- LOUDNESS control
(VOLUME control set at -40 dB position)
. +6 dB (100 Hz), +3dB (10 kHz)
- Hum and noise (IHF, shorted circuit A NETWORK)
PHONO 70 dB
TUNER, CD/AUX, TAPE PLAY, TAPE 2/ADAPTOR
. 95 dB


Power supply & miscellaneous

- Power requirements AC 220 V/240 V,
50 Hz/60 Hz
- Power consumption 170 W
- Dimensions 420 (W) x 98 (H) x 200 (D) mm
16 (W) x 3-3/4 (H) x 9-3/4 (D) in.
- Weight (net) 4.5 kg (9 lb 15 oz)

Accessories

- Operating instructions 1
- *Specifications and design subject to possible modification without notice due to improvements.*

10. FRONT PANEL FACILITIES

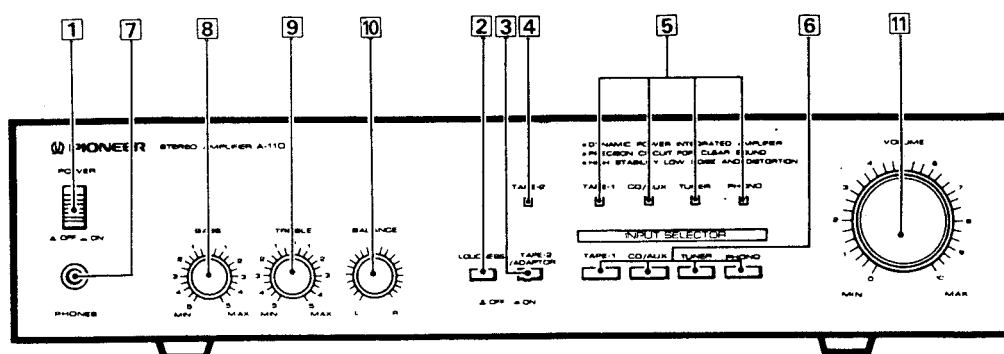

1 POWER switch

Press to turn power to the unit ON and OFF.

2 LOUDNESS switch

Press to activate the loudness function when listening to music at a low volume: the low and high tones will be emphasized to render sounds rich in power and fullness even at low volume levels.

3 TAPE 2/ADAPTOR switch

Press when using a second tape deck or other adaptor equipment, such as a graphic equalizer, that has been connected to the unit by means of the TAPE 2/ADAPTOR terminals on the rear panel.

4 TAPE 2/ADAPTOR indicator

Illuminates when the TAPE 2/ADAPTOR switch is ON.

5 Function indicators

Illuminate to show which function is currently active, i.e. which function switch has been pressed.

NOTE:

The TAPE 1 indicator will illuminate when none of the INPUT SELECTOR switches has been pressed.

6 INPUT SELECTOR switches

- PHONO: Press when you want to listen to records on a turntable.
- TUNER: Press when you want to listen to AM or FM radio broadcasts with a tuner.
- CD/AUX: Press when you want to listen to the sound from a CD player or other component, such as a TV, connected to the CD/AUX terminal.
- TAPE 1: Press when you want to listen to tape playback from a tape deck.

7 PHONES jack

When using headphones, insert their plug into this jack.

NOTE:

Don't forget to turn the volume down before listening to headphones: turning the volume up too high can result in serious damage to your ears.

8 BASS tone control

Use to adjust low frequency range tones. The center position is the flat (normal) position. Rotating this knob to the right will cause low-frequency tones to be emphasized, while rotating it to the left will cause them to be suppressed.

9 TREBLE tone control

Use to adjust high frequency range tones. The center position is the flat (normal) position. Rotating this knob to the right will cause high-frequency tones to be emphasized, while rotating it to the left will cause them to be suppressed.

10 BALANCE control

Use to adjust the volume balance between the left and right speaker channels. This knob should normally be left in the center position and is generally used only when the sound from one speaker is louder than the sound from the other. In such cases, turn the knob in the opposite direction of the louder speaker to achieve uniform volume from both speakers.

11 VOLUME control

Use to adjust the volume level; rotating it clockwise increases the volume. No sound will be emitted when set to the "0" position, and maximum volume will be output when set to the "10" position.