

---

## 4. Disassembly and Reassembly

---

### 4-1 Cabinet and PCB

---

Note : Reassembly in reverse order.

#### 4-1-1 Top Cabinet Removal

- 1) Remove 5 Screws ❶, ❷, ❸.
- 2) Lift up the Top Cabinet in direction of arrow.

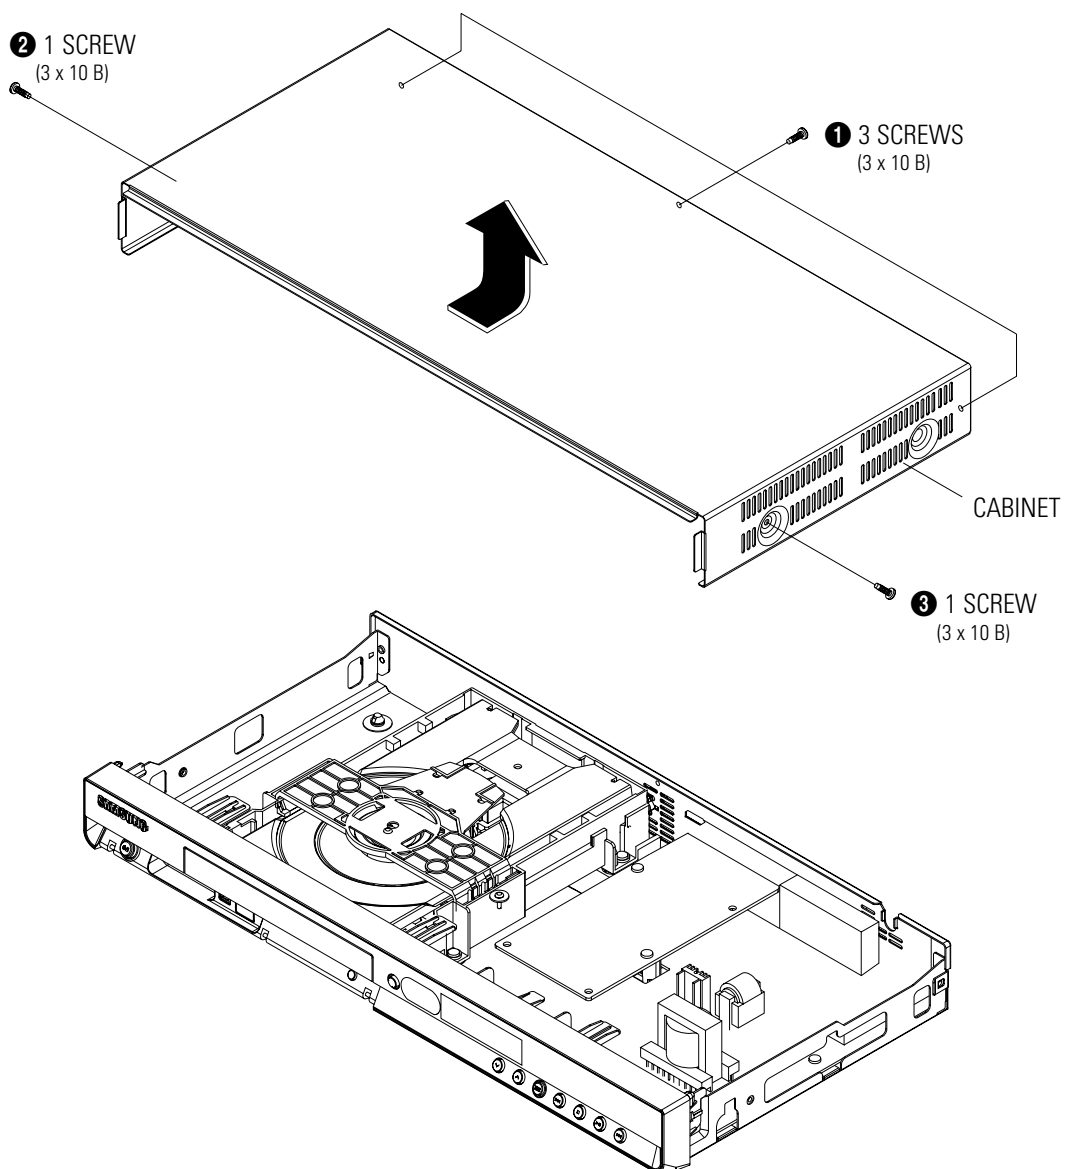


Fig. 4-1 Top Cabinet Removal

## 4-1-2 Ass'y Front-Cabinet Removal

1) Release 6 Hooks ❶, ❷, ❸, ❹ and Ass'y Front-Cabinet ❺.

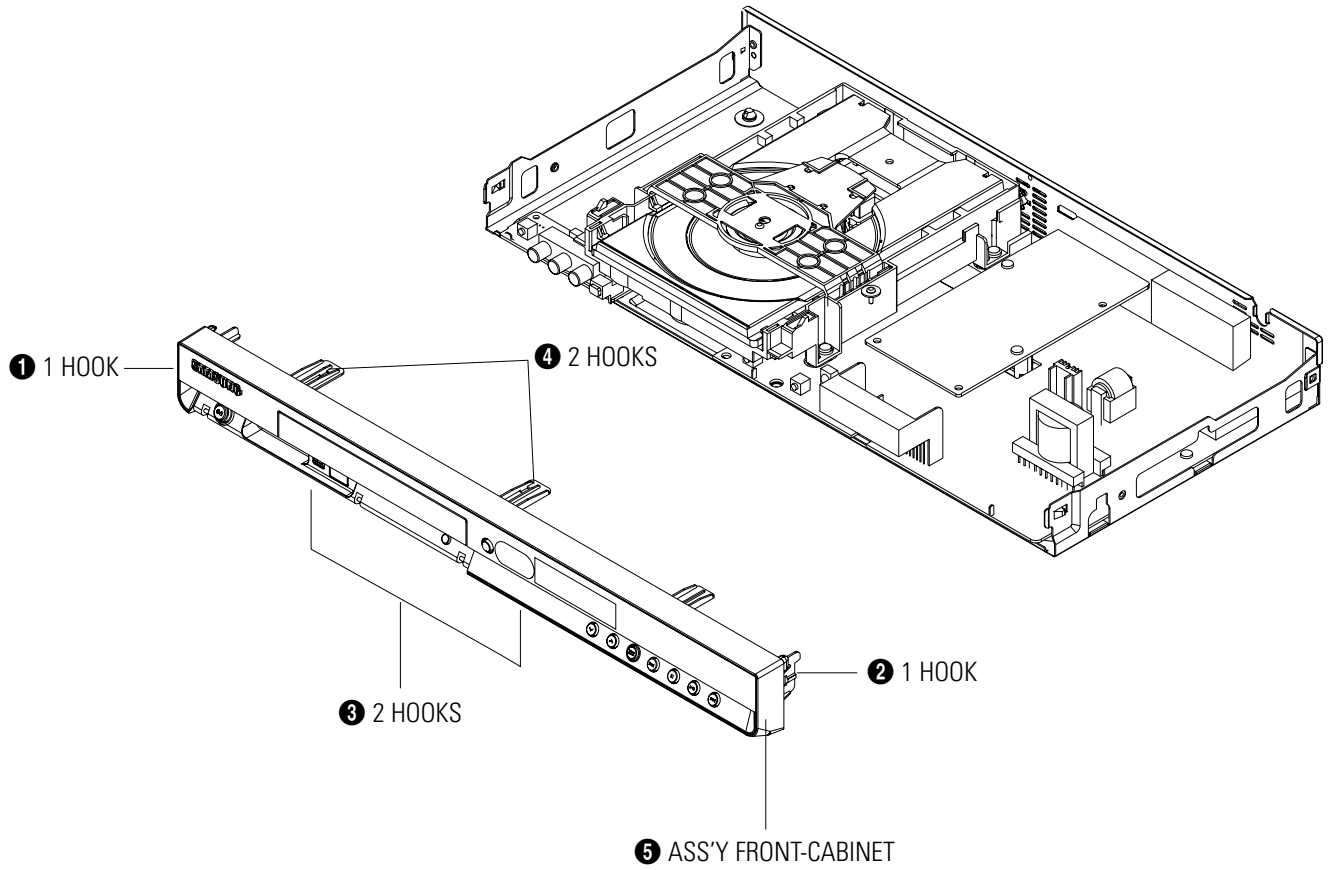


Fig. 4-2 Ass'y Front-Cabinet Removal

### 4-1-3 Ass'y Deck Removal

1) Remove 4 Screws ❶, ❷ from the Ass'y Deck ❸ and lift it up.

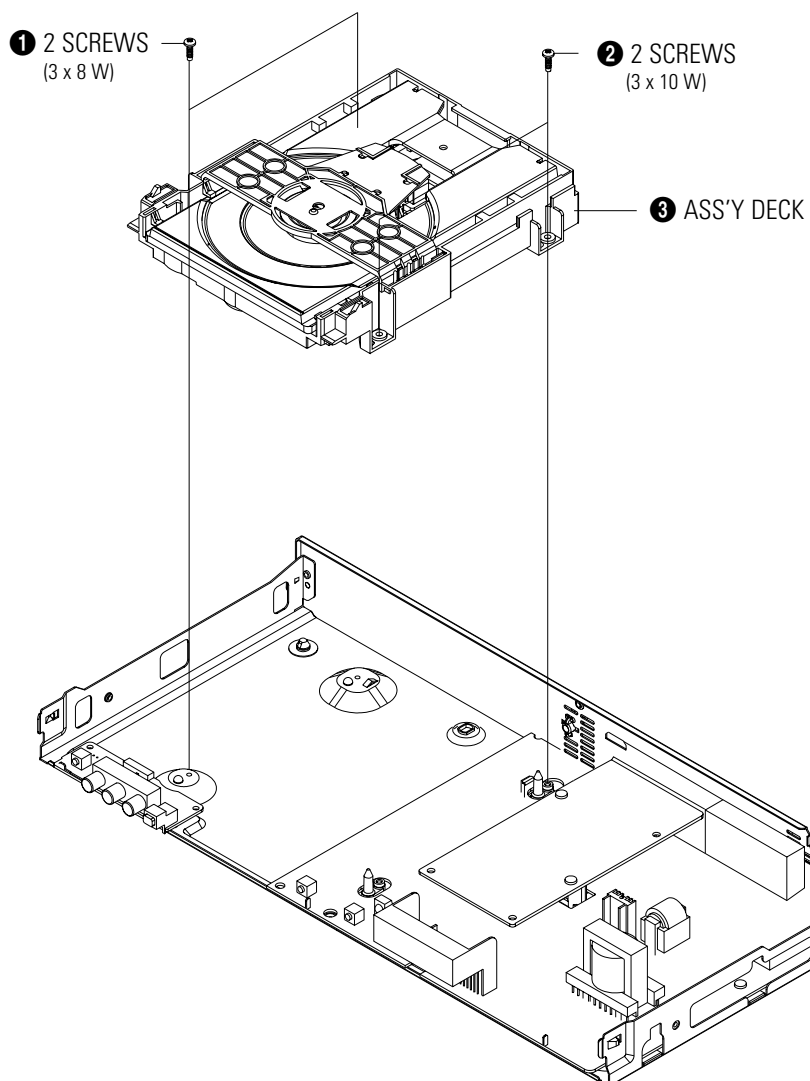


Fig. 4-3 Ass'y Deck Removal

#### 4-1-4 Main PCB Removal

1) Remove 2 Screws ❶, from the Main PCB ❷ and lift it up.

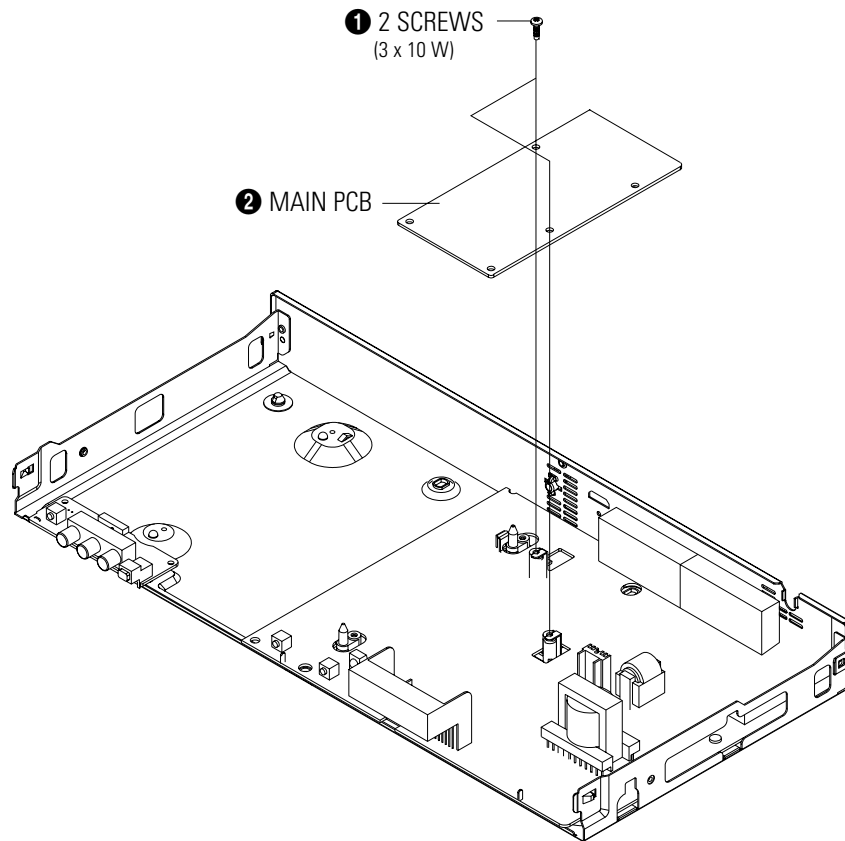


Fig. 4-4 Main PCB Removal

### 4-1-5 Jack PCB and Sub PCB Removal

- 1) Remove 5 Screws ❶, ❷ from the Jack PCB ❸ and lift it up.
- 2) Remove 1 Screw ❹ from the Sub PCB ❺ and lift it up.

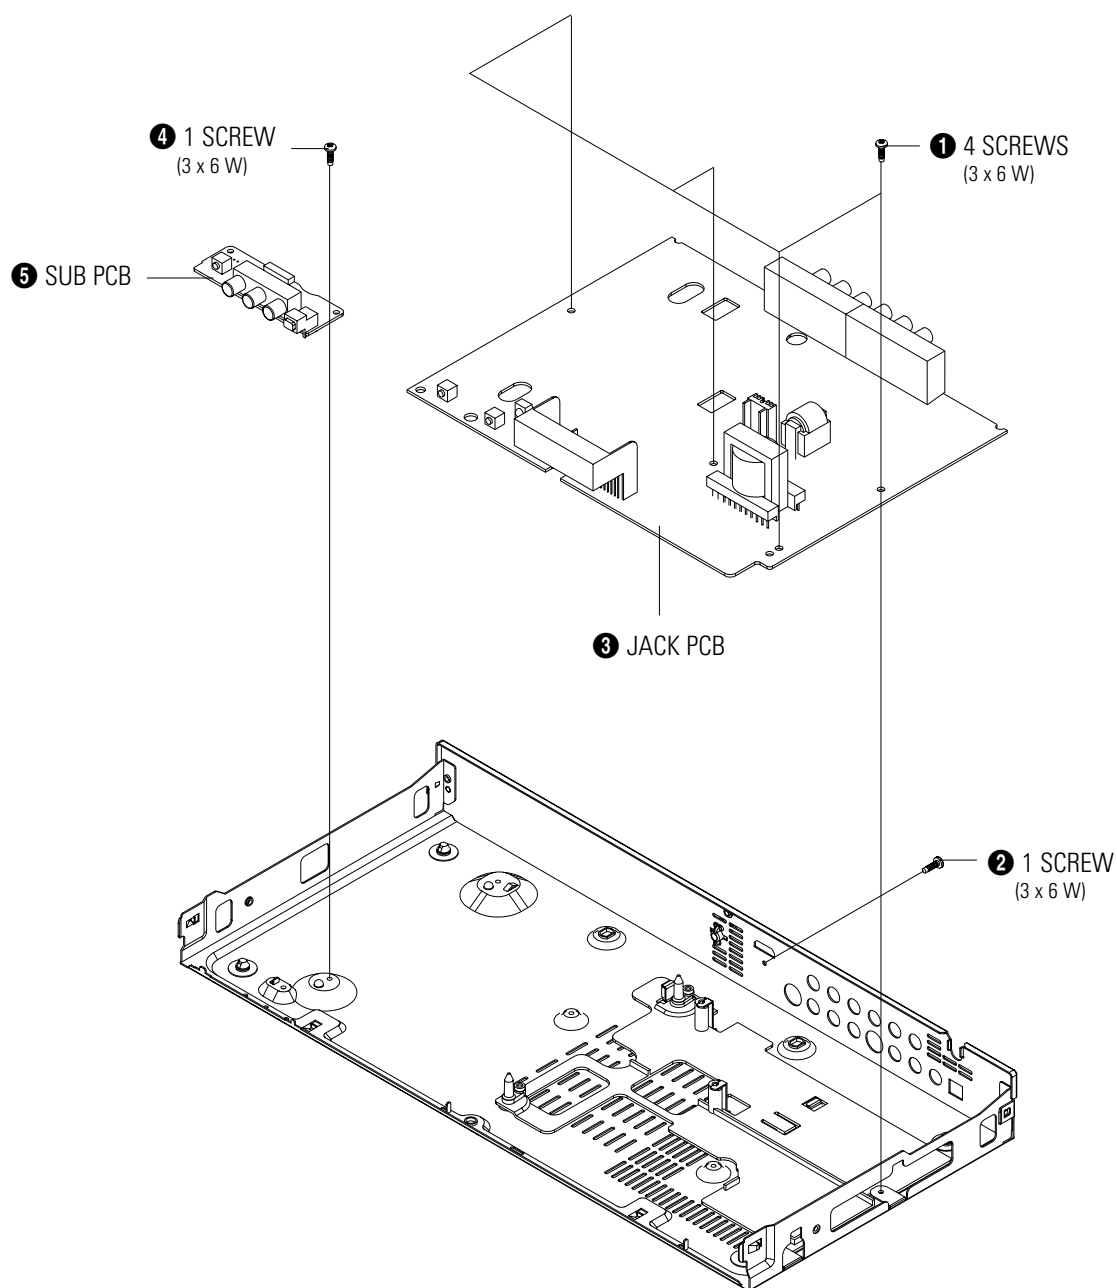


Fig. 4-5 Jack PCB and Sub PCB Removal

## 4-2 PCB Location

---

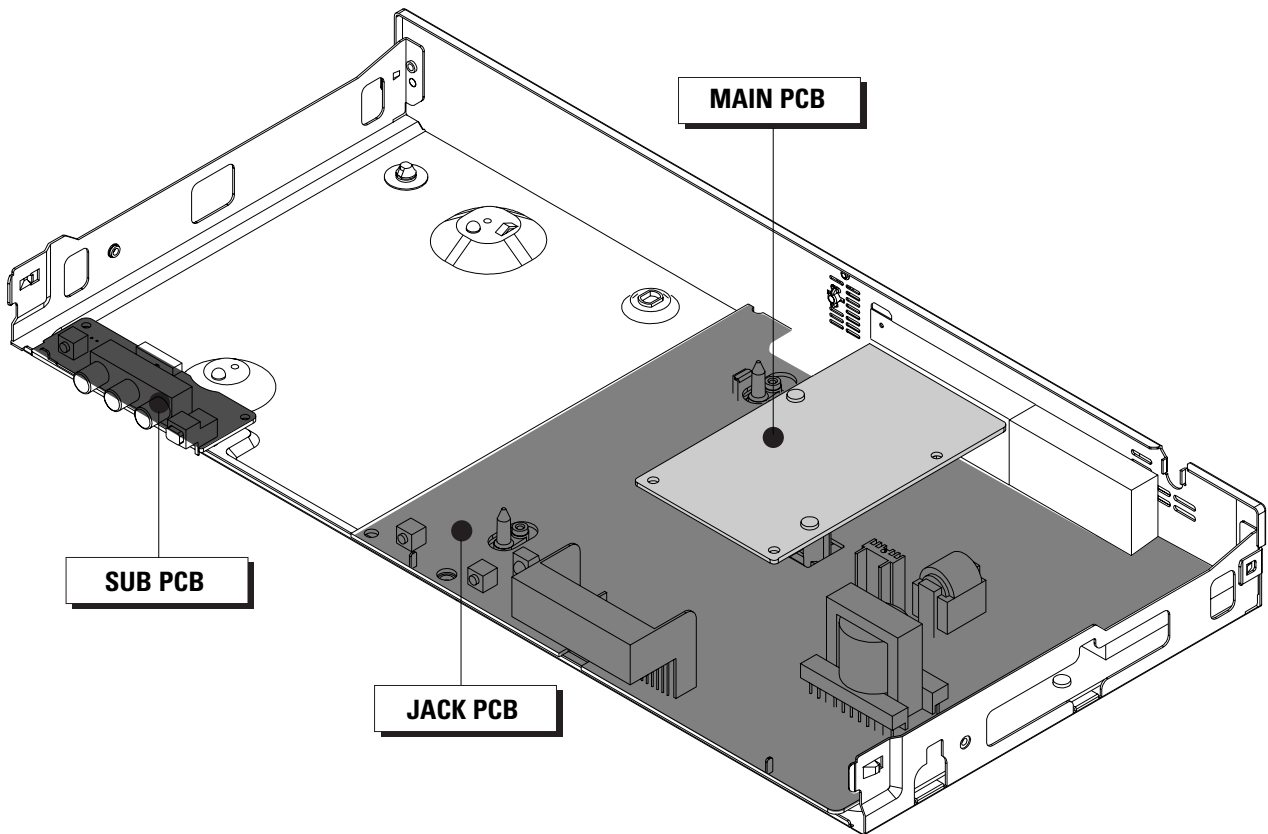


Fig. 4-6 PCB Location