


Elenberg MX-380USB

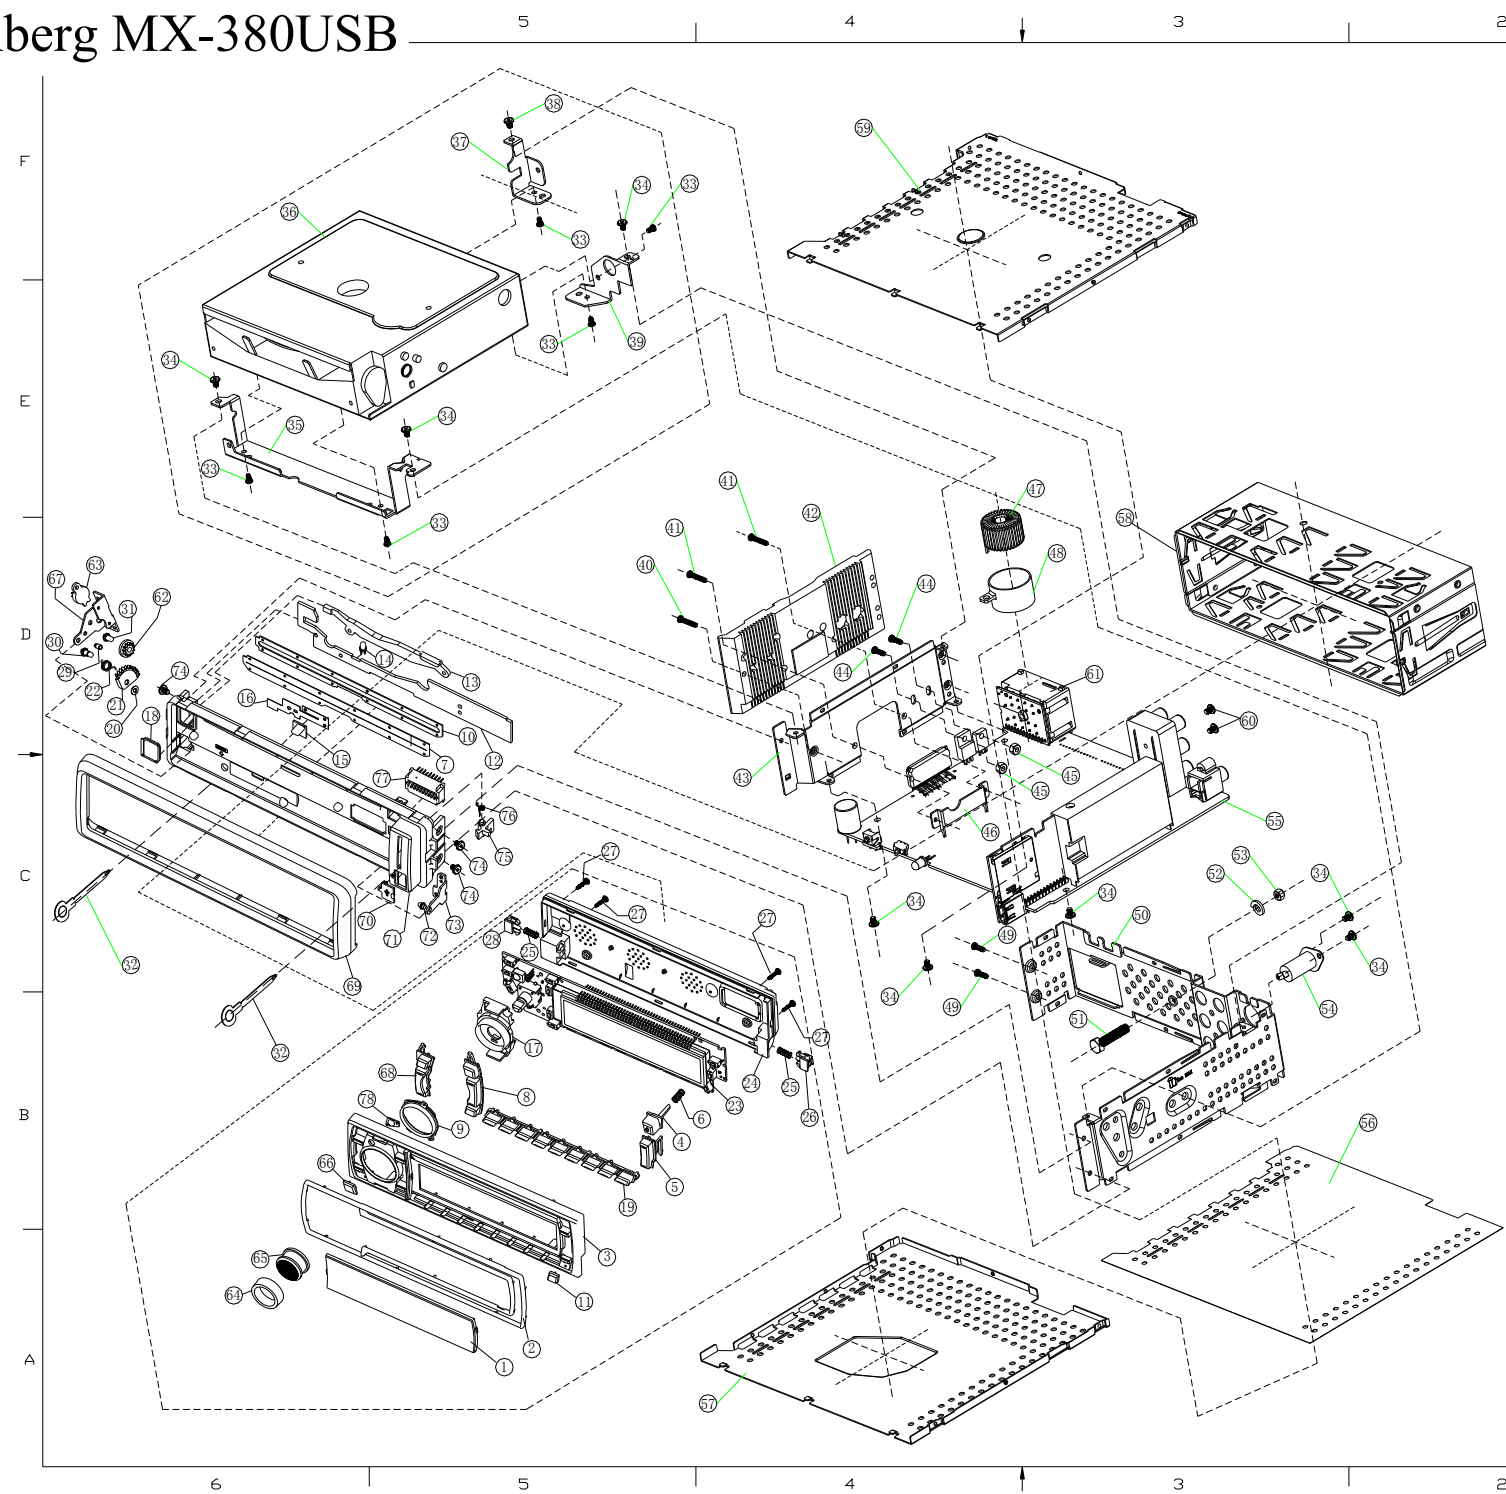


88			44	SCREW: TS3x6PM	2
87			43	SIDE-CHASSIS-L	1
86			42	HEAK-SINK	1
85			41	SCREW:MS 2. 6x13PM	2
84			40	SCREW:TTP2. 6x12TAP TYPE(C)	1
83			39	DECK-BRACKET-RIGHT	1
82			38	SCREW:TTP3x6 TAP TYPE(C)	1
81			37	DECK-BRACKET-LEFT	2
80			36	CD DECK CDM-211	1
79			35	DECK-BRACKET-F	1
78	CD7600 REMOTE-LENS	1	34	SCREW: TTP 3x5 TAP TYPE(C)	8
77	18-PIN-CONNECTOR-A	1	33	SCREW:TTP 2. 6x4 TAP TYPE	5
76	HOOK SPRING	1	32	SET-KEY	2
75	HOOK	1	31	RELEASE-GEAR-SHAFT	1
74	MS 3X4 (5. 5X1X4)	3	30	RELEASE-BRACKET-SHAFT-L	1
73	FRONT-BRACKET-R-CD7600	1	29	STOP-SHAFT	1
72	RELEASE-BRACKET-SHAFT-R	1	28	RELEASE-SHAFT BASE-LIFT-CD7600	1
71	BASE-PANEL	1	27	TS 2X8 PA BLACK	4
70	USB COVER	1	26	RELEASE-SHAFT BASE-RIGHT-CD7600	1
69	TRIM-COVER (BLACK)	1	25	SHAFT-BASE-SPRING	2
68	CD-7600 KNOB-POWER-ME	1	24	NOSE-PIECE-BACK-CD7600	1
67	FRONT-BRACKET-L-CD7600	1	23	P.C.B FRONT BOARD	1
66	CD-7600 ORNAMENT-L	1	22	RELEASE-GEAR-SPRING	1
65	CD-7801VOLUME-KNOB	1	21	RELEASE-GEAR	1
64	CD-3887 RUBBER-BAND	1	20	SPRING WASHER ? 2	1
63	MICRO SWITCH ASSY Y 10P100 1476	1	19	CD-7600 KNOB-PAL-AP	1
62	RELEASE-GEAR-B	1	18	EJ-KNOB	1
61	FIXED-ISO-CONNECTOR-MODIFY	1	17	CD-7600 ORNAMENT-LENS	1
60	SCREW: TS3x6PA	2	16	SPRING-SLICE	1
59	TOP-COVER	1	15	KNOB-IDENTIFY-CD7600	1
58	SLEEVE-CASE	1	14	LED	1
57	BOTTOM-COVER	1	13	CD-GUILD-REFLECTOR	1
56	MAIN-INSULATING-PC-SHEET	1	12	BASE-PCB-CD7600	1
55	P.C.B. MAIN BOARD	1	11	CD-7600 ORNAMENT-R	1
54	ANTENNA JACK DOUBLE SCREW	1	10	CD-GUIDE-SHEET-CD3888	1
53	HEX-NUT M5	1	9	CD-7600 ELECTRO-B	1
52	SPRING-WASHER	1	8	CD-7600 KNOB-EQ-MD	1
51	SCREW:TS 5x16PA	1	7	CD-FELT-CD3888	1
50	MAIN-CHASSIS	1	6	RELEASE SPRING	1
49	SCREW:TTP2. 6x8 TAP TYPE(C)	2	5	CD-7600 KNOB-LP-3088	1
48	TRANSFORMER-BOX	1	4	KNOB-REL	1
47	Toroid Coil	1	3	NOSE-PIECE-CD7600	1
46	IC-BRACKET	1	2	ELECTRO-A	1
45	HEX NUT:M3	2	1	WINDOW-CD7600	1
ITEM	DESCRIPTION	QTY	ITEM	DESCRIPTION	QTY
WIWI INDUSTRIES LIMITED					
TITLE CD7600-EXPLODED DRAWING		MODEL NO. CD7600			
MATERIAL		PART NO.			
FINISHING		DRAWING NO.			
DESIGNED BY 赵家峰	DATE 16/JUN/2005	SCALE 1:2	QTY. 1	UNIT. mm	
APPROVED BY:	DATE				
					A2


Spare Parts List (MX-380USB)

Item	Description	Qty	Part №
1	WINDOW-CD7600	1	MX-380USB-1
2	ELECTRO-A	1	MX-380USB-2
3	NOSE-PIECE-CD7600	1	MX-380USB-3
4	KNOB-REL	1	MX-380USB-4
5	CD-7600 KNOB-UP-DOWN	1	MX-380USB-5
6	RELEASE SPRING	1	MX-380USB-6
7	CD-FELT-CD3888	1	MX-380USB-7
8	CD-7600 KNOB-EQ-MD	1	MX-380USB-8
9	CD-7600 ELECTRO-B	1	MX-380USB-9
10	CD-GUIDE-SHEET-CD3888	1	MX-380USB-10
11	CD-7600 ORNAMENT-R	1	MX-380USB-11
12	BASE-PCB-CD7600	1	MX-380USB-12
13	CD-GUILD-REFLECTOR	1	MX-380USB-13
14	LED	1	MX-380USB-14
15	KNOB-IDENTIFY-CD7600	1	MX-380USB-15
16	SPRING-SLICE	1	MX-380USB-16
17	CD-7600 ORNAMENT-LENS	1	MX-380USB-17
18	EJ-KNOB	1	MX-380USB-18
19	CD-7600 KNOB-PAU-AF	1	MX-380USB-19
20	SPRING WASHER ?2	1	MX-380USB-20
21	RELEASE-GEAR	1	MX-380USB-21
22	RELEASE-GEAR-SPRING	1	MX-380USB-22
23	P.C.B FRONT BOARD	1	MX-380USB-23
24	NOSE-PIECE-BACK-CD7600	1	MX-380USB-24
25	SHAFT-BASE-SPRING	2	MX-380USB-25
26	RELEASE-SHAFT-BASE-RIGHT-CD7600	1	MX-380USB-26
27	TS 2X8 PA BLACK	4	MX-380USB-27
28	RELEASE-SHAFT-BASE-LEFT-CD7600	1	MX-380USB-28
29	STOP-SHAFT	1	MX-380USB-29
30	RELEASE-BRACKET-SHAFT-L	1	MX-380USB-30
31	RELEASE-GEAR-SHAFT	1	MX-380USB-31
32	SET-KEY	2	MX-380USB-32
33	SCREW: TTP 2.6x4 TAP TYPE	5	MX-380USB-33
34	SCREW: TTP 3x5 TAP TYPE (C)	8	MX-380USB-34
35	DECK-BRACKET-F	1	MX-380USB-35
36	CD DECK CDM-211	1	MX-380USB-36
37	DECK-BRACKET-LEFT	2	MX-380USB-37
38	SCREW: TTP 3x6 TAP TYPE (C)	1	MX-380USB-38
39	DECK-BRACKET-RIGHT	1	MX-380USB-39
40	SCREW: TTP 2.6x12 TAP TYPE (C)	1	MX-380USB-40
41	SCREW: MS 2.6x13PM	2	MX-380USB-41
42	HEAK-SINK	1	MX-380USB-42
43	SIDE-CHASSIS-L	1	MX-380USB-43

44	SCREW: TS3x6PM	2	MX-380USB-44
45	HEX NUT:M3	2	MX-380USB-45
46	IC-BRACKET	1	MX-380USB-46
47	Toroid Coil	1	MX-380USB-47
48	TRANSFORMER-BOX	1	MX-380USB-48
49	SCREW: TTP 2.6x8 TAP TYPE (C)	2	MX-380USB-49
50	MAIN-CHASSIS	1	MX-380USB-50
51	SCREW:TS 5x16PA	1	MX-380USB-51
52	SPRING-WASHER	1	MX-380USB-52
53	HEX-NUT M5	1	MX-380USB-53
54	ANTENNA JACK DOUBLE SCREW	1	MX-380USB-54
55	P.C.B. MAIN BOARD	1	MX-380USB-55
56	MAIN-INSULATING-PC-SHEET	1	MX-380USB-56
57	BOTTOM-COVER	1	MX-380USB-57
58	SLEEVE-CASE	1	MX-380USB-58
59	TOP-COVER	1	MX-380USB-59
60	SCREW: TS3x6PA	2	MX-380USB-60
61	FIXED-ISO-CONNECTOR-MODIFY	1	MX-380USB-61
62	RELEASE-GEAR-B	1	MX-380USB-62
63	MIRCRO DAMPER ASS'Y DPP01 14TQ	1	MX-380USB-63
64	CD-3897 RUBBER-BAND	1	MX-380USB-64
65	CD-7801VOLUME-KNOB	1	MX-380USB-65
66	CD-7600 ORNAMENT-L	1	MX-380USB-66
67	FRONT-BRACKET-L-CD7600	1	MX-380USB-67
68	CD-7600 KNOB-POWER-MU	1	MX-380USB-68
69	TRIM-COVER (BLACK)	1	MX-380USB-69
70	USB COVER	1	MX-380USB-70
71	BASE-PANEL	1	MX-380USB-71
72	RELEASE-BRACKET-SHAFT-R	1	MX-380USB-72
73	FRONT-BRACKET-R-CD7600	1	MX-380USB-73
74	MS 3X4 (5.5X1X4)	3	MX-380USB-74
75	HOOK	1	MX-380USB-75
76	HOOK SPRING	1	MX-380USB-76
77	18-PIN-CONNECTOR-A	1	MX-380USB-77
78	CD7600 REMOTE-LENS	1	MX-380USB-78

title: CD7600 CIRCUIT DIAGRAM





Product Code
Report Date

WIWI INDUSTRIES LIMITED (EXCEL)
K02-CCD7600-260402-RU1 To K02-CCD7600-260402-RU1
21.02.2006

	Material Code	Brief Description	Usage
	K02-CCD7600-260402-RU1	CAR CD 7600D USBMMC[ELENBERG MX-380USB]-64134T	1
	C02-CCD7600-64134T-OR1	RDS,MW,FM,OIRT,MP3,U/M,40Wx4,2IN/2O,ISO RM 7600	1
1	010-N035700-20000	AMORPHOUS TROID 350uH 6A 205 D21x13.5 I-TYPE L=15	1
2	022-C101000-10000	PLUG TYPE FUSE 10A 32V RED COLOUR	1
3	029-B000100-00000	ANTENNA JACK DOUBLE SCREW	1
4	209-7600000-L0000	HOOK-SPRING CD-7600	1 65mm D.Ni 0.4
5	209-7600000-V0000	RELEASE-SPRING(BLACK) CD-7600 D5.2X4.5TSX0.5t	1 65Mn D.Ni 0.5 BLACK
6	212-2000000-00000	SPRING WASHER φ2	1 MOTOR
7	212-2005000-03P00	FLAT-WASHER-AA ID2.0XOD5.0 W/OPEN CUTTING	1 PVC T=0.3 BLACK
8	212-5209000-14S00	SPRING WASHER (φ5.2)	1 SET:1
9	214-3300000-A0000	RCA JACK FIBER 40x27x0.5mm	1 FOR RCA JACK FIBER
10	214-3306000-05F00	CD-3306D MAIN FIBER 176.5x152.2x0.5mm	1
11	214-D220000-A0500	FIBRE (D=22.0MM 0.5T) FOR BUILD-IN ISO TRANSFORMER	1
12	216-3991A00-C0000	CD-3991 HEAT-SINK W/SAND BLOWING [AL DIE CASTING]	1 DIE CASTING 116GFOR CD KMC DECK
13	218-3300E00-E1000	IC-BRACKET CD-3300 [EGI-1.0]	1
14	218-3300K00-E0600	BOTTOM-COVER CD-3300 [EGI-0.6]	1 EGI T=0.6mm
15	218-7600F00-E1000	FRONT-BRACKET-L	1 EGI T=1.0mm
16	218-7600G00-E1000	FRONT-BRACKET-R	1 EGI T=1.0mm
17	219-7500000-A0000	STOP SHAFT CD-7500 [BRASS]	1 BRASS D.Ni
18	219-7500000-B0000	CD-7500 RELEASE-GEAR-SHAFT [BRASS D.Ni]	1 BRASS D.Ni
19	219-7500000-L0000	RELEASE-BRACKET-SHAFT-L (BRASS)	1 BRASS D.Ni
20	219-7500000-R0000	RELEASE-BRACKET-SHAFT-R (BRASS)	1 BRASS D.Ni
21	222-3300J00-E0600	TOP-COVER	1 EGI T=0.6mm
22	222-7600A00-E1000	MAIN-CHASSIS	1 EGI T=1.0mm
23	223-3300B00-E1000	SIDE-CHASSIS-L	1 EGI T=1.0mm
24	225-0900700-40000	PAD CORK 9x7x4mm W/ADHESIVE	3
25	228-3888A00-00000	CD FELT(60g/m2)	1 CLOTH (BLACK)
26	230-100BK00-10000	PLASTIC TIE l=100mm	1
27	233-N030W00-H0000	HEX NUT: M3	2 IC:2
28	234-HEX5000-12000	HEX BOLT: 5x12mm DOUBLE HEAD	1 CARBON STEEL D.Zn (WHITE)
29	234-KM02000-04B00	SCREW:MS 2%4KM	1 BLACK
30	234-MS03000-04000	SCREW: MS 3x4 (5.5x1x4)	3 BASE PANEL:3
31	234-PA03000-08000	SCREW: TS 3x8 PA	1 LINE SOCKET:1
32	234-PB02000-04000	SCREW: TS 2x4 PB	4 RELEASE-SHAFT-BASE-LEFT:4
33	234-PB02000-05000	SCREW: TS 2x5 PB	2 CONNECTOR PCB:2
34	234-PM02000-03000	SCREW MS 2.0x3 PM	1 RELEASE-SHAFT-BASE-LEFT:1
35	234-PM02600-13000	SCREW: TS 2.6x13 PM	2 IC:2
36	234-PM03000-06000	SCREW: TS 3x6 PM	2 IC:2
37	234-PT02600-08000	SCREW: TTP 2.6x8 TAP TYPE (C)	2 HEAT-SINK+SIDE CHASSIS:2
38	234-PT02600-12000	SCREW: TTP 2.6x12 TAP TYPE (C)	1 HEAT-SINK+SIDE CHASSIS:1
39	234-PT03000-05000	SCREW: TTP 3x5 TAP TYPE (C)	8 MAIN-PCB+SIDECHAS:3 DECK-BKT+SIDECHAS:3 ANTENNAJACK:2
40	234-PT03000-06000	SCREW: TTP 3x6 TAP TYPE (C)	1 DECK BKT+TRANSFOR MERBOX:1
41	234-PT03000-10000	SCREW TTP 3x10 WHITE	1 HEAT SINK:1
42	243-3888000-A0000	P.V.C CD GUIDE SHEET BLACK	1
43	243-7600160-A0200	CD-7600 COVER-PVC [BLACK]	1
44	402-7600A00-3BK00	CD-7600 BASE-PANEL [PC]	1 PC BLACK
45	414-7600100-2CR00	CD-GUILD-REFLECTOR [ACRYLIC]	1 ACRYL CLEAR
46	430-7600A00-1NL00	CD-7600 EJ-KNOB [ABS]	1 ABS NATURAL
47	440-7500A00-3BK00	CD-7500 HOOK [PC BLACK]	1 PC BLACK
48	462-2001A00-3BK00	MIRCRO DAMPER ASS'Y DPP01 14TQ (19-24) RED COLOR	1

49	462-7500B00-9BK00	CD-7500 RELEASE-GEAR-B [POM BLACK]	1	POM BLACK
50	462-7600A00-9BK00	CD-7600 RELEASE-GEAR [POM]	1	POM BLACK
51	463-3300C00-3BK00	CD-3300 CHOKE COIL HOLDER	1	PC BLACK
52	477-7600A00-5GY00	CD-7600 USB COVER [PVC]	1	PVC (431C)
53	802-0703E00-WE000	SILICONE GLUE 45gsm	0.03	
D02-CCD7600-3303DJ-700 CCD7600 SERIES DECK -CD/MP3 ESP USB/MMC (DONGSUNG)				
54	214-3300000-B0000	MOTOR-COVER-FIBRE 10x27mm	1	FIBRE T=0.5mm
55	214-DECK000-A0000	DECK FIBER 105x95x0.5mm	1	FOR CD KMC DECK
56	218-3300X00-E1000	DECK BRACKET-"R" CD-3300 [EGI-1.0]	1	EGI T=1.0mm
57	218-3300Y00-E1000	DECK BRACKET LEFT	1	EGI T=1.0mm
58	218-7600C00-E1000	DECK-BRACKET-F	1	EGI T=1.0mm
59	234-BMT2000-04000	SCREW TTP 2x4 BM TAP TYPE	4	
60	234-PT02600-04000	SCREW: TS 2.6x4 TAP TYPE	5	DECK BRT:5
H05-3303D00-J70000-000 CD/MP3 ESP USB/MMC (DONGSUNG) CD BOARD HISEM				
61	004-0414800-00000	DIODE 1N4148	1	D4
62	004-SR23G00-00000	INFRARED EMITTING DIODE SR-23G/0SE-23G/0SE-23F	2	IR1.3
63	006-1200000-40000	CRYSTAL 12.000MHZ [HC-49US] 30PPM LC=20PF	1	XM1
64	006-1693400-40000	CRYSTAL 16.934MHZ [HC-49US] 30PPM LC=20PF	1	X1
65	010-F022600-00000	INDUCTOR [EC24] 22uH 10% AXIAL LEAD DCR<=1.4R	1	L101
66	012-1107B00-30000	MINI E-CAP [5x7] 100uF 10V 20% 85C	9	E101.103.102.10.21. 15.11.20.16
67	012-2227B00-30000	MINI E-CAP [6x7] 220uF 10V 20% 85C	1	E9
68	012-4106B00-30000	MINI E-CAP [4X5] 10uF 10V 20% 85C	5	E7.17.18.13.14
69	012-4474F00-30000	MINI E-CAP [4X5] 0.47uF 50V 20% 85C	1	E6
70	012-4476B00-30000	MINI E-CAP [4x5] 47uF 10V 20%	1	E12.
71	012-B476B00-30000	MINI E-CAP [4x7] 47uF 10V 20% 85C	5	E8.1.3.2.4
72	025-TA02000-33000	SWITCH 2P 3.3mm SW-111 HC-49S	1	(small type)
73	031-0120U00-16000	FFC 16PIN PT1.0 L=120(4+112+4 B1=6MM)	1	C29
74	031-0120U00-17000	FFC 17PIN PT1.0 L=120(4+112+4,B1=6MM)	1	C30
75	032-E100000-03100	RAINBOW WIRE #26 3PIN 100MM(3+100+3)	1	3+100+3
76	036-B020000-04100	4P SOCKET 53015-0410 (ROHM)	1	
77	037-A518000-4A000	H'ING 4P P=2.0mm #26 DECK CONAR 4x180mm	1	CON5 (RAINBOW-WIRE)
78	037-A520000-7A000	H'ING 7P P=2.0mm #26 DECK CONAR 7x200mm	1	CON1 (RAINBOW-WIRE)
79	203-8008S00-C2E00	CD DECK CDM-211/CDX-100 W/SANYO MOTOR	1	
80	216-3300B00-C0000	HEAT-SINK-S CD-3300 [IRON PLATE]	1	WHITE IRON T=0.4
S05-3303D00-J70000-000 CD/MP3 ESP USB/MMC (DONGSUNG) CD BOARD SMTSEM				
81	001-3303D00-J7000	PCB CD-3303-D USB SERVO [VER-5] FOR D.SUNG IC	1	
82	002-0016M00-P0000	IC 16M DRAM [SOJ26(24)]	1	IC5
83	002-0111700-U1800	IC S1117-18Q 1.8V 1A LDO [SOT223] AUK	1	IC4
84	002-0111700-U3300	IC S1117-33Q 3.3V 1A LDO [SOT223] AUK	1	IC102
85	002-0400100-A0100	IC IP4001D/S3001 5CH MOTOR DRV FOR CDP	1	IC1
86	002-0922600-S0100	IC S1L9226X CDP RF+SSP [LQFP48] S.SUNG	1	IC3
87	002-0927900-H0000	IC S5L9279 DSP+MP3 DECODER FOR CDP [TQFP100]	1	IC2
88	002-51F0100-H0000	I.C TMC51F01M MMC LQFP48	1	IC100
89	003-0150400-B0300	TR-PNP-SMD KTA1504S-GR/2SA1980S/F [SOT-23]	8	Q7.3.1.6.4.5.102.101
90	003-0387500-G0000	TR-NPN-SMD KTC3875S/2SC-5343S/F [SOT-23]	1	Q104
91	004-0414800-S0000	CHIP-DIODE [0805] CD4148	6	D1.3.5.102.101.6
92	011-B100A00-20000	CHIP RES [0603] 10 OHM 5%	1	R1
93	011-B101A00-20000	CHIP RES [0603] 100 OHM 5%	5	R132.31.35.32.36
94	011-B102A00-20000	CHIP RES [0603] 1K OHM 5%	9	R129.130.58.59.34.83.84. 56.123
95	011-B103A00-20000	CHIP RES [0603] 10K OHM 5%	15	R76.54.97.89.74.16.55.128.127.95.96.17.18.73.30
96	011-B104A00-20000	CHIP RES [0603] 100K OHM 5%	8	R81.82.28.19.131.151.28.155
97	011-B105A00-20000	CHIP RES [0603] 1M OHM 5%	3	R12.136.78
98	011-B123A00-20000	CHIP RES [0603] 12K OHM 5%	2	R11.13
99	011-B124A00-20000	CHIP RES [0603] 120K OHM 5%	2	R22.152
100	011-B151A00-20000	CHIP RES [0603] 150 OHM 5%	1	R51

101	011-B153A00-20000	CHIP RES [0603] 15K OHM $\oplus$ 5%	3	R21.146.145
102	011-B154A00-20000	CHIP RES [0603] 150K OHM $\oplus$ 5%	3	R20.2.7
103	011-B203A00-20000	CHIP RES [0603] 20K OHM $\oplus$ 5%	1	R15
104	011-B220A00-20000	CHIP RES [0603] 22 OHM $\oplus$ 5%	20	R114.101.102.103.104.105.106.107.108.109.110.111.112.113.138.139.142.143.140.141
105	011-B222A00-20000	CHIP RES [0603] 2.2K OHM $\oplus$ 5%	5	R125.126.79.67.65
106	011-B223A00-20000	CHIP RES [0603] 22K OHM $\oplus$ 5%	1	R25
107	011-B224A00-20000	CHIP RES [0603] 220K OHM $\oplus$ 5%	5	R24.33.85.29.10
108	011-B333A00-20000	CHIP RES [0603] 33K OHM $\oplus$ 5%	1	R23
109	011-B390A00-20000	CHIP RES [0603] 39 OHM $\oplus$ 5%	2	R133.134
110	011-B472A00-20000	CHIP RES [0603] 4.7K OHM $\oplus$ 5%	1	R9
111	011-B473A00-20000	CHIP RES [0603] 47K OHM $\oplus$ 5%	8	R90.94.93.77.120.119.121.28
112	011-B563A00-20000	CHIP RES [0603] 56K OHM $\oplus$ 5%	1	R26
113	011-B683A00-20000	CHIP RES [0603] 68K OHM $\oplus$ 5%	5	R6.5.4.3.27
114	011-B820A00-20000	CHIP RES [0603] 82 OHM $\oplus$ 5%	1	R8
115	011-B821A00-20000	CHIP RES [0603] 820 OHM $\oplus$ 5%	1	R37
116	011-B822A00-20000	CHIP RES [0603] 8.2K OHM $\oplus$ 5%	1	R14
117	013-D475J00-50A00	CHIP TAN CAP 20% 4.7uF 6.3V [A-Size]	1	E5
118	014-B080C00-A0000	CHIP CAP [0603] 8PF 50V 10% NPO	2	C7.6
119	014-B102C00-50000	CHIP CAP [0603] 102P (0.001uF) 50V 10%	4	C10.1.2.3
120	014-B103C00-60000	CHIP CAP [0603] 103P (0.01uF) 50V 20%	5	C18.102.19.11.4
121	014-B104B00-80000	CHIP CAP [0603] 104P (0.1uF) 25V +80-20%	29	C108.109.107.101.103.62.68.67.110.21.61.27.26.5.15.12.13.8.57.31.60.59.69.28.72.56.70.111.66
122	014-B122C00-50000	CHIP CAP [0603] 122P (0.0012uF) 50V 10%	3	C53.54.55
123	014-B152C00-50000	CHIP CAP [0603] 152P (.0015) 50V 10%	2	C63.64
124	014-B220C00-A0000	CHIP CAP [0603] 22PF 50V $\oplus$ 10% NPO	2	C105.104
125	014-B222C00-50000	CHIP CAP [0603] 222P (0.0022uF) 50V 10%	2	C14.23
126	014-B270C00-A0000	CHIP CAP [0603] 27PF 50V $\oplus$ 10% NPO	2	C52.51
127	014-B333C00-60000	CHIP CAP [0603] 333P (0.033uF) 50V 20%	2	C25.16
128	014-B391C00-50000	CHIP CAP [0603] 391P (390PF) 50V 10%	2	C24.22
129	014-B472C00-50000	CHIP CAP [0603] 472P (0.0047) 50V 10%	1	C9
130	014-B474B00-80000	CHIP CAP [0603] 474P (0.47uF) 25V +80-20%	1	C17
131	014-B683C00-60000	CHIP CAP [0603] 683P (0.068uF) 50V 20%	1	C20
132	014-B821C00-50000	CHIP CAP [0603] 821P (820PF) 50V 10%	1	C106
133	036-G010000-17100	17-PIN SOCKET P=1.0MM SMT	1	
134	057-102T000-S0200	BEAD CHIP 0603 FCM1608K-102T02	8	BD101.5.6.3.7.1.2.4
H01-7601S00-W00000-EU7		MW/FM,RDS,MP3,USB/MMC/SD,40Wx4,2IN/2O,ISO OIRT	1	
135	002-0114000-A0900	IC LA1140 FM IF [ZIP16] SANYO	1	IC4
136	002-0337000-A0900	IC LA3370 MPX FOR CAR AUDIO [ZIP16]	1	IC2
137	002-0455800-G0000	IC TJM4558-C DUAL OP-AMP [SO8]	2	IC3.5
138	002-0703500-T0000	IC KIA7035 RESET	1	Q30
139	002-0738400-J0600	IC TDA7384 4X40W POWER AMP FOR CAR AUD SGS	1	U1
140	002-1923F00-G0700	IC BU1923F RDS DECODER	1	IC7
141	002-2313L00-B0000	IC PT2313L AUDIO PROCESSOR [SOP28]	1	IC601
142	002-78L0500-F0000	IC KIA78L05 5V 0.1A [TO92]	1	Q32
143	002-78R0500-F0000	IC KIA78R05API 5V1A LOW DROP REG [TO220IS4]	1	Q40
144	002-790NR00-H0000	I.C DSC-790NRF (NEO) USB/SD CAR CD MCU	1	IC1
145	003-0130300-D0000	TRANSISTOR D1303	4	Q1.8.9.10
146	003-0136800-C0000	TR-PNP KTB1368	1	Q23
147	003-0966Y00-A0200	TRANSISTOR 2SA966Y PNP TO-92	2	Q11.17.
148	003-1267Y00-A0000	TR-PNP KTA1267-Y [TO-92M] GENERAL USE (-50V 0.15A)	3	Q34.36.3
149	003-1271Y00-A0300	TR-PNP KTA1271-Y [TO-92] HIGH CURRENT (-35V 0.8A)	1	Q6
150	003-3203Y00-D0300	TRANSISTOR STC3203Y	3	Q26.28.(AM19)
151	003-CPN2000-J0000	TR ICP-N20 50V 0.8A IC PROTEC 2PIN DIP TYPE	1	PTC1
152	004-0400100-Q0000	DIODE 1N4001 50V 1A	1	D6
153	004-0414800-Q0000	DIODE 1N4148	16	D39.38.31.17.35.21.24.28.9.15.16.7.22.19(OIRT.D12.17)
154	005-0003600-A0000	ZENER DIODE 3.6V 1/2W +/-5%	2	ZD7.9

155	005-0005100-A0000	ZENER DIODE 5.1V 1/2W +/-5%	4	ZD1.10.2.8.
156	005-0005600-A0000	ZENER DIODE 5.6V 1/2W +/-5%	1	ZD4.
157	005-0007500-A0000	ZENER DIODE 7.5V 1/2W +/-5%	1	ZD6
158	005-0010000-A0000	ZENER DIODE 1/2W 10V	2	ZD3.5.
159	006-0433200-00000	CRYSTAL HC-49U 4.33MHz CL=20P 30PPM	1	XT2
160	006-0900000-40000	CRYSTAL 9.000MHZ [HC-49US] 30PPM LC=20PF	1	XT1
161	007-0504600-7GY00	I.F.T 7x7mm K5046 GREY	1	T1
162	009-0202700-A0200	FM/OIRT DBM TUNER WEF-253WV [TOP-ALPHA]	1	TUNER1
163	009-1019A00-A0100	TUNER AM CET-1019A / WEM-293U1 FOR CAR AUDIO	1	TUNER2
164	010-A022200-00000	INDUCTOR COIL 22mH	1	L1
165	011-A010F00-20000	RES 1/2W 5% 1 OHM	2	R168.98.
166	011-A100A00-20000	RES 1/16W 5% 10 OHM	1	R174
167	011-A102A00-20000	RES 1/16W 5% 1K OHM	1	R88
168	011-A104A00-20000	RES 1/16W 5% 100K OHM	1	R83
169	011-A181A00-20000	RES 1/16W 5% 180 OHM	1	R53
170	011-A223A00-20000	RES 1/16W 5% 22K OHM	1	R63
171	011-A272A00-20000	RES 1/16W 5% 2.7K OHM	1	R181
172	011-A562A00-20000	RES 1/16W 5% 5.6K OHM	4	R111.110.109.108
173	012-1476C00-30000	MINI E-CAP [5x7] 47uF 16V 20% 85C	7	C81.118.121.102.35.94.(AM C75)
174	012-2107C00-30000	MINI E-CAP [6x7] 100uF 16V 20% 85C	9	C125.86.52.55.68.79.124.120.82.
175	012-4224F00-30000	MINI E-CAP [4x5] 0.22uF 50V 20%	1	C92.
176	012-B105F00-30000	MINI E-CAP [4x7] 1uF 50V 20% 85C	14	C71.73.49.53.50.47.84.54.56.106.91.51.90.(AM C76)
177	012-B106C00-30000	MINI E-CAP [4x7] 10uF 16V 20% 85C	6	C74.42.122.117.63.(AM C108)
178	012-B335F00-30000	MINI E-CAP [4x7] 3.3uF 50V 20% 85C	2	C67.72
179	012-B474F00-30000	MINI E-CAP [4x7] 0.47uF 50V 20% 85C	4	C95.97.96.98
180	012-B475F00-30000	MINI E-CAP [4x7] 4.7uF 50V 20% 85C	10	C64.48.105.126.34.33.93.119.28.29.
181	012-C107C00-30000	E-CAP [5x11] 100uF 16V 20% 85C	1	C61
182	012-E477B00-30000	E-CAP [6x12] 470uF 10V 20% 85C	2	C87.130
183	012-U228C00-30000	E-CAP [10x30] 2200uF 16V 85C	1	GND1
184	013-A103A00-40000	MYLAR CAP 10% 0.01uF	2	C1.15
185	013-A223A00-40000	MYLAR CAP 0.022uF 50V 10%	2	C69.70
186	013-B102A00-30000	POLY CAP 1000PF 50V 5%	1	C16
187	015-H010300-E0000	SEMI-FIXED 6MM 3PIN H-TYPE SC-065 10KB (CERAMIC)	1	VR3
188	015-H020300-E0000	SEMI-FIXED 6MM 3PIN H-TYPE SC-065 20KB (CERAMIC)	2	VR2.4
189	015-H050300-E0000	SEMI-FIXED 6MM 3PIN H-TYPE SC-065 50KB (CERAMIC)	1	VR1
190	016-C030000-60000	TRIMMER CAP DIA=6MM 30PF +50-0% N750+/-500	1	C8
191	017-B010700-40000	CER FILTER 10.7MJA	1	C2
192	023-A005000-RD000	LED RED 5mm	1	D20
193	025-TA04000-38500	4P TACT SW H=3.85 169G/F	1	KEY
194	033-S150000-BN000	S.SHIELD WIRE #28 150MM (3+144+3)BROWN	1	
195	033-S100000-GY000	S.SHIELD WIRE #28 100MM(3+94+3) GREY	1	
196	035-B040000-BK100	JUMPER WIRE AWG#20 40mm BLACK(3+40+3)	1	
197	035-B120000-BK100	JUMPER WIRE AWG#20 120mm BLACK(3+120+3)	1	
198	036-A020000-04000	4PIN WAFER P=2.0mm	1	CON5
199	036-A020000-07000	7PIN WAFER P=2.0mm	1	CON1
200	036-D010000-16300	16P P=1.0 connector 90~	1	CON4
201	036-D010000-17300	17P P=1.0 connector 90~	1	CON2
202	046-0042600-00000	RCA-426 2RED+2WHITE JACK	1	
203	221-S004000-04000	BARE WIRE D=0.4x40mm	130	
204	230-100BK00-10000	PLASTIC TIE l=100mm	1	
	S01-7601S00-W00000-EU7	MW/FM,RDS,MP3,USB/MMC/SD,40Wx4,2IN/2O,ISO OIRT	1	
205	001-7601S00-W0000	PCB CD-7600-D USB H/P MAIN [REV-1]	1	
206	003-0387500-G0000	TR-NPN-SMD KTC3875S/2SC-5343S/F [SOT-23]	15	Q18.2.15.14.4.33.12.37.13.25.24.27.20.16.7
207	004-0414800-S0000	CHIP-DIODE [0805] CD4148	8	D1.4.41.11.10.5.13.14
208	004-B160M00-S0000	SHOTTKY DIODE RB160M-30 30V1A [SOD-106]	2	R210.D3.

209	010-H001600-00000	CHIP INDUCTOR [0805] 1uH 10% 50mA DCR<=0.4R	1	C136
210	011-S100A00-20000	CHIP RES [0805] 10 OHM ±5%	1	R116.
211	011-S101A00-20000	CHIP RES [0805] 100 OHM ±5%	4	R118.119.120.179
212	011-S102A00-20000	CHIP RES [0805] 1K OHM ±5%	11	R24.68.71.20.37.38.177.144.178.(AM R104.R159)
213	011-S103A00-20000	CHIP RES [0805] 10K OHM ±5%	21	R166.142.148.141.77.117.101.86.61.56.64.60.76.92.78.150.41.25.167.149.(AM R29)
214	011-S104A00-20000	CHIP RES [0805] 100K OHM ±5%	5	R97.99.173.176.17.
215	011-S105A00-20000	CHIP RES [0805] 1M OHM ±5%	4	R180.96.103.107
216	011-S122A00-20000	CHIP RES [0805] 1.2K OHM ±5%	2	R135.134
217	011-S123A00-20000	CHIP RES [0805] 12K OHM ±5%	2	R153.26.
218	011-S151A00-20000	CHIP RES [0805] 150 OHM ±5%	1	R67
219	011-S152A00-20000	CHIP RES [0805] 1.5K OHM ±5%	4	R85.87.82.66
220	011-S153A00-20000	CHIP RES [0805] 15K OHM ±5%	3	R8.9.12.
222	011-S220A00-20000	CHIP RES [0805] 22 OHM ±5%	3	R54.31.28
223	011-S221A00-20000	CHIP RES [0805] 220 OHM ±5%	2	R90.18
224	011-S222A00-20000	CHIP RES [0805] 2.2K OHM ±5%	4	R152.151.59.158
	011-S183A00-20000	CHIP RES [0805] 18K OHM ±5%	2	R22.23.
225	011-S223A00-20000	CHIP RES [0805] 22K OHM ±5%	12	R80.6.146.81.7.11.15.74.125.45.65.(AM R32)
226	011-S224A00-20000	CHIP RES [0805] 220K OHM ±5%	3	R94.102.14
227	011-S271A00-20000	CHIP RES [0805] 270 OHM ±5%	1	R105
228	011-S272A00-20000	CHIP RES [0805] 2.7K OHM ±5%	1	R100.
229	011-S330A00-20000	CHIP RES [0805] 33 OHM ±5%	4	R13.147.21.172
230	011-S331A00-20000	CHIP RES [0805] 330 OHM ±5%	1	R5
231	011-S332A00-20000	CHIP RES [0805] 3.3K OHM ±5%	5	R140.115.161.162.163
232	011-S333A00-20000	CHIP RES [0805] 33K OHM ±5%	2	R16.40
233	011-S334A00-20000	CHIP RES [0805] 330K OHM ±5%	4	R58.57.73.70
234	011-S471A00-20000	CHIP RES [0805] 470 OHM ±5%	3	R91.72.30
235	011-S472A00-20000	CHIP RES [0805] 4.7K OHM ±5%	3	R75.175.(AM R33)
236	011-S473A00-20000	CHIP RES [0805] 47K OHM ±5%	16	R169.157.69.89.49.50.42.43.48.47.154.155.10.106.95.34.
	011-S563A00-20000	CHIP RES [0805] 56K OHM ±5%	2	R164.165.
	011-S512A00-20000	CHIP RES [0805] 5.1K OHM ±5%	1	R84.
237	011-S562A00-20000	CHIP RES [0805] 5.6K OHM ±5%	8	R79.127.126.128.129.36.35.19
238	011-S681A00-20000	CHIP RES [0805] 680 OHM ±5%	2	R156.114
239	011-S820A00-20000	CHIP RES [0805] 82 OHM ±5%	1	R123
240	011-S821A00-20000	CHIP RES [0805] 820 OHM ±5%	2	R27.62
241	011-S822A00-20000	CHIP RES [0805] 8.2K OHM ±5%	4	R51.44.46.55
242	014-S101C00-50000	CHIP CAP [0805] 100PF 50V 10%	6	C11.100.31.32.103.14.
243	014-S102C00-50000	CHIP CAP [0805] 102P (0.001uF) 50V ±10%	7	C123.58.80.77.59.142.143.
244	014-S103C00-60000	CHIP CAP [0805] 103P (0.01uF) 50V 20%	8	C109.138.40.57.60(AM C18.23.99)
245	014-S104B00-80000	CHIP CAP [0805] 104P (0.1uF) 25V +80-20%	18	C65.41.46.45.44.43.127.38.37.89.85.66.26.24.111.107.3.110
246	014-S150C00-A0000	CHIP CAP [0805] 15PF 50V 10% NPO	1	C10
247	014-S200C00-A0000	CHIP CAP [0805] 20PF 50V 10% NPO	1	C2
248	014-S222C00-50000	CHIP CAP [0805] 222P (0.0022uF) 50V 10%	3	C21.22.13
249	014-S223C00-60000	CHIP CAP [0805] 223P (0.022uF) 50V 20%	5	C6.9.5.12.88
250	014-S271C00-50000	CHIP CAP [0805] 271P (270PF) 50V 10%	1	C25
251	014-S272C00-50000	CHIP CAP [0805] 272P (0.0027) 50V 10%	2	C30.36
252	014-S300C00-A0000	CHIP CAP [0805] 30PF 50V 10% NPO	2	C27.20
253	014-S330C00-A0000	CHIP CAP [0805] 33PF 50V 10% NPO	1	C101
255	014-S473C00-60000	CHIP CAP [0805] 473P (0.047uF) 50V 20%	1	C7
256	014-S561C00-50000	CHIP CAP [0805] 561P (560PF) 50V 10%	1	C19
	H04-3300D00-A90000-000	CD3300D ISO BOARD HAND INSERT	1	
257	001-3300D00-A9000	P.C.B ISO BOARD	1	
258	004-0540400-00000	DIODE IN5404/IN5403	1	
259	036-K025000-12000	12Pin P=2.5mm PCB Connector Right Angle	1	
260	263-3300000-A0000	TERMINAL-FUSE	2	COPPER NICKEL
261	263-3300000-B0000	TERMINAL-CONTACT	12	COPPER NICKEL

262	485-3300A00-8BK00	FIXED-ISO-CONNECTOR-MODIFY	1	FLAME RETARDANT AND 30% GLASSFIBER REINFORCED NYLON 66 (BLACK)
	H07-7600D00-B00000-000	CCD7600 USB/MMC BOARD HISEM	1	
263	001-7600D00-B0000	PCB CD-7600-D USB/SD CON [REV-2]	1	
264	029-7S02100-00F00	SMD SD/MMC CARD SOCKET [P7S021P18]	1	
265	029-F083600-00C00	USB-A SOCKET L-DIP & PCB TYPE NO:MJE-P-0836	1	
266	036-K020000-13000	13Pin P=2.0mm PCB Connector Right Angle	1	
	H0B-7600S00-C00000-000	CCD7600 CONNECTOR BOARD HAND INSERT	1	
267	001-7600S00-C0000	PCB CD-7600-D CONNECTOR [REV-0]	1	
268	023-A003000-RD300	LED Super Bright 3mm 3.6V 20mA RED	1	D1
269	025-TA02000-26000	TACT-SW 2P TP-1126C 3X6MM H=2.6MM DIP TYPE	1	
270	031-0050U00-15000	FFC 15P 1.25PT L=(3+50+3) FOR CD7500	1	
271	036-J020000-18000	DETACHABLE CON 18P P=2.0mm SOCKET	1	
	F02-CCD7600-000000-002	CCD7600-D FRONT PANEL WITH REMOTE(LCD 2480)	1	
272	209-3810A00-D0000	CRE-3810 FF/REW SPRING D4.0XL12.0 [8TsX0.3T]	1	
273	209-7500000-T0000	SHAFT-BASE-SPRING CD-7500 D3.35XL8.0X0.35T	2	
274	225-7600A00-03000	CD-7600 PAD CORK 7X4X3MM W/ADHESIVE	1	
275	253-3897000-A0000	RUBBER-BAND	1	
276	234-PA02000-08B00	SCREW PA 2x8 BLACK	4	
277	245-1198000-BBK00	1198 CONNECTOR COVER SHEET	1	
278	402-7600B00-1BK00	CD-7600 NOSE PIECE	1	
279	402-7600C00-3CR00	CD-7600 NOSE PIECE BACK	1	
280	413-7600A00-2CR00	CD-7600 WINDOW	1	
281	413-7600F00-2CR00	CD-7600 REMOTE-LENS [ACRYLIC]	1	
282	425-7600A00-1NL00	CD-7600 EQ-MD-KNOB [ABS]	1	
283	427-7600A00-1NL00	CD-7600 POWER-MU-KNOB [ABS]	1	
284	428-7801C00-1BK00	CD-7801 VOLUME-KNOB	1	
285	439-7600A00-1NL00	CD-7600 REL-KNOB [ABS]	1	
286	446-7600A00-1NL00	CD-7600 PAU-AF KNOB [ABS]	1	
287	457-7600A00-1NL00	CD-7600 UP-DOWN KNOB [ABS]	1	
288	462-7600C00-9BK00	CD-7600 RELEASE-SHAFT-BASE-LEFT [POM BLACK]	1	POM BLACK
289	462-7600D00-9BK00	CD-7600 RELEASE-SHAFT-BASE-RIGHT [POM BLACK]	1	POM BLACK
290	483-7600A00-1NL00	CD-7600 ELECTRO-A	1	
291	483-7600B00-1NL00	CD-7600 ELECTRO-B	1	
292	494-7600L00-1NL00	CD-7600 ORNAMENT-L (FASE-KNOB) [ABS]	1	
293	494-7600R00-1NL00	CD-7600 ORNAMENT-R (FASE-KNOB) [ABS]	1	
	H03-7600D00-S20000-002	CCD7600-D FRONT BOARD WITH REMOTE(LCD 2480)	1	
294	008-TA2480B-TN054	LCD DISPLAY TA2480BMTTN-P 54PIN FOR CD-7600-D	1	
295	025-TA02000-43000	TACT SW TA-02 2P 6.5X3.5 H=4.3MM 200G	18	
296	036-H020000-18000	DETACHABLE CON 18P P=2.0mm PLUG	1	
297	044-638CB00-00000	IR RECIVER 3PIN ANGLE TYPE FOR REMOTE	1	
298	049-E114100-05000	VOL 12mm Encoder Sw 30DET 15PUS E1141A3A L=11.5	1	
299	227-3896G00-25000	SENSOR SPONGE 227-3896G-250 EVA	1	
300	243-3896000-Q0000	CD-3896 VFD-SIDE-COVER-L BLACK [PAPER 0.1T]	1	PAPER T=0.1MM
301	245-3300000-D0000	LED FILTER-"T-SHAPE" 20x12MM [0.1T/TRACING FILM]	2	
302	245-7500000-A0000	CD-7500 REFLECTOR-PAPER	1	PET T=0.1 WHITE TOOLING SAME LCD FILTER
303	245-7500000-B0000	CD-7500 LCD-FILTER	1	DRAW PAPER T=0.1
304	245-7500000-C0000	CD-7500 LED-SIDE-COVER SHEET	1	GLOSS SILVER PAPER
305	246-WE14200-04400	SIDE-REFLECTIONAL-PAPER	2	GLOSS SILVER
306	414-7500P00-2CR00	CD-7500LCD-REFLECTOR [PMMA CLEAR]	1	
307	414-7600Q00-2CR00	CD-7600 ORNAMENT-LENS [PMMA]	1	
	S03-7600D00-S20000-002	CCD7600-D FRONT BOARD SMT WITH REMOTE(LCD 2480)	1	
308	001-7500D00-A6000	PCB CD-7500 LED	1	
309	001-7600D00-S2000	PCB CD-7600-D RDS FRONT [REV-1]	1	
310	002-0652300-H0000	IC PT6523LQ/DSD2030 LCD DRIVER 1/3 DUTY [LQFP64]	1	U1
311	011-C221A00-20000	CHIP RES [1206] 220 OHM 5%	1	R29

312	011-C561A00-20000	CHIP RES [1206] 560 OHM $\oplus$ 5%	1	R26
313	011-S102A00-20000	CHIP RES [0805] 1K OHM $\oplus$ 5%	2	R9.21
314	011-S122A00-20000	CHIP RES [0805] 1.2K OHM $\oplus$ 5%	1	R33
315	011-S152A00-20000	CHIP RES [0805] 1.5K OHM $\oplus$ 5%	2	R10.22
316	011-S181A00-20000	CHIP RES [0805] 180 OHM $\oplus$ 5%	2	R16.35
317	011-S221A00-20000	CHIP RES [0805] 220 OHM $\oplus$ 5%	3	R17.5.3
318	011-S222A00-20000	CHIP RES [0805] 2.2K OHM $\oplus$ 5%	2	R23.11
319	011-S331A00-20000	CHIP RES [0805] 330 OHM $\oplus$ 5%	2	R18.6
320	011-S332A00-20000	CHIP RES [0805] 3.3K OHM $\oplus$ 5%	2	R12.24
321	011-S471A00-20000	CHIP RES [0805] 470 OHM $\oplus$ 5%	2	R19.7
322	011-S472A00-20000	CHIP RES [0805] 4.7K OHM $\oplus$ 5%	4	R31.30.25.13
323	011-S473A00-20000	CHIP RES [0805] 47K OHM $\oplus$ 5%	1	R32
324	011-S513A00-20000	CHIP RES [0805] 51K OHM $\oplus$ 5%	1	R15
325	011-S681A00-20000	CHIP RES [0805] 680 OHM $\oplus$ 5%	8	R34.4.8.2.1.27.28.20
326	011-S822A00-20000	CHIP RES [0805] 8.2K OHM $\oplus$ 5%	1	R14
327	014-S104B00-80000	CHIP CAP [0805] 104P (0.1uF) 25V +80-20%	2	C1.2
328	014-S681C00-50000	CHIP CAP [0805] 681P (680PF) 50V 10%	1	C3
329	023-D000000-BE000	SMT LED [0603] BJS170TS-JPH BLUE	13	
330	023-F283500-WE200	SMT LED (2.8x3.5x1.9MM) WHITE NO:SBS-1311-WD-T2	1	
	P02-CCD7600-260402-RU1	CD7600DRDS/MW/FM/OIRT[ELENBERG MX-380USB]-64124T	1	
331	060-7600051-260303A	REMOTE 7600D MP3 USB MMC[ELENBERG MX-380USB]	1	
332	061-CR20250-B0000	BUTTON LITHIUM BATTERY CR2025 3.0V	1	
333	212-5209000-14S00	SPRING WASHER (ϕ 5.2)	2	ACC:2
334	212-5210000-05P00	PLATE WASHER (ϕ 5.2)	2	ACC:2
335	217-1001E00-E1200	MOUNTING STRIP	1	EGI T=1.2mm
336	222-3896S00-E0600	SLEEVE-CASE	1	EGI T=0.6mm
337	227-7803000-EA500	CD-7803 CASE CUSHION (BLACK W/ ADHESIVE TAPE)	1	SPONGE T=15mm
338	233-N050W00-H0000	HEX NUT: M5	1	ACC:1
339	234-PA05000-16000	SCREW TS 5x16 PA	1	ACC:1
340	235-3896000-H1000	CD-3896 SET KEY [EGI-1.0T]	2	EGI T=1.0mm
341	301-0C02500-08000	POLY BAG OPEN 2.5"x8"XT0.04	1	
342	301-0C06600-10500	POLY BAG 6-5/8" X 10-1/2" X 0.04MM THK [PE]	1	
343	301-0C11000-14000	POLY BAG 11"x14"XT0.04	1	
344	303-CCD01A0-PS060	POLYFOAM MTR/ETR 280x86x56 FOR CAR AUDIO	2	
345	304-7600051-260303A	GIFT BOX CD-7600D RDS/A/F/OIRT(ELENBERG MX-380USB)	1	
346	305-7600051-260303A	I/M CD-7600D RDS/MW/FM/OIRT (ELENBERG MX-380USB)	1	
347	306-7600051-260303A	CARTON 6PCS 7600D M/F/R/OIRT[ELENBERG MX-380USB]	1	
348	308-7600051-260303A	TOP LABEL 7600D RDS/M/F/OIRT[ELENBERG MX-380USB]	1	
349	311-210X150-0510000	WARRANTY CARD 210X150 [ELENBERG]	1	
350	315-029X025-LSB001A	LASER BEAM LABEL 29X25 YEL/BLK [LASER SYMBOL]	1	
351	315-050X025-CAS003A	CLASS1 LABEL 50X25 YEL/BLK(6-LANG)	1	
352	315-050X030-CAU001A	LASER CAUTION LB 50x30 YEL/BLK(6-LANG)	1	
353	315-134X030-WAR001A	WARRANTY LABEL 134X30 GOLD W/BLK (5-LANG)	1	
354	402-3300S00-4BK00	CD-3300 NOSE-PIECE-CASE [PP BLACK]	1	PP BLACK
355	441-7500A00-1BK00	CD-7500 TRIM COVER [ABS BLACK]	1	ABS BLACK