


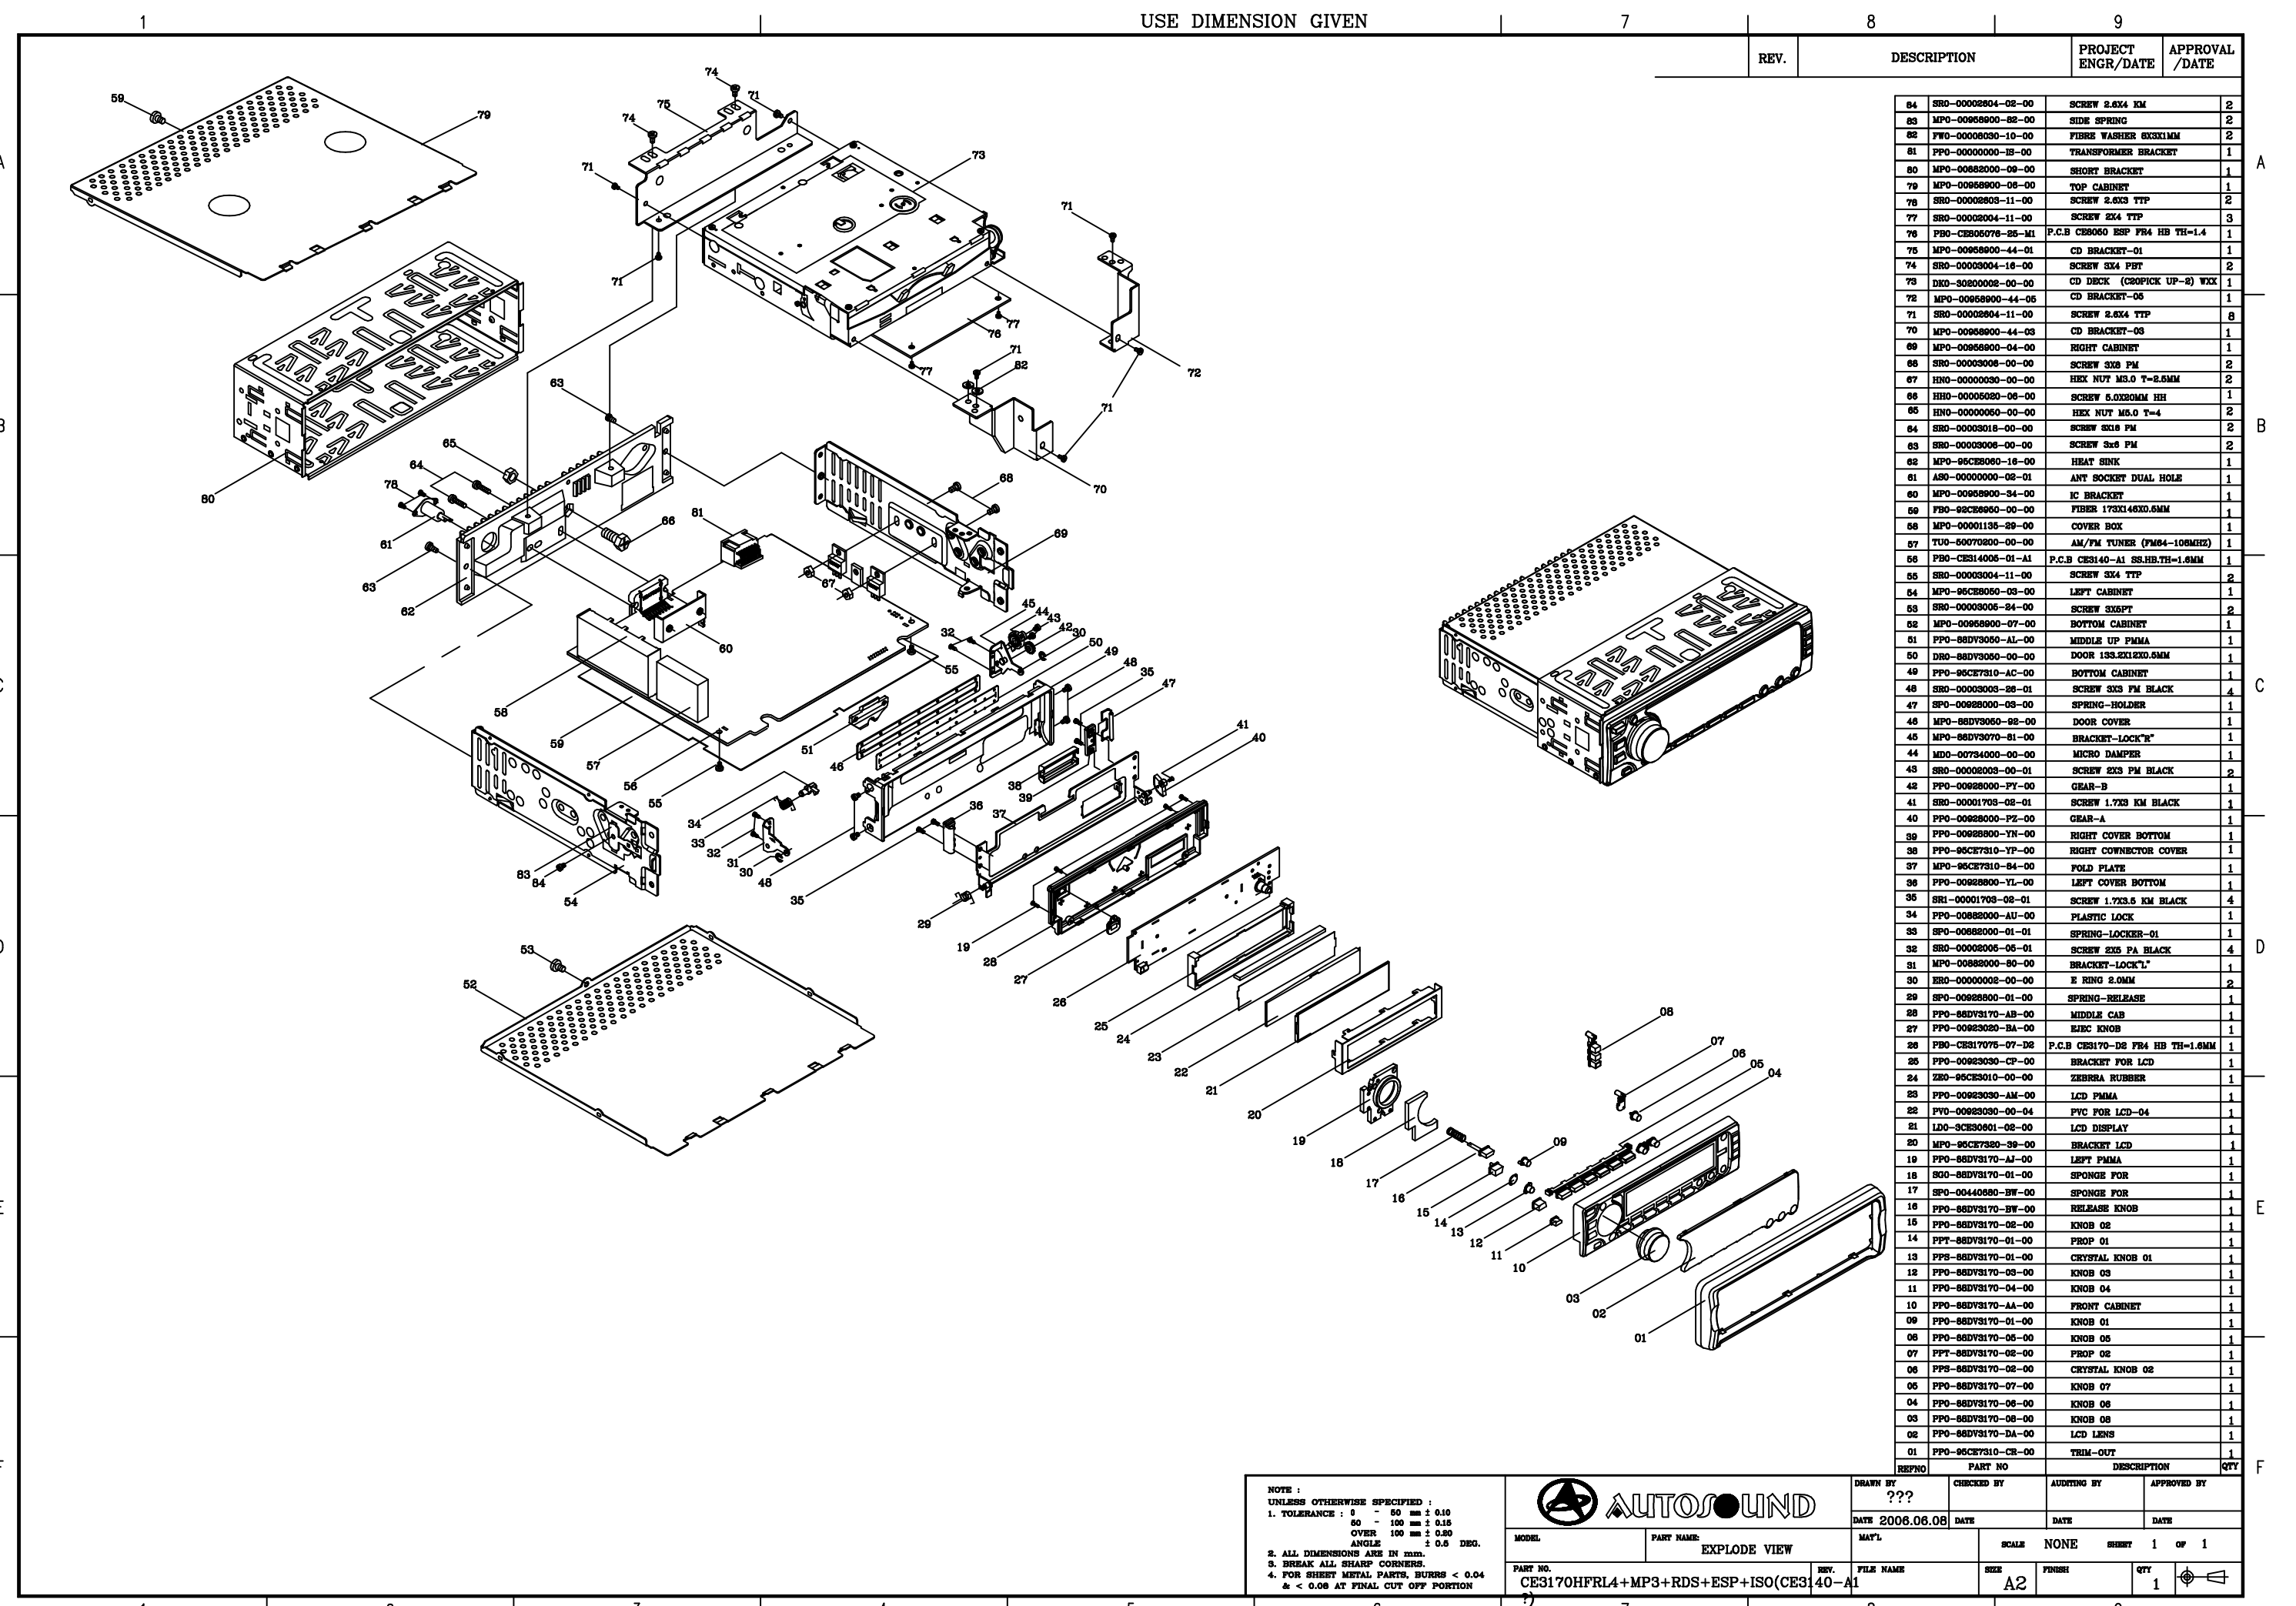

REV.	DESCRIPTION	PROJECT ENGR/DATE	APPROVAL /DATE
84	SRO-00002804-02-00	SCREW 2.5X4 KM	2
83	MP0-00068800-02-00	SIDE SPRING	2
82	FW0-00008030-10-00	FIBRE WASHER 6X3X1MM	2
81	FP0-00000000-18-00	TRANSFORMER BRACKET	1
80	MP0-00068800-09-00	SHORT BRACKET	1
79	MP0-00068800-06-00	TOP CABINET	1
78	SRO-00008803-11-00	SCREW 2.6X3 TTP	2
77	SRO-00002804-11-00	SCREW 2X4 TTP	3
76	FB0-CES050778-25-M1	P.C.B CES050 ESP FR4 HB TH=1.4	1
75	MP0-00068800-44-01	CD BRACKET-01	1
74	SRO-00009004-16-00	SCREW 3X4 PBT	2
73	DK0-30200002-00-00	CD DECK (C20PICK UP-8) WXX	1
72	MP0-00068800-44-05	CD BRACKET-05	1
71	SRO-00002804-11-00	SCREW 2.6X4 TTP	8
70	MP0-00068800-44-03	CD BRACKET-03	1
69	MP0-00068800-04-00	RIGHT CABINET	1
68	SRO-00003006-00-00	SCREW 3X8 PM	2
67	HNO-00000030-00-00	HEX NUT M3.0 T=2.5MM	2
66	HNO-00005020-06-00	SCREW 6.0X20MM HH	1
65	HNO-00000050-00-00	HEX NUT M5.0 T=4	2
64	SRO-00003018-00-00	SCREW 3X16 PM	2
63	SRO-00003006-00-00	SCREW 3x8 PM	2
62	MP0-96CE8080-16-00	HEAT SINK	1
61	AS0-00000000-02-01	ANT SOCKET DUAL HOLE	1
60	MP0-00068800-34-00	IC BRACKET	1
59	FB0-92CE8060-00-00	FIBER 173X148X0.5MM	1
58	MP0-00001135-29-00	COVER BOX	1
57	TU0-50070200-00-00	AM/FM TUNER (FM84-106MHZ)	1
56	FB0-CES14005-01-A1	P.C.B CES140-A1 SS.HB.TH=1.6MM	1
55	SRO-00003004-11-00	SCREW 3X4 TTP	2
54	MP0-96CE8060-03-00	LEFT CABINET	1
53	SRO-00003005-24-00	SCREW 3X5PT	2
52	MP0-00068800-07-00	BOTTOM CABINET	1
51	FP0-88DV3050-A1-00	MIDDLE UP PMMA	1
50	DR0-88DV3050-00-00	DOOR 133.2X120.5MM	1
49	FP0-96CE7310-AC-00	BOTTOM CABINET	1
48	SRO-00003003-28-01	SCREW 3X3 FM BLACK	4
47	SP0-00088000-03-00	SPRING-HOLDER	1
46	MP0-88DV3050-02-00	DOOR COVER	1
45	MP0-88DV3070-81-00	BRACKET-LOCK"R"	1
44	MD0-00734000-00-00	MICRO DAMPER	1
43	SRO-00002003-00-01	SCREW 2X3 PM BLACK	2
42	FP0-00088000-PY-00	GEAR-B	1
41	SRO-00001703-02-01	SCREW 1.7X3 KM BLACK	1
40	FP0-00088000-PX-00	GEAR-A	1
39	FP0-00088000-YN-00	RIGHT COVER BOTTOM	1
38	FP0-96CE7310-YP-00	RIGHT COWNECTOR COVER	1
37	MP0-96CE7310-84-00	FOLD PLATE	1
36	FP0-00088000-YL-00	LEFT COVER BOTTOM	1
35	SRI-00001703-02-01	SCREW 1.7X3.5 KM BLACK	4
34	FP0-00088000-AU-00	PLASTIC LOCK	1
33	SP0-00088000-01-01	SPRING-LOCKER-01	1
32	SRO-00002005-05-01	SCREW 2X5 PA BLACK	4
31	MP0-00088000-80-00	BRACKET-LOCK"L"	1
30	ERO-00000002-00-00	E RING 2.0MM	2
29	SP0-00088000-01-00	SPRING-RELEASE	1
28	FP0-88DV3170-AB-00	MIDDLE CAB	1
27	FP0-00088000-BA-00	EXEC KNOB	1
26	FB0-CES17075-07-D2	P.C.B CES170-D2 FR4 HB TH=1.6MM	1
25	FP0-00088000-CF-00	BRACKET FOR LCD	1
24	ZB0-95CE8010-00-00	ZEBBRA RUBBER	1
23	FP0-00088000-AM-00	LCD PMMA	1
22	FP0-00088000-00-04	PVC FOR LCD-04	1
21	LDO-95CE80601-02-00	LCD DISPLAY	1
20	MP0-96CE7320-38-00	BRACKET LCD	1
19	FP0-88DV3170-AJ-00	LEFT PMMA	1
18	SQ0-88DV3170-01-00	SPONGE FOR	1
17	SP0-00440880-BW-00	SPONGE FOR	1
16	FP0-88DV3170-BW-00	RELEASE KNOB	1
15	FP0-88DV3170-02-00	KNOB 02	1
14	PPT-88DV3170-01-00	PROP 01	1
13	PPS-88DV3170-01-00	CRYSTAL KNOB 01	1
12	FP0-88DV3170-03-00	KNOB 03	1
11	FP0-88DV3170-04-00	KNOB 04	1
10	FP0-88DV3170-AA-00	FRONT CABINET	1
09	FP0-88DV3170-01-00	KNOB 01	1
08	FP0-88DV3170-05-00	KNOB 05	1
07	PPT-88DV3170-02-00	PROP 02	1
06	PPS-88DV3170-02-00	CRYSTAL KNOB 02	1
05	FP0-88DV3170-07-00	KNOB 07	1
04	FP0-88DV3170-06-00	KNOB 06	1
03	FP0-88DV3170-08-00	KNOB 08	1
02	FP0-88DV3170-DA-00	LCD LENS	1
01	FP0-96CE7310-CR-00	TRIM-OUT	1
REFNO	PART NO	DESCRIPTION	QTY

NOTE :
UNLESS OTHERWISE SPECIFIED :
1. TOLERANCE : 0 - 50 mm ± 0.10
50 - 100 mm ± 0.15
OVER 100 mm ± 0.20
ANGLE 100 mm ± 0.5 DEG.
2. ALL DIMENSIONS ARE IN mm.
3. BREAK ALL SHARP CORNERS.
4. FOR SHEET METAL PARTS, BURRS < 0.04
& < 0.06 AT FINAL CUT OFF PORTION

MODEL

PART NAME

EXPLODE VIEW

PART NO

CE3170HFR14+MP3+RDS+ESP+ISO(CE3140-A1

REV.

7

DRAWN BY

DATE

2006.06.08

CHECKED BY

DATE

2006.06.08

AUDITING BY

DATE

2006.06.08

APPROVED BY

DATE

2006.06.08

SCALE

NONE

SHEET

1

OF

1

FILE NAME

SIZE


A2

FINISH

QTY

1

CE3170-D2(790S)貼片圖

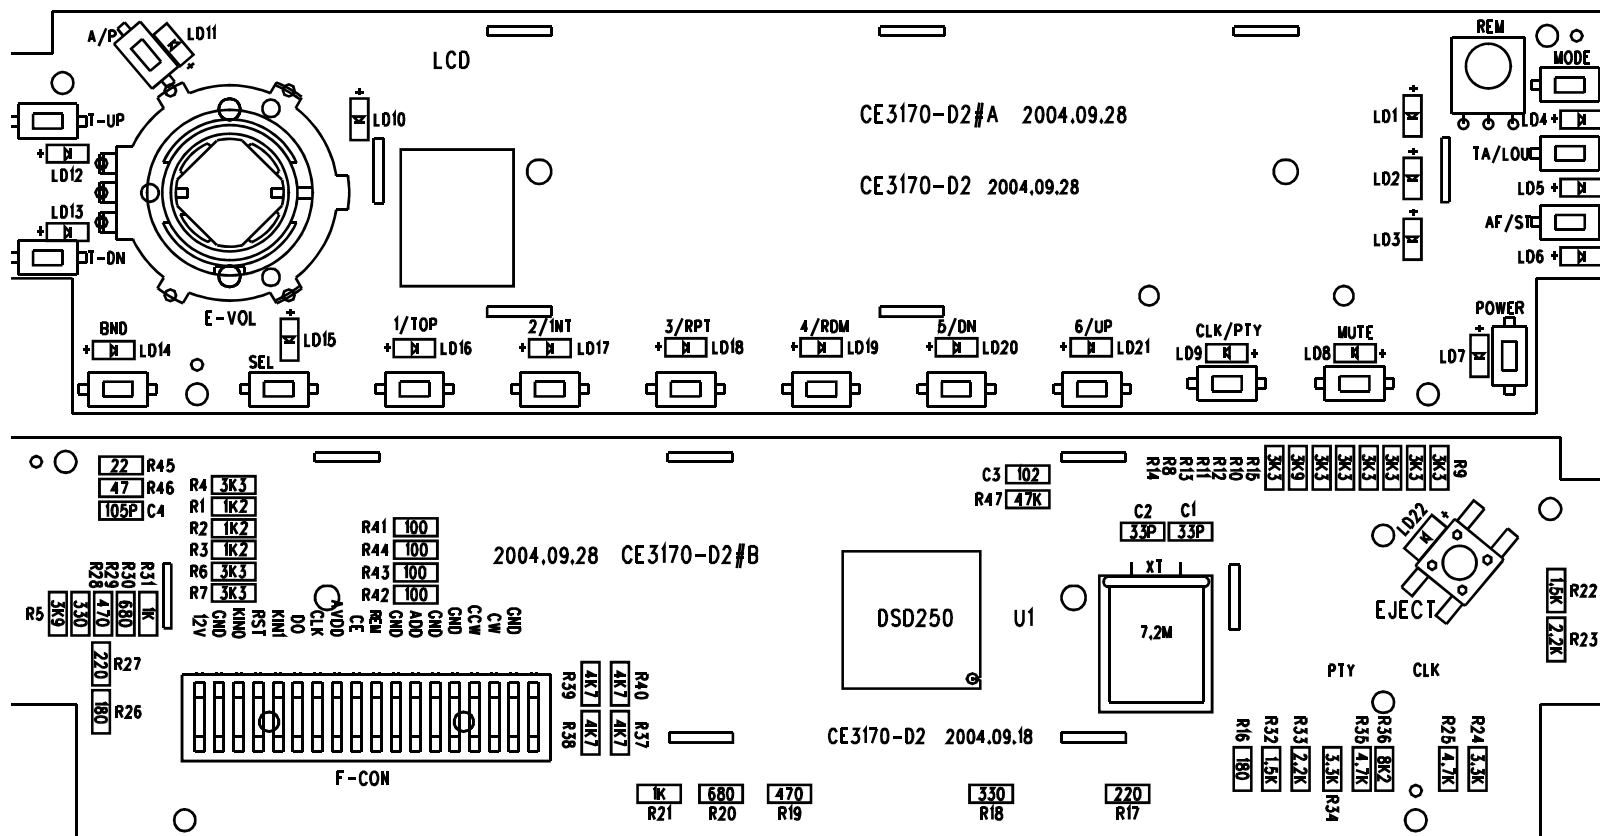

制圖

審核

確認

注:做CD時連CLK,加RDS時取消CLK,連PTY.

AUTOSOUND ELECTRONICSLTD

永合电子有限公司

SPECIFICATIONS

电气技术指标

MODEL NUMBER (型号): H-CDM8067 RDS (大功率)
 DESCRIPTION (类别): 汽车 CD 机
 DATE (日期): _____
 TEST CONDITION (测试条件): _____
 SUPPLY VOLTAGE (电源电压) : 14.4V
 LOAD IMPESANCE (负载阻抗) : 40HM
 REFERENCE OUTPUT (参考电平) : 1W
 DEVIATION (调频频偏) : 22.5KHz 1KHz
 DUMMY ANTENNA (等效天线) : DIRECT THROUGH IN

FM SECTION

	ITEMS	UNIT	NORMAL	LIMIT	TEST
1	Frequency Range				
	Low End	MHz	87.5	87.5	
	High End	MHz	108	108	
2	Intermediate frequency	MHz	10.7	+/-0.04	
3	Useable Sensitivity 30dB S/N				
	90.1MHz	dB	8	12	
	98.1MHz	dB	8	12	
	106.1MHz	dB	8	12	
4	IF Rejection 90.1MHz	dB	70	>60	
5	Image Rejection 106.1MHz	dB	60	>45	
6	-3dB Limiting Sensitivity 98.1MHz	dB	8	15	
7	S/N Ratio @1mv 98.1MHz	dB	55	45	
8	Auto Seek Sens (DX) 98.1MHz	dB	25	+/-5	
9	LO/DX Effect 98.1MHz	dB	20	+/-10	
10	THD @1mV 22.5KHz Dev 98.1MHz	%	1	1.5	
	75KHz Dev	%	2	3	
11	Frequency Response -6dB 98.1MHz	Hz	20	100	
	With 50us Pre-emphasis	KHz	5	4	
12	Stereo Indicator Sensitivity ON Sens 98.1MHz	dB	10	20	
13	Stereo Separation 1mV Input 98.1MHz	dB	35	25	
14	Channel Balance 10KHz	dB	1	3	
15	10% Output Power	W	25	20	
16	Maximum Output Power 1mV 75KHz Dev	W	40	35	
17	Stereo S/N Ratio 1mV Input	dB	35	30	
18	AM Suppression 98.1MHz	dB	35	>30	
19	RDS SEEK STOP SENSE	dB	40	50	

制表 : _____

审核 : _____

确认 : _____

AUTOSOUND ELECTRONICS LTD

永合电子有限公司

SPECIFICATIONS

电气技术指标

MODEL: H-CDM8067 RDS (大功率)

DATE: _____

TEST CONDITION(测试条件):

SUPPLY VOLTAGE (电源电压) : 14.4V
 LOAD IMPEDANCE (负载阻抗) : 40HM
 REFERENCE OUTPUT(参考电平) : 1W
 MODULATION (调制频偏) : 30% 400Hz
 DUMMY ANTENNA (等效天线) : 15PF/60PF SHUNT

AM Section

	ITEMS	UNET	NORMAT	LIMIT	TEST
1	Frequency Range Low End High End	KHz KHz	522 1620	522 1620	
2	Intermediate Frequency	KHz	450	+/-1	
3	Maximum Sensitivity 603KHz 999KHz 1404KHz	dB dB dB	30 30 30	40 40 40	
4	Useable Sensitivity 20dB S/N 603KHz 999KHz 1404KHz	dB dB dB	30 30 30	40 40 40	
5	IF Rejection 603KHz	dB	55	>50	
6	Image Rejection 1 404KHz	dB	55	45	
7	Bandwidth-6dB 999KHz	KHz	5	3-8	
8	ACA) 10KHz 999KHz	dB	35	35+/-10	
9	AGC figure of merit @100mV 999KHz	dB	70	50	
10	S/N Ratio @5mV 999KHz	dB	45	35	
11	Auto Seek Sensitivity 999KHz	dB	38	+/-6	
12	LO/DX Effect 999KHz	dB	20	+/-10	
13	THD @5mV 999KHz	%	1	3	
14	Overload Distortion @ 5mV 80% Mod 999KHz	%	1.5	5	
15	Fidelity-6dB @5mV 999KHz	Hz Hz	50 2500	100 1800	
16	10% Output Power	W	25	20	
17	Maximum Output Power 5mV 80% Mod	W	40	35	

制表 : _____

审核 : _____

确认 : _____

AUTOSOUND ELECTRONICS LTD

永合电子有限公司

SPECIFICATIONS

电气技术指标

MODEL: H-CDM8067 RDS (大功率)

DATE: _____

TEST CONDITION (测试条件):

SUPPLY VOLTAGE (电源电压)

:14.4V

LOAD IMPEDANCE (负载阻抗)

:40HM

REFERENCE OUTPUT(参考电平)

:1W

CD STANDADR TEST DISC(标准测试碟)

: SONY YEDS-18(TYPE4)

A.BEX TCD-784




CD Section

NO	ITEMS		TNO	RECONDING LEVEL		UNIT	NORMAL	LIMIT	TEST
1	Output Power	Max	2	1KHz	0dB	W	40	35	
		10%THD	2	1KHz	0dB	W	25	20	
2	Frequency Response		3	20Hz	0dB	dB	+/-2	+/-5	
			4	100Hz	0dB	dB	+/-1	+/-3	
			5	10KHz	0dB	dB	+/-1	+/-3	
			6	20KHz	0dB	dB	+/-2	+/-5	
3	S/N Ratio		7	1KHz	0dB	dB	60	50	
4	Channel Unbalance		2	1KHz	0dB	dB	0	+/-3	
5	Channel Separation		8	1KHz	(L)	dB	50	40	
			10	1KHz	(R)	dB	50	40	
			9	10KHz	(L)	dB	50	40	
			11	10KHz	(R)	dB	50	40	
6	Distortion		2	1KHz	0dB	%	0.5	1	
7	Gain Ratio FM 75KHz 1KHz 1mv (MW LW)80% Mod 1KHz 5mv	FM	1KHz	0dB	dB	4	+/-2		
		AM	1KHz	0dB	dB	4	+/-2		
8	RCA Line Out Level S.T.O			1KHz	0dB	mV	1200	+/-300	
9	Bass Treble Effect		4	100Hz		dB	+/-10	+/-7	
			5	10KHz		dB	+/-10	+/-7	
10	Loudness Effect		4	100Hz		dB	8	+/-3	
11	Skip Test			Interruption		mm	1	0.8	
				Black dots		mm	1	0.8	
				Finger Prints		um	75	65	

制表:____ _

审核 :_____

确认 :_____

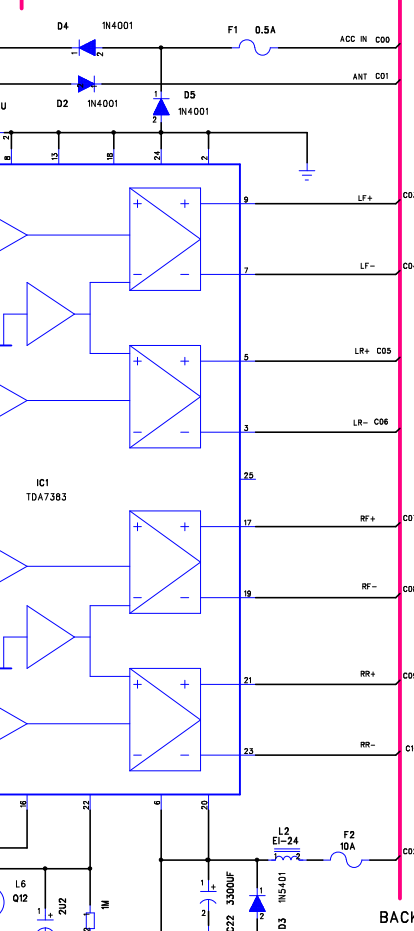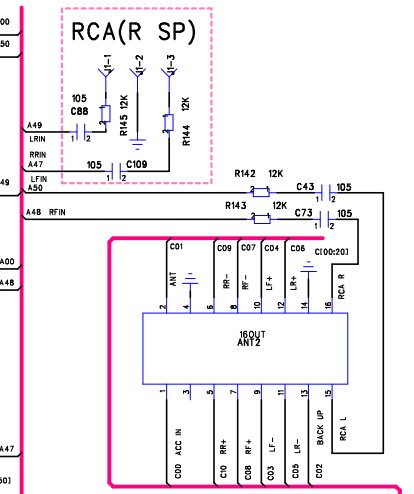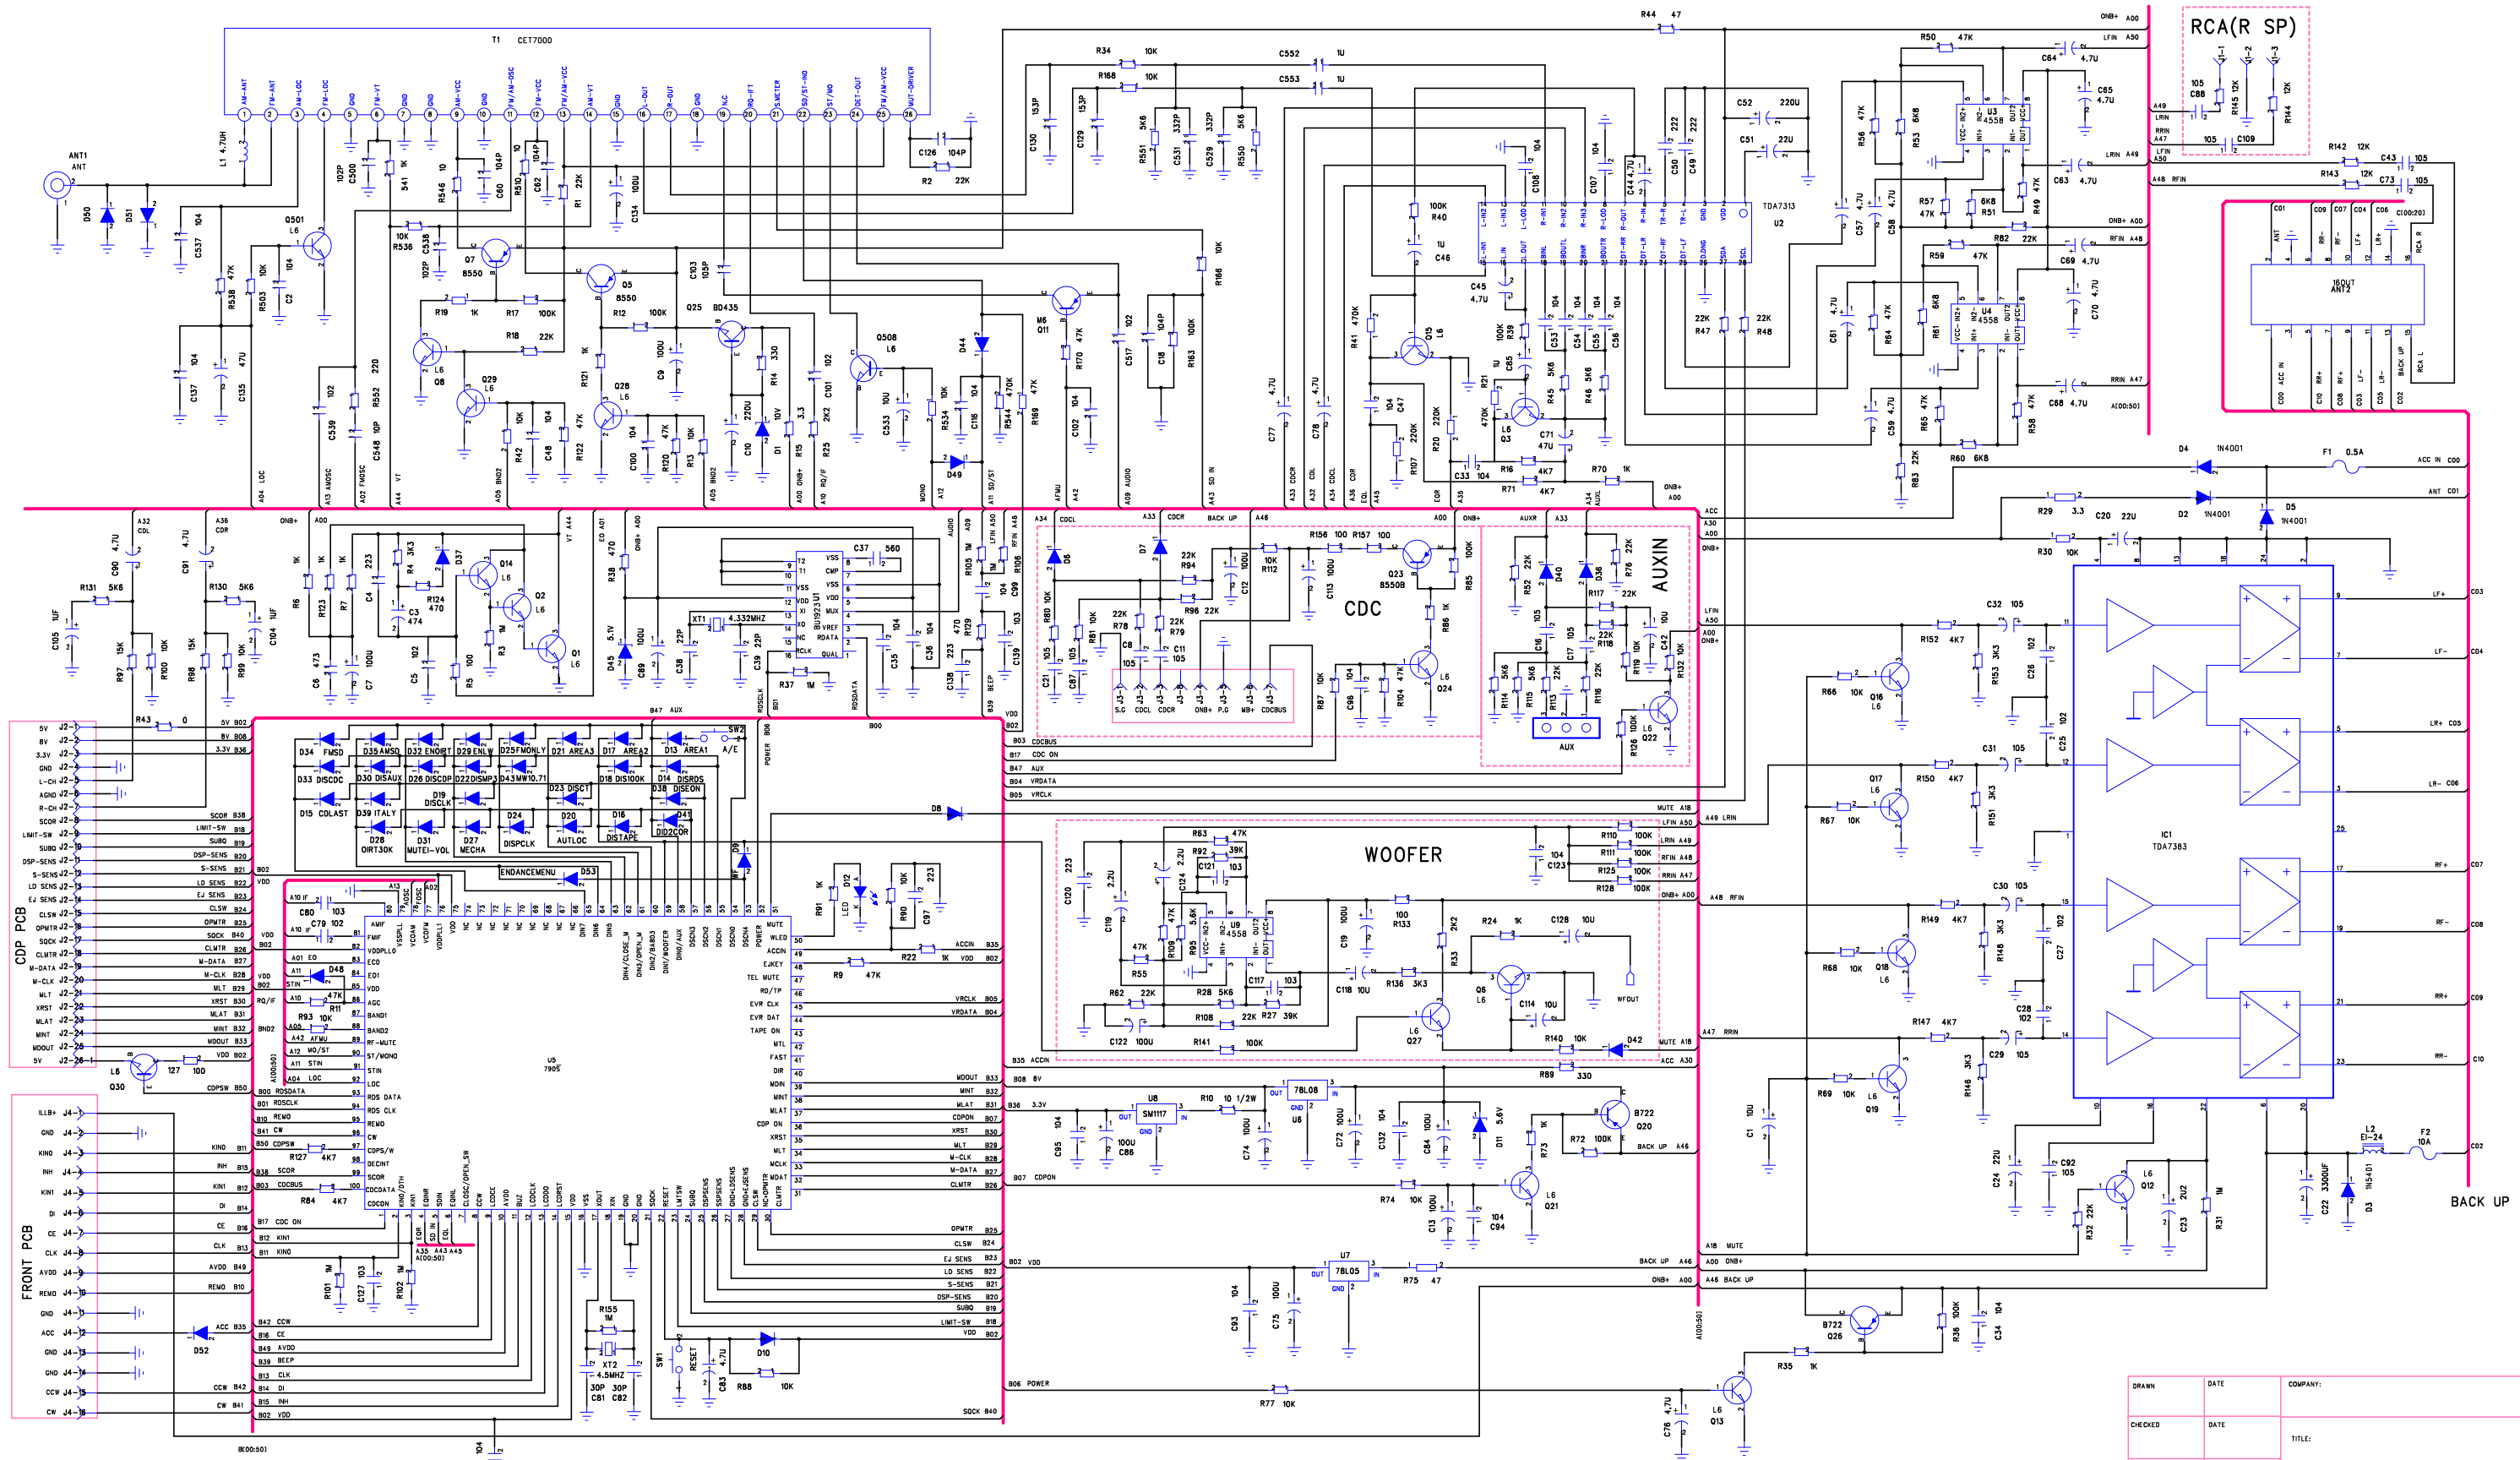

DRAWN	DATE	COMPANY:
CHECKED	DATE	TITLE:
CONTROL	DATE	CODE:
RELEASED	DATE	SIZE: DRAWING NO: REV:

Product Number: CE317020-H0IR0F00-00
Product Name: CE3170HFR+MP3+RDS+ESP+I
SO (790MCU配CE3140-A1主板)
點陣LCD 40WX4 AM/FM64-
108MHZ LCD DISPLAY CD機
HIGH POWER RCA OUT
FADER

Part Code	Name/Description		Qty	Loc	
零件編號	規格/名稱		用量		位置
Assembly Code:					
	ISO-939600-00-00	ISO WITHLINE WIRE A'SSY ISO插座線部件			
OP0-00929600-00-00	ISO OUT PLUG WITHLINE		KIT	1	
	ISO插座線				
OP0-02440002-00-00			KIT	1	
	帶16P連接器公插				
OS0-02440001-00-00	OUT SOCKET WITH WIRE		PCS	0	1
	16P連接器母插(不帶線)				
PP0-00000000-IS-00	ISO 16P		PCS	0	1
	ISO膠頭(母)				
PW0-10300511-00-01	TWIN WIRE AWG 20 L=5+300+5MM GREEN/ GREEN.BLACK		PCS	0	1
	綠/綠黑雙PVC線				
PW0-10300519-00-01	TWIN WIRE AWG 20 L=5+300+5MM WHITE/WHITE.BLACK		PCS	0	1
	白/白黑雙PVC線				
PW0-10300520-00-01	TWIN WIRE AWG 20 L=5+300+5MM PURPLE/PURPLE.BLACK		PCS	0	1
	紫/紫黑雙PVC線				
PW0-10300531-00-01	TWIN WIRE AWG 20 L=5+300+5MM GREY/GREY BLACK		PCS	0	1
	灰/灰黑雙PVC線				
PW0-20140602-00-00	PVC WIRE AWG 24 L=5+140+5MM RED		PCS	0	1
	紅色PVC線				
PW0-20140604-00-01	PVC WIRE AWG 20 L=5+140+5MM YELLOW		PCS	0	1
	黃色PVC線				
PW0-20140606-00-00	PVC WIRE AWG 24 L=5+140+5MM BLUE		PCS	0	1
	藍色PVC線				
PW0-20350600-00-01	PVC WIRE AWG 18 L=5+350+5MM BLACK		PCS	0	1
	黑色PVC線				
SK0-07031801-00-01	AUDIO SOCKET RCA JACK 180MM WITH WIRE		PCS	0	1
	灰色RCA線(無上錫)(帶帽)				
WE0-00000000-00-00	4400RDS 16P 鐵端子		PCS	0	16
WE0-01000000-00-00	ISO OP & OS		PCS	0	12
	ISO鐵端子				
WE0-02000000-00-00	FUSE VALUE END		PCS	0	6
	保險絲套端子				
Assembly Code:					

	JPW-93CE3140-00-00	線仔部件(配CE3140-A1主板)點陣顯示			
FC0-20309002-00-00	RIBBON WIRE AWG 28 3P L=3+90+3MM COLOUR		PCS	1	機芯
	彩色排線				
PW0-40080000-00-00	75 OHM SINGLE SHIELD WIRE D=3.0 L=5+80+5MM BLACK		PCS	1	ANT
	75Ω 黑色單芯屏蔽線				
PW0-40120608-00-00	SINGLE SHIELD WIRE D=1.8 L=5+120+5MM GREY		PCS	1	
	灰色單芯屏蔽線				
Assembly Code:					
	MPA-94CE3170-00-00	METAL PARTS A'SSY 五金沖壓料部件(H)點陣 LCD			
AS0-00000000-02-01	ANT SOCKET DUAL HOLE		PCS	1	
	雙耳天線插				
FB0-92CE3010-01-00	FIBER 150X33X0.5MM		PCS	1	後機芯支架
	快巴紙				
FB0-92CE6950-00-00	FIBER 173X146X0.5MM		PCS	1	
	快巴紙				
FB0-92CE8700-01-00	FIBRE SHEET 45X35X0.5MM		PCS	1	機芯與伺服板排線之間
	快巴紙				
FW0-00008030-10-00	FIBRE WASHER 8X3X1MM		PCS	2	墊機芯左支架
	快巴介子				
MP0-00000410-28-00	REAR BRACKET PLATE		PCS	1	
	后支撐片				
MP0-00882000-09-00	SHORT BRACKET		PCS	1	
	短套				
MP0-00882000-80-00	BRACKET-LOCK"L"		PCS	1	
	翻板左支架				
MP0-00928000-27-00	KEY		PCS	2	附件
	鎖匙片				
MP0-00958900-04-00	RIGHT CABINET		PCS	1	
	右側板				
MP0-00958900-06-00	TOP CABINET		PCS	1	
	頂蓋				
MP0-00958900-07-00	BOTTOM CABINET		PCS	1	
	底蓋				
MP0-00958900-34-00	IC BRACKET		PCS	1	
	IC 支架(TDA7383IC)				
MP0-00958900-44-01	CD BRACKET-01		PCS	1	
	CD 支架-01				
MP0-00958900-44-03	CD BRACKET-03		PCS	1	
	CD 支架-03				
MP0-00958900-44-05	CD BRACKET-05		PCS	1	
	CD 支架-05				
MP0-00958900-82-00	SIDE SPRING		PCS	2	
	外套彈簧片				
MP0-88DV3050-92-00	DOOR COVER		PCS	1	
	門壓片				
MP0-88DV3070-81-00	BRACKET-LOCK"R"		PCS	1	
	翻板右支架				
MP0-95CE7310-84-00	FOLD PLATE		PCS	1	噴黑油處理
	翻板				

MP0-95CE7320-39-00	BRACKET LCD		PCS	1	
	LCD支架				
MP0-95CE8050-03-00	LEFT CABINET		PCS	1	
	左側板(CE8060主板)				
MP0-95CE8060-16-00	HEAT-SINK		PCS	1	
	散熱片				
PV0-00020848-02-00	PVC SHEET 19.5X11.5MM		PCS	1	主板與高頻頭
	PVC片				
PV0-00923030-00-04	PVC FOR LCD-04 108X23.30MM		PCS	1	LCD白底黑字用
	PVC 奶白片-04				
Assembly Code:					
	OPC-95CE3170-00-00	OTHER PARTS A'SSY 外購部件LCD			
DR0-88DV3050-00-00	DOOR		PCS	1	
	門				
ER0-00000002-00-00	E RING 2.0MM		PCS	2	
	E形介子				
HH0-00005020-06-00	SCREW 5.0X20MM HH		PCS	1	
	六角螺絲				
HN0-00000030-00-00	HEX NUT M3.0 T=2.5MM		PCS	2	L7808 IC1
	六角螺母				
HN0-00000050-00-00	HEX NUT M5.0 T=4		PCS	2	附件1.散熱片1
	六角螺母				
LB0-80402201-01-00	FLASH LABEL 30X30X0.1MM		PCS	1	後散熱片
	貼紙				
MD0-00734000-00-00	MICRO DAMPER		PCS	1	
	阻尼輪				
MP0-00928000-70-00	FOLD PLAE		PCS	1	
	翻板支撐銅柱				
PL0-00005010-00-00	PLAIN WASHER M5X10		PCS	2	附件
	平面介子				
SA0-00000050-00-00	SPRING WASHER D=5.0MM		PCS	1	附件
	彈弓介子				
SG0-00440828-05-00	SPONGE FOR CARRY BOX 180X58X5MM		PCS	2	
	防盜盒海綿				
SG0-88DV3170-01-00	SPONGE FOR		PCS	1	機嘴內
	海棉				
SP0-00440680-BW-00	SPRING FOR REL KNOB		PCS	1	用于OPEN鈕
	脫扣鈕彈弓				
SP0-00882000-01-01	SPRING-LOCKER-01		PCS	1	
	鎖扣彈弓-01				
SP0-00928000-03-00	SPRING-HOLDER		PCS	1	
	翻板支架彈弓				
SP0-00928800-01-00	SPRING-RELEASE		PCS	1	
	翻板彈弓				
SR0-00001703-02-01	SCREW 1.7X3 KM BLACK		PCS	1	齒輪1
	黑色螺絲				
SR0-00002003-00-01	SCREW 2X3 PM BLACK		PCS	2	阻尼輪
	黑色螺絲				
SR0-00002004-11-00	SCREW 2X4 TTP		PCS	3	伺服PCB板
	螺絲				
SR0-00002005-05-00	SCREW 2X5 PA		PCS	3	機嘴內
	螺絲				
SR0-00002005-05-01	SCREW 2X5 PA BLACK		PCS	4	翻板支架
	黑色螺絲				

SR0-00002008-05-00	SCREW 2X8 PA		PCS	2	機嘴
	螺絲				
SR0-00002010-05-01	SCREW 2X10 PA BLACK		PCS	2	機嘴
	黑色螺絲				
SR0-00002603-11-00	SCREW 2.6X3 TTP		PCS	2	天線插2
	螺絲				
SR0-00002604-02-00	SCREW 2.6X4 KM		PCS	2	外套彈簧片2
	螺絲				
SR0-00002604-11-00	SCREW 2.6X4 TTP		PCS	8	支架
	螺絲				
Assembly Code:					
	OPC-95CE3170-00-00	OTHER PARTS A'SSY 外購部件LCD			
SR0-00002604-23-00	SCREW 2.6X4 TKM		PCS	2	機芯支架
	螺絲				
SR0-00003003-26-01	SCREW 3X3 FM BLACK		PCS	4	底殼
	黑色螺絲				
SR0-00003004-11-00	SCREW 3X4 TTP		PCS	2	主板2
	螺絲				
SR0-00003004-16-00	SCREW 3X4 PBT		PCS	2	機芯支架2
	螺絲				
SR0-00003005-24-00	SCREW 3X5PT		PCS	2	底蓋頂蓋2
	螺絲				
SR0-00003006-00-00	SCREW 3X6 PM		PCS	2	側板2
	螺絲				
SR0-00003008-00-00	SCREW 3X8 PM		PCS	2	I7808 IC1
	螺絲				
SR0-00003018-00-00	SCREW 3X18 PM		PCS	2	IC
	螺絲				
SR0-00005025-05-00	SCREW 5X25 PA		PCS	1	附件
	螺絲				
SR1-00001703-02-01	SCREW 1.7X3.5 KM BLACK		PCS	4	翻板左右蓋4
	螺絲				
SU0-00440839-01-00	SPONGE RUBBER 8X6X3.5		PCS	1	用於遙控接收器
	回力膠				
SU0-00928000-03-00	SPONGE RUBBER 1.0X8.0MM		PCS	3	墊塑膠底殼.機咀墊鈕1P CS
	回力膠 C				
SU0-95CE8050-01-00	SPONGE RUBBER 15X7X6MM		PCS	1	貼連接插座與排線之間
	單面回力膠				
ZF0-95CE8030-01-00	FABRIC 25X15X0.5MM		PCS	1	用於機芯支架與印刷線 之間
	黑色單面帶膠絨布				
Assembly Code:					
	PAK-92CE9605-00-00	PACKING A'SSY 包裝部件H(15A)			
CT0-92CE9620-00-00	CARTON 39X26X32CM 4PCS/CTN		PCS	0,25	
	卡通(B三B)				
GB0-92CE9620-00-00	GIFT BOX 240X90X280MM		PCS	1	
	彩盒				
IB0-00929605-00-00	INSTRUCTION BOOK		PCS	1	
	說明書				
IM0-99000000-00-00	DESICCANT SILICASOL 6克		PCS	1	
	防潮珠				
LB0-00000203-00-00	QC PASS LABEL		PCS	1	

	QC貼紙				
LB0-00000903-00-01	FUSE LABEL 0.5A		PCS	2	
	0.5A 保險絲貼紙				
LB0-00000903-00-07	FUSE LABEL 15A		PCS	1	
	15A 保險絲貼紙				
LB0-00002103-00-00	LABEL FOR TOP CABINET		PCS	1	
	面蓋貼紙				
LB0-00102703-00-00	LASER LABEL		PCS	1	
	鐳射貼紙				
LB0-20000803-00-00	CHASSIS GROUND BATTERY BLACK LABEL		PCS	1	
	黑色貼紙2000/3000機				
LB0-23870803-05-00	LEFT SPEAKER REAR OUTPUT GREEN LABEL		PCS	1	
	綠色貼紙				
LB0-30000803-02-00	DC POWER BATTERY 12V +RED LABEL		PCS	1	
	紅色貼紙				
LB0-30000803-09-00	LEFT CH RCA OUTPUT WHITE LABEL		PCS	1	
	白色貼紙2000/3000機				
LB0-30000803-14-00	"RIGHT RCA OUTPUT" RED LABEL		PCS	1	
	RCA紅色貼紙				
LB0-80000603-01-00	CATION LABLE-01		PCS	1	
	警示貼紙				
LB0-80000603-02-00	CATION LABLE-02		PCS	2	
	警示貼紙				
LB0-80000603-03-00	CATION LABLE-03		PCS	1	
	警示貼紙				
LB0-96000803-04-00	BATTERY B(+) YELLOW LABEL		PCS	1	
	黃色B+貼紙				
LB0-96000803-06-00	AUTO ANTENNA (B+) BLUE LABEL		PCS	1	
	藍色貼紙				
LB0-96000803-07-00	RIGHT SPEAKER REAR OUTPUT PURPLE LABEL		PCS	1	
	紫色貼紙				
LB0-96000803-08-00	RIGHT SPEAKER FRONT OUTPUT GREY LABEL		PCS	1	
	灰色貼紙				
LB0-96000803-09-00	LEFT SPEAKER FRONT OUTPUT WHITE LABEL		PCS	1	
	白色貼紙				
PF0-92CE9620-00-00	POLY FORM 272X86X60MM		KIT	1	
	發泡膠				
PR0-00235085-03-00	PAPER PAD 235X85X3MM		PCS	2	
	紙板				
PY0-00030090-00-00	POLY BAG 9"X3"X0.05MM		PCS	1	裝附料
	膠袋				
PY0-00043100-00-00	POLY BAG 10"X4.3"X0.025MM		PCS	2	用散線時取消1PCS
	膠袋				
Assembly Code:					
	PAK-92CE9605-00-00	PACKING A'SSY 包裝部件H(15A)			
PY0-00110120-00-00	POLY BAG 12"X11"X0.05MM		PCS	1	主機
	膠袋				
Assembly Code:					

	PCB-92CE8050-25-18	CD机芯伺服板部件MP3+ESP (ESP+RDS+MP3)790M CU			
CC0-10215500-00-00	CHIP CAP 0805 厚=0.8MM 102P X7R 50V +/-10%		PCS	2	C62.27
	貼片電容				
CC0-10315500-00-00	CHIP CAP 0805 厚=1.25MM 103P X7R 50V +/-10%		PCS	8	C43.44.36.15.17.29.2.2 3
	貼片電容				
CC0-10415500-00-00	CHIP CAP 0805 厚=1.25MM 104P X7R 50V +/-10%		PCS	19	C9.12.14.19.24.25.26.2 8.31.38.58.61.63- 66.68.69.75.
	貼片電容				
CC0-10650110-00-00	TANTALUM CAP 1206 10UF 10V +/-20%		PCS	3	EC4.46.45
	鉭電解(貼片)				
CC0-15215500-00-00	CHIP CAP 0805 厚=0.8MM 152P X7R 50V +/-10%		PCS	3	C49.50.16
	貼片電容				
CC0-22015500-00-00	CHIP CAP 0805 厚=0.8MM 22P NPO 50V +/-5%		PCS	1	C34
	貼片電容				
CC0-22215500-00-00	CHIP CAP 0805 厚=0.8MM 222P X7R 50V +/-10%		PCS	4	C8.51.52.57
	貼片電容				
CC0-22315500-00-00	CHIP CAP 0805 厚=1.25MM 223P X7R 50V +/-10%		PCS	1	C33
	貼片電容				
CC0-22415500-00-00	CHIP CAP 0805 厚=1.25MM 224 X7R 50V +/-10%		PCS	1	C6
	貼片電容				
CC0-30815500-00-00	CHIP CAP 0805 厚=0.8MM 3P NPO 50V +/-5%		PCS	1	C35
	貼片電容				
CC0-33015500-00-00	CHIP CAP 0805 厚=0.8MM 33P NPO 50V +/-5%		PCS	2	C55.56
	貼片電容				
CC0-33315500-00-00	CHIP CAP 0805 厚=1.25MM 333P X7R 50V +/-10%		PCS	2	C21.10
	貼片電容				
CC0-39115500-00-00	CHIP CAP 0805 厚=0.8MM 391P X7R 50V +/-10%		PCS	2	C11.7
	貼片電容				
CC0-47210500-00-00	CHIP CAP 0805 厚=0.8MM 472P X7R 50V +/-10%		PCS	1	C32
	貼片電容				
CC0-47410500-00-00	CHIP CAP 0805 厚=1.25MM 0.47UF X7R 50V +/-10%		PCS	2	C1.20
	貼片電容				
CC0-47550110-00-00	TANTALUM CAP 1206 4.7UF 10V +/-10%		PCS	1	EC30
	鉭電解(貼片)				
CC0-68315500-00-00	CHIP CAP 0805 厚=0.8MM 683P X7R 50V +/-10%		PCS	1	C3
	貼片電容				
CC0-82115500-00-00	CHIP CAP 0805 厚=0.8mm 821P NPO 50V +/-5%		PCS	1	C60(MP3用,ESP取消)
	貼片電容				

CF0-11693401-00-00	X-TAL 16.9344MHZ 2LEG(SMD TYPE)		PCS	1	X2
	貼片晶體				
CR0-10050210-00-00	CHIP RESISTOR 0805 10 OHM 1/8W +/-5%		PCS	1	R32
	貼片電阻				
CR0-10150210-00-00	CHIP RESISTOR 0805 100 OHM 1/8W +/-5%		PCS	1	R20
	貼片電阻				
CR0-10250210-00-00	CHIP RESISTOR 0805 1K OHM 1/8W +/-5%		PCS	8	R37.34.27.21.12.42.22.57
	貼片電阻				
CR0-10350210-00-00	CHIP RESISTOR 0805 10K OHM 1/8W +/-5%		PCS	7	R45.53.54.1.2.39.44
	貼片電阻				
CR0-10450210-00-00	CHIP RESISTOR 0805 100K OHM 1/8W +/-5%		PCS	4	R55.56.11.10
	貼片電阻				
CR0-10550210-00-00	CHIP RESISTOR 0805 1M OHM 1/8W +/-5%		PCS	5	R15.19.58.59.60
	貼片電阻				
CR0-12150210-00-00	CHIP RESISTOR 0805 120 OHM 1/8W +/-5%		PCS	1	R50
	貼片電阻				
Assembly Code:					
	PCB-92CE8050-25-18	CD机芯伺服板部件MP3+ESP (ESP+RDS+MP3)790M CU			
CR0-12450210-00-00	CHIP RESISTOR 0805 120K OHM 1/8W +/-5%		PCS	1	R4
	貼片電阻				
CR0-15350210-00-00	CHIP RESISTOR 0805 15K OHM 1/8W +/-5%		PCS	3	R46.16.31
	貼片電阻				
CR0-15450210-00-00	CHIP RESISTOR 0805 150K OHM 1/8W +/-5%		PCS	3	R51.52.25
	貼片電阻				
CR0-20350210-00-00	CHIP RESISTOR 0805 20K OHM 1/8W +/-5%		PCS	1	R14
	貼片電阻				
CR0-22250210-00-00	CHIP RESISTOR 0805 2K2 OHM 1/8W +/-5%		PCS	5	R38.35.33.23.13
	貼片電阻				
CR0-22350210-00-00	CHIP RESISTOR 0805 22K 1/8W OHM +/-5%		PCS	1	R3
	貼片電阻				
CR0-22850210-00-00	CHIP RESISTOR 0805 2.2 OHM 1/8W +/-5%		PCS	1	3V ROM
	貼片電阻				
CR0-27450210-00-00	CHIP RESISTOR 0805 270K OHM 1/8W +/-5%		PCS	1	R30
	貼片電阻				
CR0-33350210-00-00	CHIP RESISTOR 0805 33K OHM 1/8W +/-5%		PCS	2	R24.5
	貼片電阻				
CR0-33450210-00-00	CHIP RESISTOR 0805 330K OHM 1/8W +/-5%		PCS	1	R29
	貼片電阻				
CR0-39250210-00-00	CHIP RESISTOR 0805 3K9 OHM 1/8W +/-5%		PCS	1	R28

	貼片電阻				
CR0-47350210-00-00	CHIP RESISTOR 0805 47K OHM 1/8W +/-5%		PCS	5	R7.41.40.26.36(用WXX 的PPN13KA11C馬達時 R36改為100K.)
	貼片電阻				
CR0-68350210-00-00	CHIP RESISTOR 0805 68K OHM 1/8W +/-5%		PCS	6	R47.48.49.61.8.6
	貼片電阻				
CR0-82250210-00-00	CHIP RESISTOR 0805 8K2 OHM 1/8W +/-5%		PCS	1	R9
	貼片電阻				
DI0-24148010-00-00	SIGNAL DIODE 1N 4148 DO-35		PCS	5	D1-5
	二極管				
DI0-80023000-00-00	DIODE-IR EMITTING ST-23G		PCS	2	
	發射二極管 (CD機)				
DK0-WF000000-00-00	WIL LIFAST CD DECK A'SSY(組件編號DK0-928050-25- 00)		KIT	1	
	威利發CD機芯				
EC0-10709011-00-00	100UF 10V +/-20% -40+85°C 5X8MM I=0.004CV or 0.4(uA)		PCS	2	C54.59
	電解電容(小)				
EC0-22604031-00-00	22UF 25V +/-20% - 40+85°C 4X7MM I=0.004CV or 0.4(uA)		PCS	1	
	電解電容				
EC0-47604011-00-00	47UF 10V +/-20% 4X7MM - 40+85°C I=0.004CV or 0.4ua		PCS	7	C18.67.13.37.41.39.71
	電解電容 (4X7MM)				
FC0-42608530-00-00	FLAT CABLE L=85MM 26PIN PH=1.25MM		PCS	1	
	塑膠排線				
IC0-34001001-00-00	IC IP4001S SOP-28		PCS	1	U4
	集成電路				
IC0-39291700-00-00	IC S5L9291X 100-TQFP-1414		PCS	1	U2
	集成電路				
IC0-91922700-00-00	IC S1L9226 TQFP48		PCS	1	U1
	集成電路				
IC0-95927700-00-00	IC S5L9274=S5L9276 TQFP64		PCS	1	U3
	集成電路				
IC0-97117300-00-00	IC SDRAM CM71V17403CT6 3V TSOP-24		PCS	1	U6
	集成電路(靜態存儲器)				
Assembly Code:					
	PCB-92CE8050-25-18	CD機芯伺服板部件MP 3+ESP (ESP+RDS+MP3)790M CU			
PB0-CE805076-25-M1	P.C.B CE8050ESP+MP3-M1 112X95.5MM FR4.HB TH=1.2MM		PCS	1	
	雙面機芯伺服板				
SK0-02040020-00-02	D TYPE CONNECTOR WAFER 4PIN PH=2.0MM		PCS	1	
	D型彎腳公插				
SK0-15170001-00-00	CONNECT SOCKET 17P PH=1.0MM		PCS	1	CON3
	17P 連接插座(貼片)				

SW0-10001110-00-00	SWITCH-TACT (CHECK SW SW-111)		PCS	1	
	無鎖輕觸開關				
TR0-61015806-00-00	CHIP TRANSISTOR HMBT1015 SOT-23 PNP (M6)		PCS	6	Q4.5.6.2.3.1
	貼片三极管				
Assembly Code:					
	PCB-93CE3140-01-20	主板部件 RDS+ESP+MP3 (點陣)(AM/FM) CE3140-A1主板			
CC0-10015500-00-00	CHIP CAP 0805 厚=0.8MM 10P NPO 50V +/-5%		PCS	1	C548
	貼片電容				
CC0-10215500-00-00	CHIP CAP 0805 厚=0.8MM 102P X7R 50V +/-10%		PCS	11	C25- 28.79.67.539.500.5.51 7.538
	貼片電容				
CC0-10315500-00-00	CHIP CAP 0805 厚=1.25MM 103P X7R 50V +/-10%		PCS	4	C139.80.141.537
	貼片電容				
CC0-10410540-00-00	CHIP CAP 0603 104P 50V X7R +/-10%		PCS	2	
	貼片電容				
CC0-10415500-00-00	CHIP CAP 0805 厚=1.25MM 104P X7R 50V +/-10%		PCS	36	C1.2.18.19.33- 36.41.47.53- 56.62.66.83.93-95.97- 102.60.48
	貼片電容				
CC0-10510500-00-00	CHIP CAP 0805 厚=1.25MM 1UF X7R 50V +/-10%		PCS	20	C103.59.57.552.32.31. 29.30.92.61.58.104.10 5.90.91.553.43
	貼片電容				
CC0-15315500-00-00	CHIP CAP 0805 厚=1.25MM 153P X7R 50V +/-10%		PCS	2	C129.130
	貼片電容				
CC0-22015500-00-00	CHIP CAP 0805 厚=0.8MM 22P NPO 50V +/-5%		PCS	2	C38.39
	貼片電容				
CC0-22215500-00-00	CHIP CAP 0805 厚=0.8MM 222P X7R 50V +/-10%		PCS	2	C49.50
	貼片電容				
CC0-22315500-00-00	CHIP CAP 0805 厚=1.25MM 223P X7R 50V +/-10%		PCS	2	C4.138
	貼片電容				
CC0-33015500-00-00	CHIP CAP 0805 厚=0.8MM 33P NPO 50V +/-5%		PCS	2	C81.82
	貼片電容				
CC0-33215500-00-00	CHIP CAP 0805 厚=0.8MM 332P X7R 50V +/-10%		PCS	2	C529.531
	貼片電容				
CC0-47315500-00-00	CHIP CAP 0805 厚=1.25MM 473P X7R 25V +/-10%		PCS	1	C6
	貼片電容				
CC0-47410500-00-00	CHIP CAP 0805 厚=1.25MM 0.47UF X7R 50V +/-10%		PCS	1	C115
	貼片電容				
CC0-56115500-00-00	CHIP CAP 0805 厚=0.8MM 561P X7R 50V +/-10%		PCS	1	C37
	貼片電容				

CF0-14332301-00-00	CRYSTAL 4.332MHZ 2LEG		PCS	1	XT1
	2腳晶體				
CF0-14500301-00-00	CRYSTAL 4.5MHZ 2LEG		PCS	1	XT2
	晶體2腳				
CH0-01478000-00-00	CHOKE COIL 4.7UH +/-10%		PCS	1	L1
	色環電感				
CH0-14201280-00-00	TRANSFORMER 20X12X8 2~3mH		PCS	1	L2
	立式環形電感(火牛)				
CR0-00051210-00-00	CHIP RESISTOR 0805 0 OHM 1/8W +/-5%		PCS	3	R54.167.23
	貼片電阻				
CR0-10050000-00-00	RESISTOR 10 OHM 1/8W +/-5%		PCS	2	R510.546
	碳膜電阻				
CR0-10052000-00-00	RESISTOR 10 OHM 1/2W +/-5%		PCS	1	R10
	碳膜電阻				
CR0-10150210-00-00	CHIP RESISTOR 0805 100 OHM 1/8W +/-5%		PCS	2	R5.129
	貼片電阻				
CR0-10250000-00-00	RESISTOR 1K OHM 1/8W +/-5%		PCS	1	R6
	碳膜電阻				
CR0-10250210-00-00	CHIP RESISTOR 0805 1K OHM 1/8W +/-5%		PCS	10	R91.7.123.121.166.70. 541.22.174.19
	貼片電阻				
CR0-10350000-00-00	RESISTOR 10K OHM 1/8W +/- 5%		PCS	5	R74.77.168.34.182
	碳膜電阻				
Assembly Code:					
	PCB-93CE3140-01-20	主板部件 RDS+ESP+MP3 (點陣)(AM/FM) CE3140-A1主板			
CR0-10350210-00-00	CHIP RESISTOR 0805 10K OHM 1/8W +/-5%		PCS	16	R93.13.503.30.66.69.6 8.67.100.127.88.134.9 0.11.99.42.536
	貼片電阻				
CR0-10450210-00-00	CHIP RESISTOR 0805 100K OHM 1/8W +/-5%		PCS	10	R12.17.72.36.163.20.1 01.172.173
	貼片電阻				
CR0-10550000-00-00	RESISTOR 1M OHM 1/8W +/- 5%		PCS	3	R31.106.105
	碳膜電阻				
CR0-10550210-00-00	CHIP RESISTOR 0805 1M OHM 1/8W +/-5%		PCS	5	R101.102.37.155.3.139
	貼片電阻				
CR0-12350210-00-00	CHIP RESISTOR 0805 12K OHM +/-5%		PCS	2	R143.142
	貼片電阻				
CR0-15350210-00-00	CHIP RESISTOR 0805 15K OHM 1/8W +/-5%		PCS	2	R97.98
	貼片電阻				
CR0-22250210-00-00	CHIP RESISTOR 0805 2K2 OHM 1/8W +/-5%		PCS	9	R8.35.73.103.162.146. 148.151.153
	貼片電阻				
CR0-22350000-00-00	RESISTOR 22K OHM 1/8W +/- 5%		PCS	2	R47.48
	碳膜電阻				

CR0-22350210-00-00	CHIP RESISTOR 0805 22K 1/8W OHM +/-5%		PCS	5	R82.83.32.2.18
	貼片電阻				
CR0-33250210-00-00	CHIP RESISTOR 0805 3K3 OHM 1/8W +/-5%		PCS	1	R4
	貼片電阻				
CR0-33852000-00-00	RESISTOR 3.3 OHM 1/2W +/- 5%		PCS	2	R15.29
	碳膜電阻				
CR0-47050000-00-00	RESISTOR 47 OHM 1/8W +/-5%		PCS	1	R44
	碳膜電阻				
CR0-47050210-00-00	CHIP RESISTOR 0805 47 OHM 1/8W +/-5%		PCS	2	R25.165
	貼片電阻				
CR0-47052000-00-00	RESISTOR 47 OHM 1/2W +/-5%		PCS	1	R75
	碳膜電阻				
CR0-47150210-00-00	CHIP RESISTOR 0805 470 OHM 1/8W +/-5%		PCS	3	R124.137.552
	貼片電阻				
CR0-47151000-00-00	RESISTOR 470 OHM 1/4W +/- 5%		PCS	1	R38
	碳膜電阻				
CR0-47250210-00-00	CHIP RESISTOR 0805 4K7 OHM +/-5%		PCS	6	R16.71.152.150.147.14 9
	貼片電阻				
CR0-47350000-00-00	RESISTOR 47K OHM 1/8W +/- 5%		PCS	4	R9.170.169.39
	碳膜電阻				
CR0-47350210-00-00	CHIP RESISTOR 0805 47K OHM 1/8W +/-5%		PCS	13	R56.50.57.49.59.64.58. 65.11.120.40.122.538
	貼片電阻				
CR0-47450210-00-00	CHIP RESISTOR 0805 470K OHM 1/8W +/-5%		PCS	1	R544
	貼片電阻				
CR0-47851000-00-00	RESISTOR 4.7 OHM 1/4W +/- 5%		PCS	1	R1
	碳膜電阻				
CR0-56250210-00-00	CHIP RESISTOR 0805 5K6 OHM 1/8W +/-5%		PCS	4	R551.550.130.131
	貼片電阻				
CR0-56450210-00-00	CHIP RESISTOR 0805 560K OHM 1/8W +/-5%		PCS	2	R21.41
	貼片電阻				
CR0-68150210-00-00	CHIP RESISTOR 0805 680 OHM 1/8W +/-5%		PCS	2	R14.158
	貼片電阻				
CR0-68250210-00-00	CHIP RESISTOR 0805 6K8 OHM 1/8W +/-5%		PCS	6	R53.51.60.61.45.46
	貼片電阻				
DI0-14001020-00-00	RECTIFIER SILICON FOR 1N4001		PCS	3	D2.4.5
	二極管				
Assembly Code:					
	PCB-93CE3140-01-20	主板部件 RDS+ESP+MP3 (點陣)(AM/FM) CE3140-A1主板			

DI0-15401020-00-00	RECTIFIER SILICON FOR 1N5401		PCS	1	D3
	二極管				
DI0-24148010-00-00	SIGNAL DIODE 1N 4148 DO-35		PCS	4	D13.44.8.54
	二極管				
DI0-24148080-00-00	CHIP SIGNAL DIODE 1206 1N4148 SMD		PCS	17	D48-51.34.37.30.43.18.16.17.10.41.53.33.55.35
	貼片二極管				
DI0-30501010-00-00	ZENER SILICON 5V1 1/2W DO-35		PCS	1	D45
	穩壓二極管				
DI0-31005010-00-00	ZENER SILICON 10V 1/2W DO-35		PCS	1	D1
	穩壓二極管				
EC0-10504051-00-00	1UF 50V +/-20% 4X7MM -40+85℃		PCS	1	C112
	電解電容(4X7MM)				
EC0-10604031-00-00	10UF 25V +/-20% 4X7MM -40+85℃		PCS	2	C111.40
	電解電容(4X7MM)				
EC0-10709011-00-00	100UF 10V +/-20% -40+85℃ 5X8MM I=0.004CV or 0.4(uA)		PCS	13	C89.9.7.10.15.14.70.65.13.75.86.52.134
	電解電容(小)				
EC0-22504051-00-00	2.2UF 50V +/-20% 4X7MM -40+85℃		PCS	1	C23
	電解電容(4X7MM)				
EC0-22604031-00-00	22UF 25V +/-20% -40+85℃ 4X7MM I=0.004CV or 0.4(uA)		PCS	3	C51.20.24
	電解電容				
EC0-22704010-00-00	220UF 10V +/-20% -40+85℃ 6.3X11MM I=0.004CV or 0.4(uA)		PCS	1	C74
	電解電容				
EC0-22704020-00-00	220UF 16V +/-20% -40+85℃ (6.3X11MM) I=0.004CV or 0.4 (uA)		PCS	1	C72
	電解電容				
EC0-33809020-00-00	3300UF 16V +/-20% -40+85℃ 13X20MM I=0.004CV or 0.4 (uA)		PCS	1	C22
	電解電容				
EC0-47504051-00-00	4U7 50V +/-10% 4X7MM -40+85℃		PCS	8	C44.45.69.83.68.64.63.84
	電解電容(4X7MM)				
EC0-47604011-00-00	47UF 10V +/-20% 4X7MM -40+85℃ I=0.004CV or 0.4ua		PCS	3	C71.106.135
	電解電容 (4X7MM)				
FS0-01000050-00-01	FUSE VALUE 0.5A (6X30)MM		PCS	2	
	保險絲管				
FS0-01001500-00-00	FUSE VALUE 15A (6X30)MM		PCS	1	
	保險絲				
IC0-11117000-00-00	IC AMS1117-3.3 SOT-223 3PIN		PCS	1	U7
	穩壓集成電路(電源調整管)				
IC0-17805500-00-00	IC 78L05J TO-92 3PIN		PCS	2	IC2.3
	三端穩壓電路				
IC0-17808800-00-00	IC UA7808 ZIP 3PIN		PCS	1	U6

	穩壓電路				
IC0-30790701-00-02	IC DSM790RES QFP 100PIN		PCS	1	U5
	集成電路(點陣)				
IC0-31923300-00-00	IC BU1923F SOP16		PCS	1	U1
	集成電路				
IC0-32313300-00-00	IC PT2313 SOP 28PIN		PCS	1	U2
	集成電路				
IC0-34558300-00-00	IC YM4558M SO-8PIN		PCS	2	U3.4
	集成電路(貼片)(比較放大器)				
IC0-38264800-00-00	IC TA8264AH HZIP25-P-1.00F		PCS	1	IC1
	集成電路				
LE0-12035420-00-00	LED ROUND 3MM (RED) LEG.L=30MM		PCS	1	
	發光二極管紅色				
Assembly Code:					
	PCB-93CE3140-01-20	主板部件 RDS+ESP+MP3 (點陣)(AM/FM) CE3140-A1主板			
PB0-CE314005-01-A1	P.C.B CE3140-A1 173.4X146.8MM SS HB TH=1.6MM		PCS	1	
	主板				
SK0-15180000-00-01	CONNECT SOCKET 1.0C- NPBX(S) 18P PH=1.0MM		PCS	1	
	18P 連接插座(貼片式)下接點				
SK0-15260010-01-02	WIRE CONNECT SOCKET 1.25- 2S-26PW 26PIN PH=1.25MM		PCS	1	CON2
	彎腳連接插座(鍍金)(上接點)				
SW0-10040501-00-00	TACT SWITCH 4P L=5MM		PCS	1	REJES
	帶支架按制開關				
SW0-50020200-00-00	DIP SWITCH DC 6P (同發寶)		PCS	1	SW2(加開關時用)
	拔動開關				
TR0-10435000-00-00	TRANSISTOR BD435 NPN TO- 126ML		PCS	1	Q25
	三极管				
TR0-12458026-00-00	TRANSISTOR C2458GR NPN TO-92		PCS	3	Q1.2.14
	三极管				
TR0-20772000-00-00	TRANSISTOR KSB772-Y PNP TO-126ML		PCS	2	Q20.26
	三极管				
TR0-61015806-00-00	CHIP TRANSISTOR HMBT1015 SOT-23 PNP (M6)		PCS	3	Q11.5.7
	貼片三极管				
TR0-61815824-00-00	CHIP TRANSISTOR HMBT1815 SOT-23 NPN (L6)		PCS	17	Q501.508.30.3.15- 19.12.21.13.4.32.28.8. 29
	貼片三极管				
TU0-50070001-00-00	AM/FM TUNER CET-7000AFL (EU BAND)		PCS	1	
	AM/FM高頻頭				
Assembly Code:					
	PCB-94CE3170-07-00	FRONT BOARD A'SSY 前板部件			
CC0-10215500-00-00	CHIP CAP 0805 厚=0.8MM 102P X7R 50V +/-10%		PCS	1	C3
	貼片電容				
CC0-10510500-00-00	CHIP CAP 0805 厚=1.25MM 1UF X7R 50V +/-10%		PCS	1	C4

	貼片電容				
CC0-33015500-00-00	CHIP CAP 0805 厚=0.8MM 33P NPO 50V +/-5%		PCS	2	C1.2
	貼片電容				
CF0-17200301-00-00	CRYSTAL 7.2MHZ 2LEG		PCS	1	
	晶體2腳				
CR0-10150210-00-00	CHIP RESISTOR 0805 100 OHM 1/8W +/-5%		PCS	4	R41-44
	貼片電阻				
CR0-10250210-00-00	CHIP RESISTOR 0805 1K OHM 1/8W +/-5%		PCS	5	R1.2.3.31.21
	貼片電阻				
CR0-15250210-00-00	CHIP RESISTOR 0805 1K5 OHM +/-5%		PCS	2	R22.32
	貼片電阻				
CR0-18150210-00-00	CHIP RESISTOR 0805 180 OHM 1/8W +/-5%		PCS	2	R16.26
	貼片電阻				
CR0-22050210-00-00	CHIP RESISTOR 0805 22 OHM 1/8W+/-5%		PCS	1	R45
	貼片電阻				
CR0-22150210-00-00	CHIP RESISTOR 0805 220 OHM 1/8W +/- 5%		PCS	2	R17.27
	貼片電阻				
CR0-22250210-00-00	CHIP RESISTOR 0805 2K2 OHM 1/8W +/-5%		PCS	2	R23.33
	貼片電阻				
CR0-33150210-00-00	CHIP RESISTOR 0805 330 OHM 1/8W +/-5%		PCS	2	R18.28
	貼片電阻				
CR0-33250210-00-00	CHIP RESISTOR 0805 3K3 OHM 1/8W +/-5%		PCS	11	R24.34.9.15.10.12.13.1 4.4.6.7
	貼片電阻				
CR0-39250210-00-00	CHIP RESISTOR 0805 3K9 OHM 1/8W +/-5%		PCS	2	R5.8
	貼片電阻				
CR0-47050210-00-00	CHIP RESISTOR 0805 47 OHM 1/8W+/-5%		PCS	1	R46
	貼片電阻				
CR0-47150210-00-00	CHIP RESISTOR 0805 470 OHM 1/8W +/-5%		PCS	2	R19.29
	貼片電阻				
CR0-47250210-00-00	CHIP RESISTOR 0805 4K7 OHM +/-5%		PCS	6	R25.35.40.39.37.38
	貼片電阻				
CR0-47350210-00-00	CHIP RESISTOR 0805 47K OHM 1/8W +/-5%		PCS	1	R47
	貼片電阻				
CR0-68150210-00-00	CHIP RESISTOR 0805 680 OHM 1/8W +/-5%		PCS	2	R20.30
	貼片電阻				
CR0-68250210-00-00	CHIP RESISTOR 0805 6K8 OHM 1/8W +/-5%		PCS	1	R11
	貼片電阻				
CR0-82250210-00-00	CHIP RESISTOR 0805 8K2 OHM 1/8W +/-5%		PCS	1	R36
	貼片電阻				
FC0-41806141-01-00	FILEXABLE WIRE 18P 61MM PITH=1MM		PCS	1	
	印刷線				
IC0-30250700-00-00	IC DSD-250 100-TQFP-1414		PCS	1	

	集成電路				
LD0-3CE30601-02-00	LCD DISPLAY 100X26.5MM		PCS	1	
	無腳白底黑字顯示屏(點陣)				
LE0-56120620-00-00	CHIP LED (RED) 0805 SMD		PCS	21	
	貼片紅色發光二極管				
LE0-70080560-00-00	CHIP ULTRA (BLUE) 0805 SMD		PCS	1	LD17
	貼片超高亮藍色發光二極管				
Assembly Code:					
	PCB-94CE3170-07-00	FRONT BOARD A'SSY 前板部件			
PB0-CE317075-07-D2	P.C.B CE3170-D2 165X41MM FR4 HB TH=1.6MM		PCS	1	
	雙面前板(點陣LCD)				
SK0-13180000-01-01	18PIN CONNECTOR MALE P-18A 2.0MM 單排腳		PCS	1	
	平腳連接器公				
SK0-14180000-01-01	18PIN CONNECTOR FEMALE P-18B 2.0MM 單排腳		PCS	1	
	連接器母				
SW0-10020430-00-00	TACT SWITCH SKQM 2P 3.5X6X4.3MM		PCS	17	
	按制開關				
SW0-10040250-00-00	TACT SWITCH 4PIN 2.5MM SMD PM1157		PCS	1	
	貼片式輕觸按鍵				
VR0-80008700-01-00	ENCODER VOLUME L=8.7MM E22A1A3AV1A50401		PCS	1	
	編碼音量電位器				
ZE0-95CE3010-00-00	ZEBRRA RUBBER 93.6X7.3X2.5MM		PCS	1	
	導電橡膠連接片(粉色)				
Assembly Code:					
	PPA-95CE3170-00-20	PLASTIC PARTS A'SSY 塑膠料部件(CD+RDS+MP3+ESP)LCD			
PP0-00732380-YH-00	FUSE SLEEVE		PCS	3	
	保險絲套管				
PP0-00882000-AU-00	PLASTIC LOCK		PCS	1	
	鎖片				
PP0-00882000-DN-00	TRANSFORMER BRACKET		PCS	1	
	火牛支架				
PP0-00923020-BA-00	EJ-KNOB		PCS	0	
	出帶透光鈕				
PP0-00923020-BA-01	EJ-KNOB-01(絲印"EJ")		PCS	1	
	出帶透光鈕-01				
PP0-00923030-AM-00	LCD PMMA		PCS	1	
	LCD亞加力				
PP0-00923030-CP-00	BRACKET FOR LCD		PCS	1	
	LCD支架				
PP0-00928000-PY-00	GEAR-B		PCS	1	
	塑膠齒輪				
PP0-00928000-PZ-00	GEAR-A		PCS	1	
	月牙齒輪				
PP0-00928800-YL-00	LEFT COVER BOTTOM		PCS	1	
	翻板左下蓋				
PP0-00928800-YN-00	RIGHT COVER BOTTOM		PCS	1	
	翻板右下蓋				

PP0-88DV3050-AL-00	MIDDLE UP PMMA		PCS	1	
	中上亞加力				
PP0-88DV3080-AG-00	ANTE-THEFT BOX		PCS	1	
	防盜盒				
PP0-88DV3170-01-00	KNOB 01		PCS	0	
	透光鈕 01				
PP0-88DV3170-01-02	KNOB 01-02(絲印"●")		PCS	1	
	透光鈕 01-02				
PP0-88DV3170-02-00	KNOB 02		PCS	0	
	透光鈕 02				
PP0-88DV3170-02-02	KNOB 02-02(絲印"+▲> ")		PCS	1	
	透光鈕 02-02				
PP0-88DV3170-03-00	KNOB 03		PCS	0	
	透光鈕 03				
PP0-88DV3170-03-02	KNOB 03-02(絲印" <▲—")		PCS	1	
	透光鈕 03-02				
PP0-88DV3170-04-00	KNOB 04		PCS	0	
	透光鈕 04				
PP0-88DV3170-04-01	KNOB 04-01(絲印"—")		PCS	1	
	透光鈕 04-01				
PP0-88DV3170-05-00	KNOB 05		PCS	0	
	透光鈕 05				
PP0-88DV3170-05-02	KNOB 05-02(絲印"MD","TA","AF")		PCS	1	
	透光鈕 05-02				
PP0-88DV3170-06-00	KNOB 06		PCS	0	
	透光鈕 06				
PP0-88DV3170-06-02	KNOB 06-02(絲印"●","●")		PCS	1	
	透光鈕 06-02				
PP0-88DV3170-07-00	KNOB 07(電鍍)		PCS	1	
	透光鈕 07				
Assembly Code:					
	PPA-95CE3170-00-20	PLASTIC PARTS A'SSY 塑膠料部件(CD+RDS+ MP3+ESP)LCD			
PP0-88DV3170-08-00	KNOB 08(電鍍)		PCS	1	
	透光鈕 08				
PP0-88DV3170-AA-00	FRONT CABINET		PCS	0	
	面殼				
PP0-88DV3170-AA-02	FRONT CABINET 02(絲印"OPEN","A.P","BAND","S EL")		PCS	1	
	面殼 02				
PP0-88DV3170-AB-00	MIDDLE CABINET		PCS	1	
	中殼				
PP0-88DV3170-AJ-00	LEFT PMMA		PCS	1	
	亞加力(底面噴白油)				
PP0-88DV3170-BW-00	RELEASE KNOB		PCS	1	
	開啓鈕				
PP0-88DV3170-DA-00	LCD LENS		PCS	0	
	LCD 鏡片				
PP0-88DV3170-DA-08	LCD LENS- 08(CD+ESP+RDS+MP3絲印)		PCS	1	

	LCD 鏡片-08				
PP0-95CE7310-AC-00	BOTTOM CAB		PCS	1	
	底殼				
PP0-95CE7310-CR-00	TRIM-OUT		PCS	1	
	裝飾外殼				
PP0-95CE7310-YP-00	RIGHT CONNECTOR COVER		PCS	1	
	右連接蓋				
PPS-88DV3170-01-00	CRYSTAL KNOB 01		PCS	0	
	水晶鈕 01				
PPS-88DV3170-01-02	CRYSTAL KNOB 01-02(絲印"●")		PCS	1	
	水晶鈕 01-02				
PPS-88DV3170-02-00	CRYSTAL KNOB 02		PCS	0	
	水晶鈕 02				
PPS-88DV3170-02-01	CRYSTAL KNOB 02-01(絲印"電源符號")		PCS	1	
	水晶鈕 02-01				
PPT-88DV3170-01-00	PROP 01		PCS	1	
	鈕托 01				
PPT-88DV3170-02-00	PROP 02		PCS	1	
	鈕托 02				