

Service
Service
Service



Service Manual

Horizontal Frequency
32": 31~60 kHz
42"/47": 31~65 kHz

TABLE OF CONTENTS

Description	Page	Description	Page
Table Of Contents.....	1	6.3.Tuner Board.....	26
Important Safety Notice.....	2	6.4.Key Board.....	26
Revision List.....	3	6.5.IR Board.....	26
1. General Specification.....	4	7.Adjustment.....	27
2. Operating Instructions.....	5	8. Block Diagram.....	28
2.1. Remote Control.....	5	9. Schematic.....	47
2.2. Control Buttons and Connections.....	6	9.1.Main Board.....	47
2.3. Use the Menus.....	9	9.2.Power Board.....	57
2.4. Front Panel Control Knobs.....	10	9.3.Tuner Board.....	62
3. Input/Output Specification.....	11	9.4.Key Board.....	70
4. Mechanical Instructions.....	13	9.5.IR Board.....	71
5. Repair Flow Chart.....	16	10.Exploded View.....	72
6. PCB Layout.....	21	11.BOM List.....	75
6.1.Main Board.....	21	12.Different Parts List.....	186
6.2.Power Board.....	24		

SAFETY NOTICE

ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

Important Safety Notice

Proper service and repair is important to the safe, reliable operation of all AOC Company Equipment. The service procedures recommended by AOC and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It is also important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. AOC could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, AOC has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by AOC must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

Hereafter throughout this manual, AOC Company will be referred to as AOC.

WARNING

Use of substitute replacement parts, which do not have the same, specified safety characteristics might create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from AOC. AOC assumes no liability, express or implied, arising out of any unauthorized modification of design.

Servicer assumes all liability.

FOR PRODUCTS CONTAINING LASER:

DANGER-Invisible laser radiations when open AVOID DIRECT EXPOSURE TO BEAM.

CAUTION-Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION -The use of optical instruments with this product will increase eye hazard.

TO ENSURE THE CONTINUED RELIABILITY OF THIS PRODUCT, USE ONLY ORIGINAL MANUFACTURER'S REPLACEMENT PARTS, WHICH ARE LISTED WITH THEIR PART NUMBERS IN THE PARTS LIST SECTION OF THIS SERVICE MANUAL.

Take care during handling the LCD module with backlight unit

- Must mount the module using mounting holes arranged in four corners.
- Do not press on the panel, edge of the frame strongly or electric shock as this will result in damage to the screen.
- Do not scratch or press on the panel with any sharp objects, such as pencil or pen as this may result in damage to the panel.
- Protect the module from the ESD as it may damage the electronic circuit (C-MOS).
- Make certain that treatment person's body is grounded through wristband.
- Do not leave the module in high temperature and in areas of high humidity for a long time.
- Avoid contact with water as it may a short circuit within the module.
- If the surface of panel becomes dirty, please wipe it off with a soft material. (Cleaning with a dirty or rough cloth may damage the panel.)

Revision List

1. General Specification

Modelo	D32W831
Tamanho da Tela (Diagonal)	31.5", 800mm
Resolução	1366x768
Saída Áudio	5Wx2
Voltagem	AC100-240V 50/60Hz
Consumo de Energia (Operação Normal) (Standby)	180W
Dimensões (com base) (L)x(A)x(P) (mm)	783x559x209
Dimensões para Suporte de Parede	200x200mm M6x10mm, 4 pçs
Considerações Ambientais Temperatura de Operação Umidade de Operação Temperatura de Armazenamento Umidade de Armazenamento	0°C~35°C (32°F~95°F) 20~80% -10°C~50°C (14°F~122°F) 20~80%

Modelo	D42H831	D47H831
Tamanho da Tela (Diagonal)	42", 1067mm	47", 1193mm
Resolução	1920x1080	
Saída Áudio	7Wx2	
Voltagem	AC100-24V 50/60Hz	
Consumo de Energia (Operação Normal)	250W	300W
Dimensões (com base) (L)x(A)x(P) (mm)	1009x688x262	1125x768x314
Dimensões para Suporte de Parede	400x200mm M6x10mm. 4pçs	(200+200)x200mm M6x10mm, 6pçs (parafuso)
Considerações Ambientais Temperatura de Operação Umidade de Operação Temperatura de Armazenamento Umidade de Armazenamento	0°C~35°C (32°F~95°F) 20~80% -10°C~50°C (14°F~122°F) 20~80%	

2. Operating Instructions

2.1 Remote Control

Uso do controle remoto

COMP

Selecione a origem de entrada para Componente

VIDEO

Selecione a origem de entrada. Pressione para selecionar AV ou S-VIDEO

TECLAS 0 a 9 / - / 100

Selecione um canal de TV. Pressione "-" para indicar a escolha de um subcanal.

ENTER

Pressione para ajustar as os vários itens das funções no menu.

CC

Selecione o menu Closed Caption no modo TV.

BOTÃO < >

Teclas esquerda e direita para alterar as configurações dos submenus na tela. Quando o menu está fechado, pressione para ajustar o volume.

MENU

Pressione para abrir ou sair do menu.

WIDE

Para escolher o aspecto do display como nos modos: Normal, Wide (Ampla), Zoom ou Cinema.

CH- / CH+

Muda o canal da TV para cima ou para baixo.

CH LIST

Mostra a listagem dos canais digitais disponíveis.

VIDEO ADJ

Muda os pré-ajustes do modo vídeo.

FREEZE

Congela a imagem da tela.

PC/HDMI

Selecione a origem de entrada para HDMI/PC.

POWER

Liga/desliga o televisor. (Nota: a TV nunca é desligada por completo ao menos que tirada da tomada).

TV

Selecione a origem de entrada para TV (antena ou cabo) ou TV Digital (DTV).

MUTE

Ativa e desativa o som.

DISPLAY

Pressione para mostrar a informação sobre a fonte de entrada ou o canal da TV.

SLEEP

Define o tempo para desligar automaticamente o televisor. Pressione a tecla repetidamente para selecionar 5, 10, 15, 30, 45, 60, 90, 120, 180 e 240 minutos.

MTS / SAP

Ativa os sons da TV, tais como: Stereo, SAP ou Mono.

PREV CH

Volta ao canal de TV anterior.

EXIT

Pressione para sair do menu ou OSD.

EPG

Pressione para mostrar o EPG (Guia de Programação Eletrônica). Ele contém a informação da programação do canal que você está assistindo. Somente no modo TV Digital.

VOL - / VOL +

Pressione + ou - para ajustar o volume.

BOTÃO ΔV

Teclas para subir ou descer nos menus na tela. Quando os menus estão fechados, pressione para mudar o número do canal.



DTV MENU

Pressione para abrir ou sair do menu Digital TV.

SOURCE


Mostra a fonte de informação.

AUDIO ADJ

Muda os pré-ajustes do modo áudio.

2.2 Control Buttons and Connections

Control Buttons

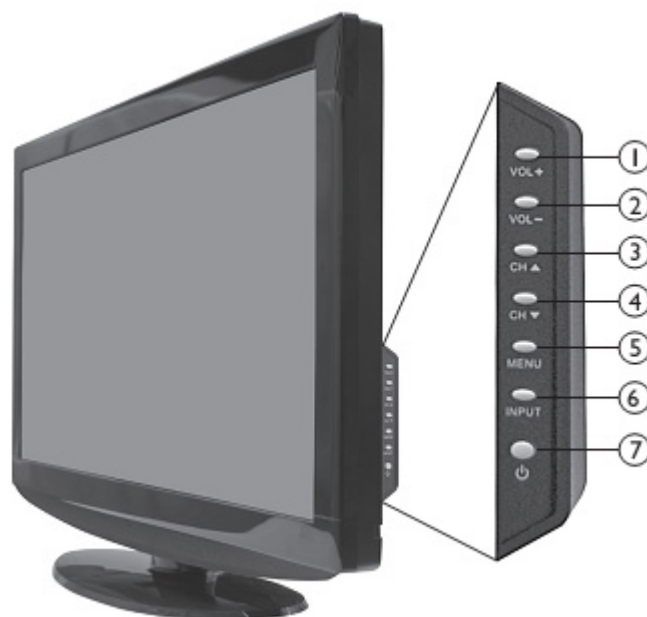


1 VOL +	VOL +: Pressione para aumentar o nível do volume do som.
2 VOL -	VOL -: Pressione para diminuir o nível do volume do som.
3 CH ▲	CH +: Pressione para selecionar o próximo número maior na programação.
4 CH ▼	CH -: Pressione para selecionar o próximo número menor na programação.
5 MENU	Pressione para abrir ou sair do menu OSD.
6 INPUT	Pressione para selecionar a fonte de entrada.
7 POWER	Pressione para ligar / desligar (standby) o aparelho de TV.

FONTE

TV
DTV
AV 1
AV 2
SVIDEO 1
SVIDEO 2
COMPONENTE
HDMI 1
HDMI 2
VGA

Uma vez que seu equipamento periférico estiver conectado: Pressione o botão INPUT para selecionar a fonte de entrada do seu equipamento. (ex: Selecione AVI se você tiver conectado um DVD na entrada AVI).

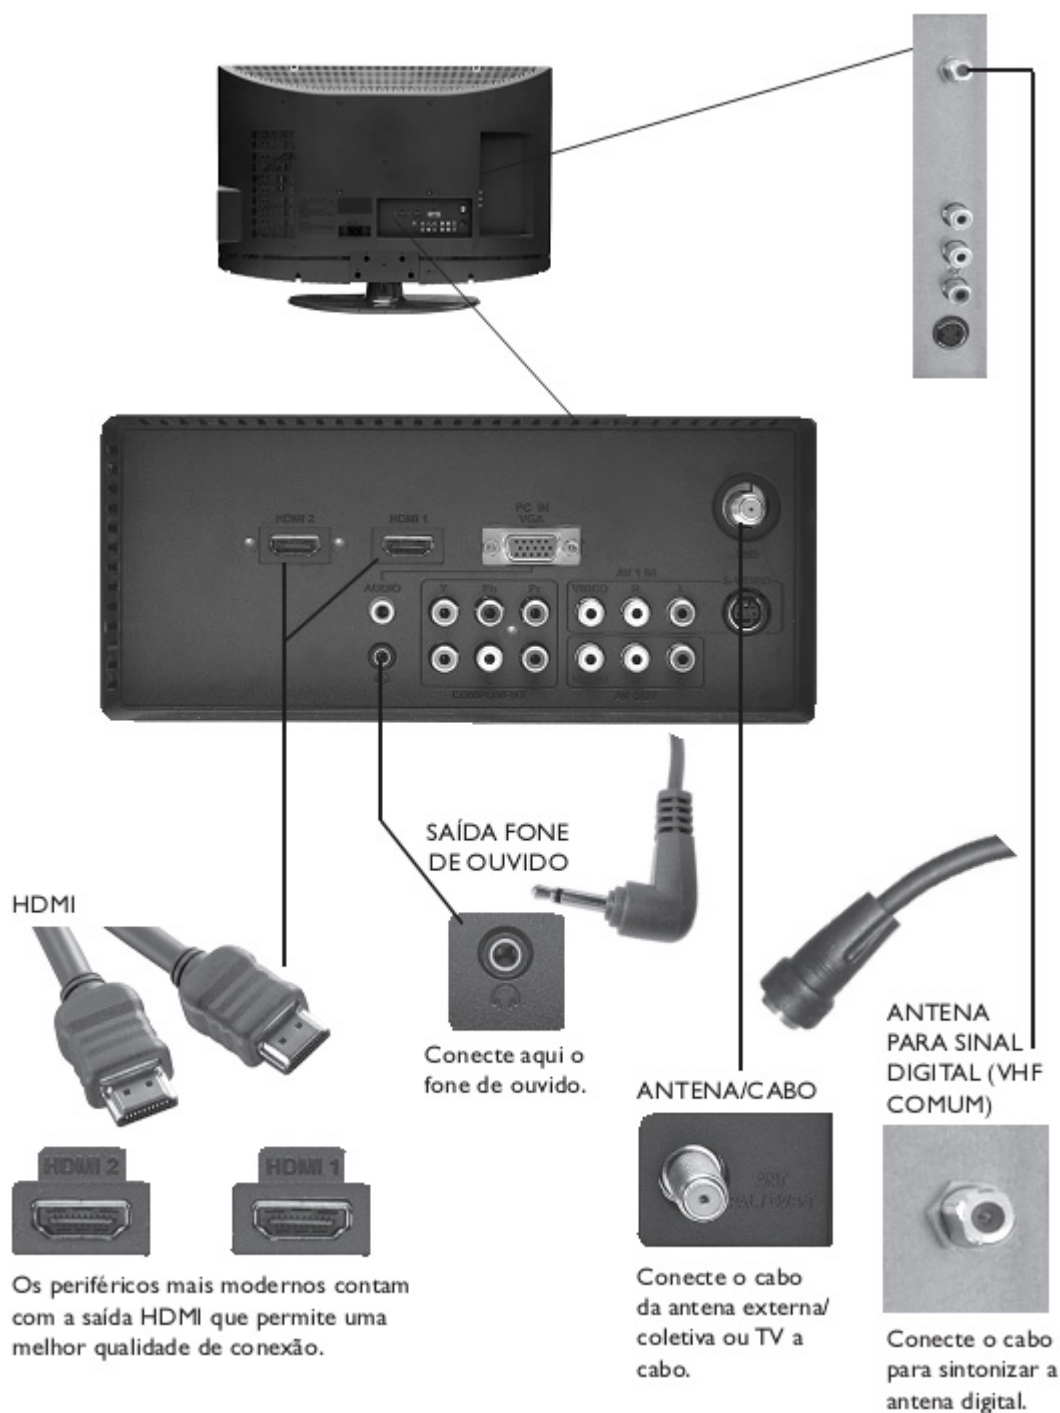



NOTA: Uma vez que seu equipamento estiver conectado, use o seguinte procedimento para verificar a entrada de sinal:

Pressione o botão Source no controle remoto para selecionar a fonte apropriada a ser verificada. (ex.: Pressione o botão VIDEO para selecionar "AV" - se você conectou um gravador de vídeo ao soquete Componente Traseiro).


2.3 Use the Menus

ATRAVÉS DO CONTROLE REMOTO



1. Pressione o botão MENU para mostrar o menu principal.
2. Use o cursor direita/esquerda para selecionar um item do menu.
3. Use o cursor para cima/para baixo para entrar num submenu.
4. Pressione o botão ENTER para habilitar/desabilitar a função.
5. Pressione o botão MENU ou EXIT para sair do menu.

ATRAVÉS DO CONTROLE LATERAL

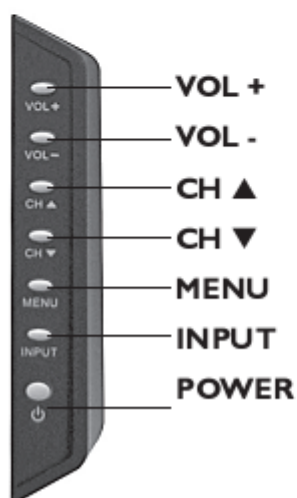


1. Pressione o botão MENU para mostrar o menu principal.
2. Use o cursor VOL+/VOL- para selecionar um item do menu.
3. Use o cursor para cima/para baixo para entrar num submenu.
4. Pressione o botão INPUT para habilitar/desabilitar a função.
5. Pressione o botão MENU para sair.

OPÇÕES DE MENU

O Menu Configuração no modo de TV Analógico é mostrado conforme abaixo.




Pressione o botão MENU para entrar no menu principal. Ajuste os itens incluindo: **Menu Configuração, Menu Vídeo, Menu Áudio e Menu Opção**. No entanto, algumas funções nos menus somente podem ser habilitadas em modos de fontes específicas.

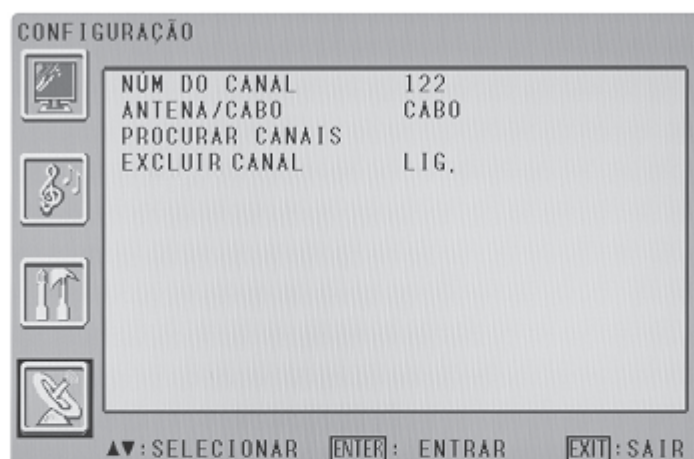

1. **Nº DO PROGRAMA:** Mostra a tarja do canal de TV no menu para que o usuário modifique as tarjas dos canais especificamente.
2. **ANTENA/CABO:** Seleciona a fonte de sinal de TV - Antena (Externa) ou Cabo (CATV).
3. **PROCURAR CANAIS:** Faz uma varredura automática em todos os canais disponíveis na sua região e então armazena numa tabela de canais. Durante esse processo, o menu principal pode mostrar o número dos canais que foram encontrados.
4. **EXCLUIR CANAL:** Você pode selecionar Skip (excluir) em LIGADO/DESLIGADO e assim programar para que nenhum canal possa ser apagado ou adicionado.

MENU VÍDEO

O menu Vídeo em muitos modos de fonte é mostrado conforme abaixo. Ele oferece vários ajustes para o usuário fazer a sintonia fina no display do vídeo. Somente nos modos de fonte VGA, o menu Video simplesmente oferece os itens: **Contraste, Brilho e Temperatura de Cor.**

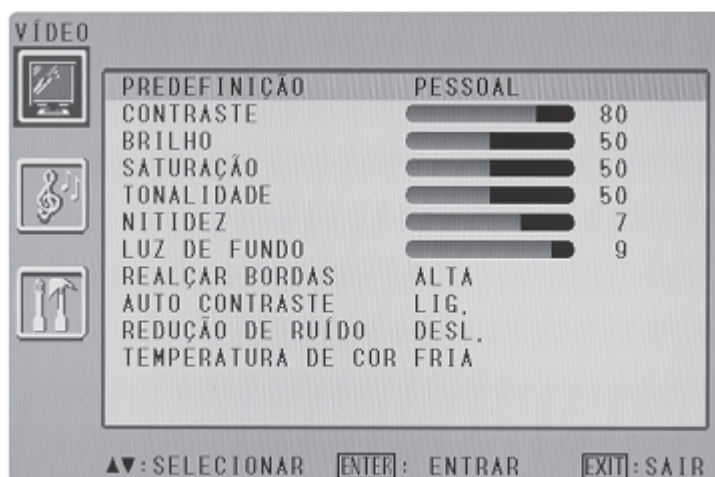

Pré-Definição: O usuário pode selecionar **PADRÃO, SUAVE, FORTE** e **PESSOAL**.


Se você selecionou um dos padrões Pré-Definidos todos os ajustes obedecerão aos padrões de fábrica.

Se você selecionou **PESSOAL** escolha uma opção, então pressione **▲** ou **▼** para selecioná-la. Você pode ajustar:

1. **Contraste:** Ajusta o contraste do vídeo.
2. **Brilho:** Ajusta o brilho do vídeo.
3. **Saturação:** Ajusta a saturação de cores.
4. **Matiz:** Ajusta a tonalidade do vídeo.
5. **Nitidez:** Ajusta a nitidez do vídeo.
6. **Luz de Fundo:** Ajusta a intensidade da luz do menu.
7. **Realçar bordas:** Pressione **<** ou **>** para selecionar **ALTA, DESLIGADA** ou **BAIXA**.
8. **Auto Contraste:** Ajusta automaticamente o contraste da imagem.
9. **Redução de Ruído:** Pressione **<** ou **>** para reduzir a intensidade da interferência em **ALTA, DESLIGADA** ou **MÉDIA**.
10. **Temperatura de Cor:** Pressione **<** ou **>** para selecionar **FRIA, PADRÃO** ou **QUENTE**.

MENU ÁUDIO

O menu Áudio no modo TV é mostrado conforme abaixo. Ele oferece ajustes de áudio ao usuário para modificar a colocação de áudio. A colocação do idioma do áudio somente está disponível com a fonte ATSC TV, a opção estará desabilitada nos outros modos de fonte.

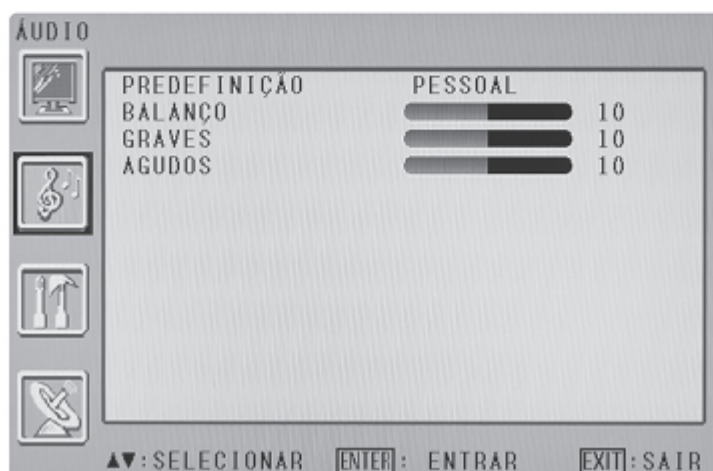


Pressione **▲** ou **▼** para demarcar **ÁUDIO**, então pressione **>**. O menu ÁUDIO se abre.

Pressione **▼** para demarcar **PREDEFINIÇÃO**, então pressione **<** ou **>** para selecionar um modo de áudio. Você pode selecionar: **PESSOAL, VOZ, MÚSICA** ou **TEATRO**

Se você selecionar **PESSOAL**, pressione **▲** ou **▼** para demarcar uma opção, então pressione **▲** ou **▼** para ajustar a opção. Você pode ajustar:

- **BALANÇO** - Ajusta o balanço entre os canais de áudio direito e esquerdo.
- **GRAVES** - Ajusta os sons baixos.
- **AGUDOS** - Ajusta os sons altos.

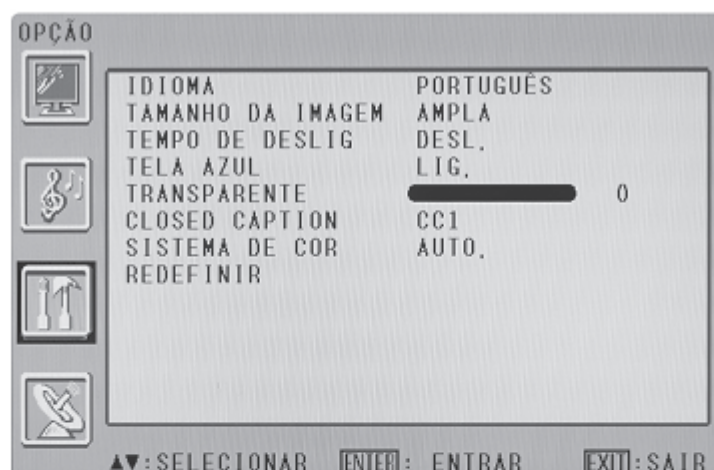

1. IDIOMA: você pode selecionar Inglês, Espanhol, Português ou Francês.

2. TAMANHO DA IMAGEM: você pode escolher Wide, Zoom, Cinema, Normal.

3. TEMPO DE DESLIGAMENTO (SLEEP TIMER): Habilita ou desabilita o tempo que a TV ficará em modo standby. O usuário pode colocar a TV para desligar em 5 min / 10 min / 15 min / 30 min / 45 min / 60 min / 90 min / 120 min / 180 min / 240 min. O temporizador começa a contagem após o cursor sair do submenu. (Neste momento, o item mostra **00**** min restantes) e o cursor demarca o ícone Opção).

4. TELA AZUL: você pode selecionar tela azul em Ligada/Desligada.

5. TRANSPARENTE: você pode selecionar de 0 a 7.


6. CLOSED CAPTION: Você pode selecionar o modo de legendas entre: CC1, CC2, CC3, CC4, TEXT1, TEXT2, TEXT3 or TEXT4.

7. SISTEMA DE COR: Com esta função você pode selecionar o sistema de cores, o padrão de fábrica é Auto, mas você pode escolher: Auto, NTSC, PAL M & PAL N.

8. REDEFINIR: Você pode redefinir todas as colocações ao sistema original de fábrica (default).

MENU DE CONFIGURAÇÃO MODO VGA

Esta opção somente mostra e está disponível no modo VGA, o qual oferece vários itens para sintonia fina do display VGA.

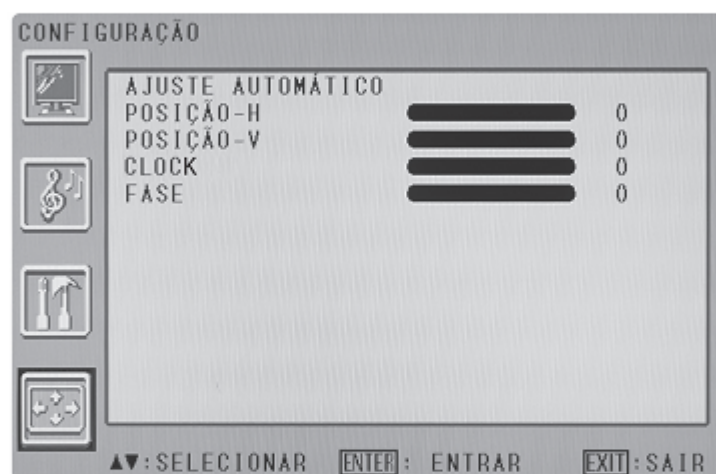

1. Auto Ajuste: Faz a sintonia fina para uma melhor apresentação na tela.

2. Posição-H: Ajusta a posição horizontal da tela.

3. Posição-V: Ajusta a posição vertical da tela.

4. Clock

5. Fase: Aperfeiçoa e refina o foco e a estabilidade da imagem.


COMO UTILIZAR O MENU DA TV DIGITAL

1. Pressione o botão DTV MENU para mostrar o menu DTV principal.
2. Pressione "△", "▽" para selecionar um item do menu.
3. Pressione "<", ">" para entrar num submenu.
4. Pressione ENTER (ENTRAR) para habilitar/desabilitar a função.
5. Pressione EXIT (SAIR) para sair do menu.



ARMAZENANDO CANAIS DIGITAIS NA MEMÓRIA

AUTO BUSCA

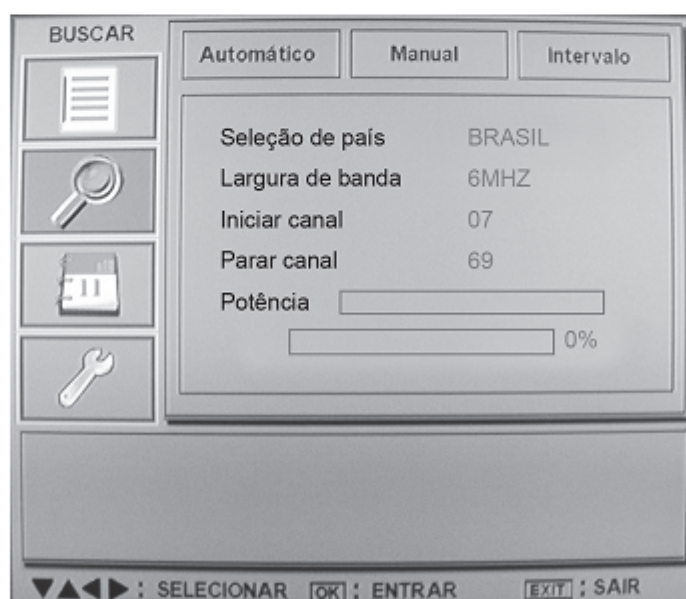

1. Pressione o botão **DTV MENU** para entrar no menu principal.
2. Pressione "△", "▽" para selecionar o menu "**BUSCAR**".
3. Pressione "<", ">" para selecionar "**Automático**", então pressione **ENTRAR** para operar a função Auto Busca de Canais.
Para parar a busca, pressione **SAIR** a qualquer hora.
4. A tela de Auto Busca será mostrada, e após sua apresentação, a tela retornará ao primeiro canal encontrado.

BUSCA MANUAL

1. Pressione "<", ">" para selecionar "**Manual**".
2. Selecione **Número do Canal** e então pressione **ENTRAR** para operar a função de Busca Manual.

INTERVALO DE BUSCA DE CANAIS

1. Pressione "<", ">" para selecionar "**Intervalo**".
2. Selecione **Iniciar canal** e **Parar canal** e então pressione **ENTRAR** para operar a função Intervalo.

LISTA DE CANAIS



1. Pressione o botão **DTV MENU** para entrar no menu principal.
2. Pressione " $\triangle$ ", " ∇ " para selecionar o menu "**LISTA**". Ou pressione o botão **CH LIST** no controle remoto para trazer as listagens dos canais.


EPG - GUIA DE PROGRAMAÇÃO ELETRÔNICO



A função EPG pode mostrar a informação da programação. Esta função suporta até 7 dias de informação EPG.


Selecione EPG no menu principal ou pressione o botão EPG no controle remoto para iniciar o Guia de Programação Eletrônico.

SETUP - CONFIGURAÇÃO

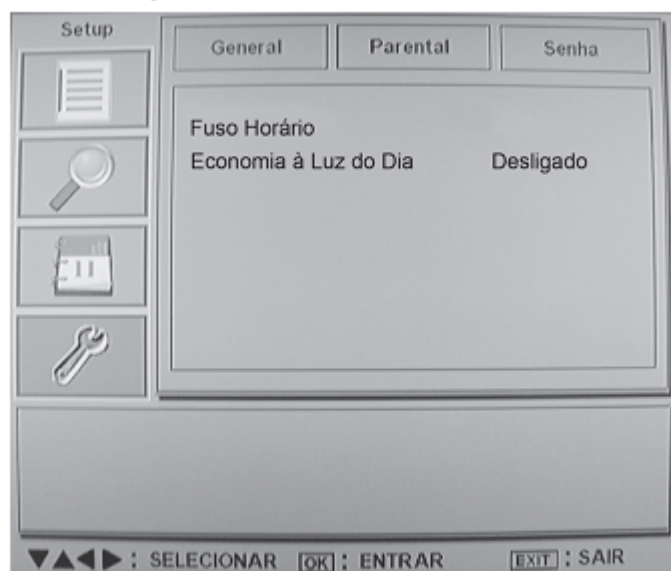


1. **Fuso Horário:** Para ajustar a base de hora local por GMT.
2. **Economia à Luz do Dia:** Para LIGAR ou DESLIGAR o tempo de economia durante a luz do dia.

PARENTAL - BLOQUEIO DE CANAIS PELOS PAIS

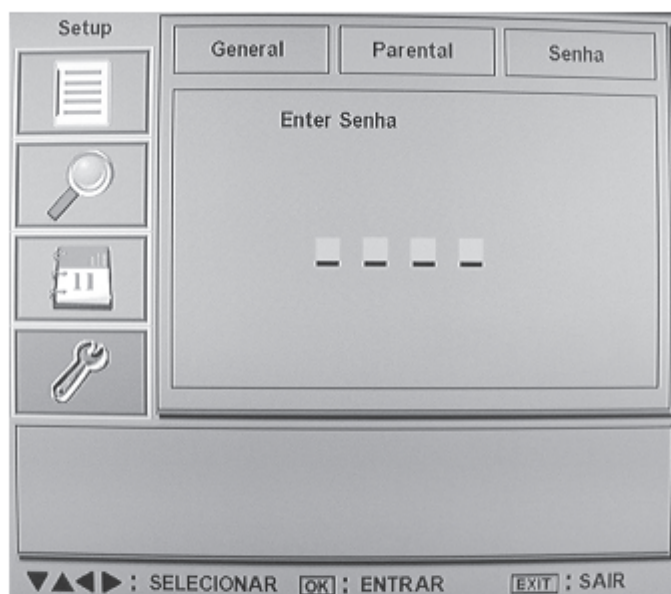


Sua TV possui a função Controle Parental que permite a você controlar os tipos de programas que suas crianças podem assistir. Antes que você selecione esta função, você precisa configurar uma senha para poder habilitá-la.

1. Pressione o botão **DTV MENU** para entrar no menu principal. Pressione "<" ou ">" repetidamente para demarcar "Parental". O menu Parental se abre.
2. Pressione os botões de números para entrar com sua senha. Se você não determinou uma senha, entre com o número **0000**, então acesse a função de controle Parental.
 - A senha padrão de fábrica é **0000**

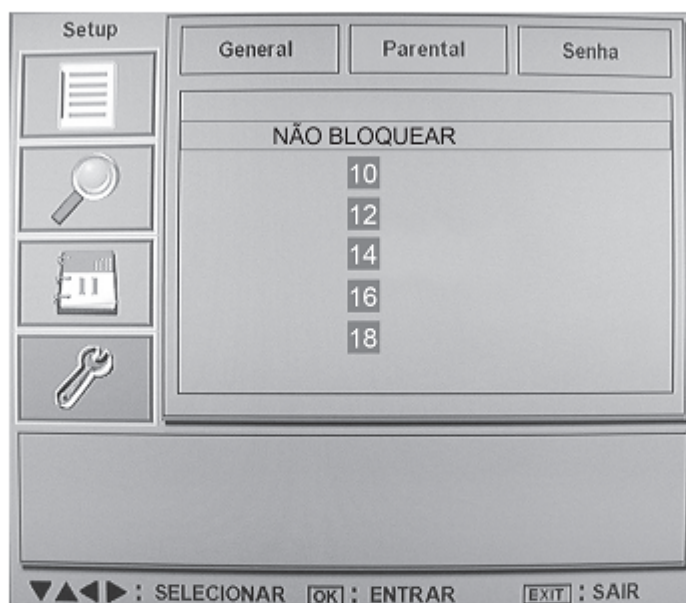

CLASSIFICAÇÃO PARENTAL DE PROGRAMAÇÃO

10	Não recomendado para espectadores com menos de 10 anos de idade
12	Não recomendado para espectadores com menos de 12 anos de idade
14	Não recomendado para espectadores com menos de 14 anos de idade
16	Não recomendado para espectadores com menos de 16 anos de idade
18	Não recomendado para espectadores com menos de 18 anos de idade

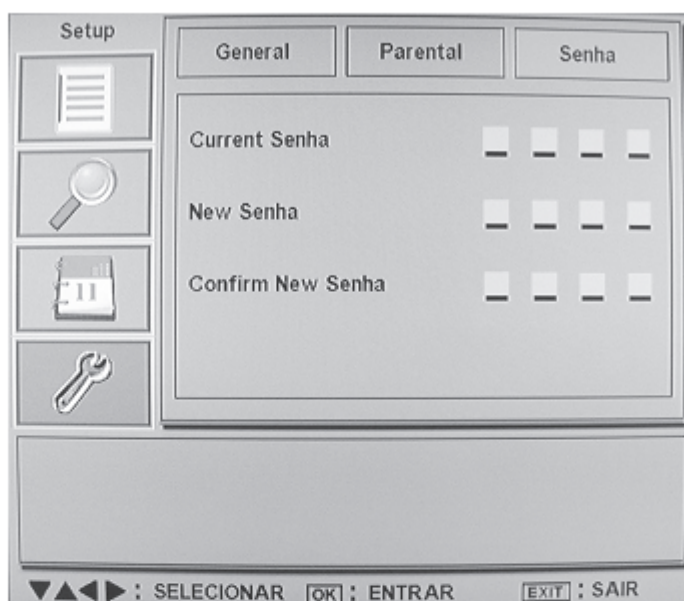




O menu de colocação de senha permite alterar a senha do receptor usando valores numéricos.

1. Pressione os botões de números para entrar com sua senha antiga. Se você não determinou uma senha, entre com **0000**.
2. Pressione os botões de números para entrar com uma nova senha.
3. Pressione os botões de números para confirmar novamente sua nova senha.

** Se você esquecer sua senha, tecla **3448** para resgatar sua senha antiga, então entre com uma nova senha. Esta senha sempre permanecerá válida.*

3. Input/Output Specification

3.1 Connectors

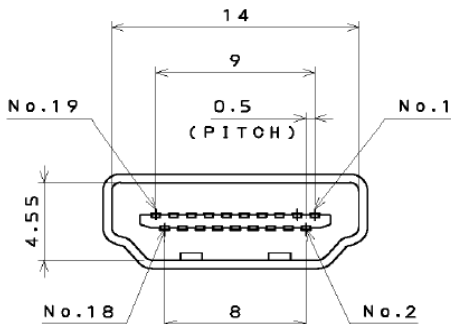CONNECTORS			
AC Power	IEC	: 3 Pin Cord	
The display shall support an IEC C-13/C-14 (Standard) type male power receptacle for connection to mains power.			
			
AV Video	Composite Input Connector		
			
S-video	S-video Input Connector		
			
Component	HD Component YPbPr RCA Video Input (480i, 480P, 720P, 1080i) Connectors		
	SPDIF output test(the black port)		
Analog RGB	: Rear side / Data Cable	: 15-pin D-sub female	
			
Pin – Assignment of 15-pin D-sub:			
1	Red Video	9	No Pin!
2	Green Video	10	Sync Ground
3	Blue Video	11	SDA(Remote Control)
4	SCL(Remote Control)	12	Serial Data for DDC
5	Ground	13	H-Sync.
6	Red Ground	14	V-Sync.
7	Green Ground	15	Serial Clock for DDC
8	Blue Ground		
Digital RGB	:Rear side/Data Cable	: HDMI Video Input Connector	
			
HDMI Digital connector pin assignments:			
PIN	Signal Assignment	PIN	Signal Assignment
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	NC
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		

3.2 Input Signal Timing

Analog RGB Input Signal Timing

Dots × Lines	Horizontal	Vertical	Sync Polarity		Presence		Screen Mode		Remark
	Frequency	Frequency	Horizontal	Vertical	Horizontal	Vertical	Normal	FULL	
	(kHz)	(Hz)					(4:3)	(16:9)	
720×400	31.47	70.00	NEG	POS	YES	YES	YES	YES	
640×480	31.47	59.94	NEG	NEG	YES	YES	YES	YES	
640×480	37.50	75.00	NEG	NEG	YES	YES	YES	YES	
640×480	37.86	72.81	NEG	NEG	YES	YES	YES	YES	
800×600	37.88	60.32	POS	POS	YES	YES	YES	YES	
800×600	46.88	75.00	POS	POS	YES	YES	YES	YES	
800×600	48.08	72.19	POS	POS	YES	YES	YES	YES	
1024×768	48.40	60.00	NEG	NEG	YES	YES	YES	YES	
1360×768	47.70	60.00	POS	POS	YES	YES	YES	YES	
1440×900	55.94	60.00	NEG	POS	YES	YES	YES	YES	Only for 42" and 47"

HDMI Input Signal Timing

VESA MODES							
Mode	Resolution	Total	Horizontal		Vertical		Nominal Pixel Clock (MHz)
			Nominal Frequency (KHz)	Sync Polarity	Nominal Freq. (Hz)	Sync Polarity	
720P	1280×720P		45.00		60		74.25
1080i	1920×1080i		33.75		60		74.25
480P	720×480P		31.54		60		27.00
480i	720×480i		15.75		60		13.51

4.1 D32W831

1. Remove the base as figure 1.



Figure 1

2. Remove the rear cover as figure 2.

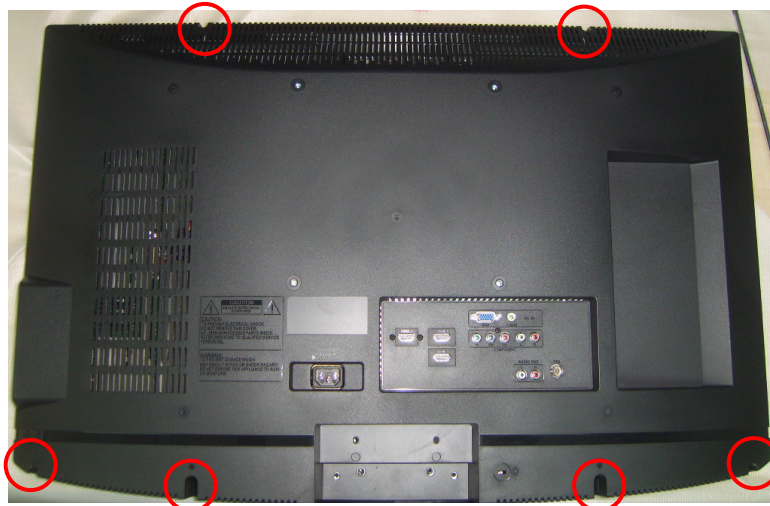


Figure 2

3. Remove the main board, power board and tuner board figure 3.

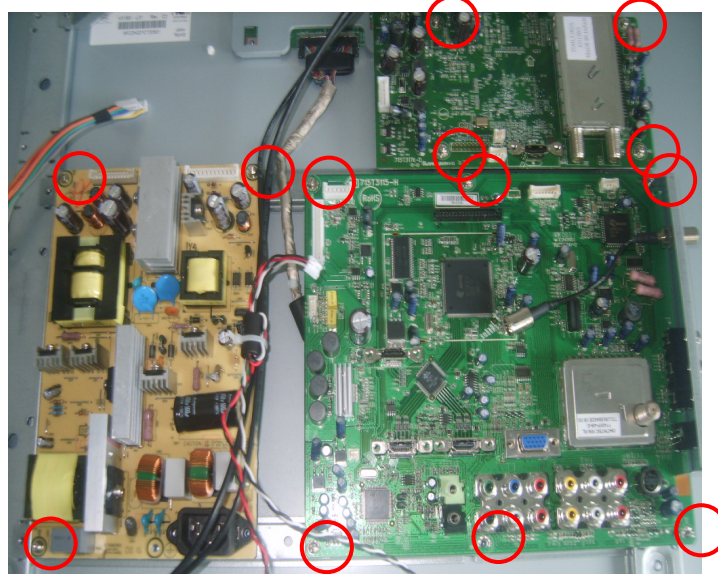


Figure 3

4. Remove the screws to remove the BKT-BASE-SUPPORT BKT-PCB-HOLDER(TOP and BTM) as figure 4.

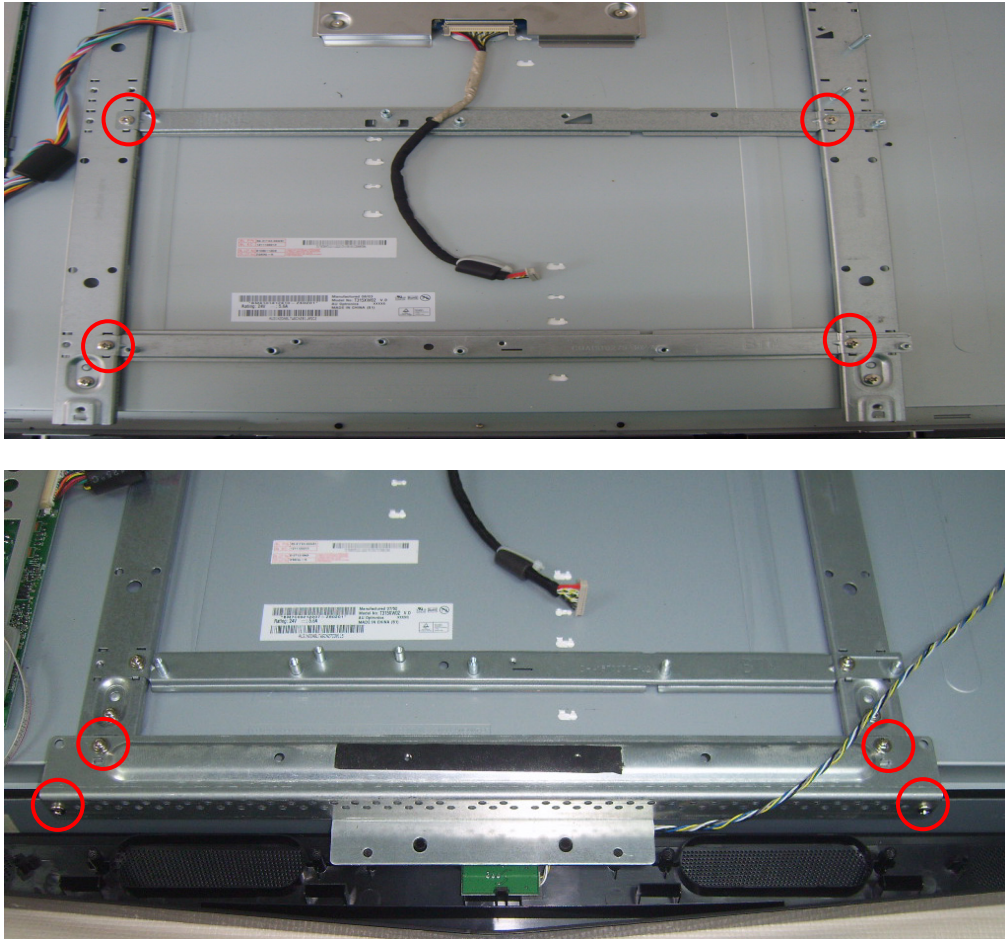


Figure 4

5. Remove the key board and IR board as figure 5.



Figure 5

6. Remove the panel support as figure 6.

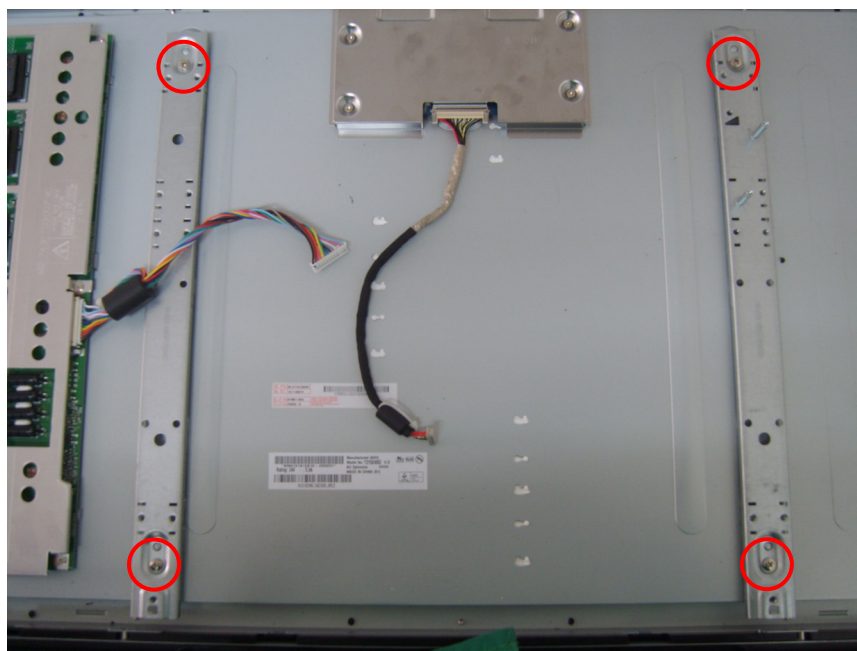


Figure 6

7. Remove the panel as figure 7.

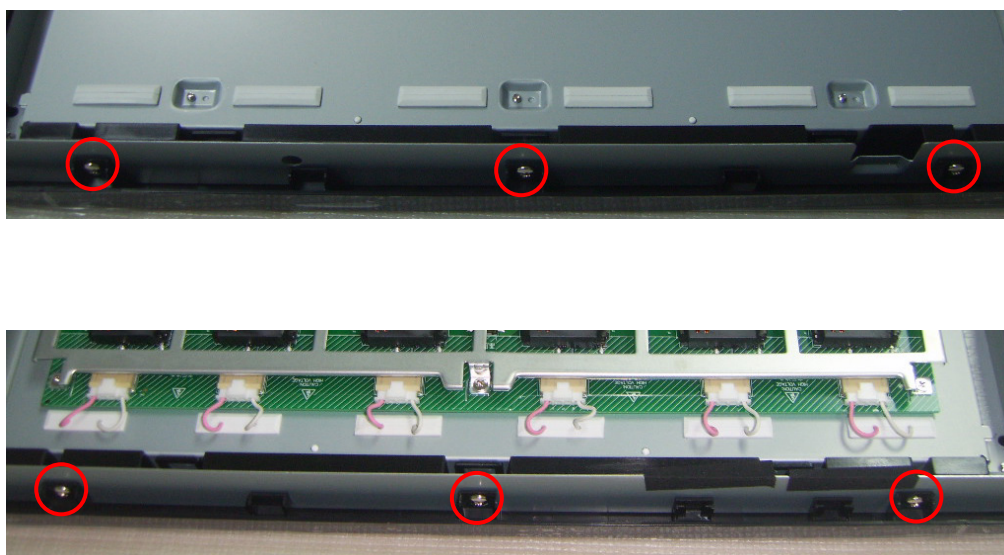


Figure 7

8. The end.



1. Remove the base as figure 1.



Figure 1

2. Remove the rear cover as figure 2.

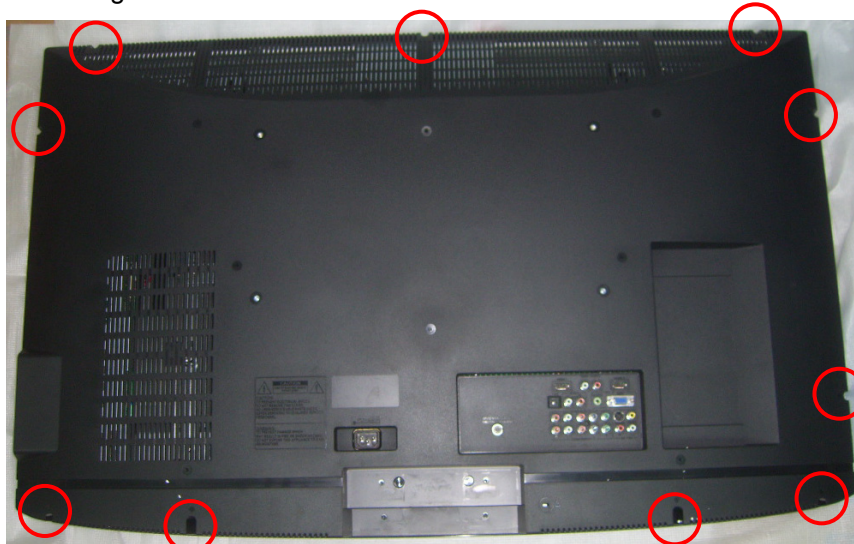


Figure 2

3. Remove the main board, power board, tuner board and key board as figure 3.

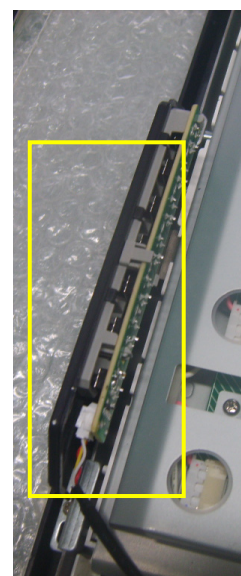
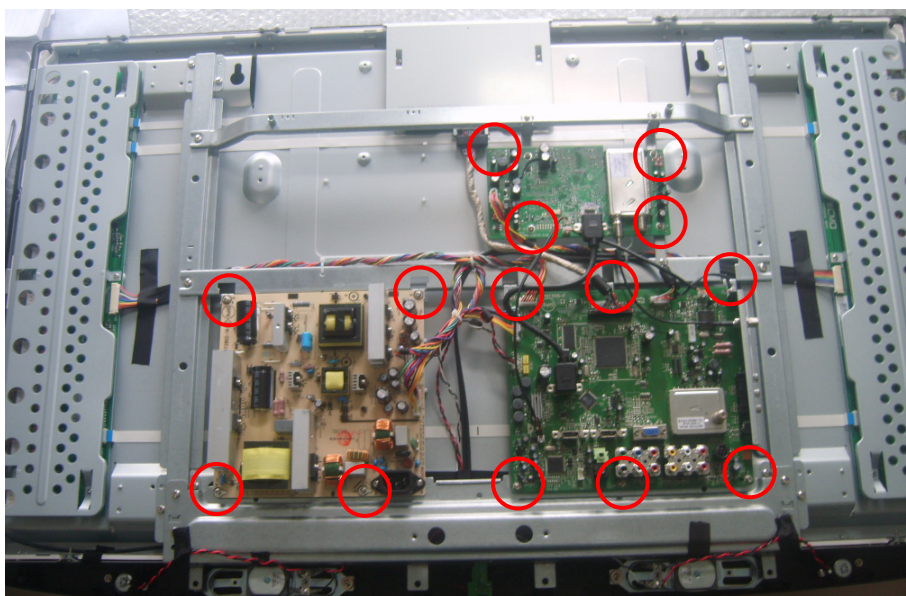


Figure 3

4. Remove the IR board as figure 4.

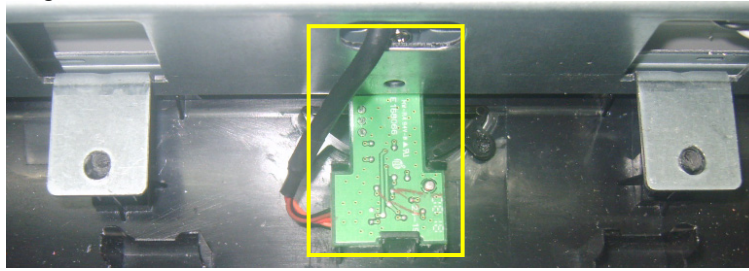


Figure 4

5. Remove the BKT_VESA(big) and BKT_FIX(small) as figure 5.

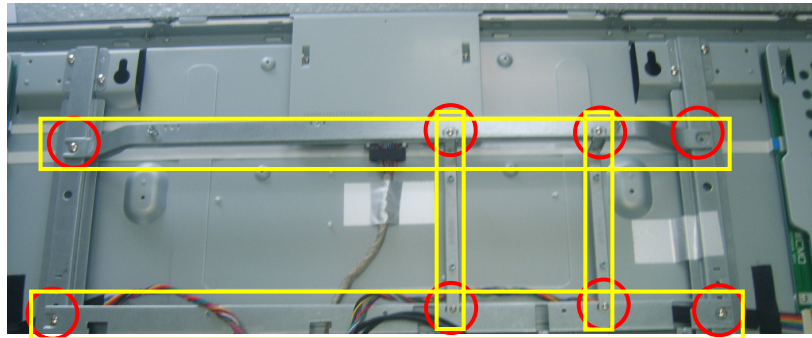


Figure 5

6. Remove the BKT-PCB as figure 6.

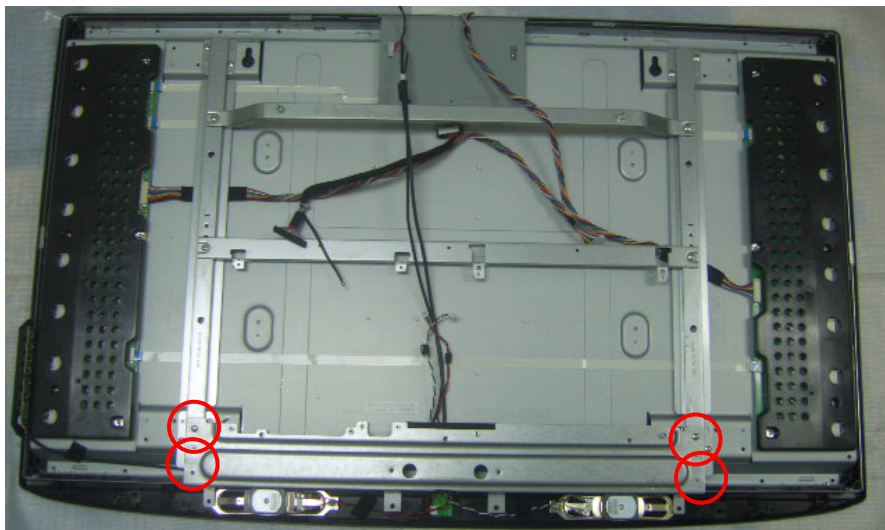


Figure 6

7. Remove the panel BKT as figure 7.

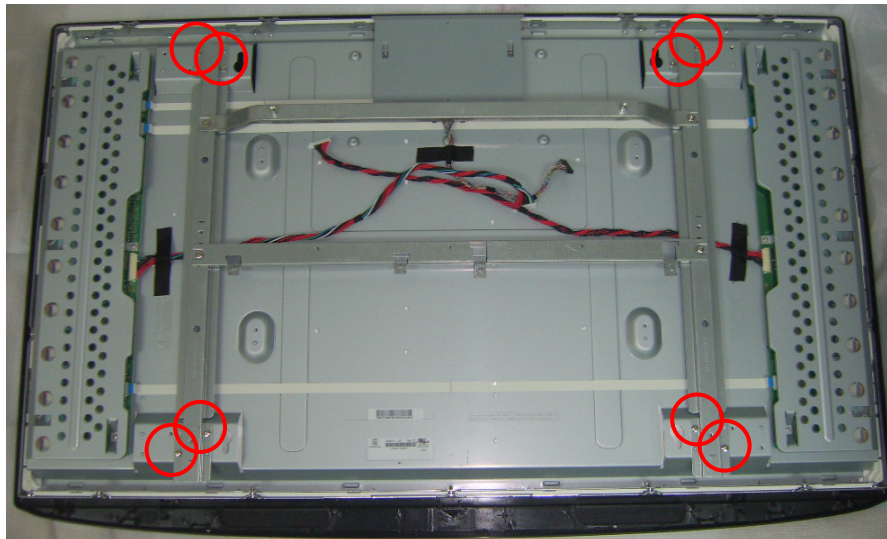


Figure 7

8. The end.



1. Remove the base as figure 1.



Figure 1

2. Remove the rear cover as figure 2.

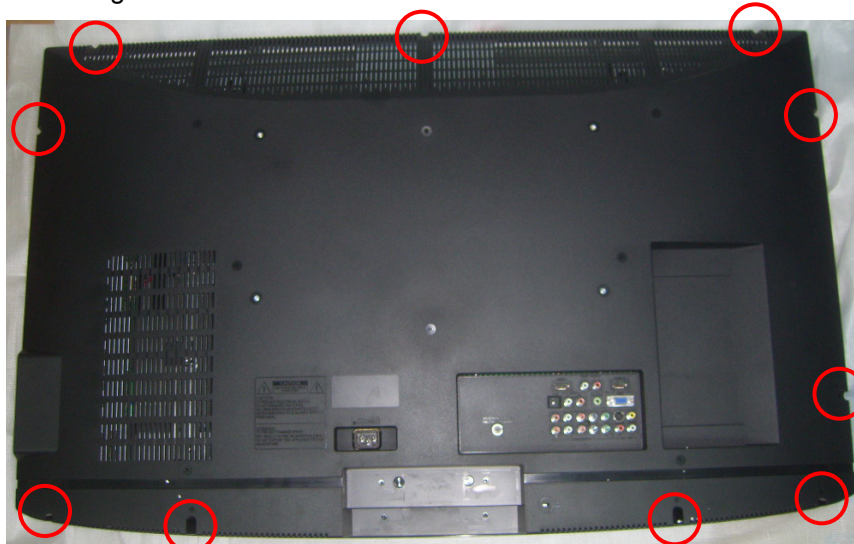


Figure 2

3. Remove the main board, power board, tuner board and key board as figure 3.

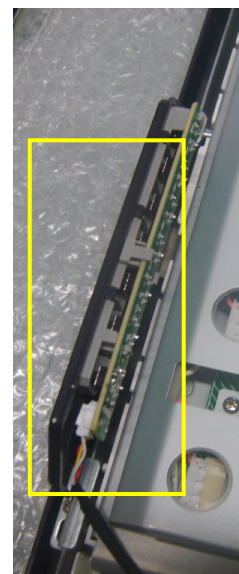
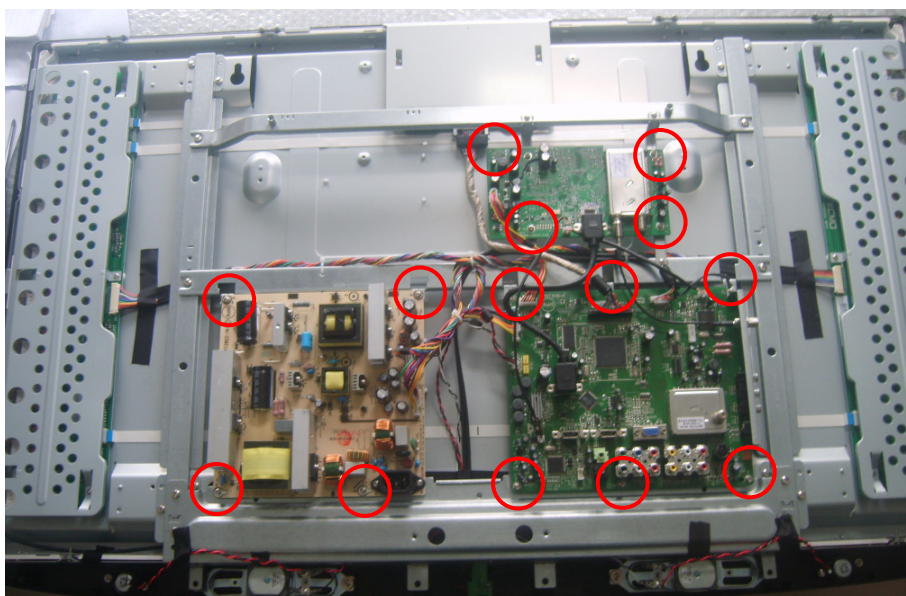


Figure 3

4. Remove the IR board as figure 4.

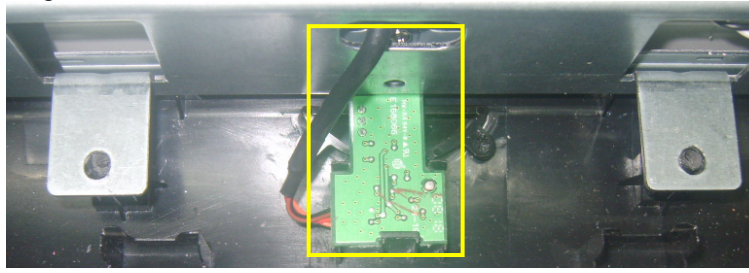


Figure 4

5. Remove the BKT_FIX as figure 5.

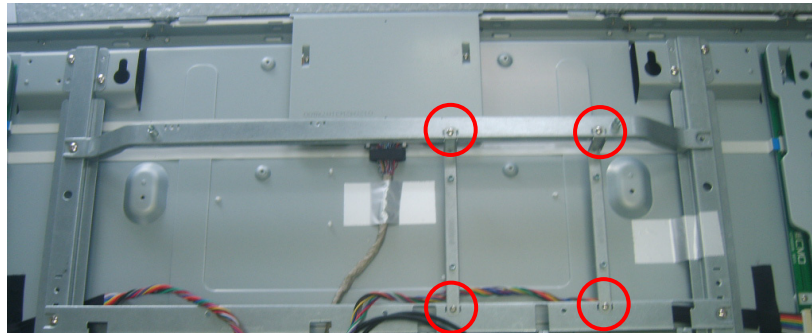


Figure 5

6. Remove the BKT_VESA as figure 6.

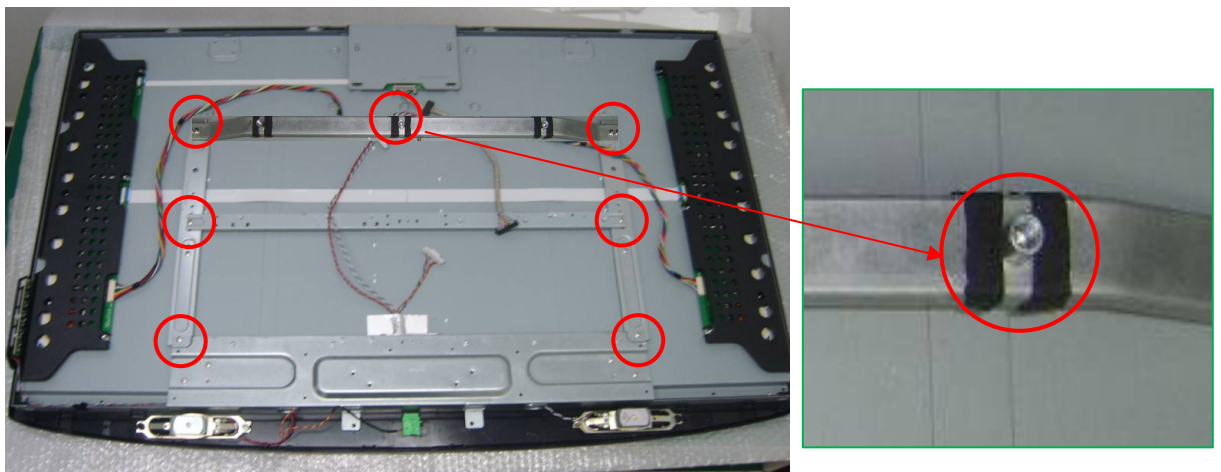


Figure 6

7. Remove the BKT_panel as figure 7.

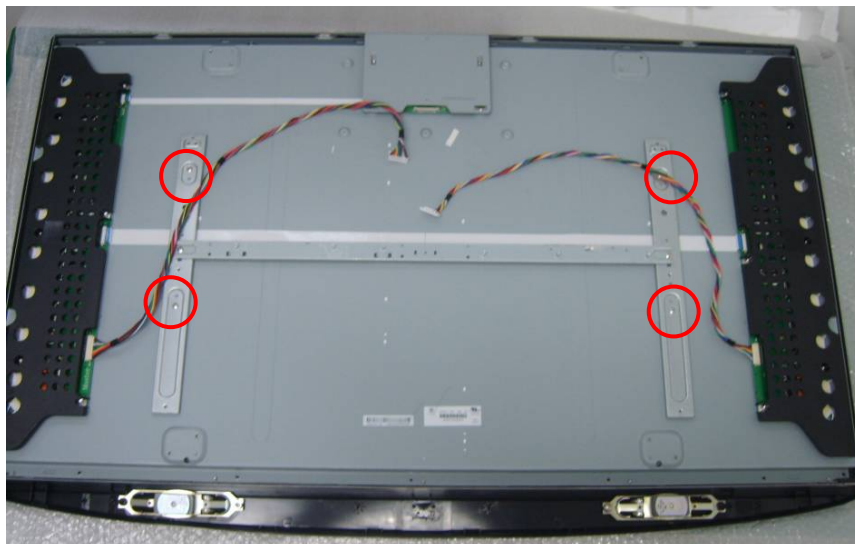



Figure 7

8. The end.




5. Repair Flow Chart


1. No Power (No LED indicator)

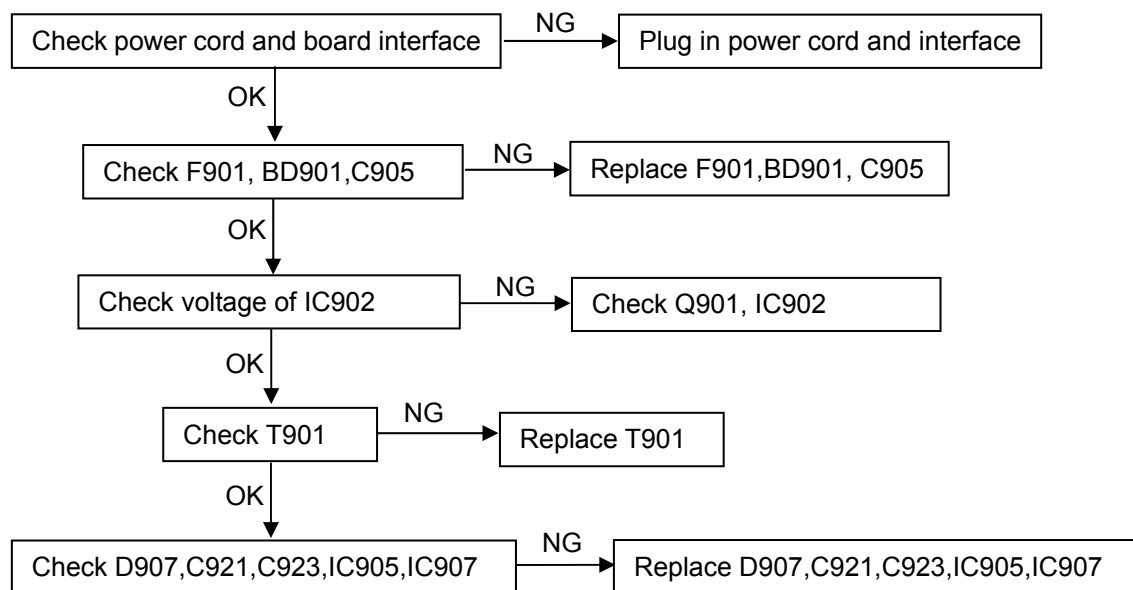


2. Can not start (No LED indicator)

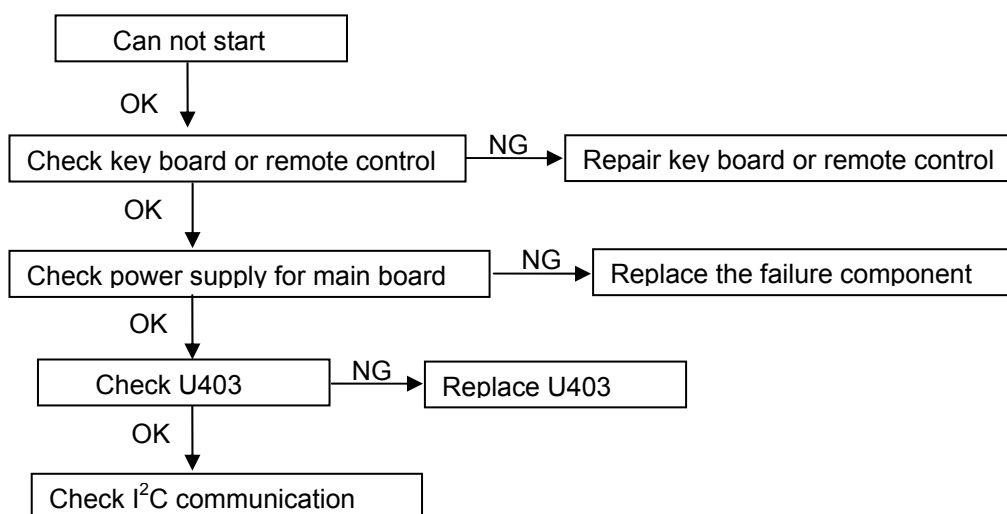


3. No display (LED indicator Green)

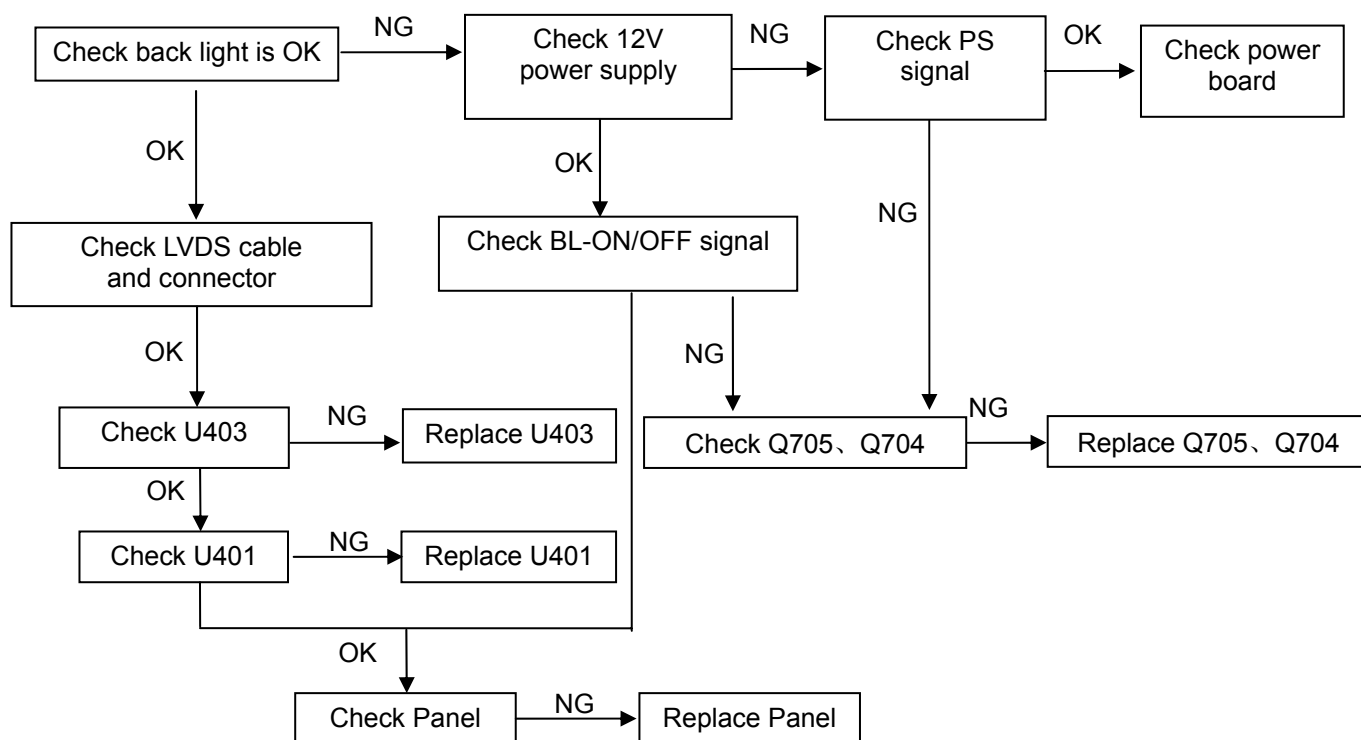


4. Abnormal display

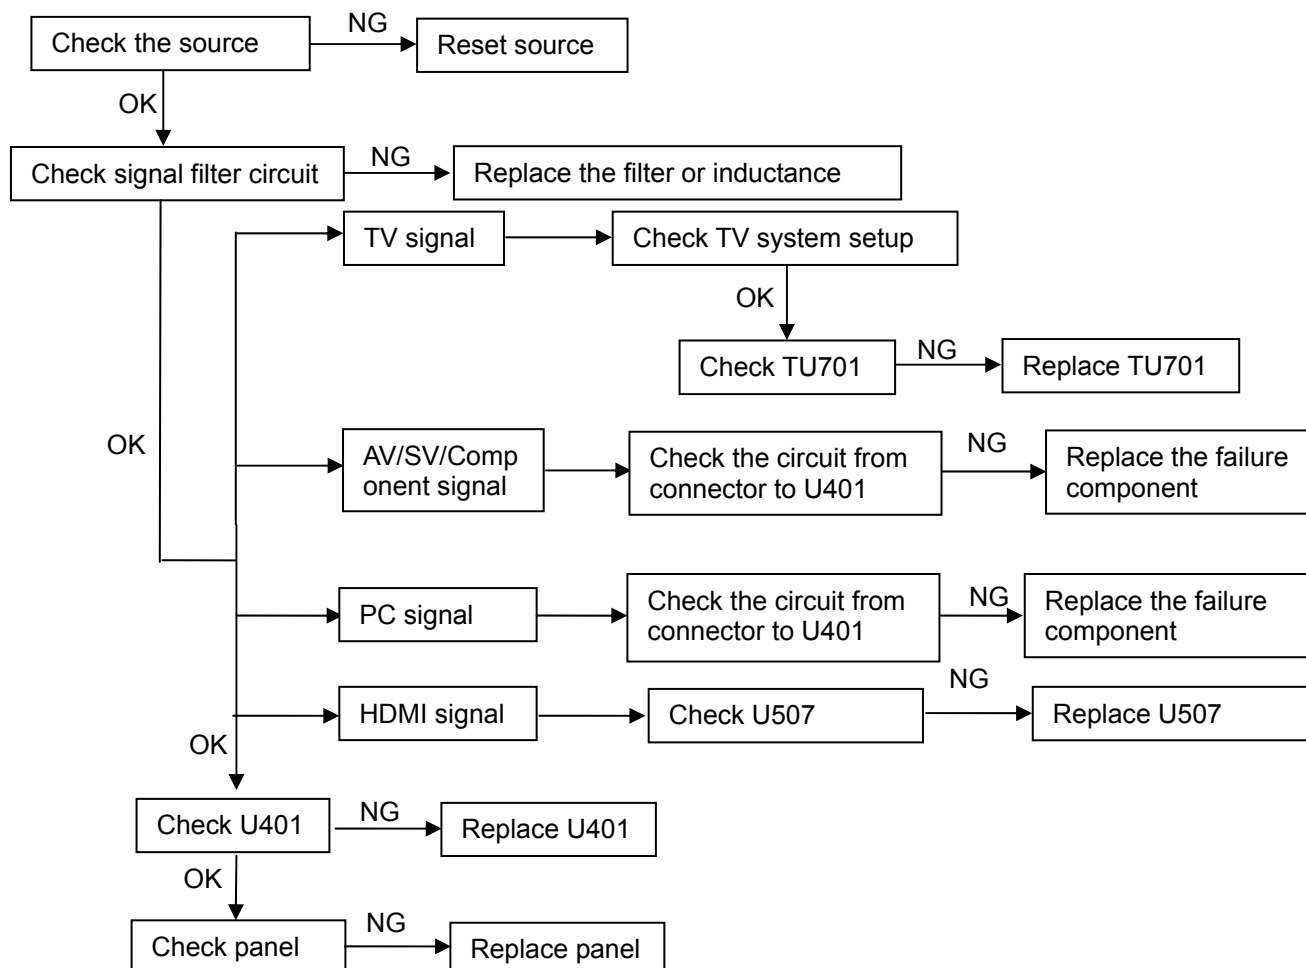

5. No sound

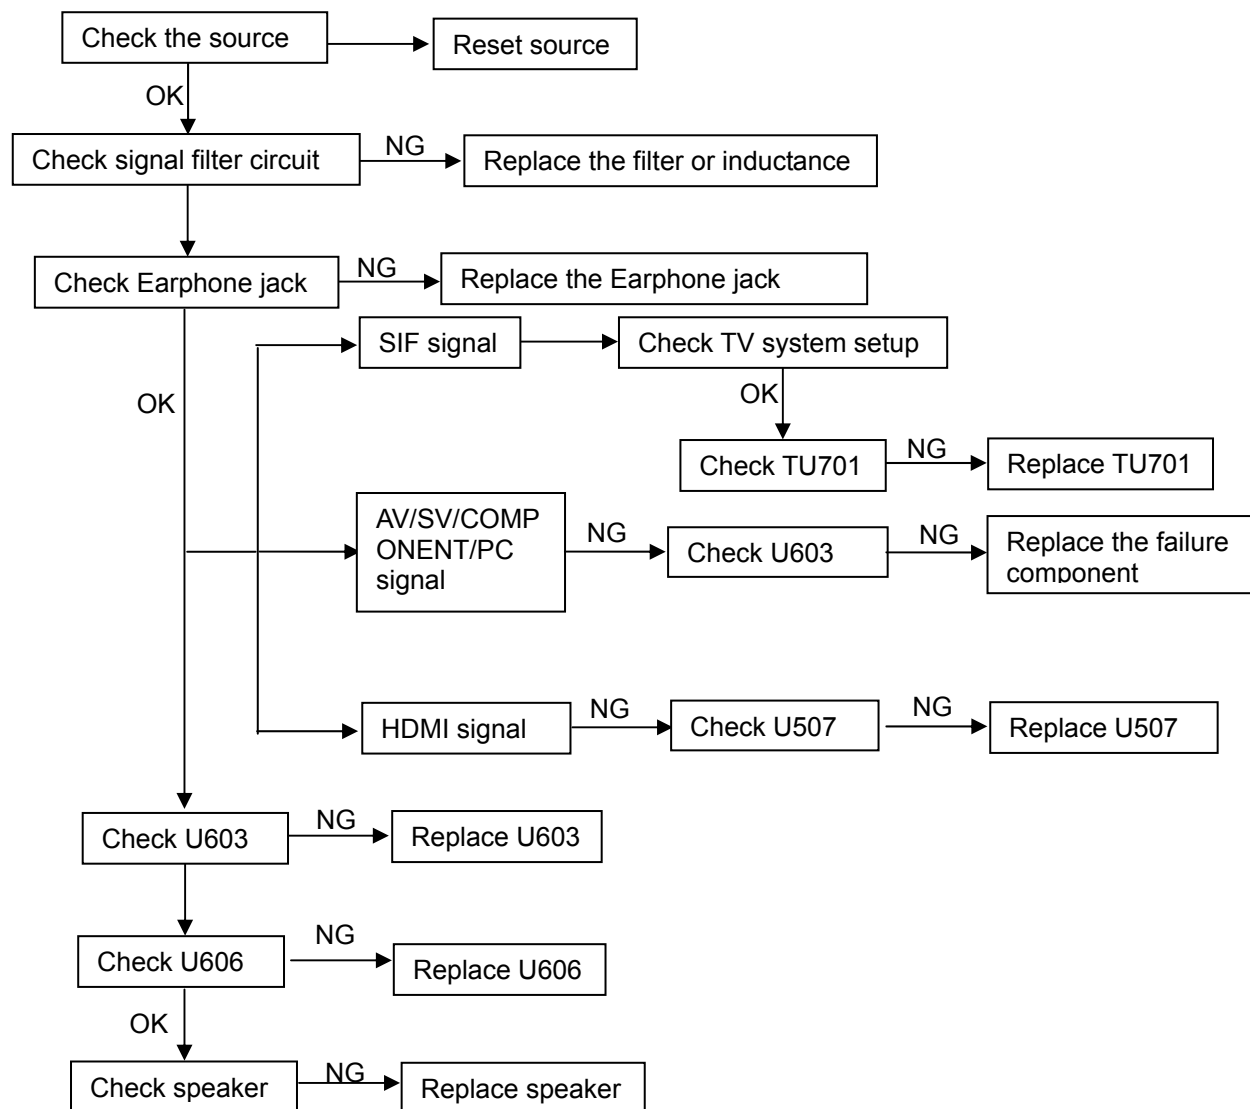


6. Key Board

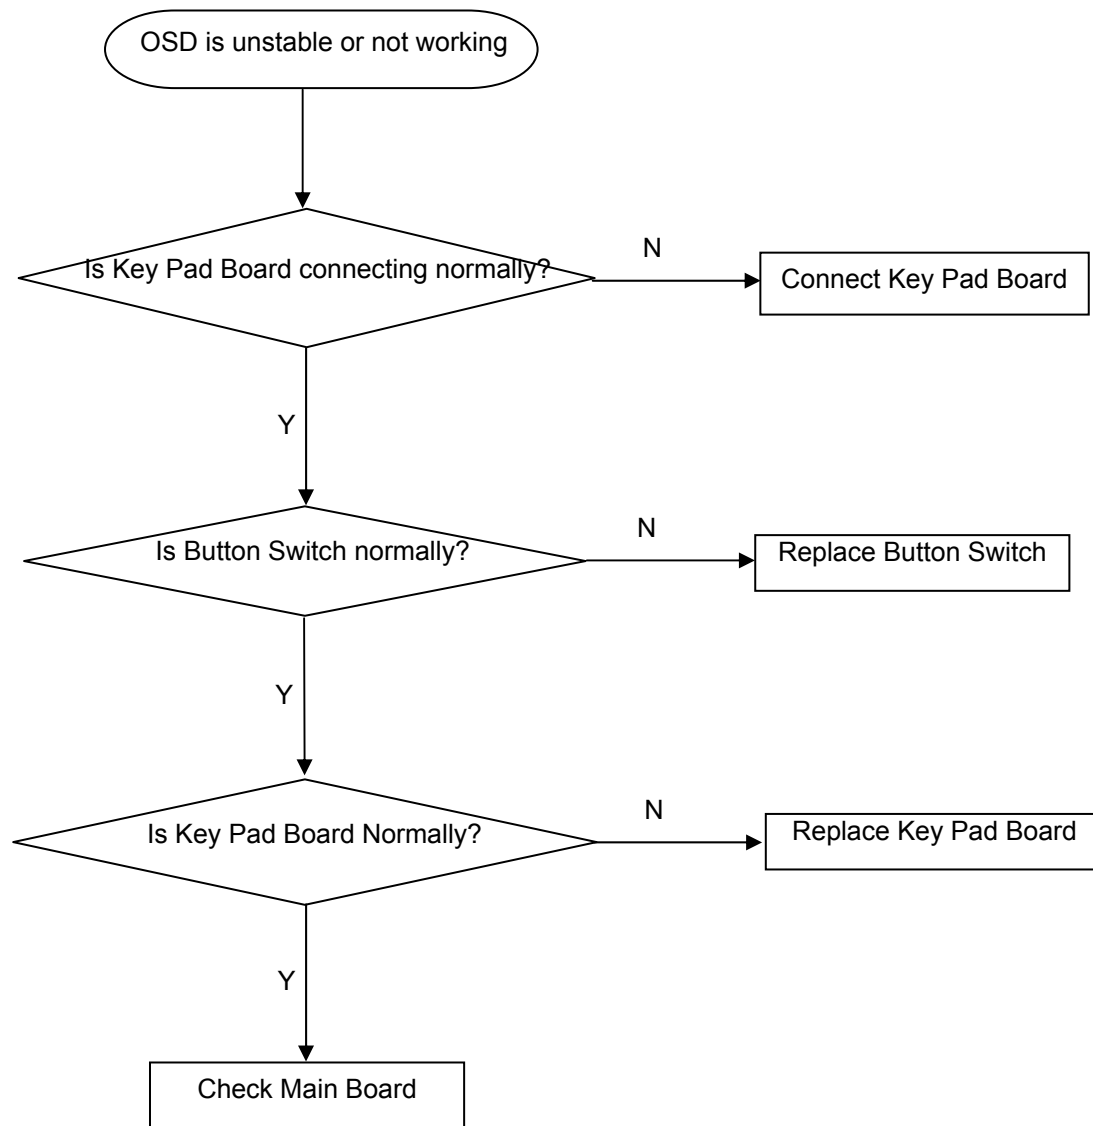



6. PCB Layout

6.1 Main Board

715T3115-H

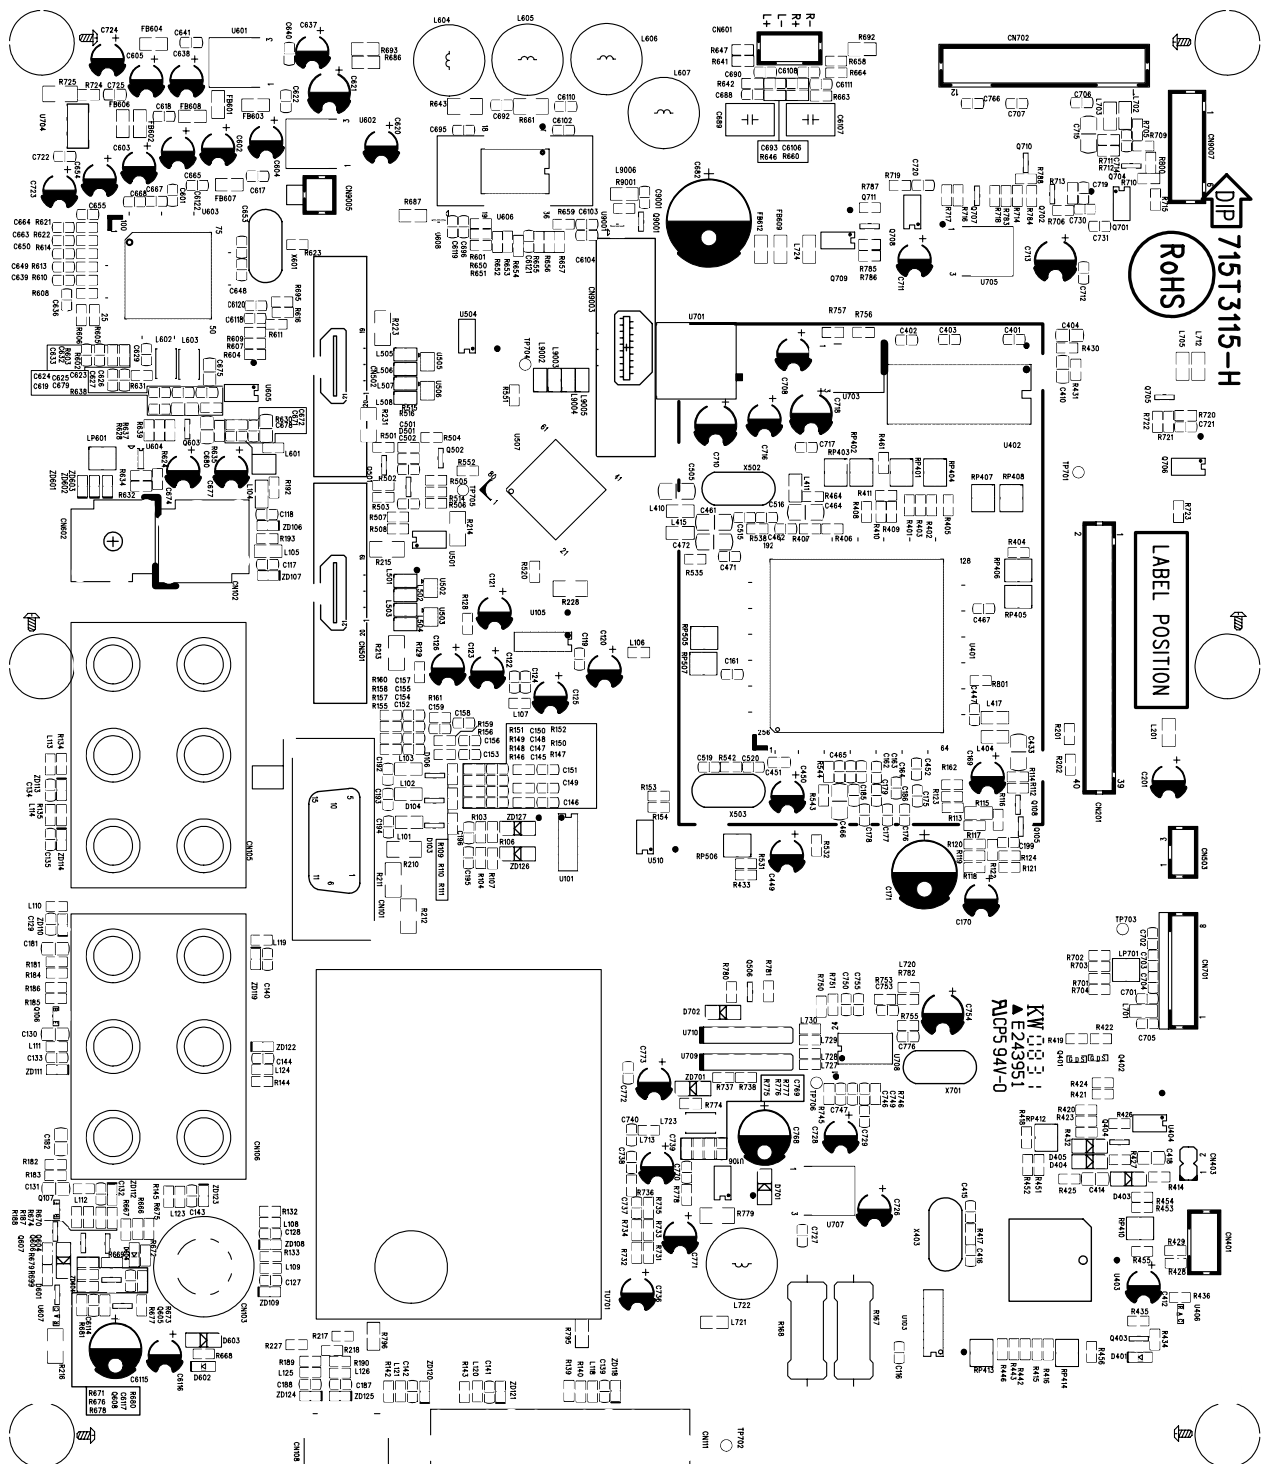


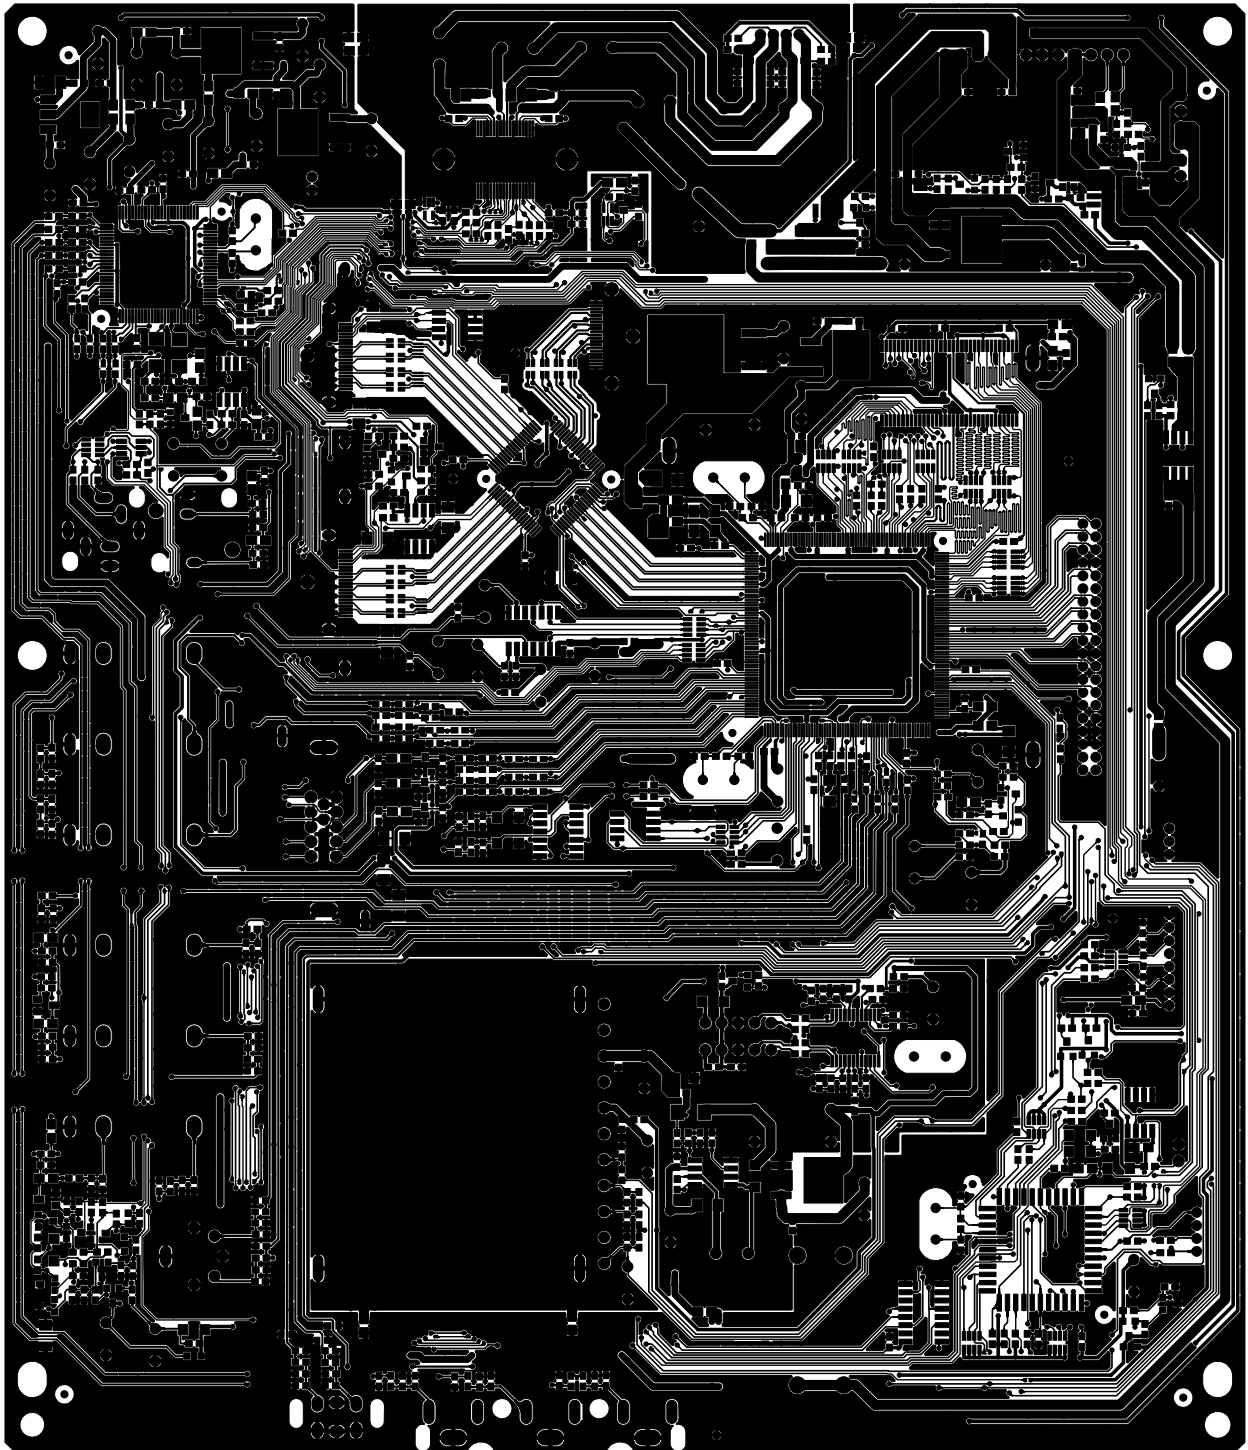

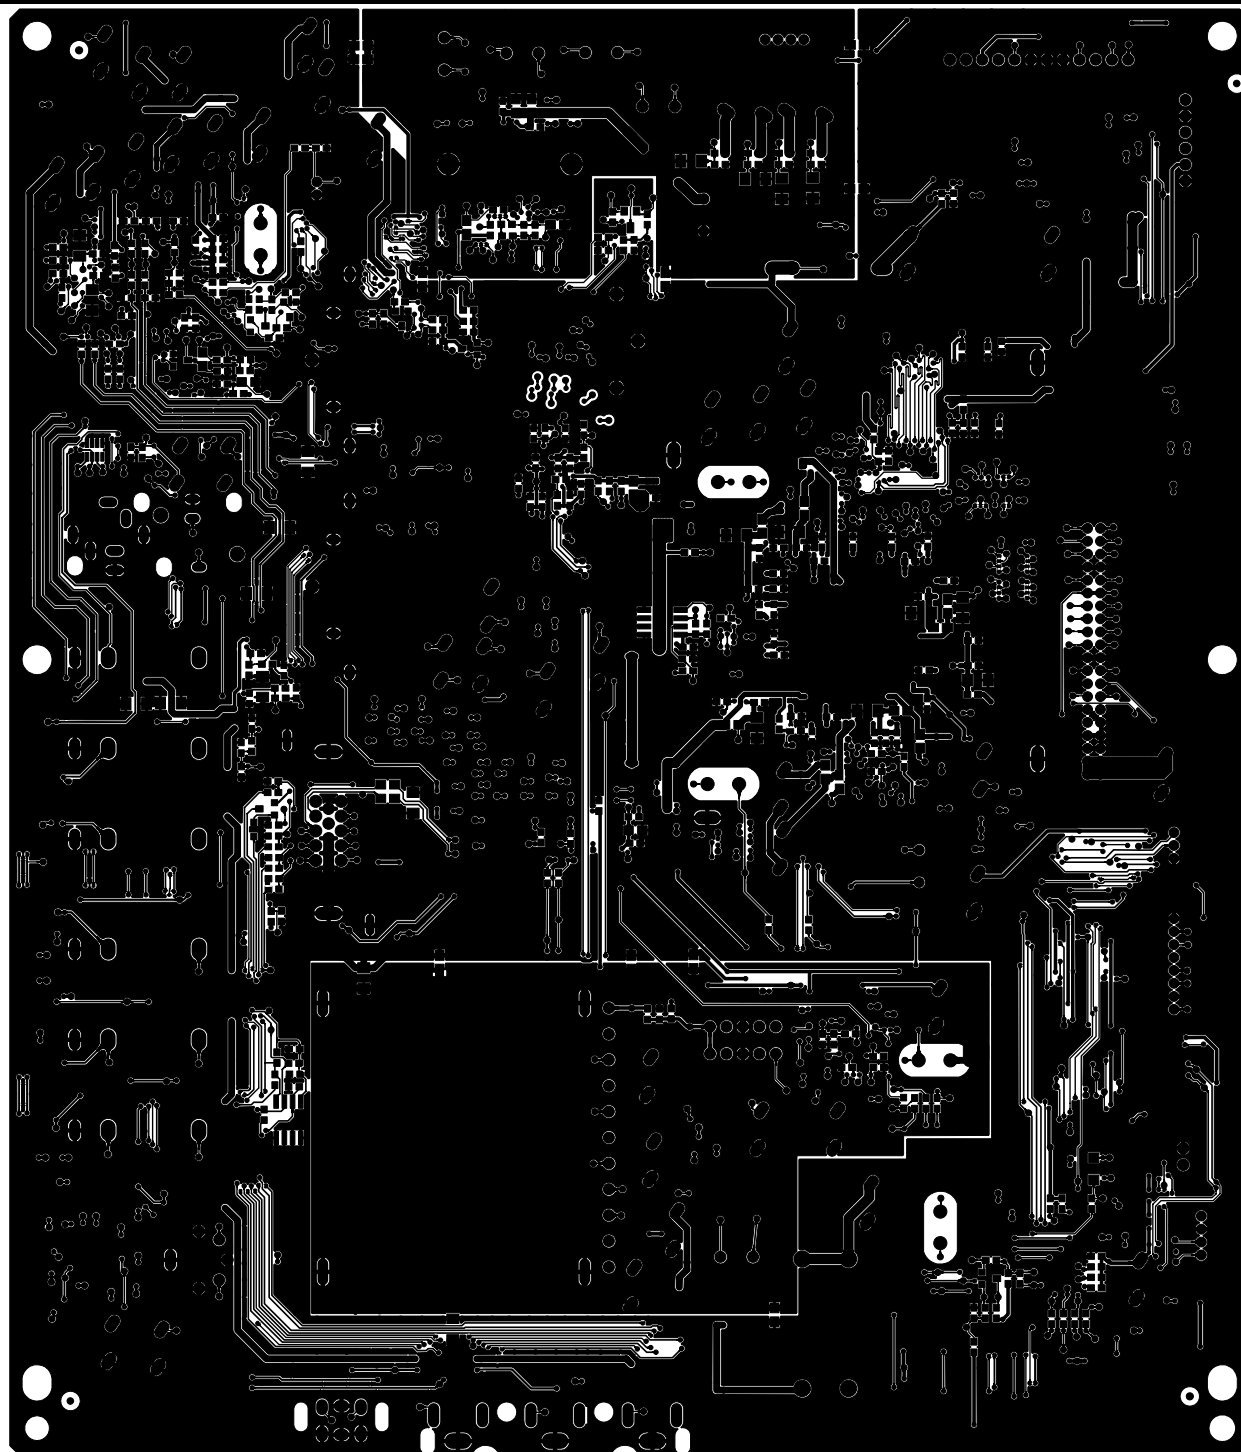



6.2 Power Board


D32W831 715T2804 2

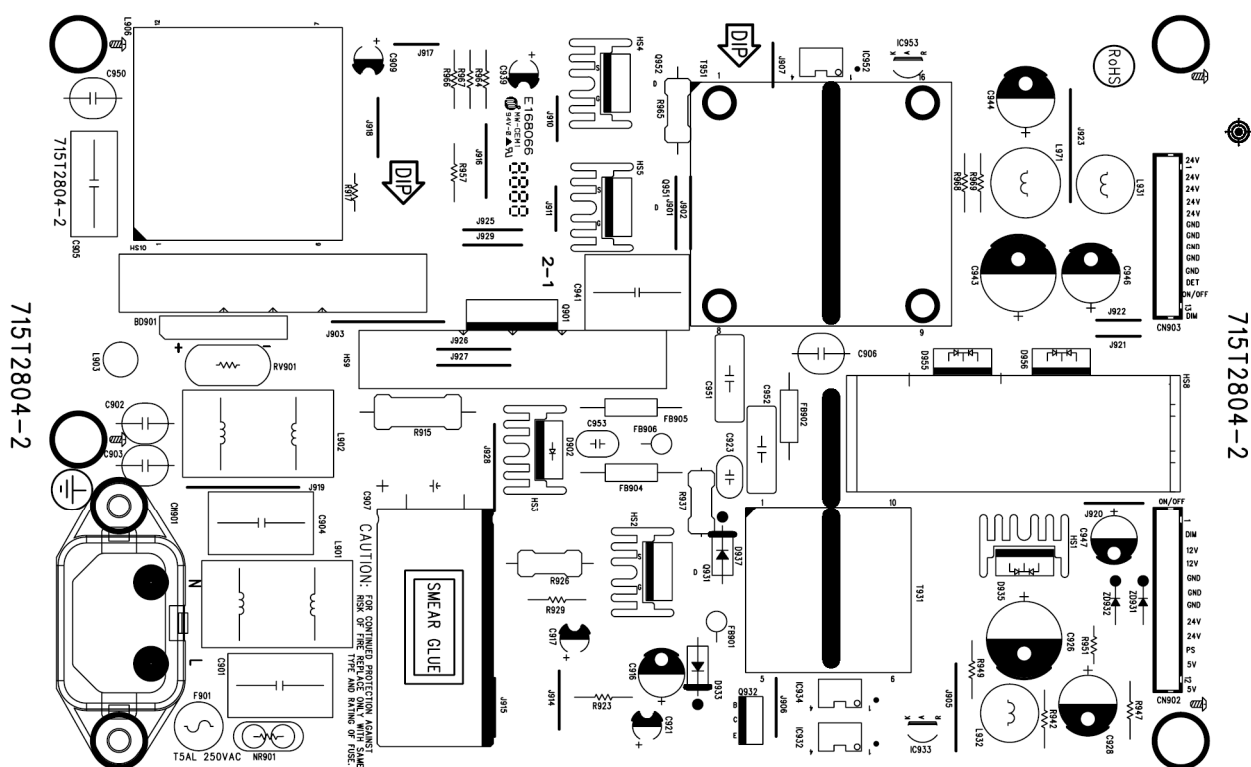



715T2804-2 2008/05/09

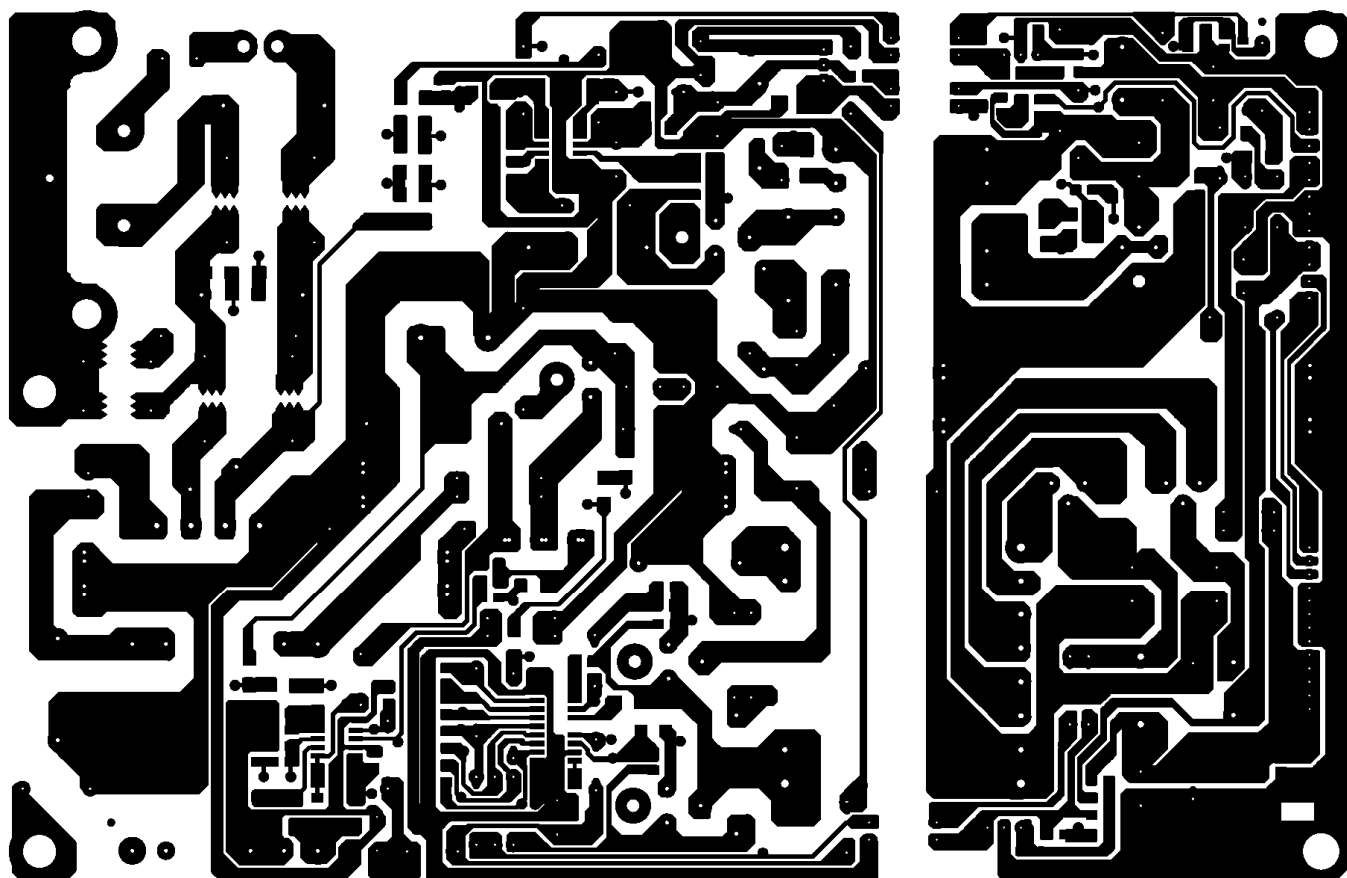

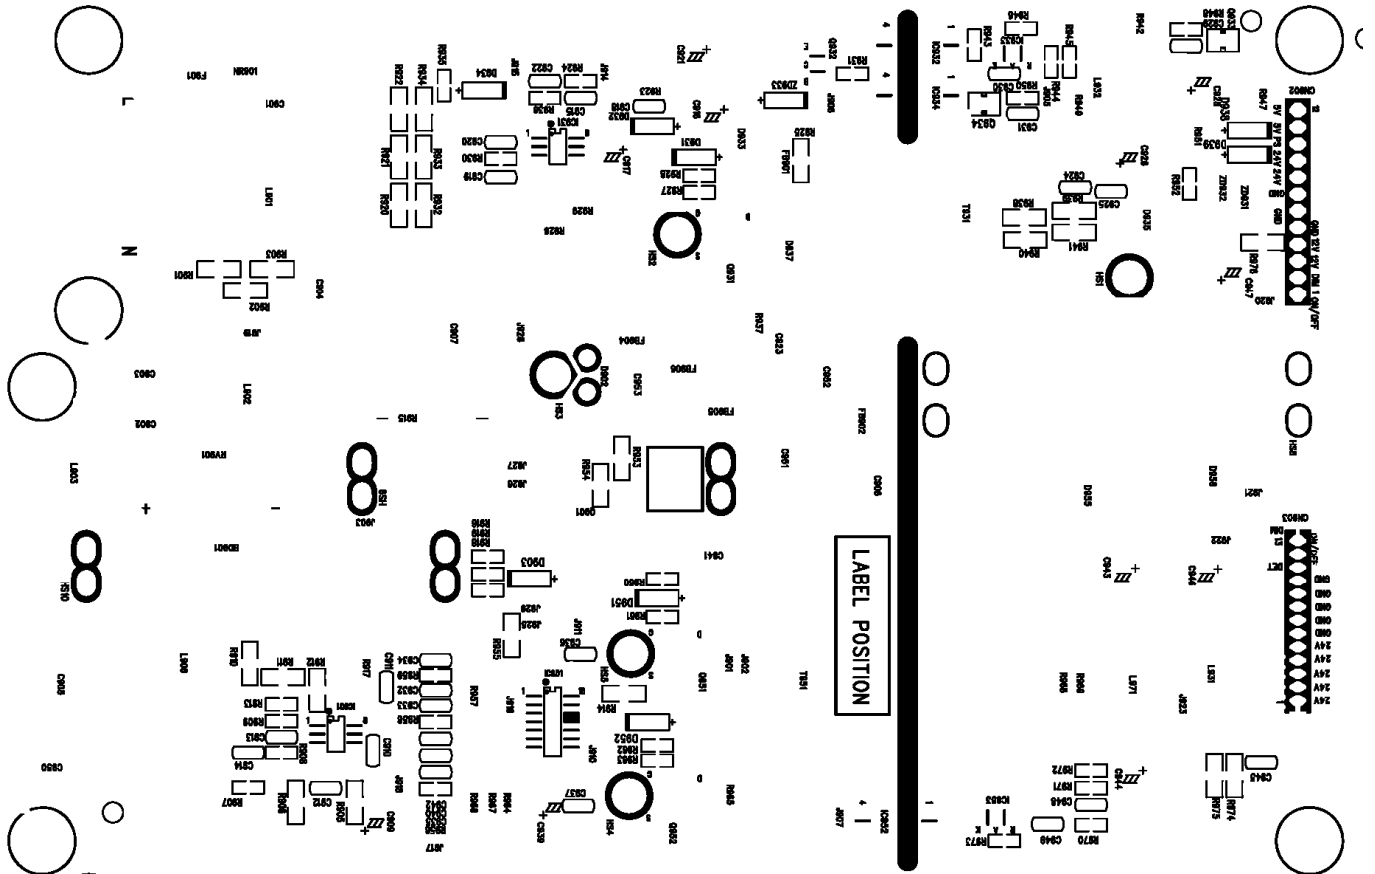


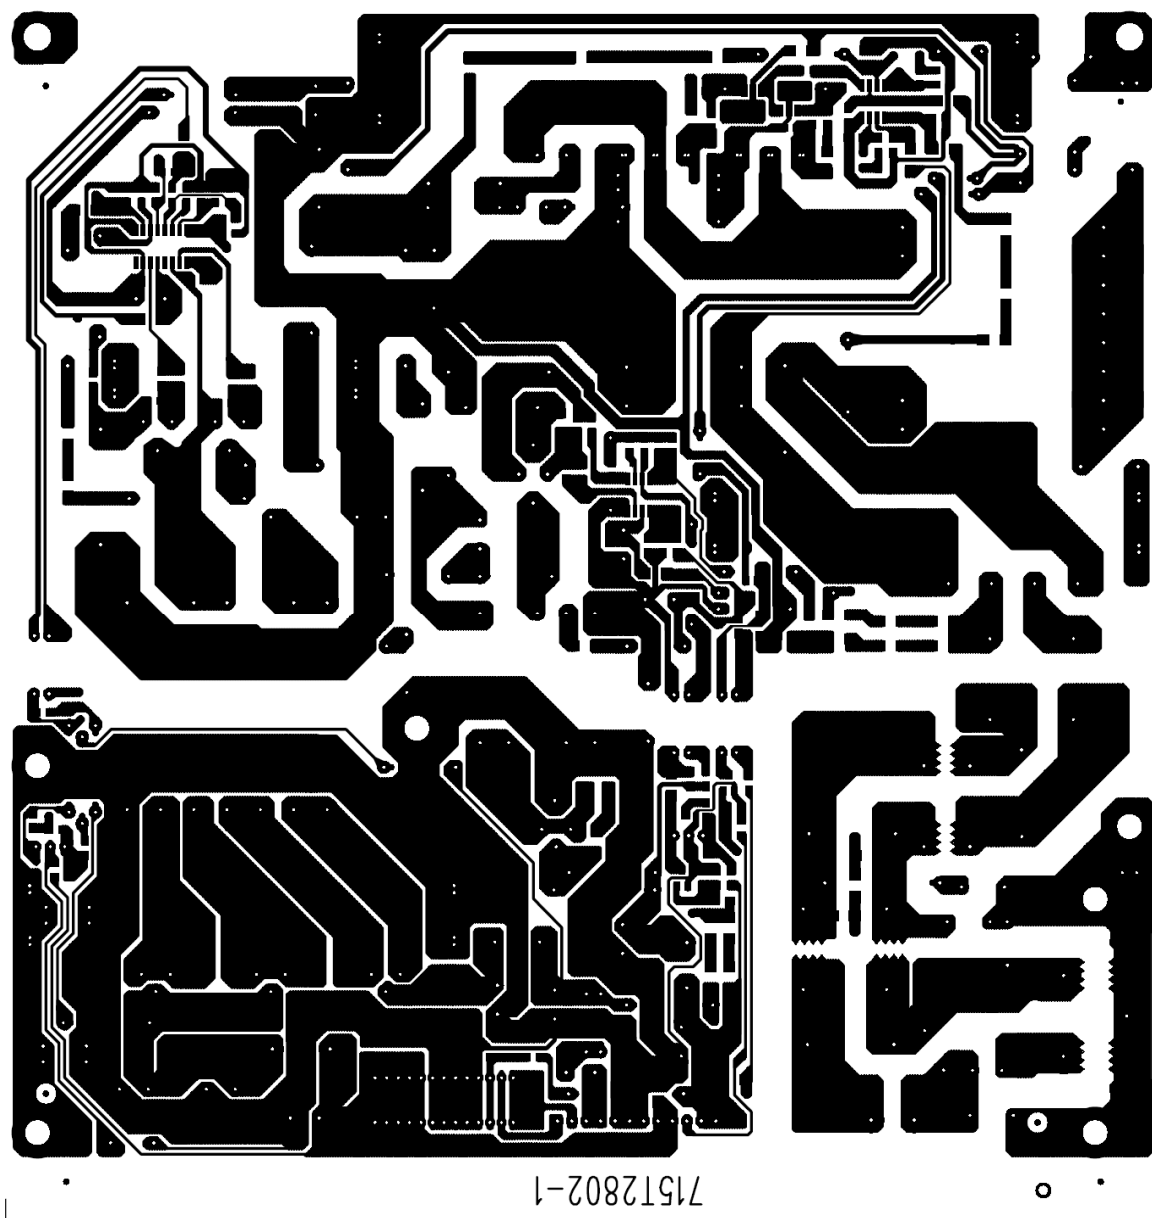


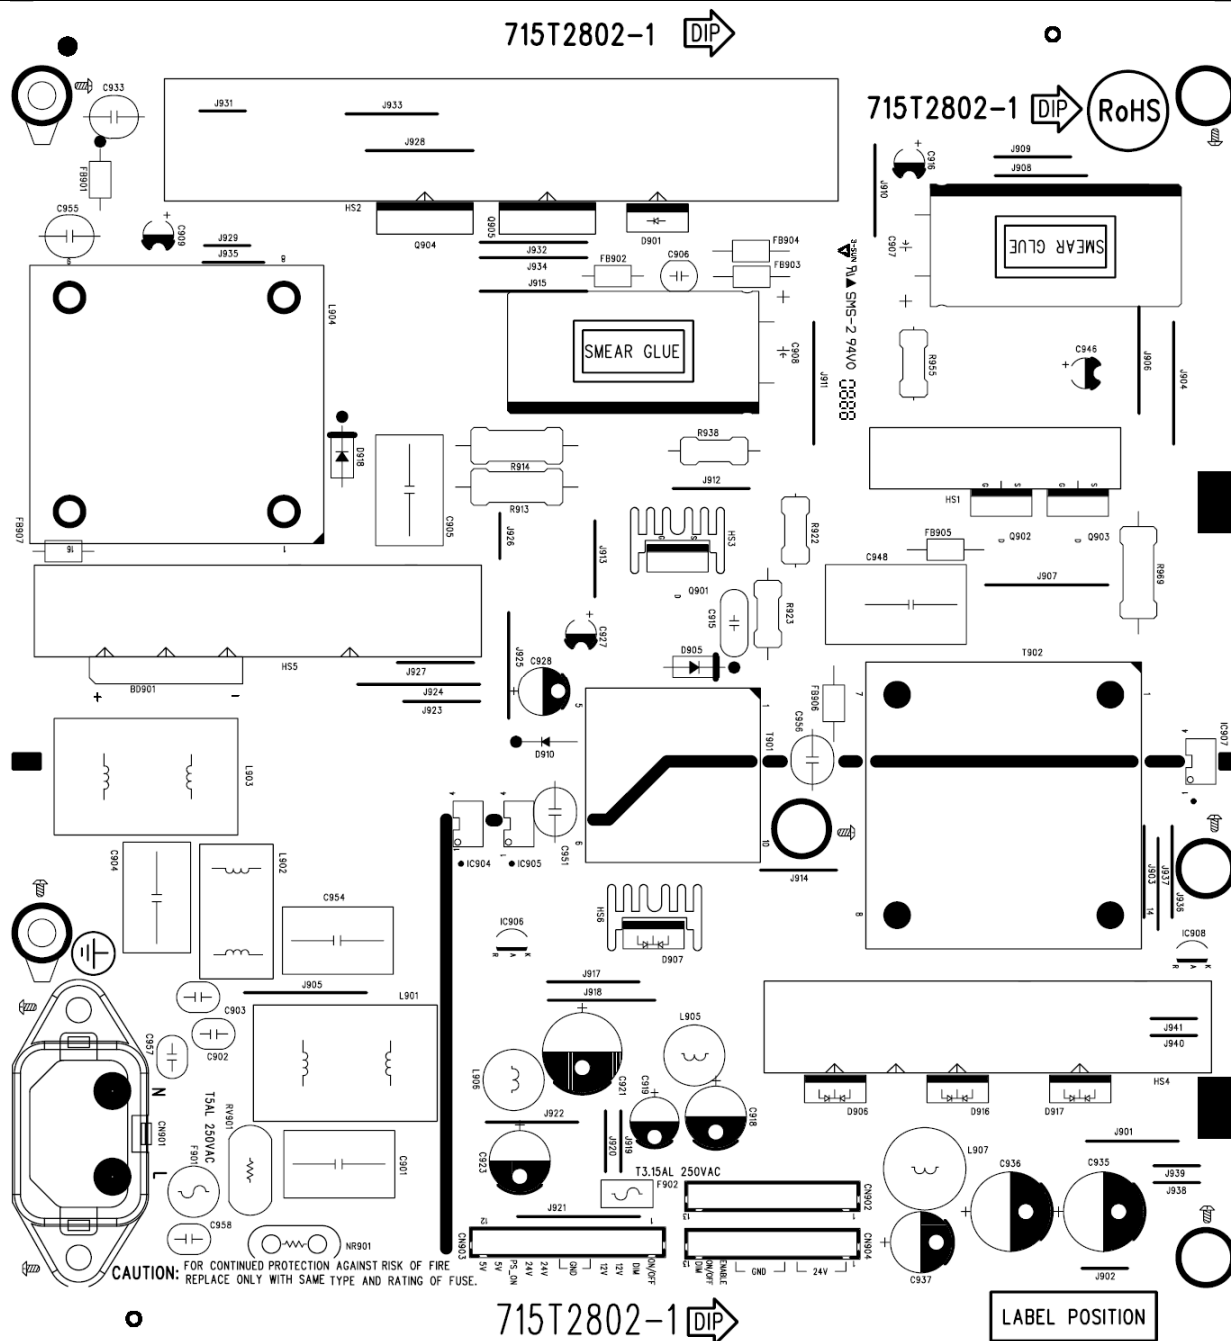


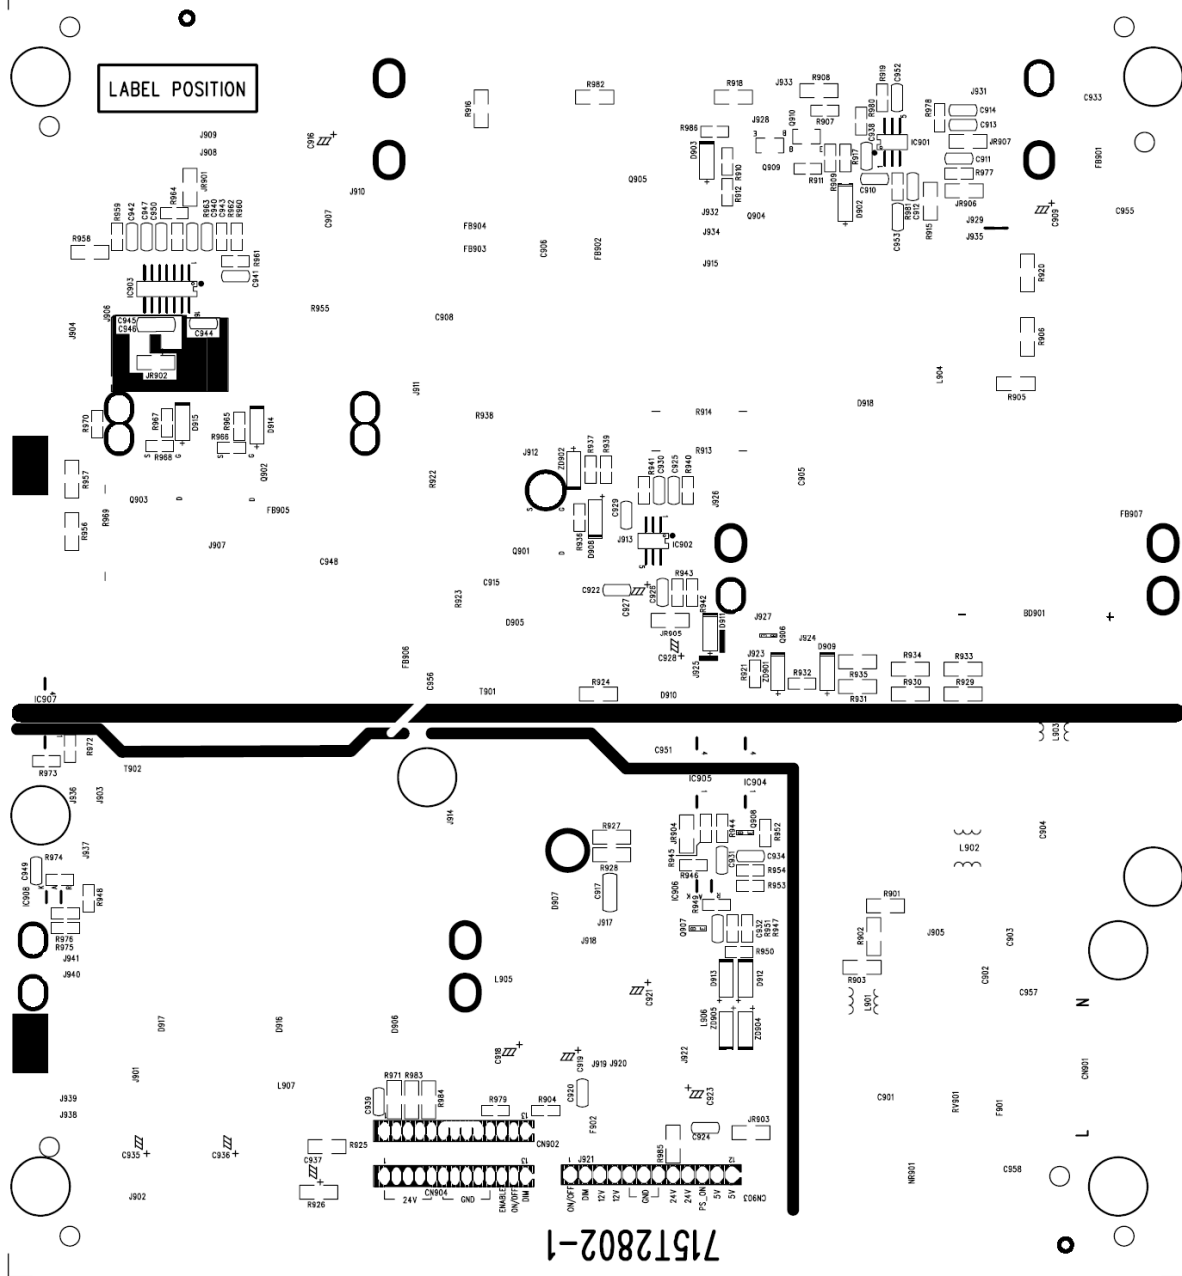

6.3 Tuner Board


715T3176-D

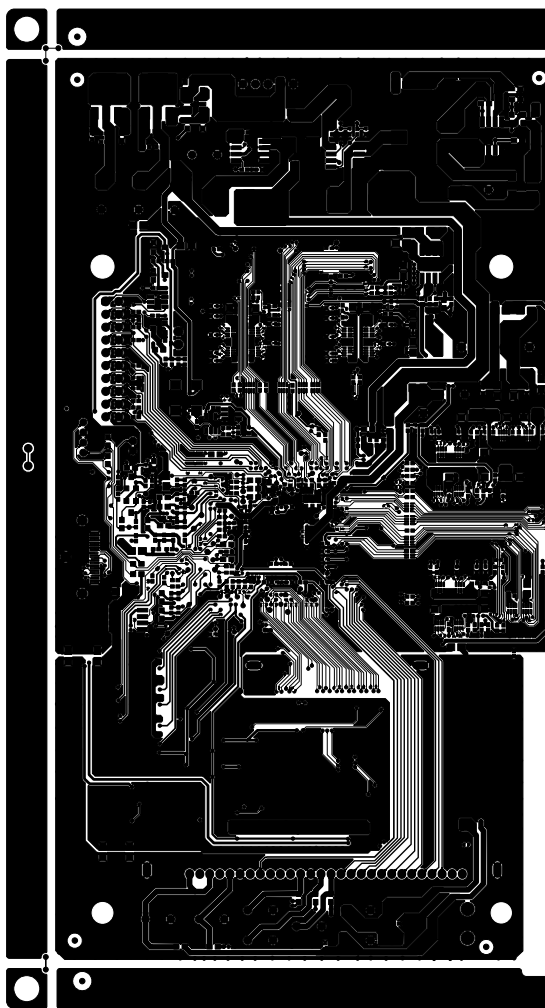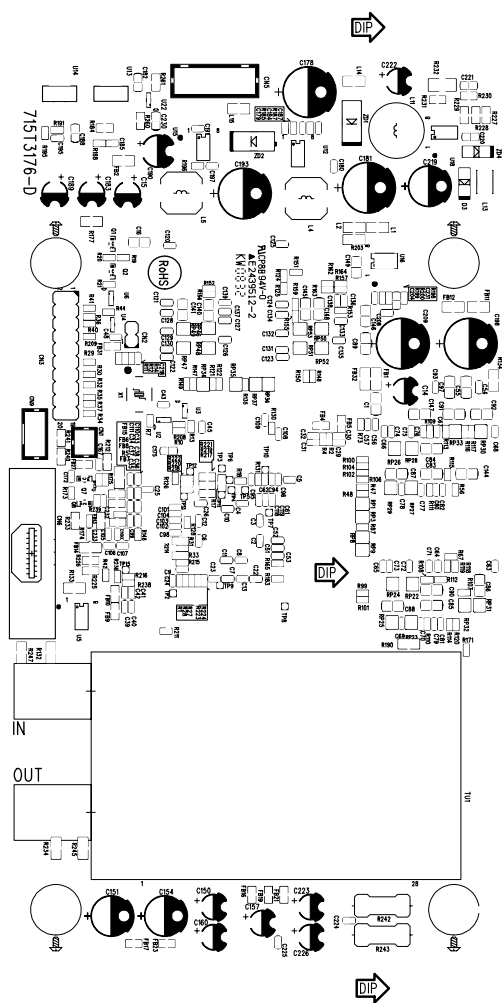

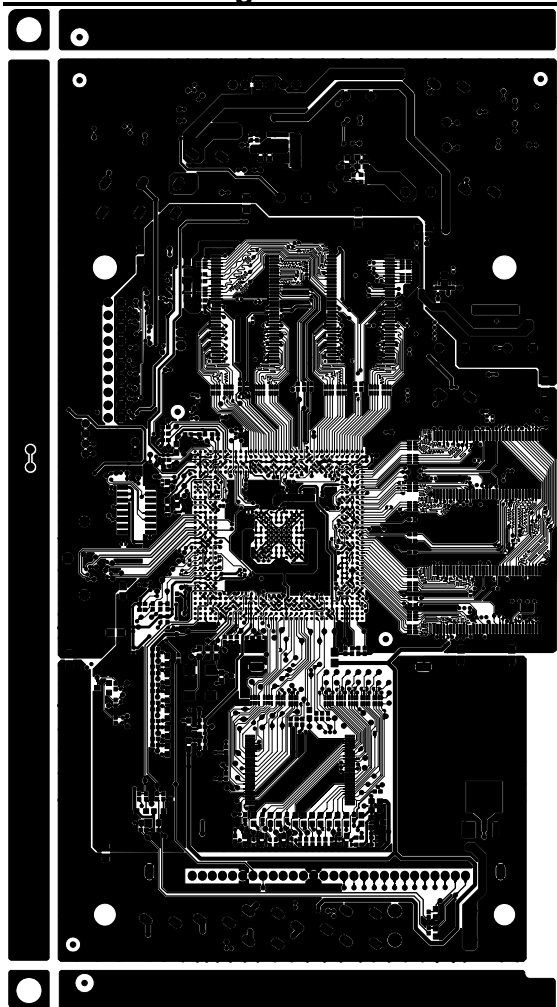



6.4 Key Board

715T2876 1

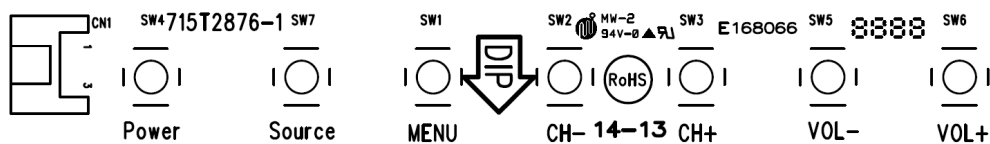

6.5 IR Board

715T3004 1



7. Adjustment

It's no need to do white balance adjustment, you need only do the "Auto Color" for the DTV models.

First, you have to enter into the factory mode:

Press the "menu" and "1-9-9-9" buttons in the remote control to enter the factory mode.

Then, do the "Auto Color" in the PC mode and Component mode below:


1. PC mode, TIMING =137; PATTERN =5;

2. Component mode:


1). TIMING=310, PATTERN=5;

2). TIMING =312, PATTERN =5;

3). TIMING =314, PATTERN =5

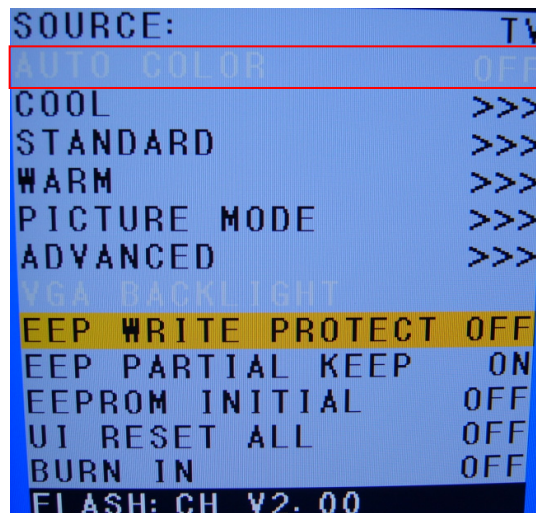


8. Block Diagram

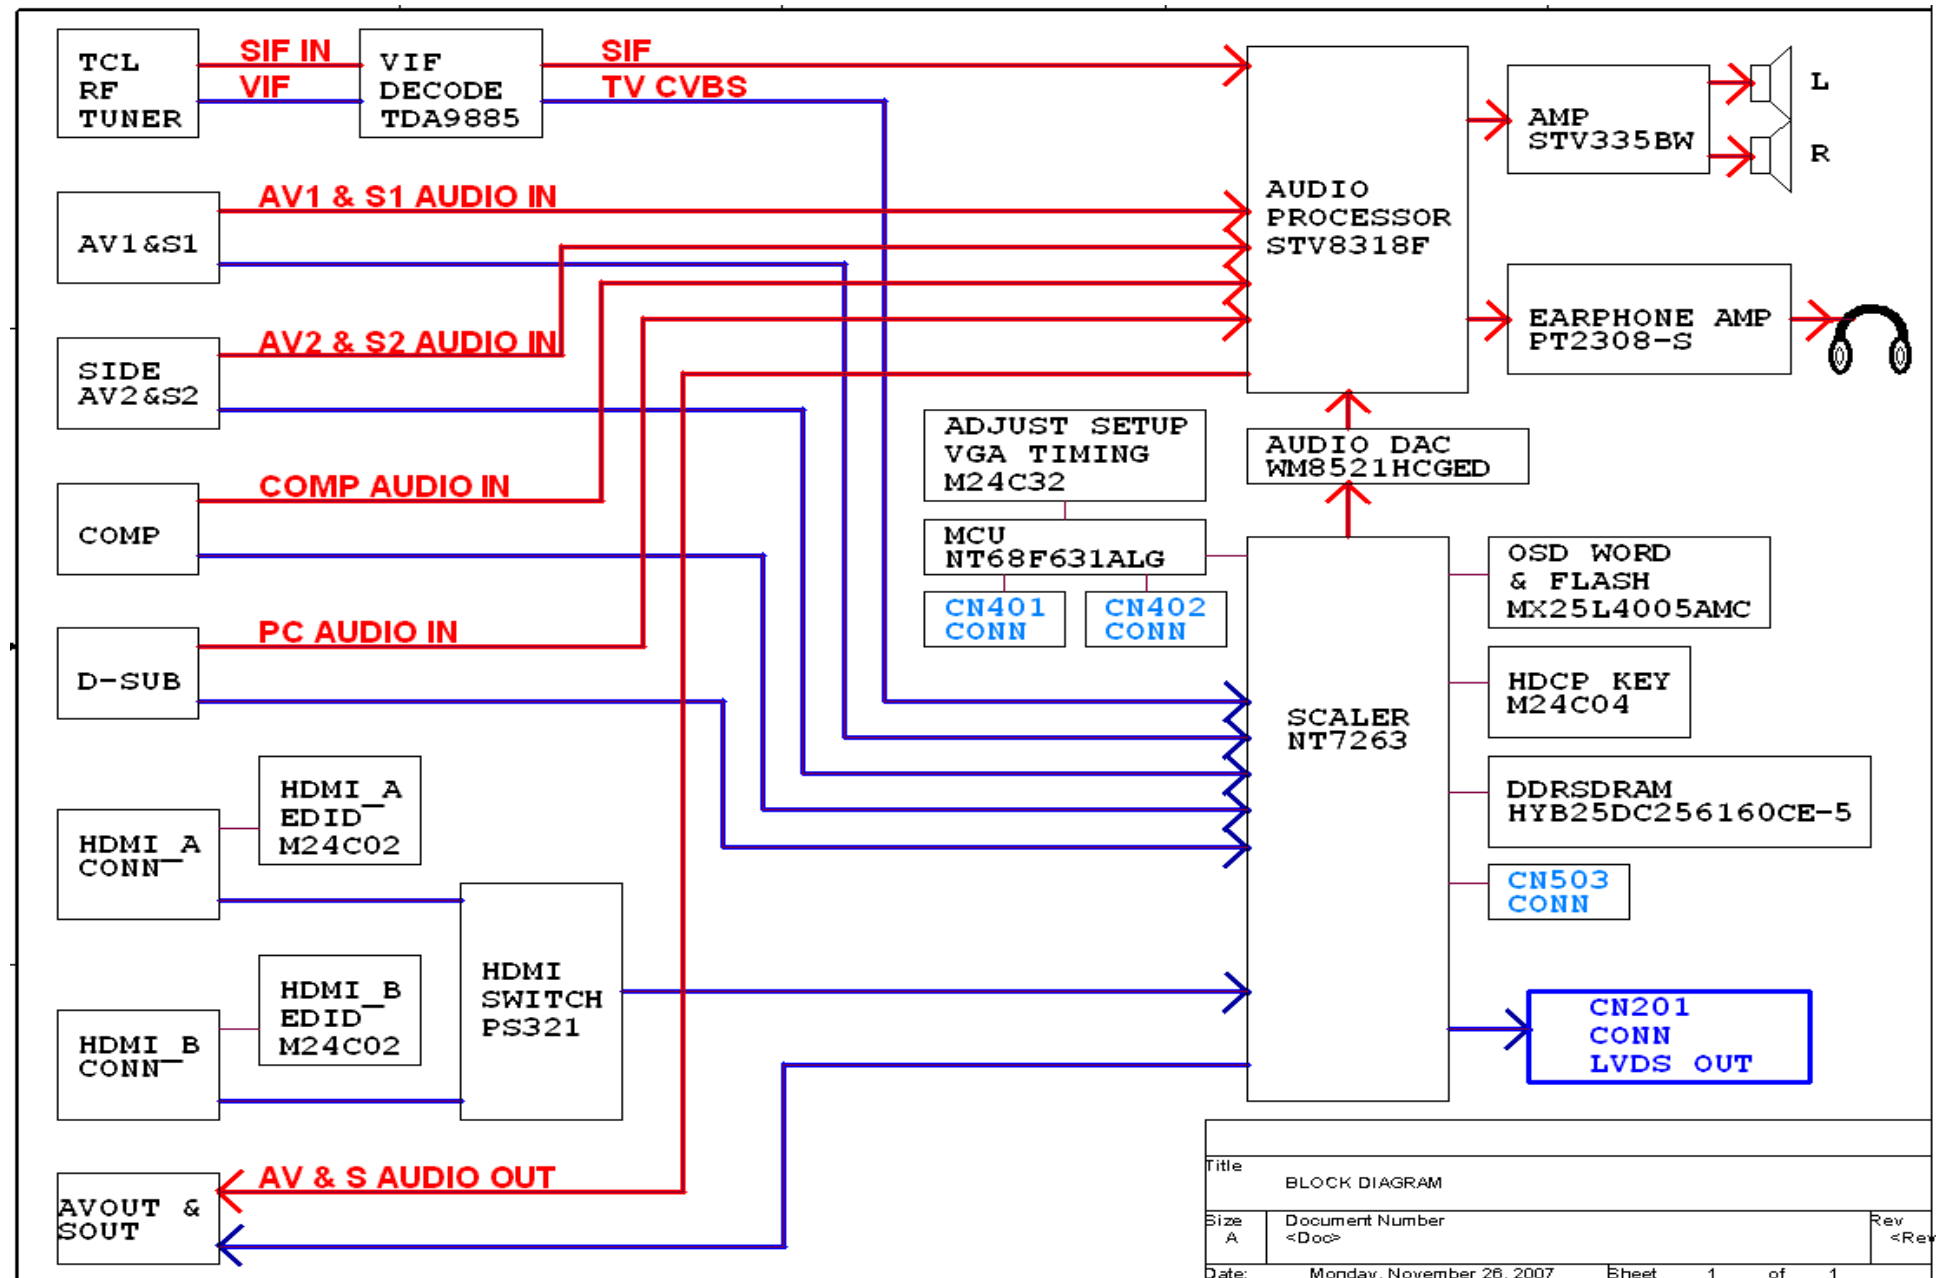



9. Schematic



9.1 Main Board 715T3115-H

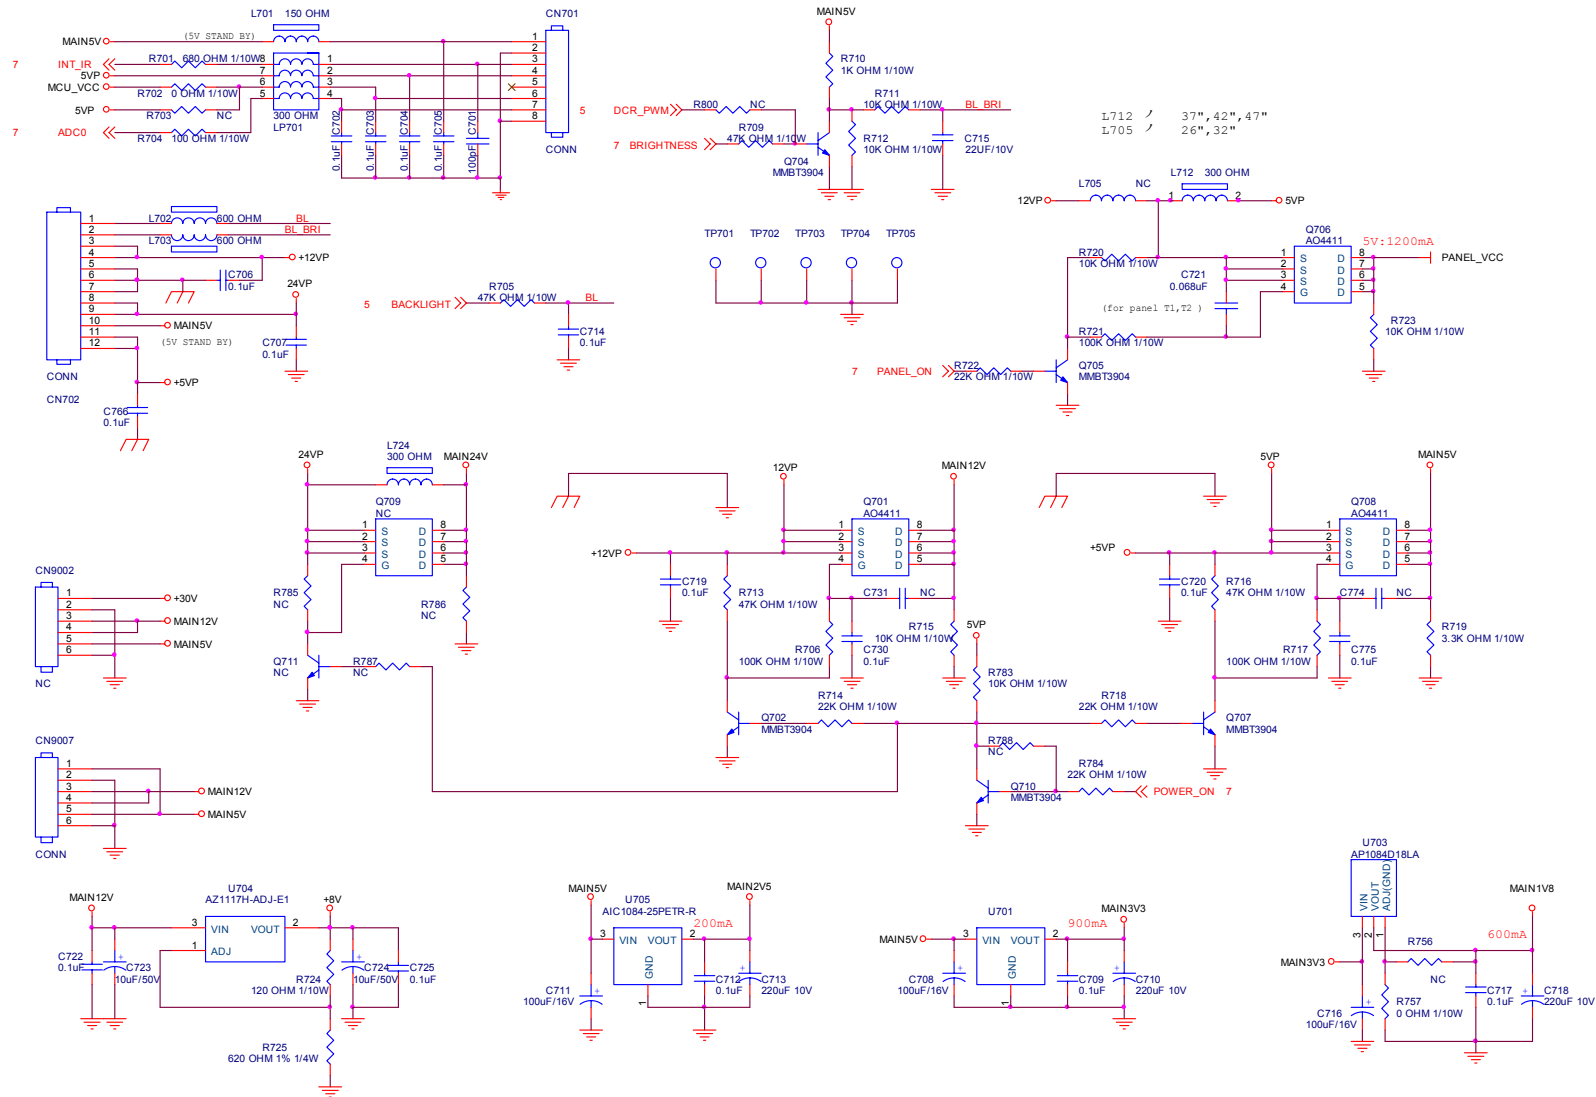


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	A3
新瑞瓜頭廠	TPV MODEL		Rev	C
Key Component	01 POWER	PCB NAME	715T3115-F	修裝
Date	Tuesday, August 05, 2008	Sheet	1 of 10	

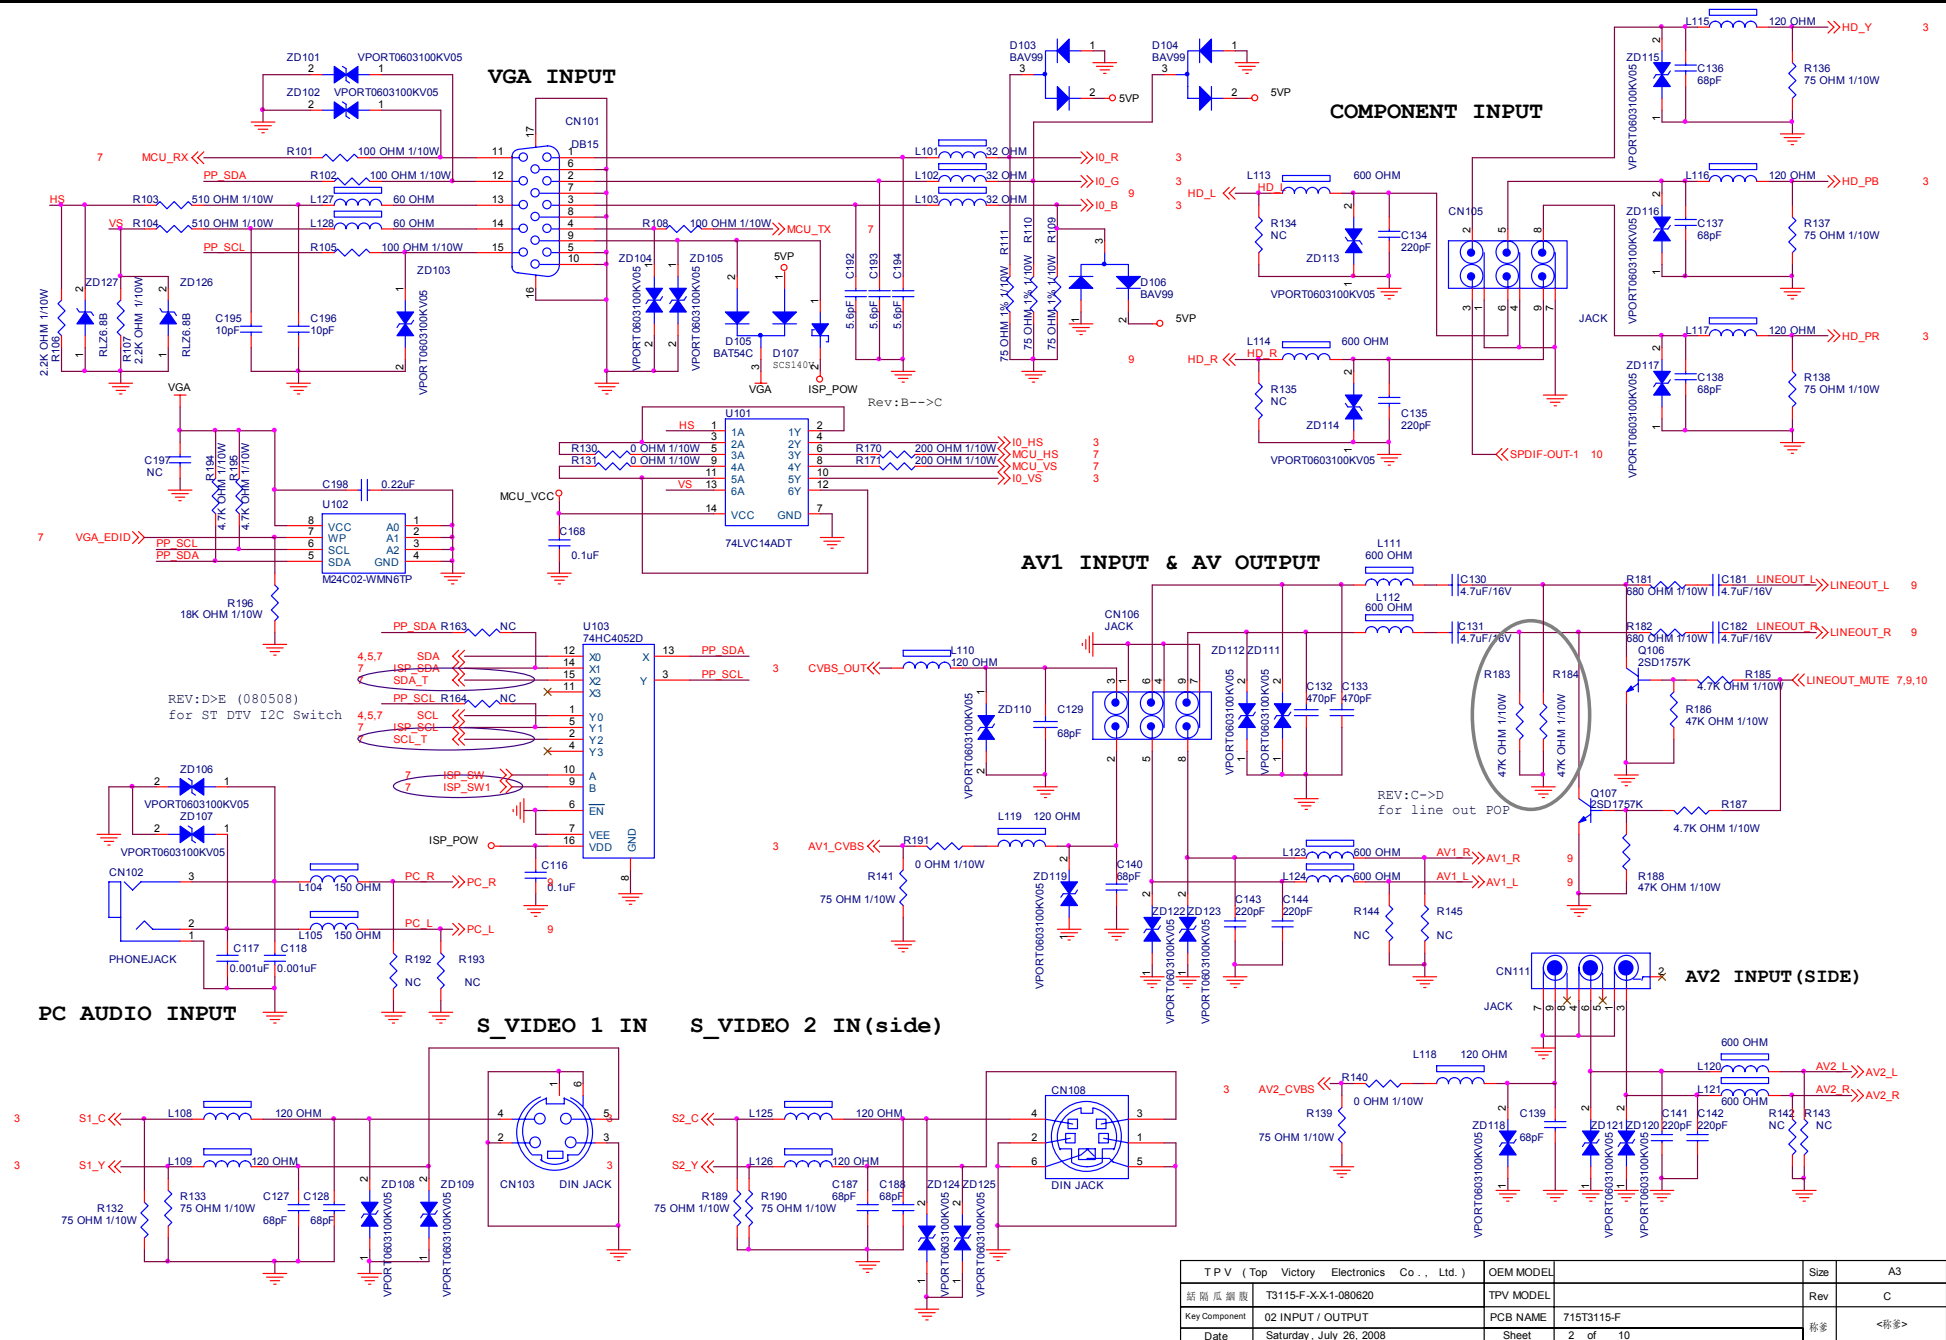

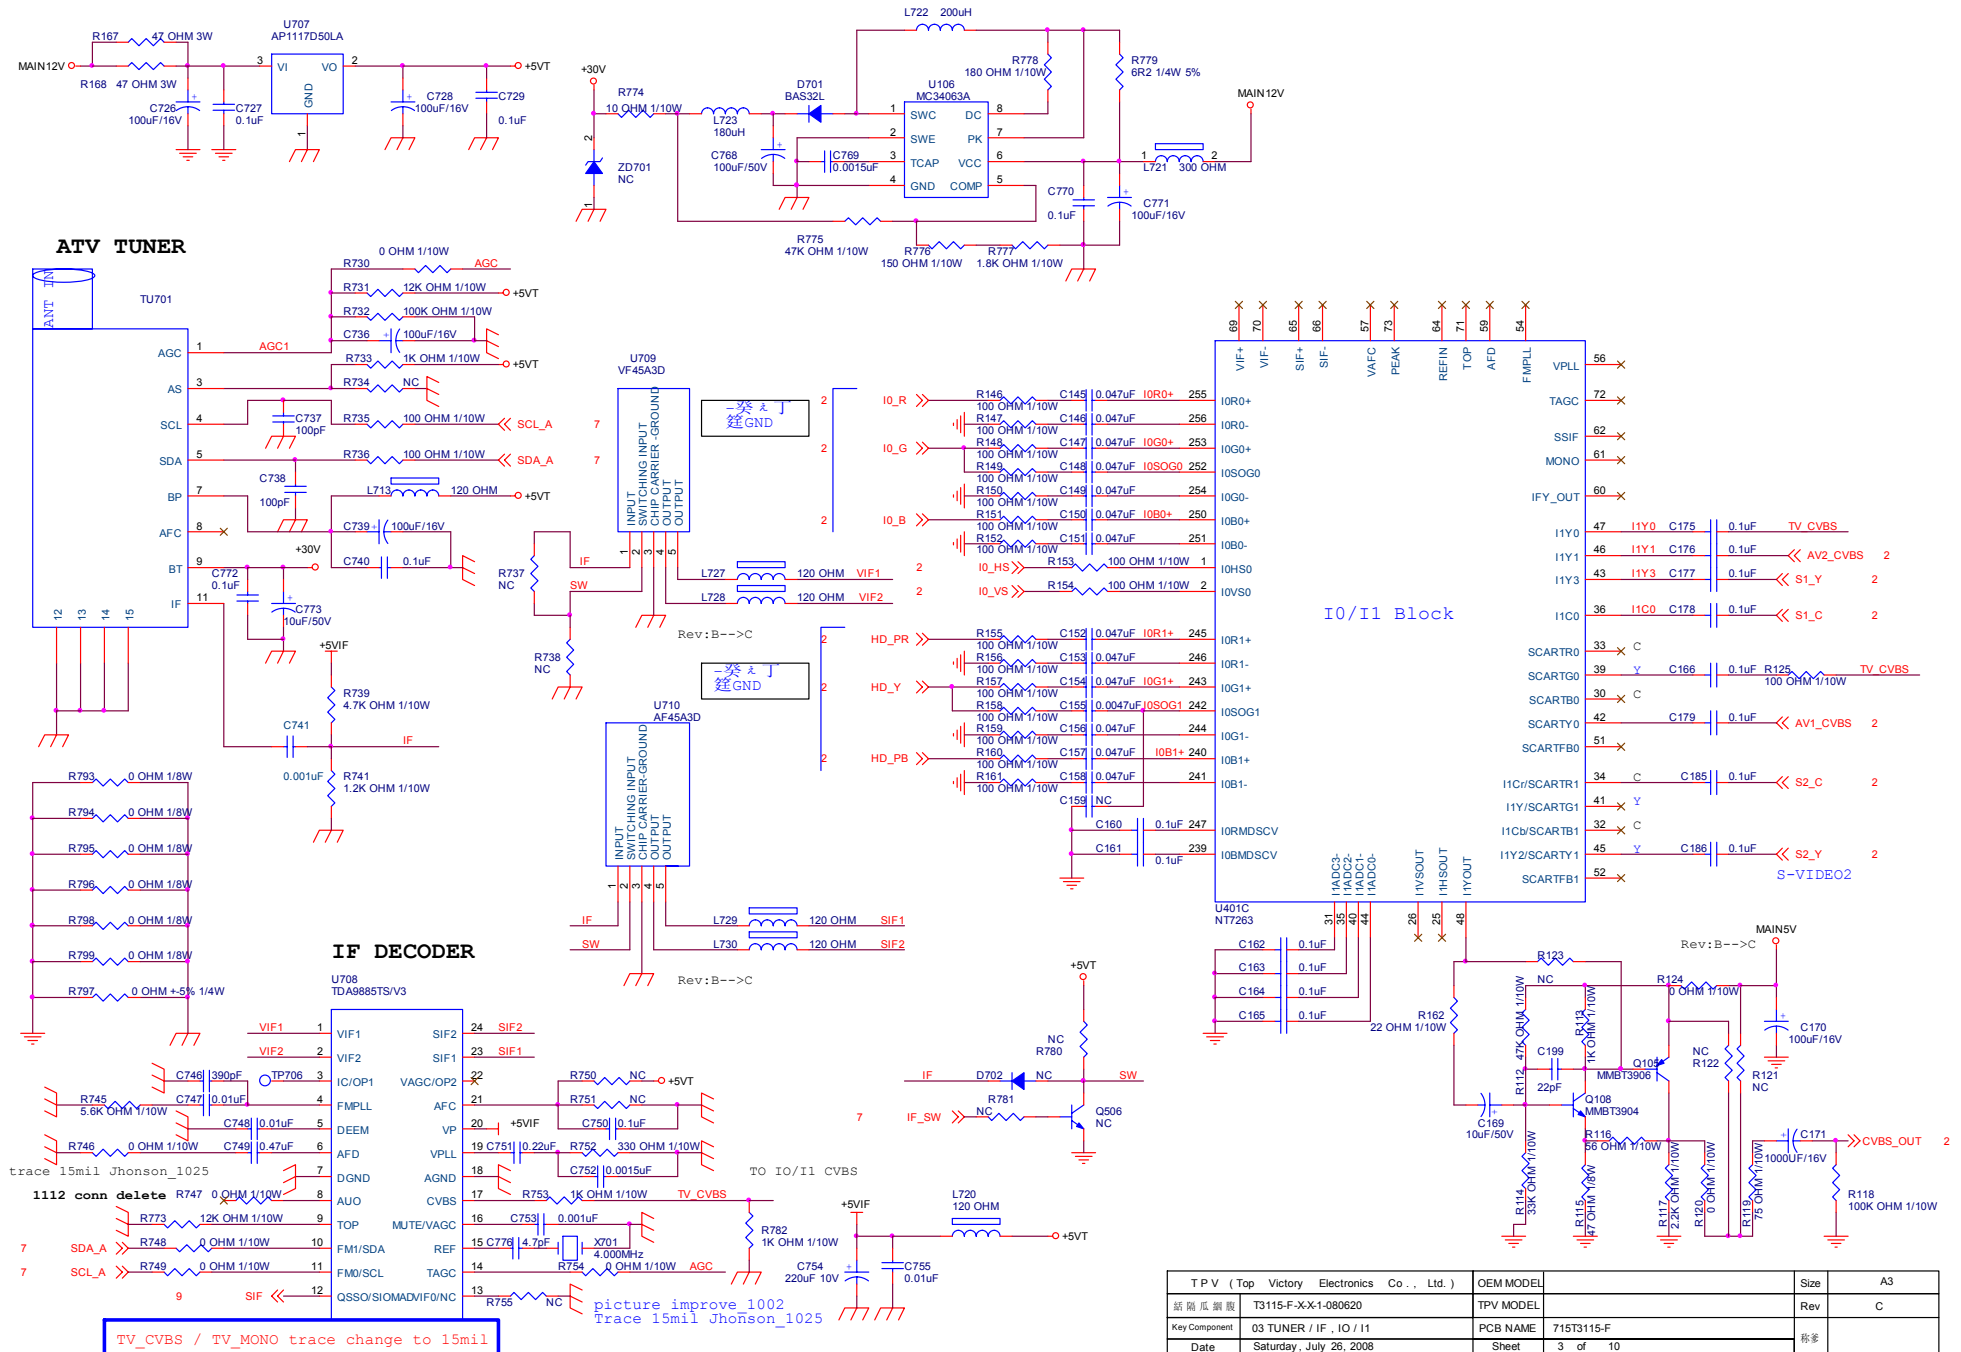


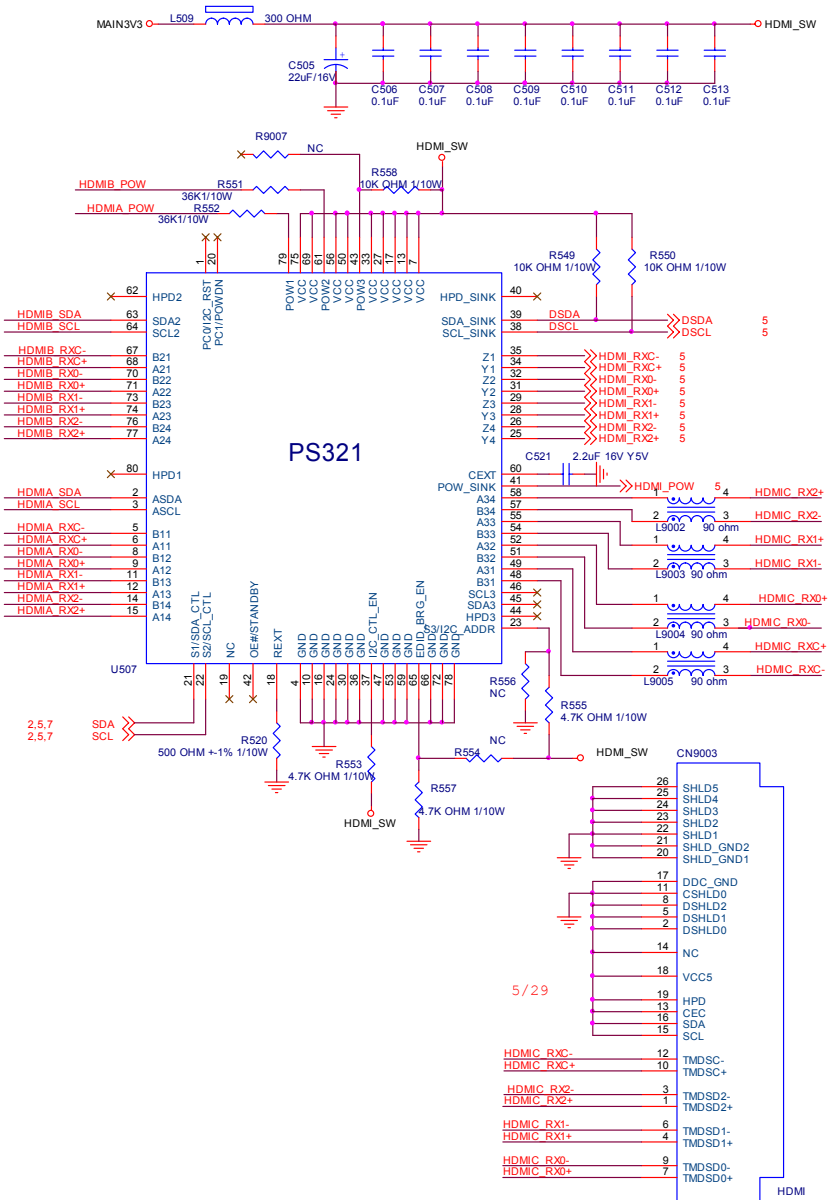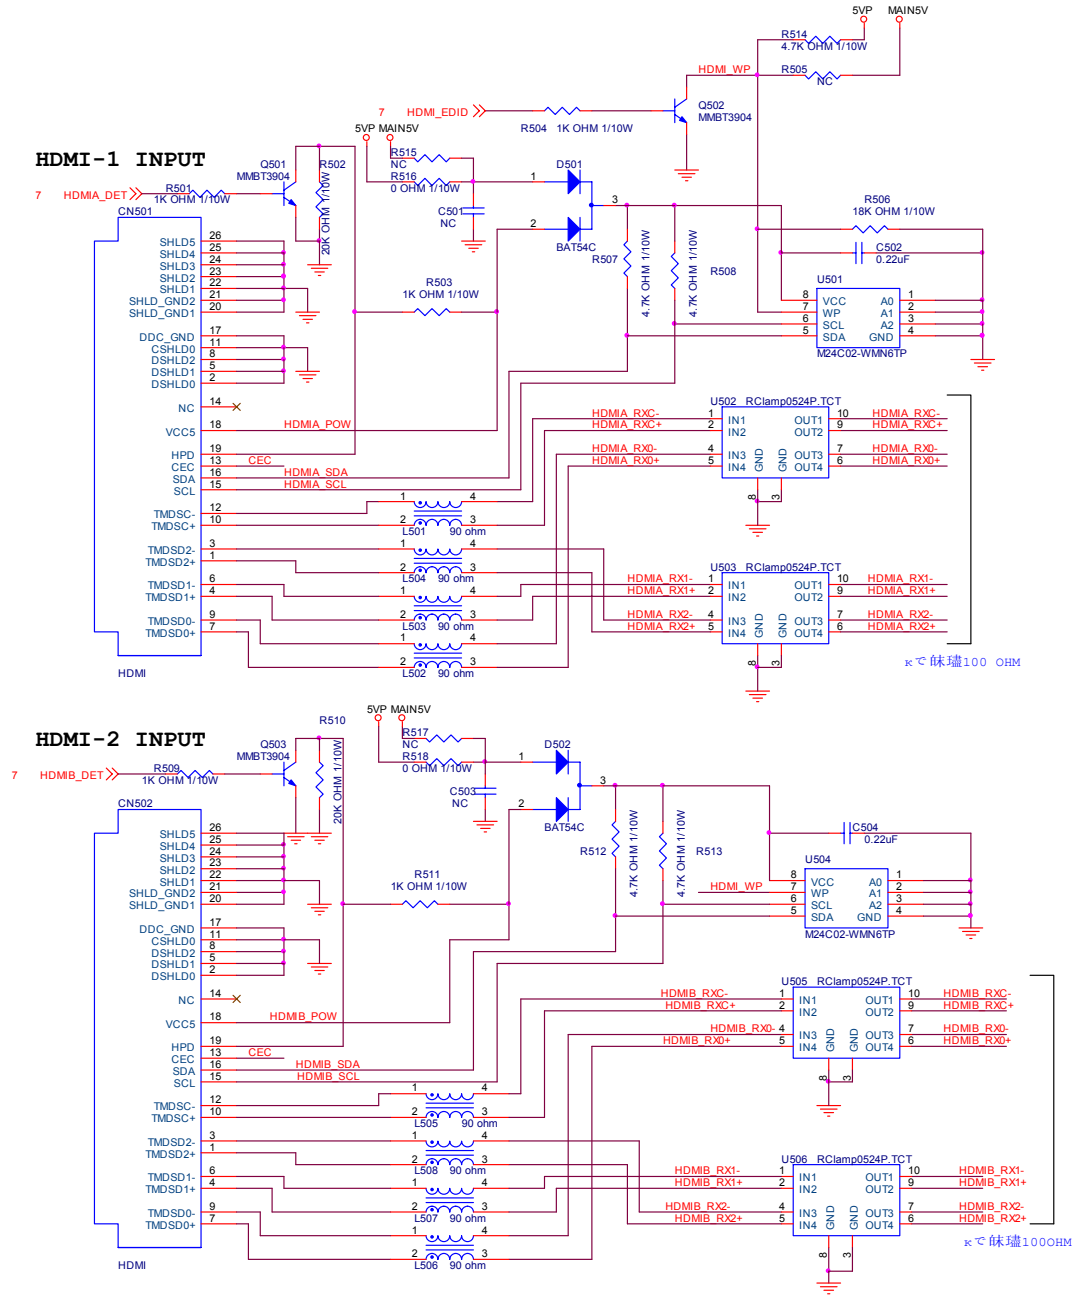



TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	A3
話 爾 瓜 廠	T3115-F-XX-1-080605	TPV MODEL	Rev	C
Key Component	04 PS321 HDMI SW	PCB NAME	715T3115-F	
Date	Friday, August 01, 2008	Sheet	4 of 10	稱 參

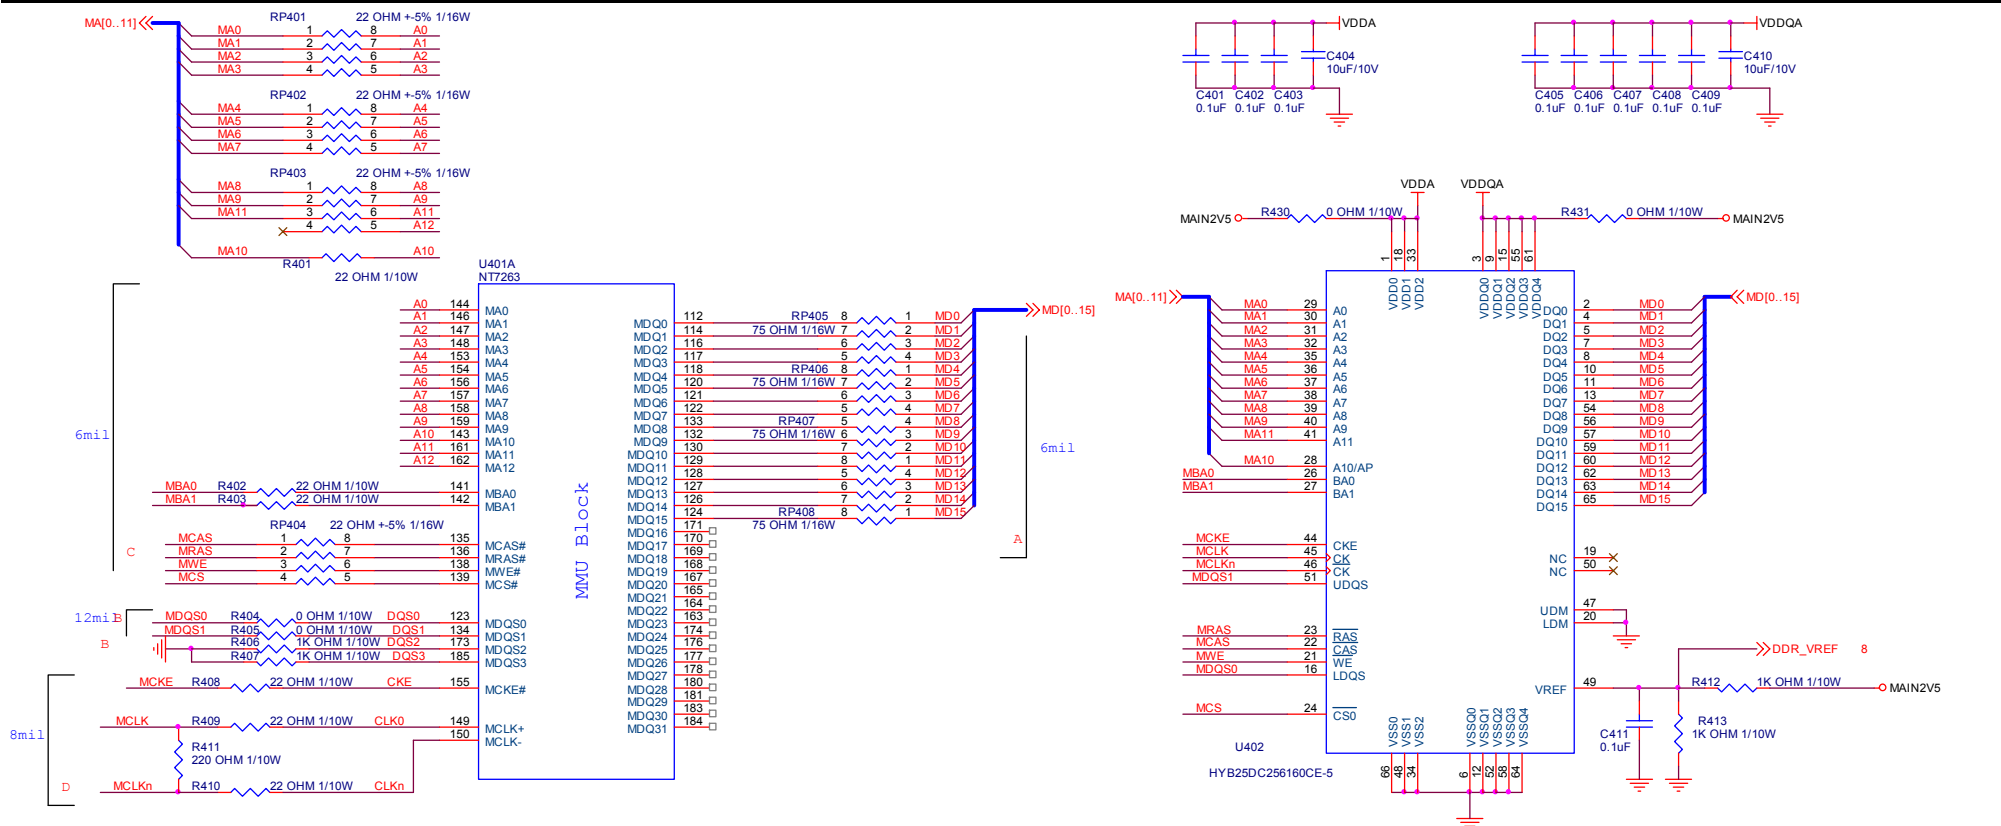

TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Size	A3
屏隔瓜網製 T3115-F-X-X-1-080605	TPV MODEL	Rev	C
Key Component 06.MMU/DDR	PCB NAME 715T3115-F	稱號	
Date Saturday, July 26, 2008	Sheet 6 of 10		




54

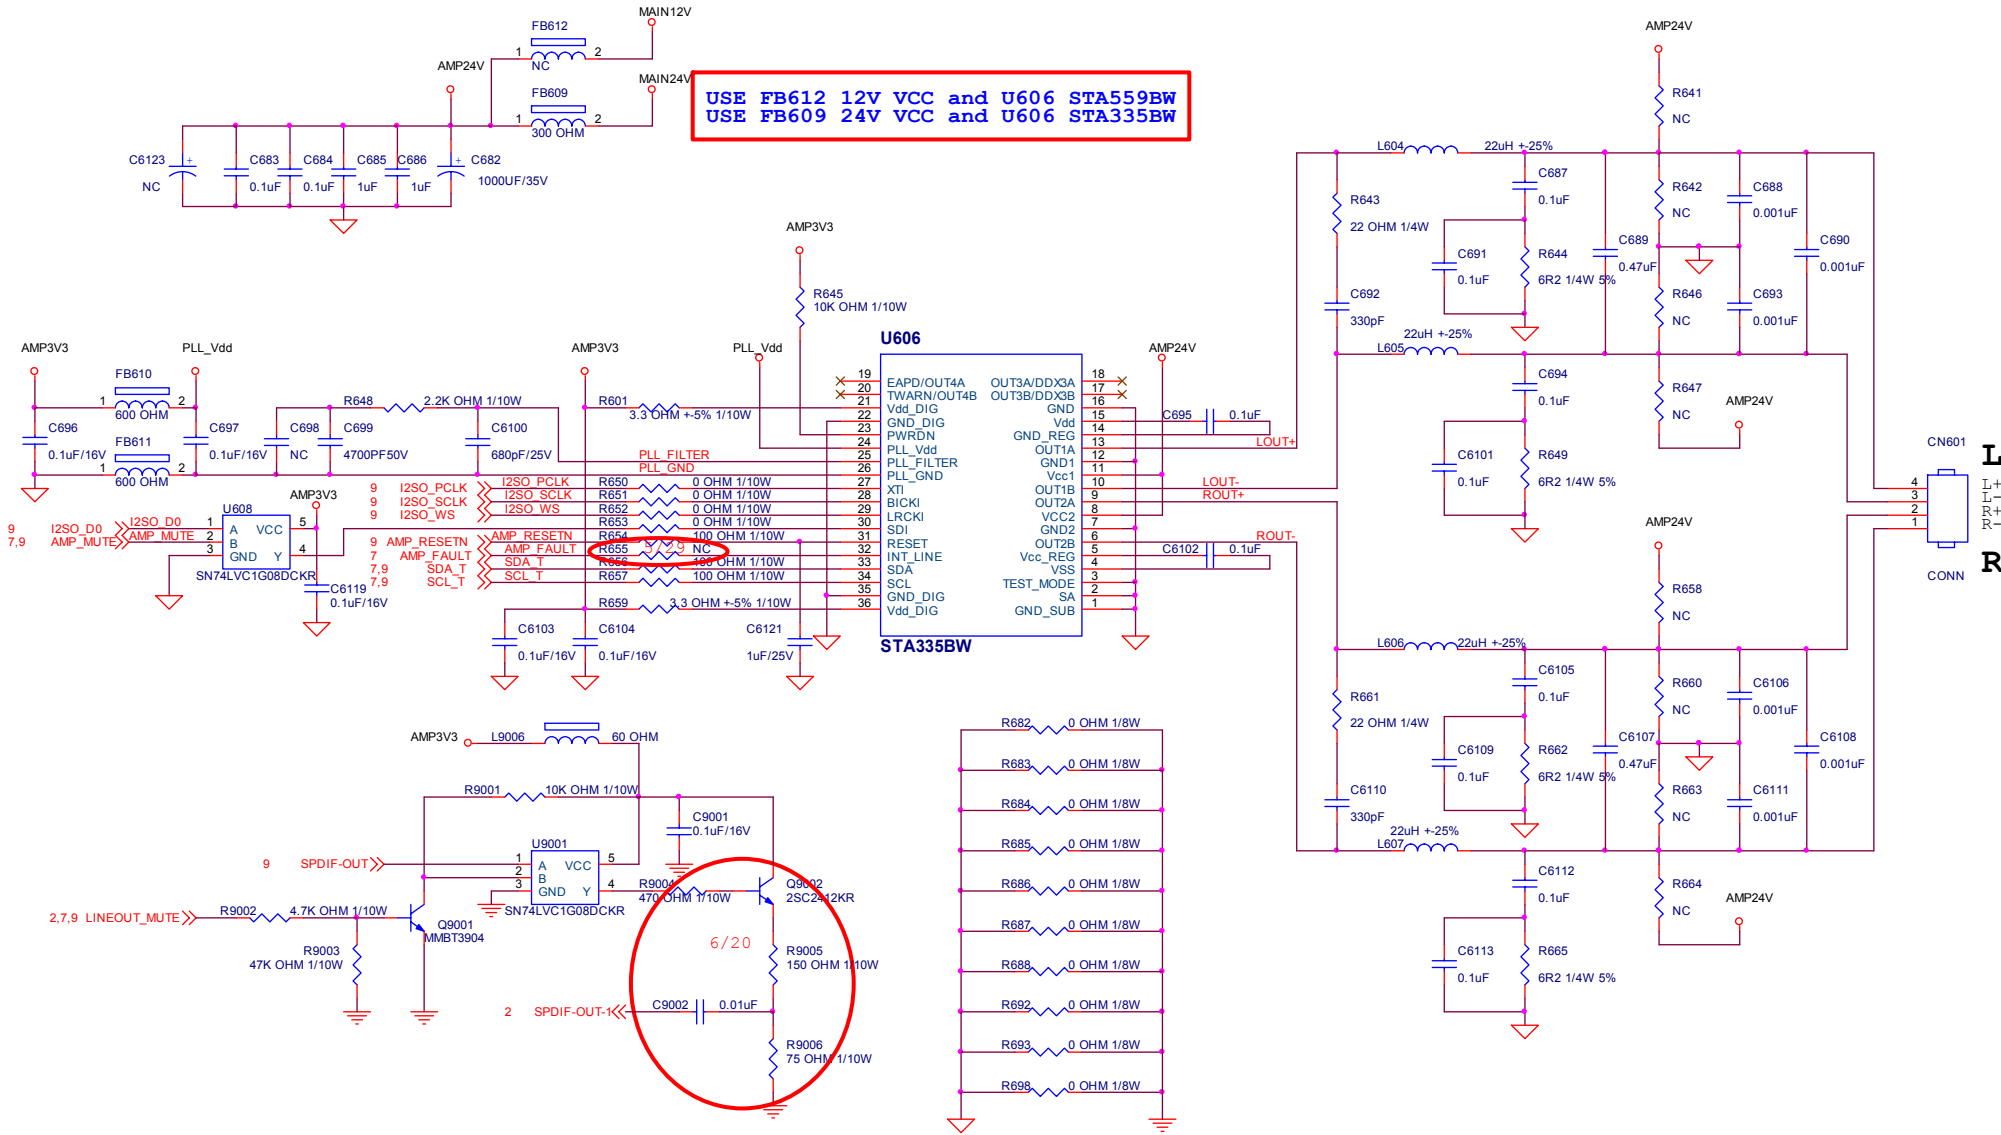


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	B
括隔瓜蜜膜	T3115-F-X-X1-080605		Rev	C
Key Component	10.AUDIO AMP	PCB NAME	715T3115-F	移多
Date	Saturday, July 26, 2008	Sheet	10 of 10	

9.2 Power Board


D32W831 715T2804 2

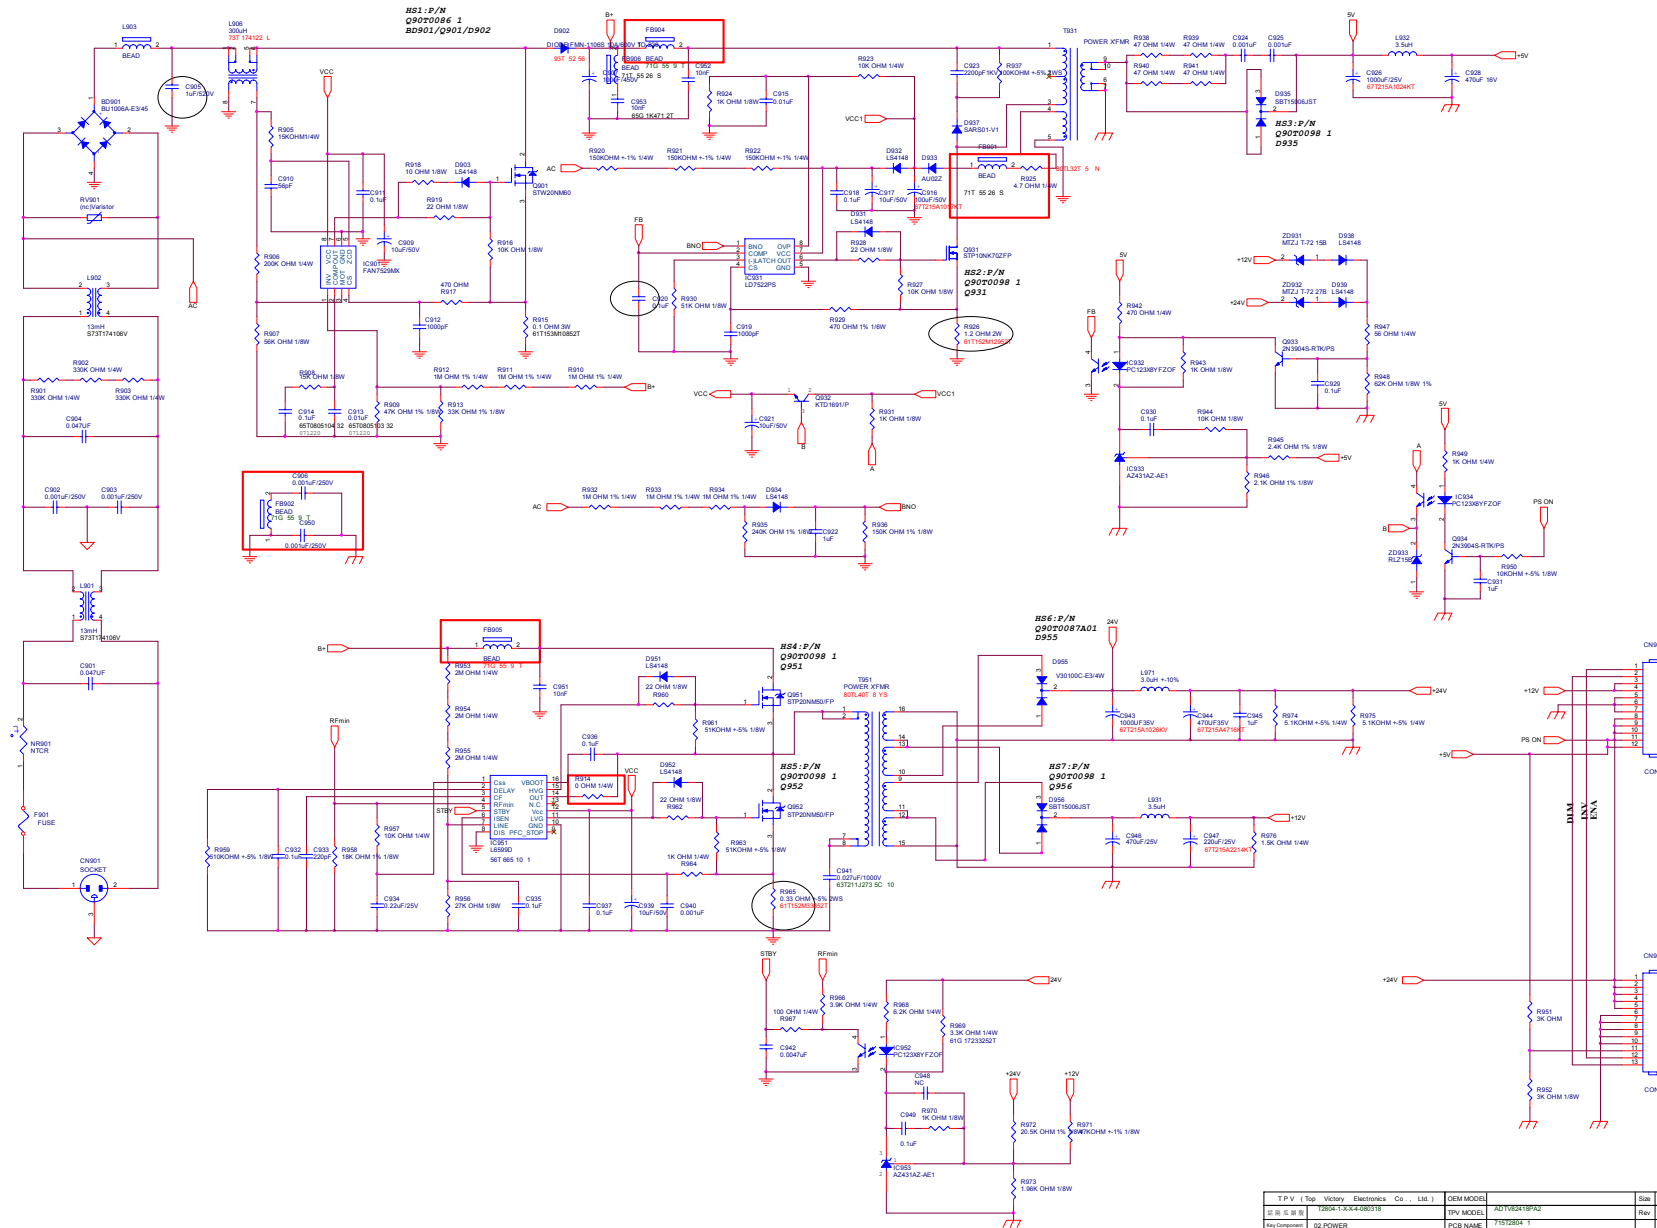


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Size	Custom
品名 伝 送 機	1280A-1-3-X4-080315	TPV MODEL	A01V824189A2
Key Component	02 POWER	PCB NAME	7151280A_1
Order	Tenwin, March 19, 2008	Sheet	1 of 3
		図表	《図表》

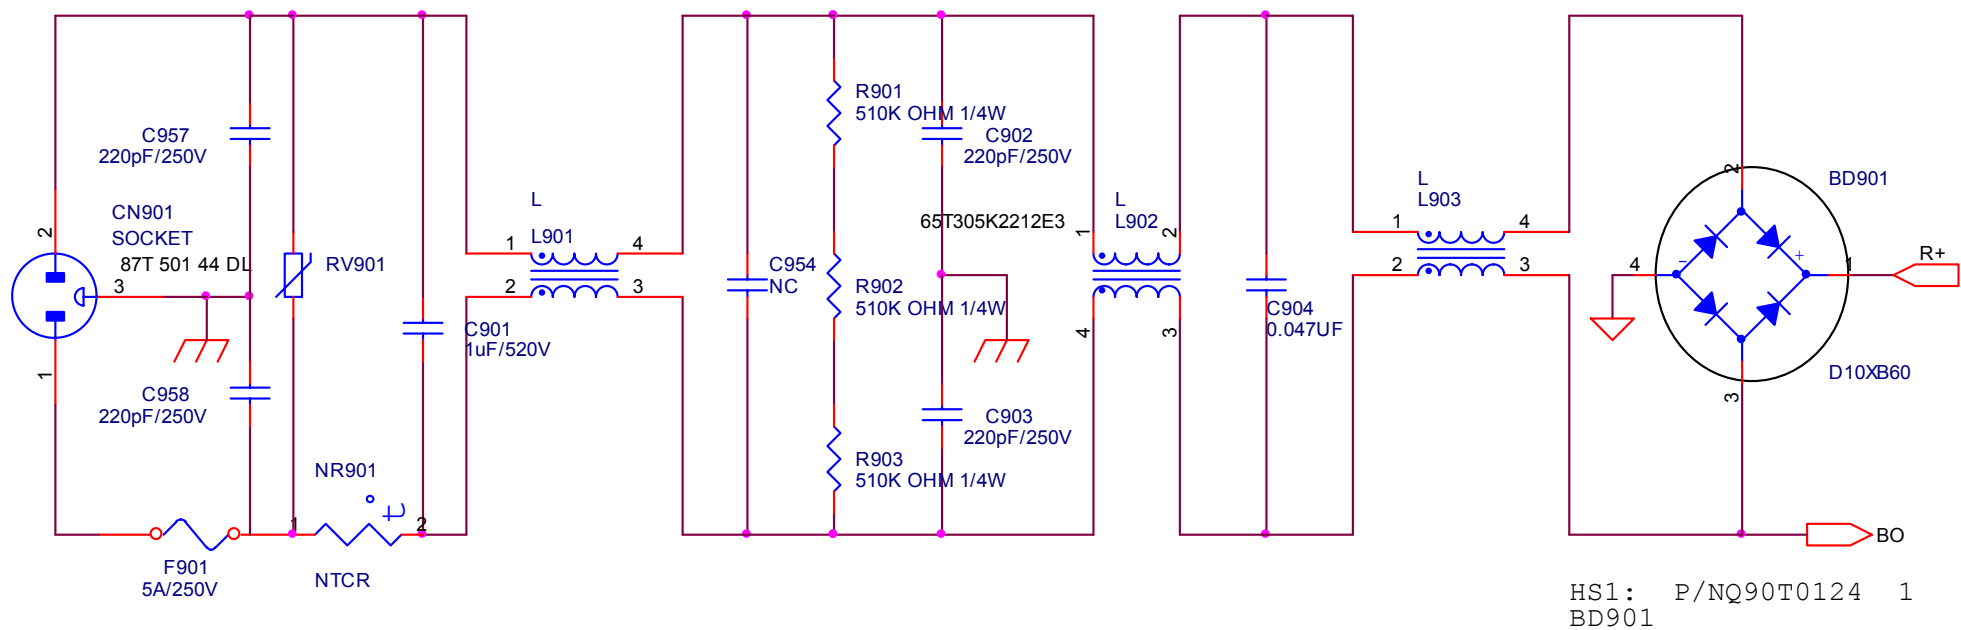


T P V (Top Victory Electronics Co . , Ltd.)		OEM MODEL		Size	A
結構圖		TPV MODEL	ADPC24250BB1	Rev	1.0
Key Component	02.ACside	PCB NAME	715T2802 F	称爹	<称爹>
Date	Monday , March 03, 2008	Sheet	1 of 2		

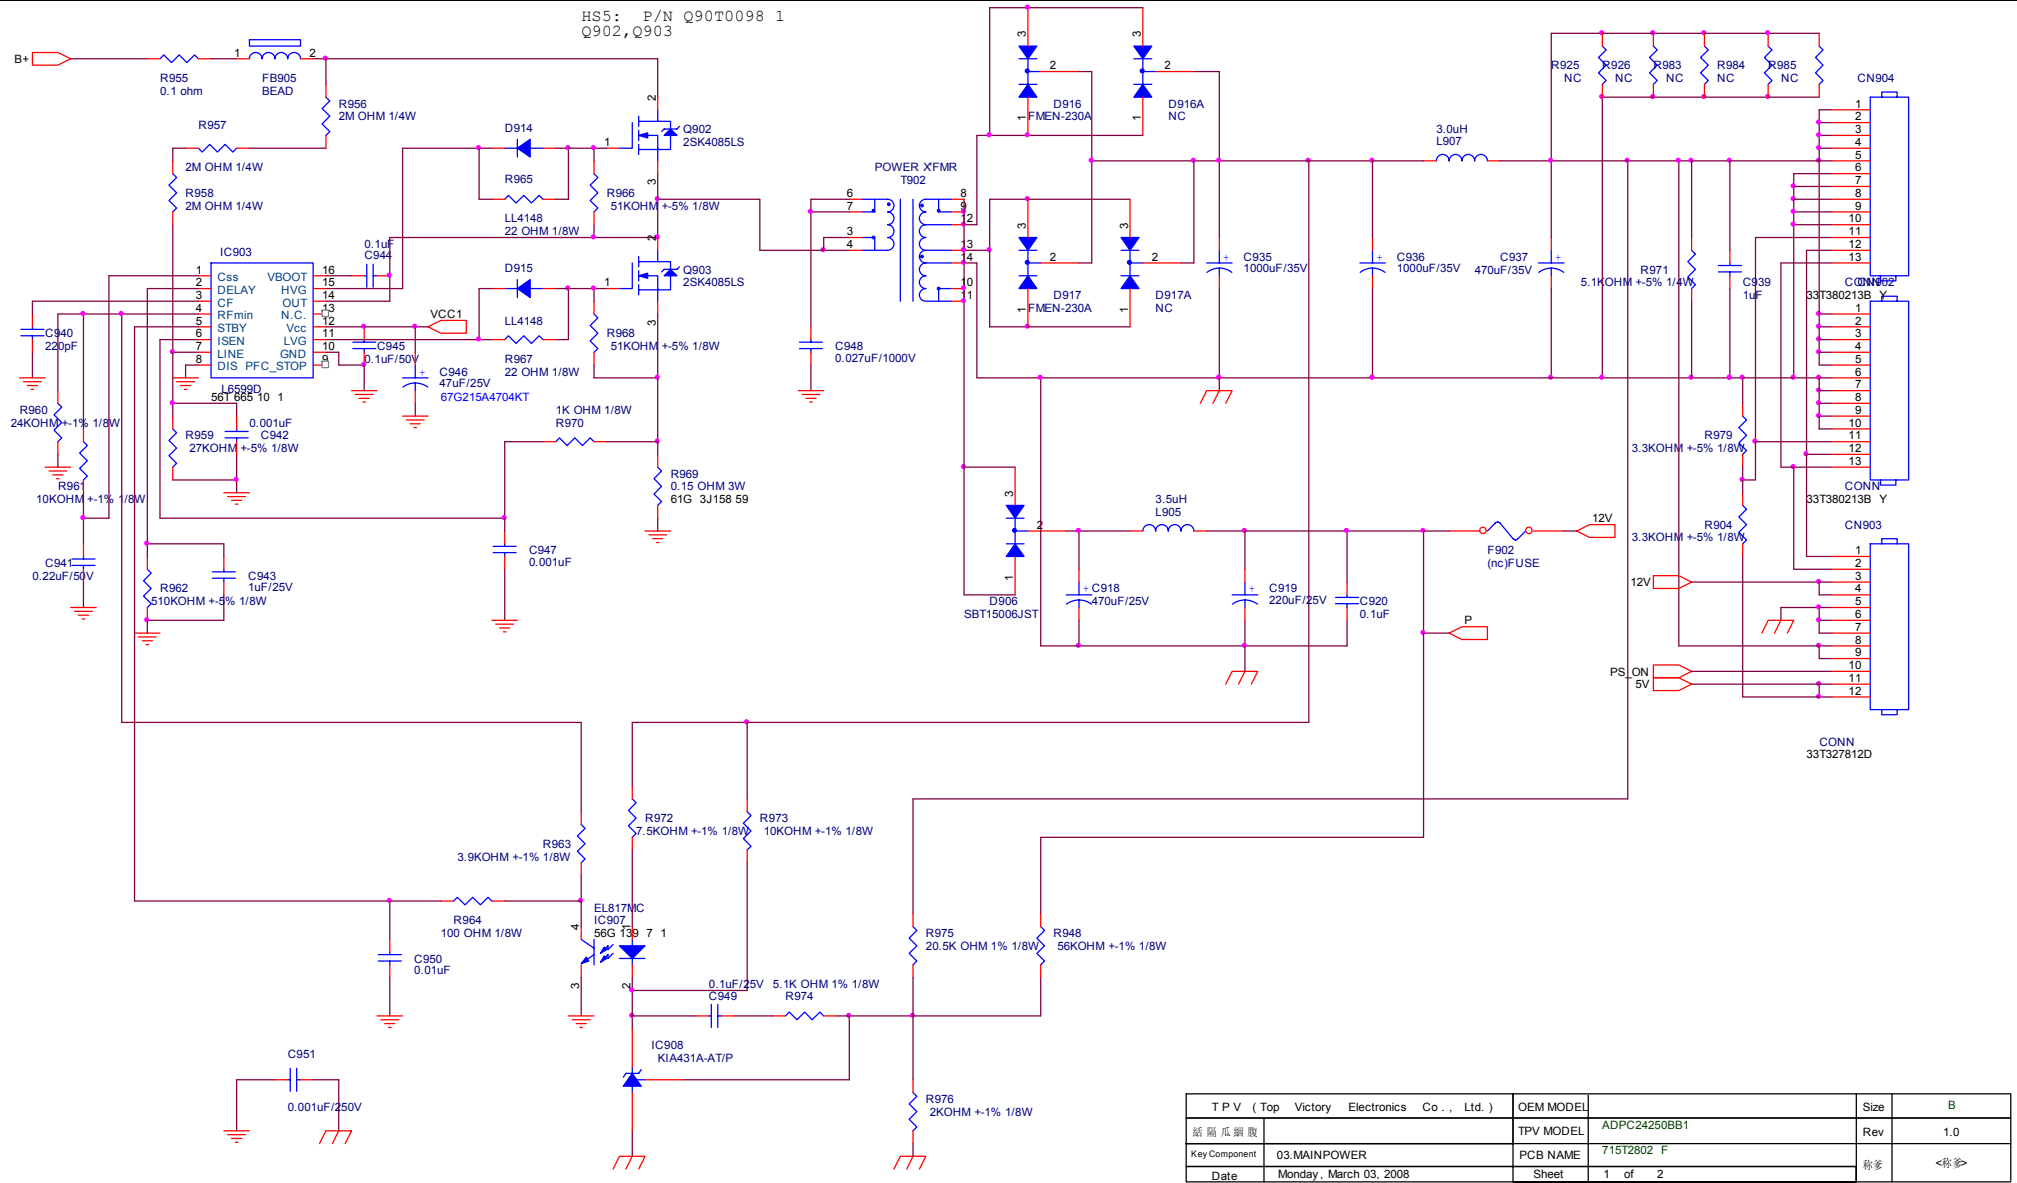

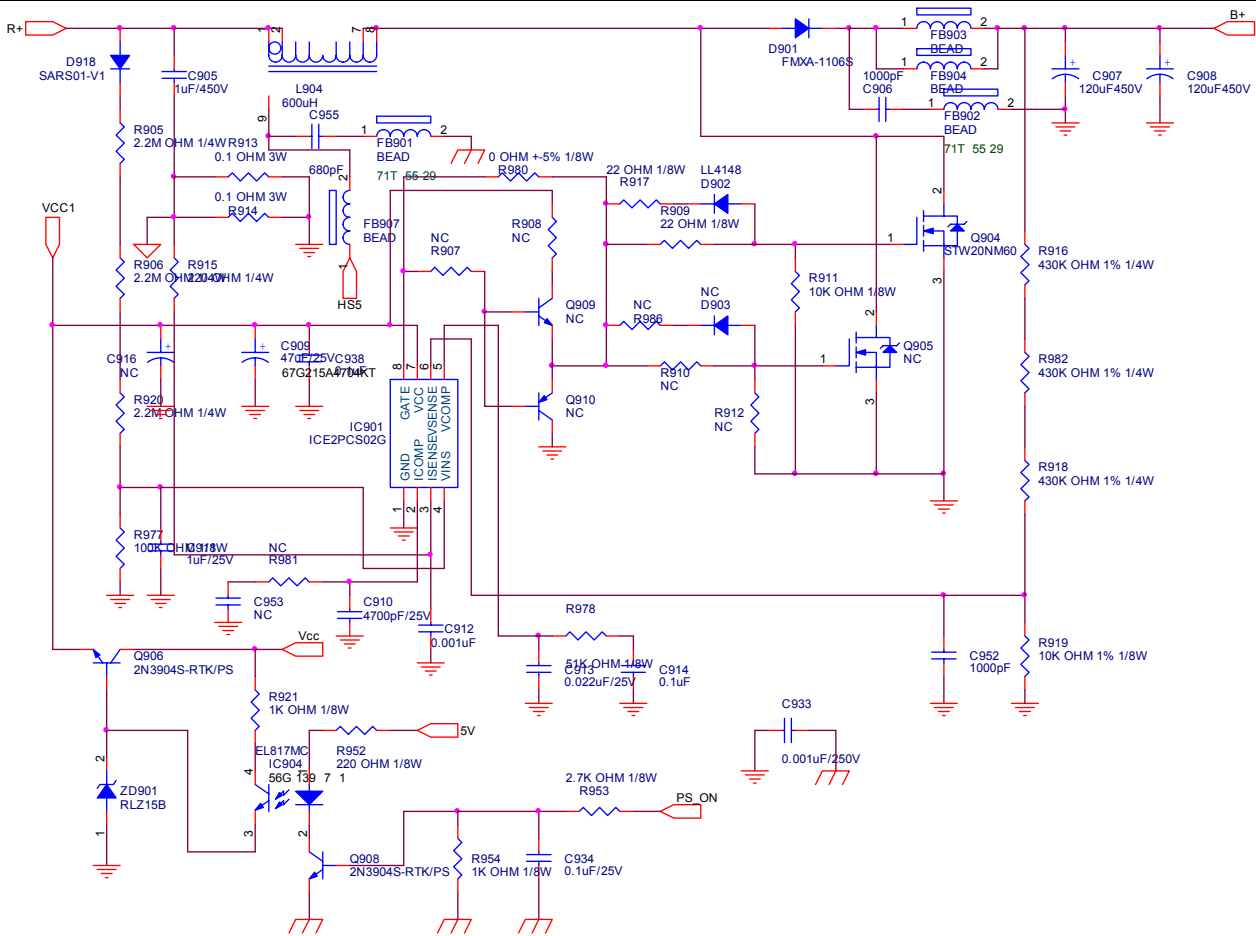


T P V (Top Victory Electronics Co . , Ltd .)	OEM MODEL		Size	B
括隔瓜網腹	TPV MODEL	ADPC24250BB1	Rev	1.0
Key Component	04,PFC	PCB NAME	715T2802 F	修爹
Date	Monday, March 03, 2008	Sheet	1 of 2	<修爹>

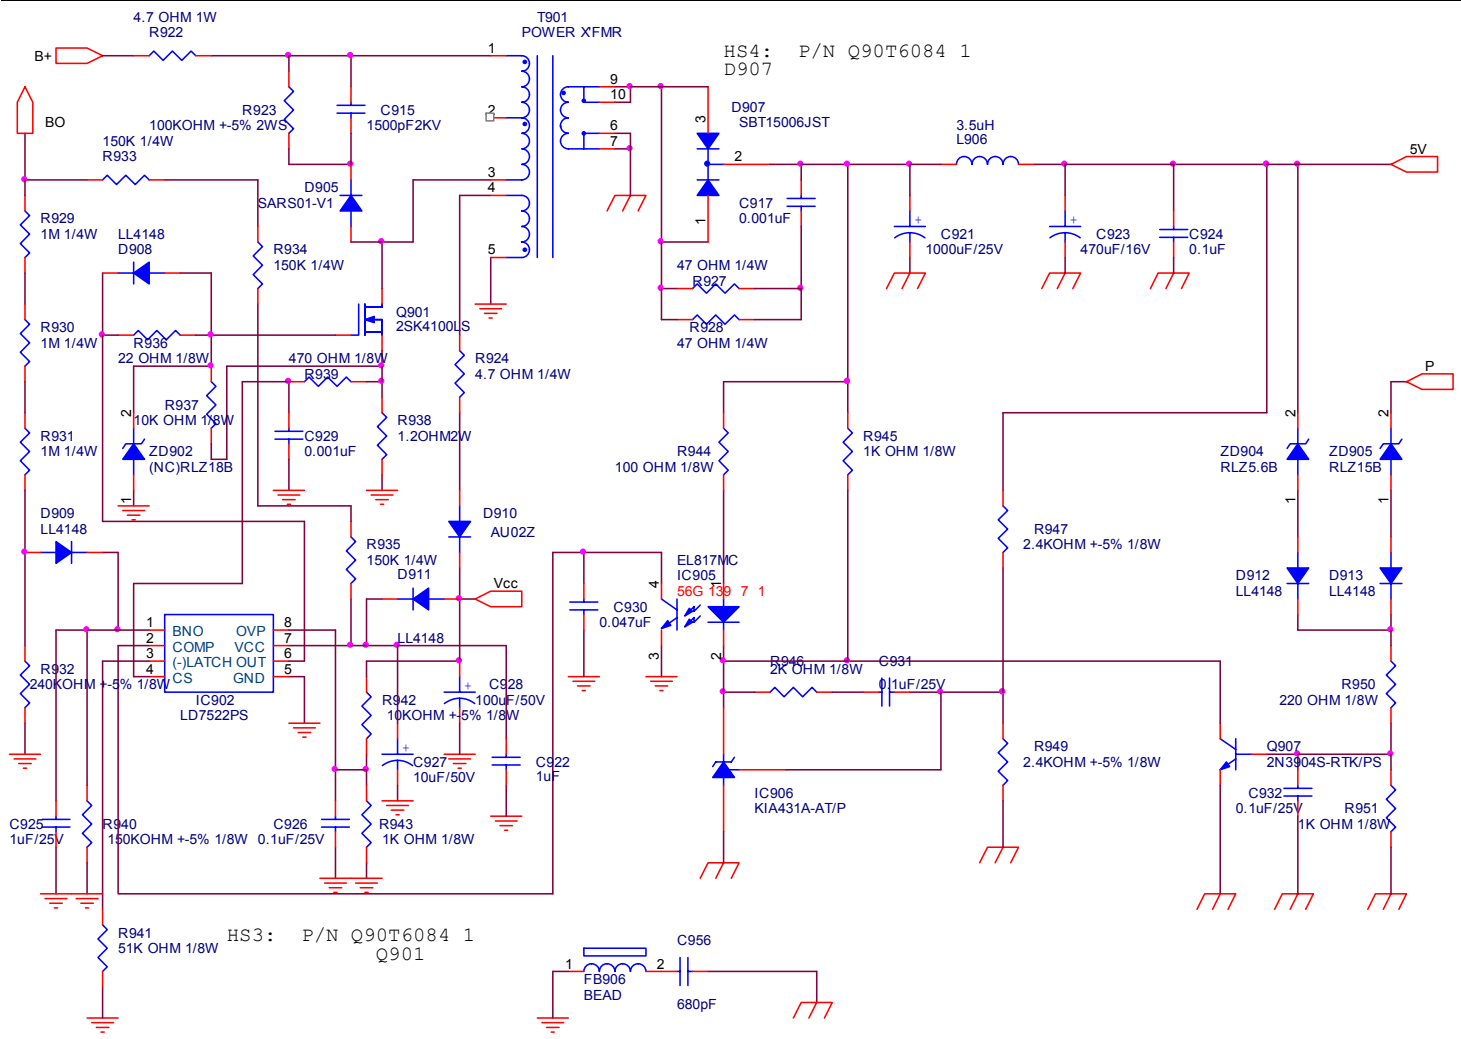

TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	B
結構瓜網腹	TPV MODEL	ADPC24250BB1	Rev	1.0
Key Component	05.STANDBY	PCB NAME	715T2802 F	称爹
Date	Monday , March 03, 2008	Sheet	1 of 2	<称爹>


9.3 Tuner Board
715T3176-D

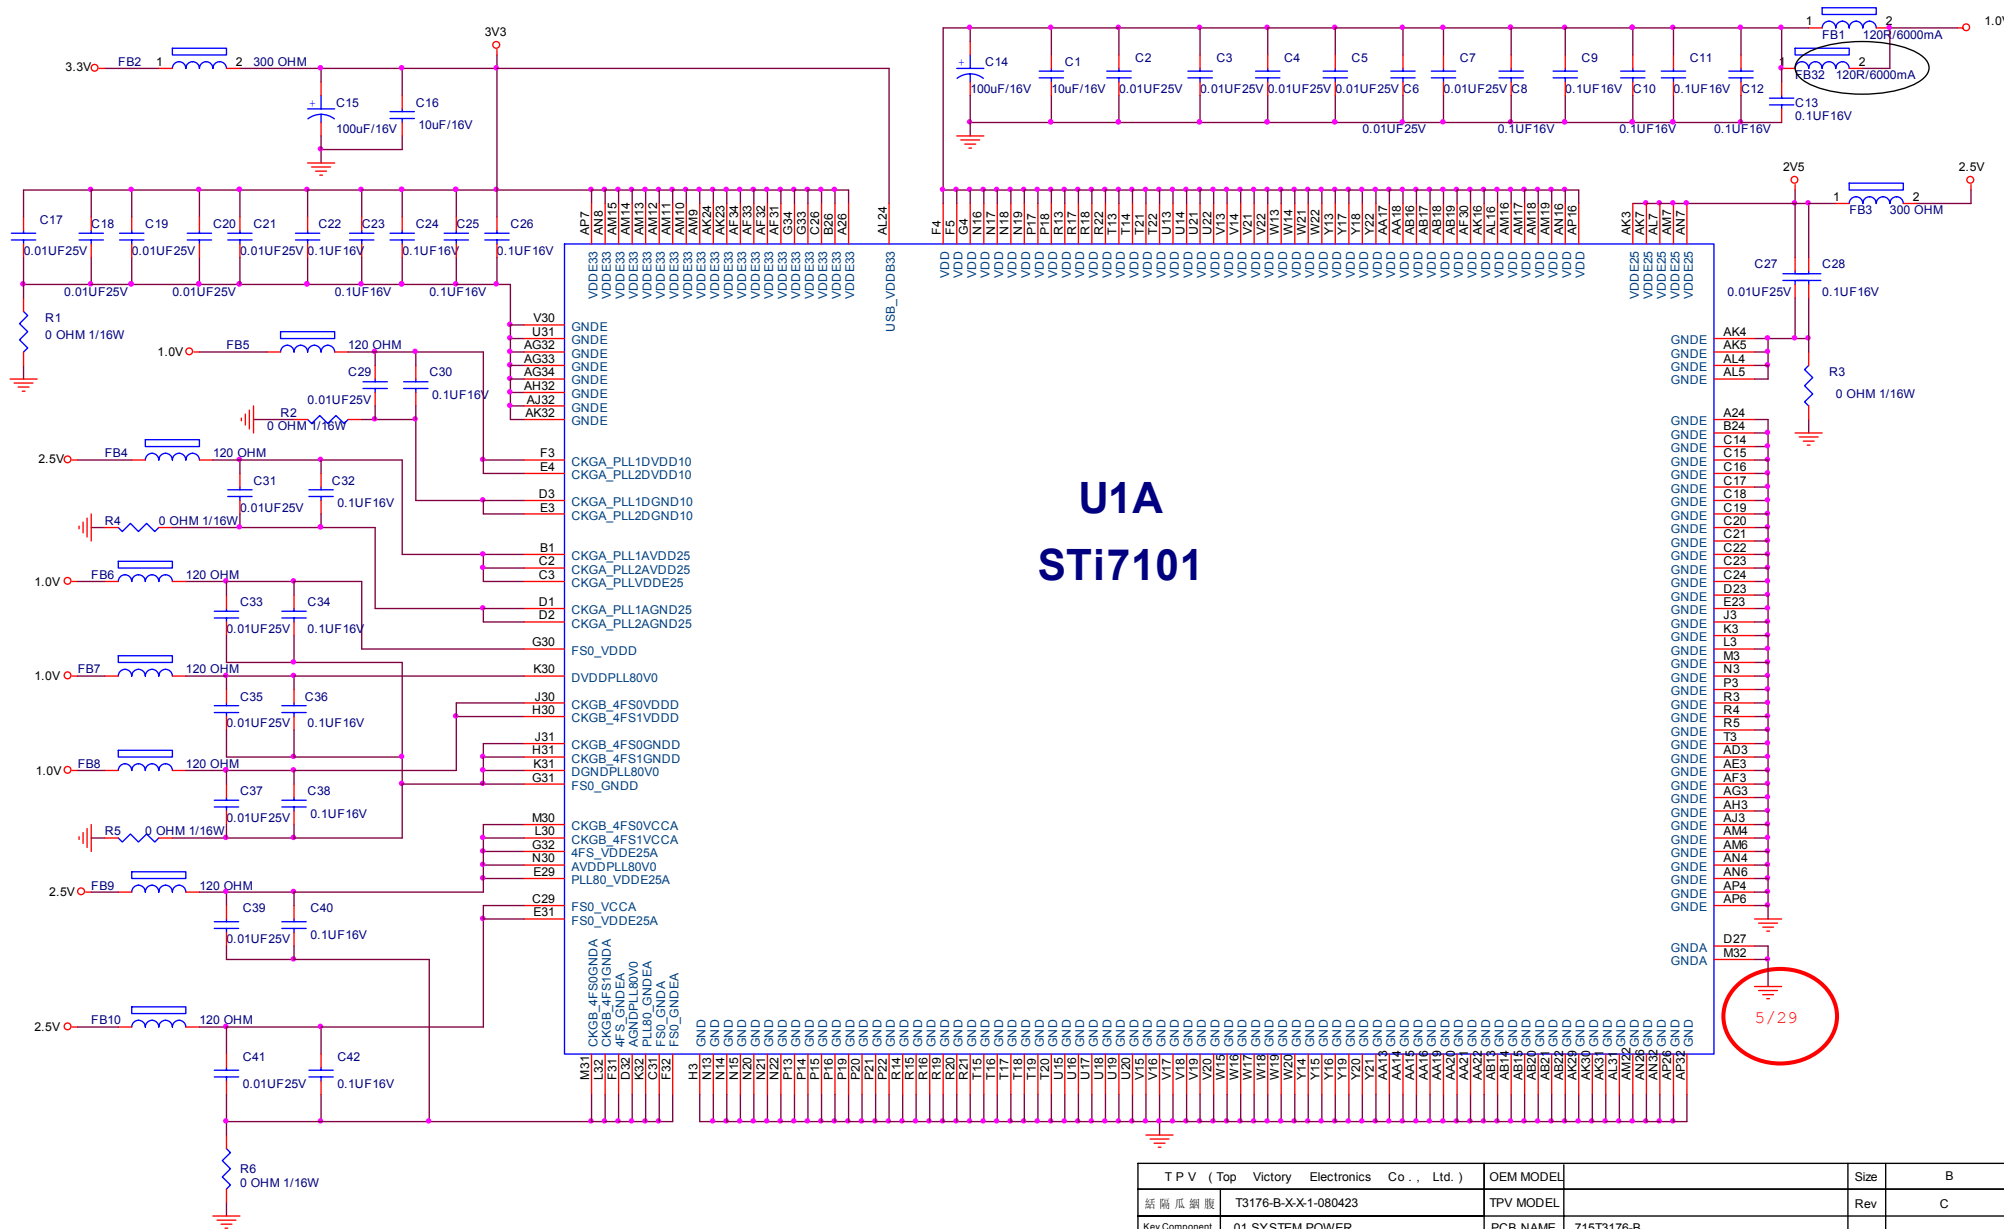


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	B
話隔瓜劉腹	T3176-B-X-X-1-080423	TPV MODEL	Rev	C
Key Component	01 SYSTEM POWER	PCB NAME	715T3176-B	称爹
Date	Saturday, July 26, 2008	Sheet	1 of 8	<路爹>




TPV (Top Victory Electronics Co., Ltd.)		OEM MODEL		Size	B
話隔瓜銅腹	T3176-B-X-X-1-080423	TPV MODEL		Rev	C
Key Component	02 SYSTEM	PCB NAME	715T3176-B	称爹	
Date	Saturday, July 26, 2008	Sheet	2 of 8		

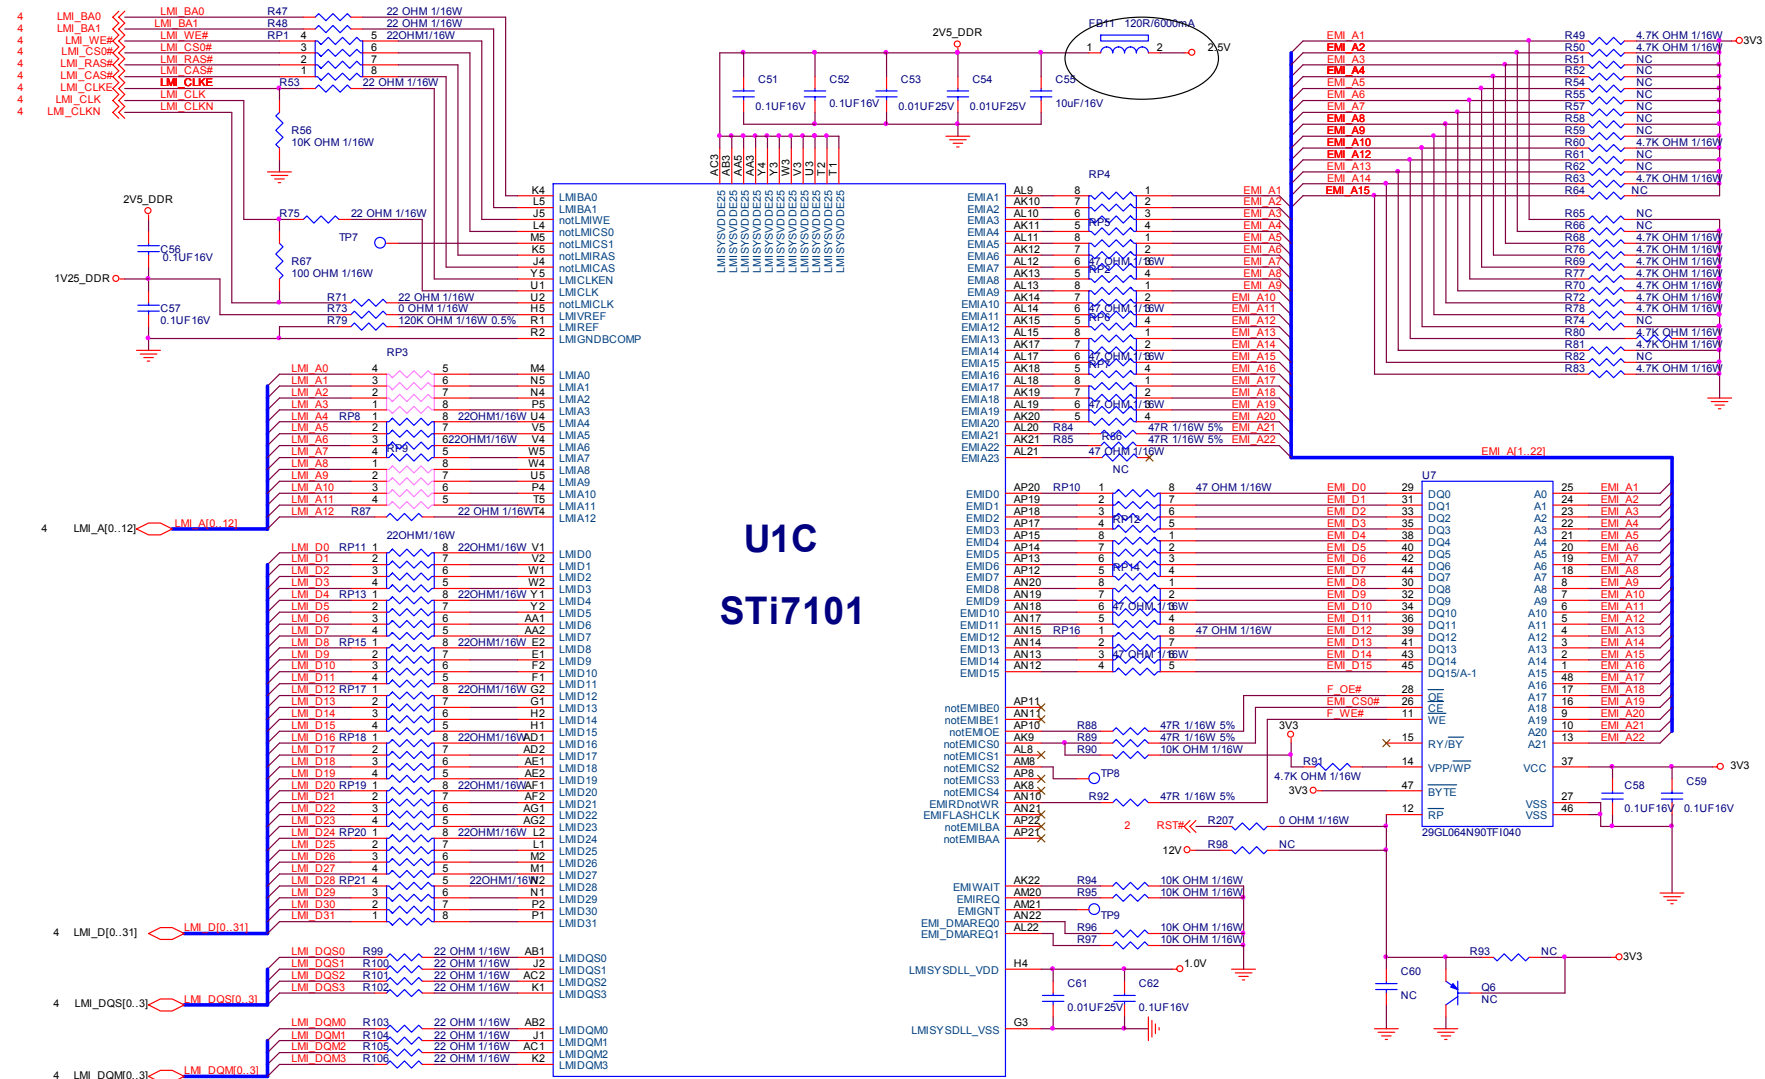


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	Custom
规格书编号	T3176-B-XX1-080423	TPV MODEL	Rev	C
Key Component	03 FLASH	PCB NAME	715T3176	数量
Date	Saturday, July 26, 2008	Sheet	3 of 8	

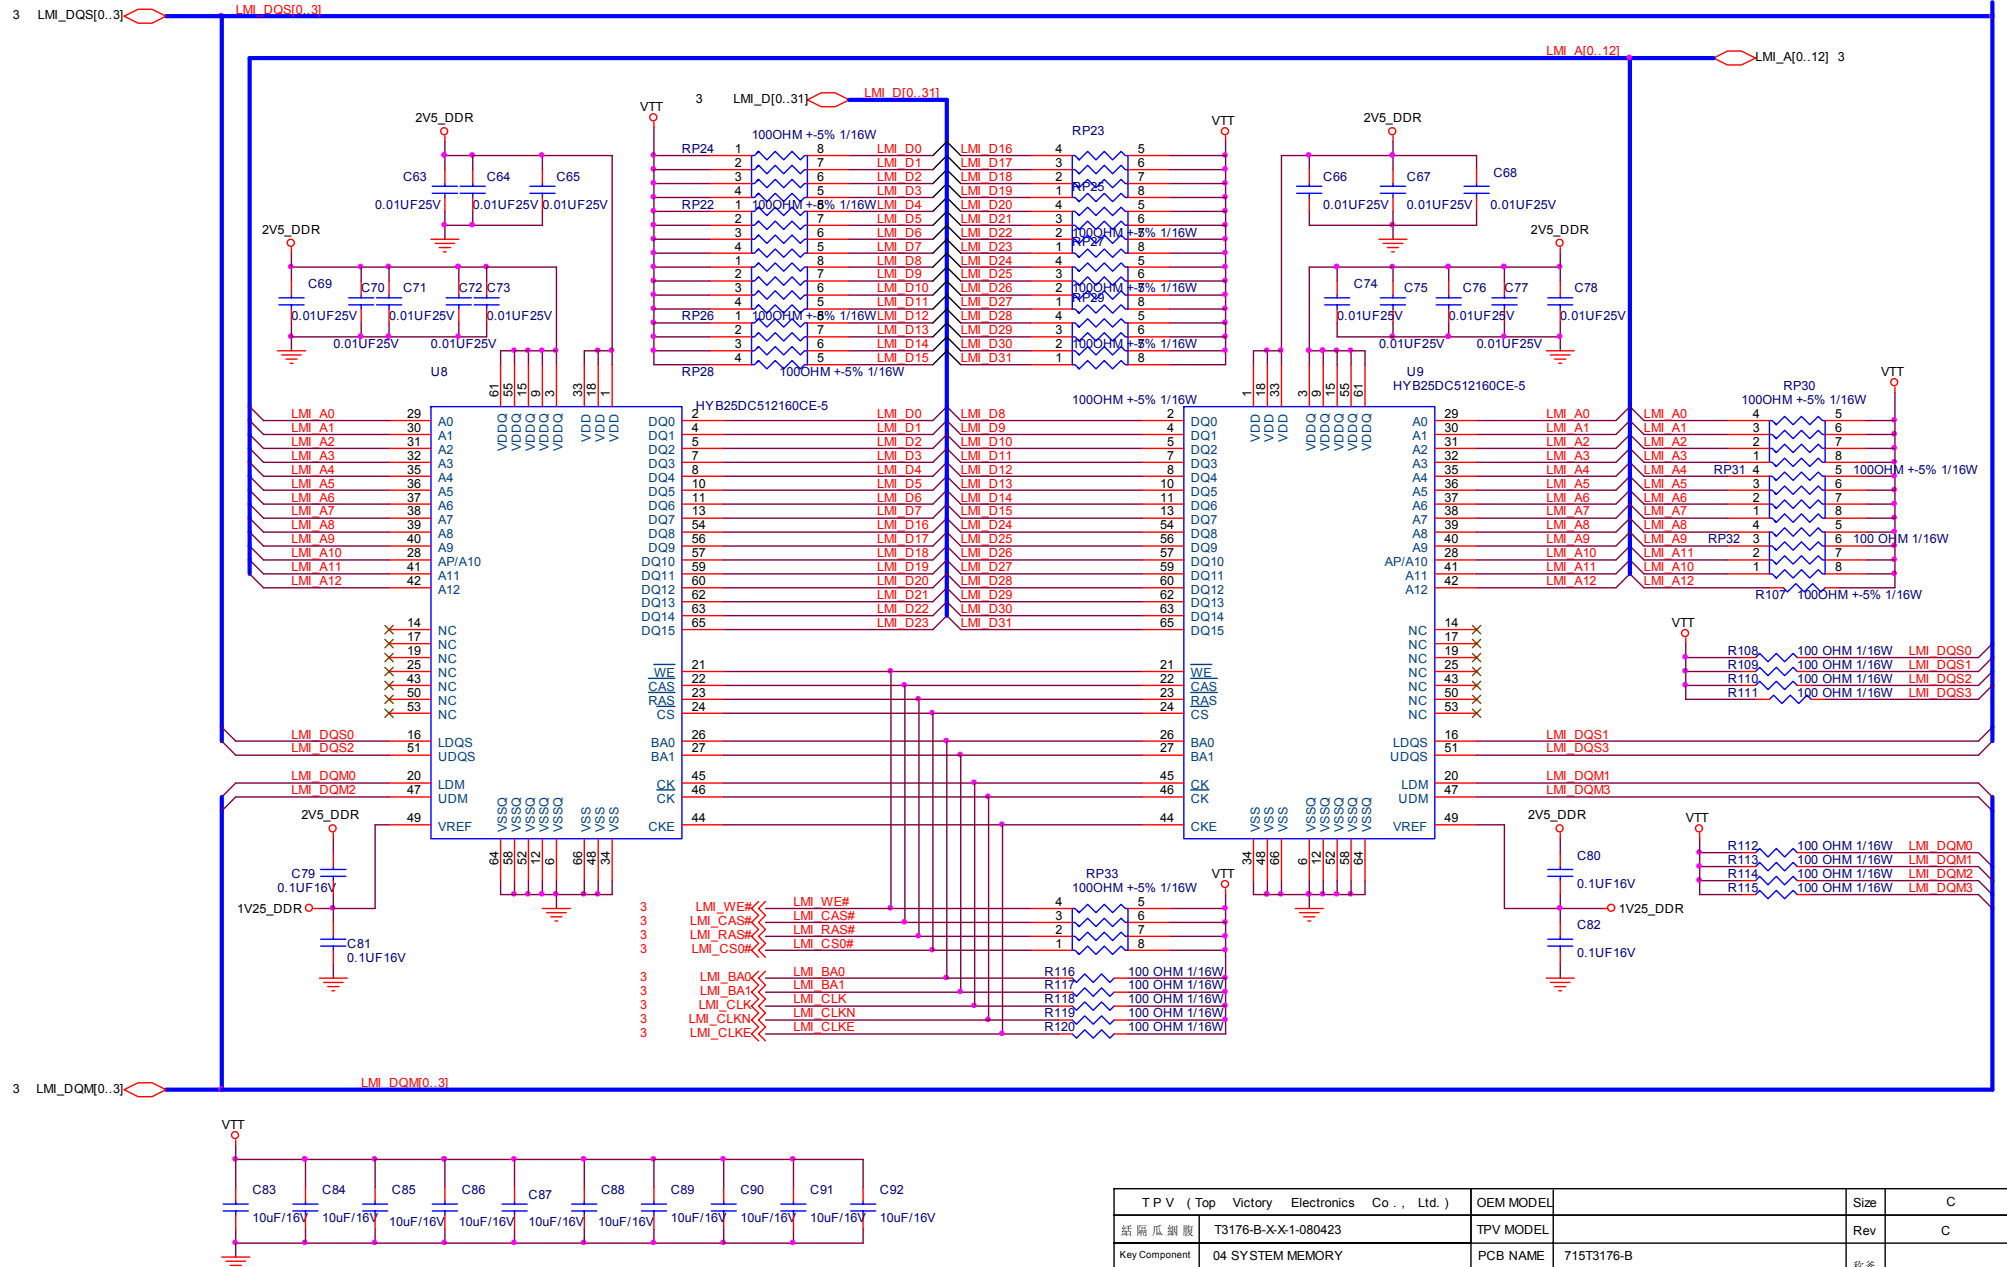


T P V (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	C
銘臨瓜洲廠	T3176-B-X-X-1-080423	TPV MODEL	Rev	C
Key Component	04 SYSTEM MEMORY	PCB NAME	715T3176-B	称參
Date	Saturday, July 26, 2008	Sheet	4 of 8	

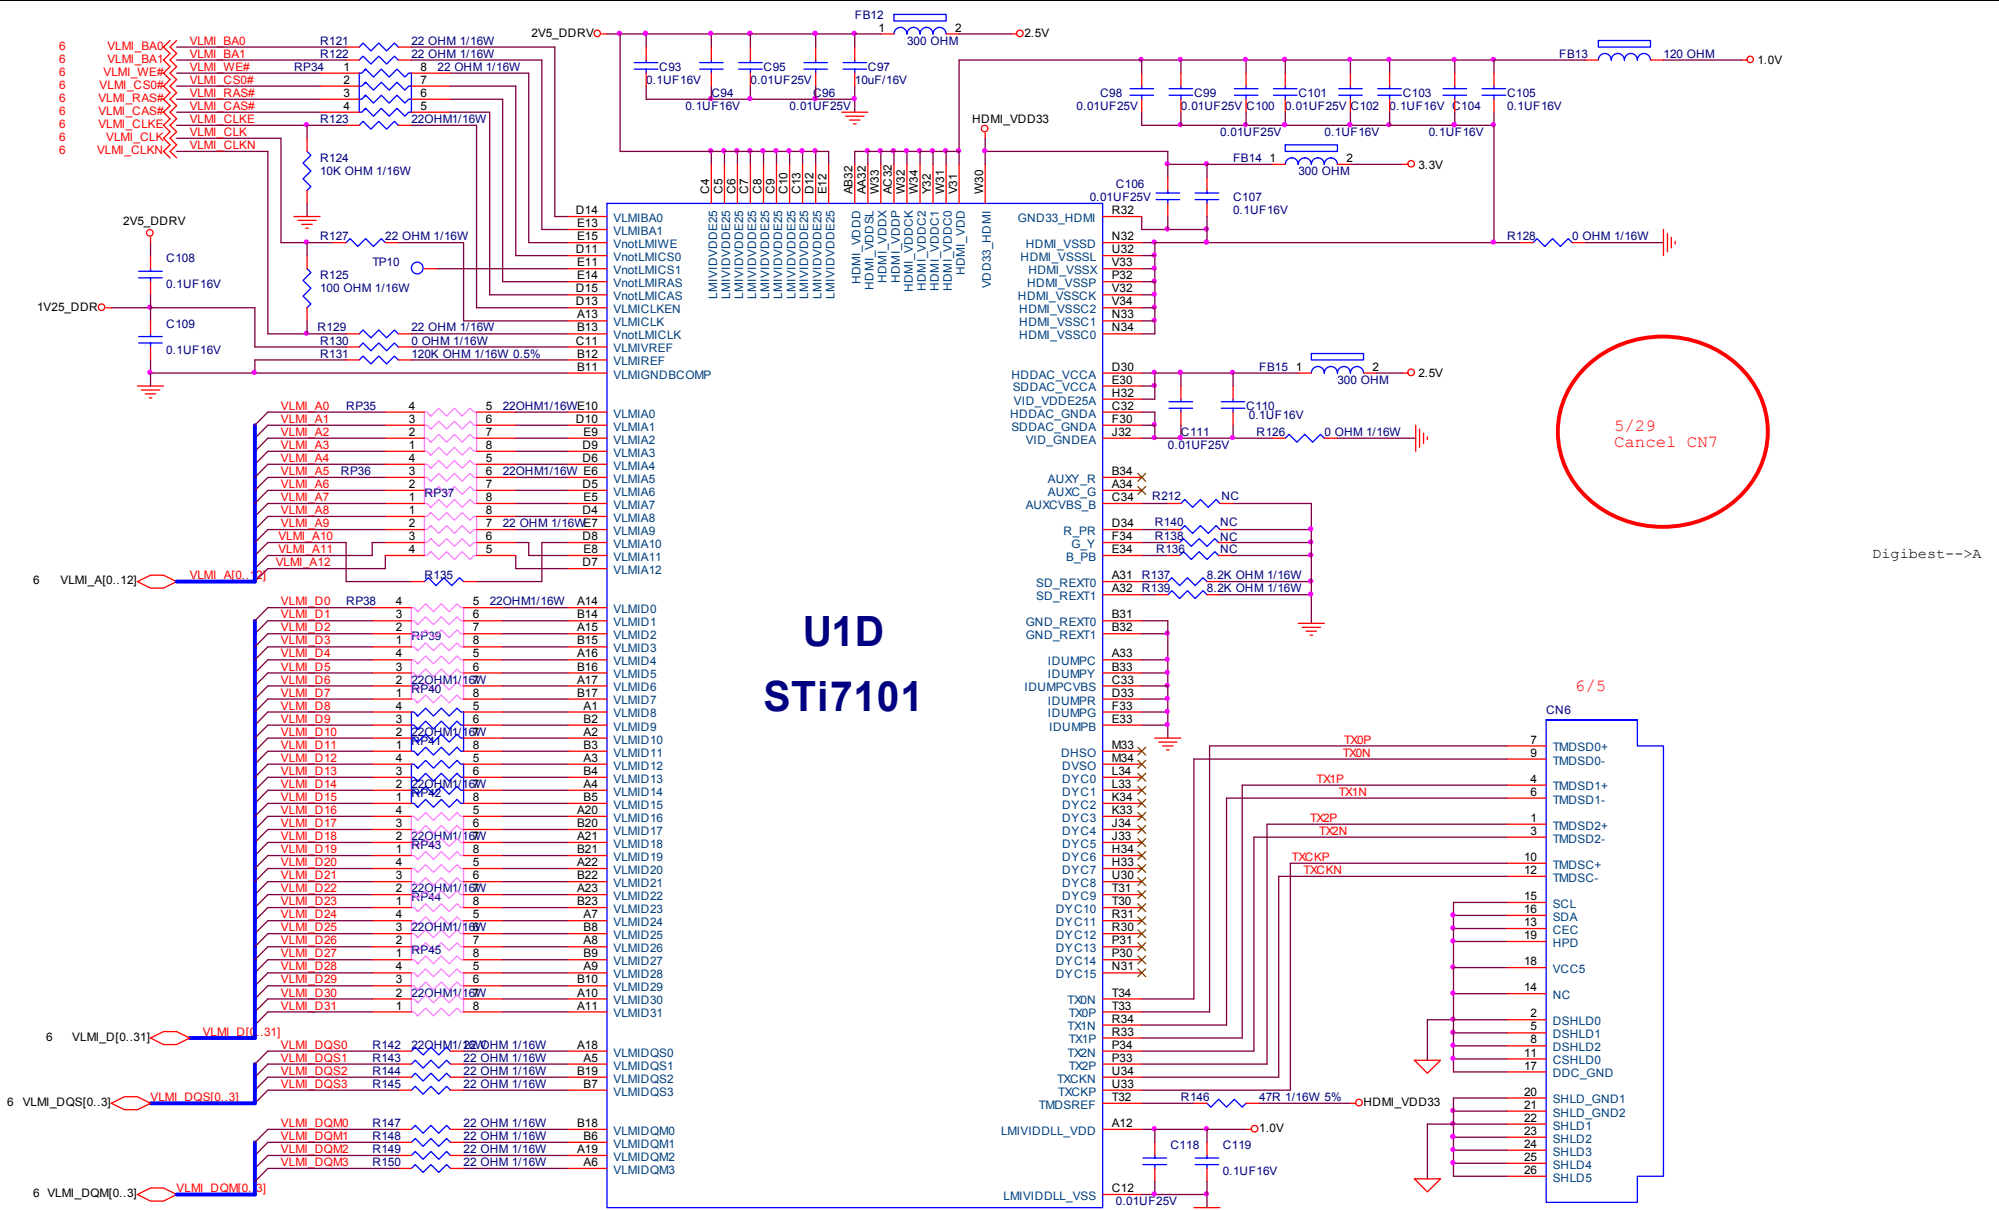


TPV (Top Victory Electronics Co., Ltd.)				HDMI	
TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Size	Custom		
話 隔 瓜 網 膜	T3176-B-X-X-1-080423	Rev	C		
Key Component	05 VIDEO	PCB NAME	715T3176-B		
Date	Saturday, July 26, 2008	Sheet	5 of 8		

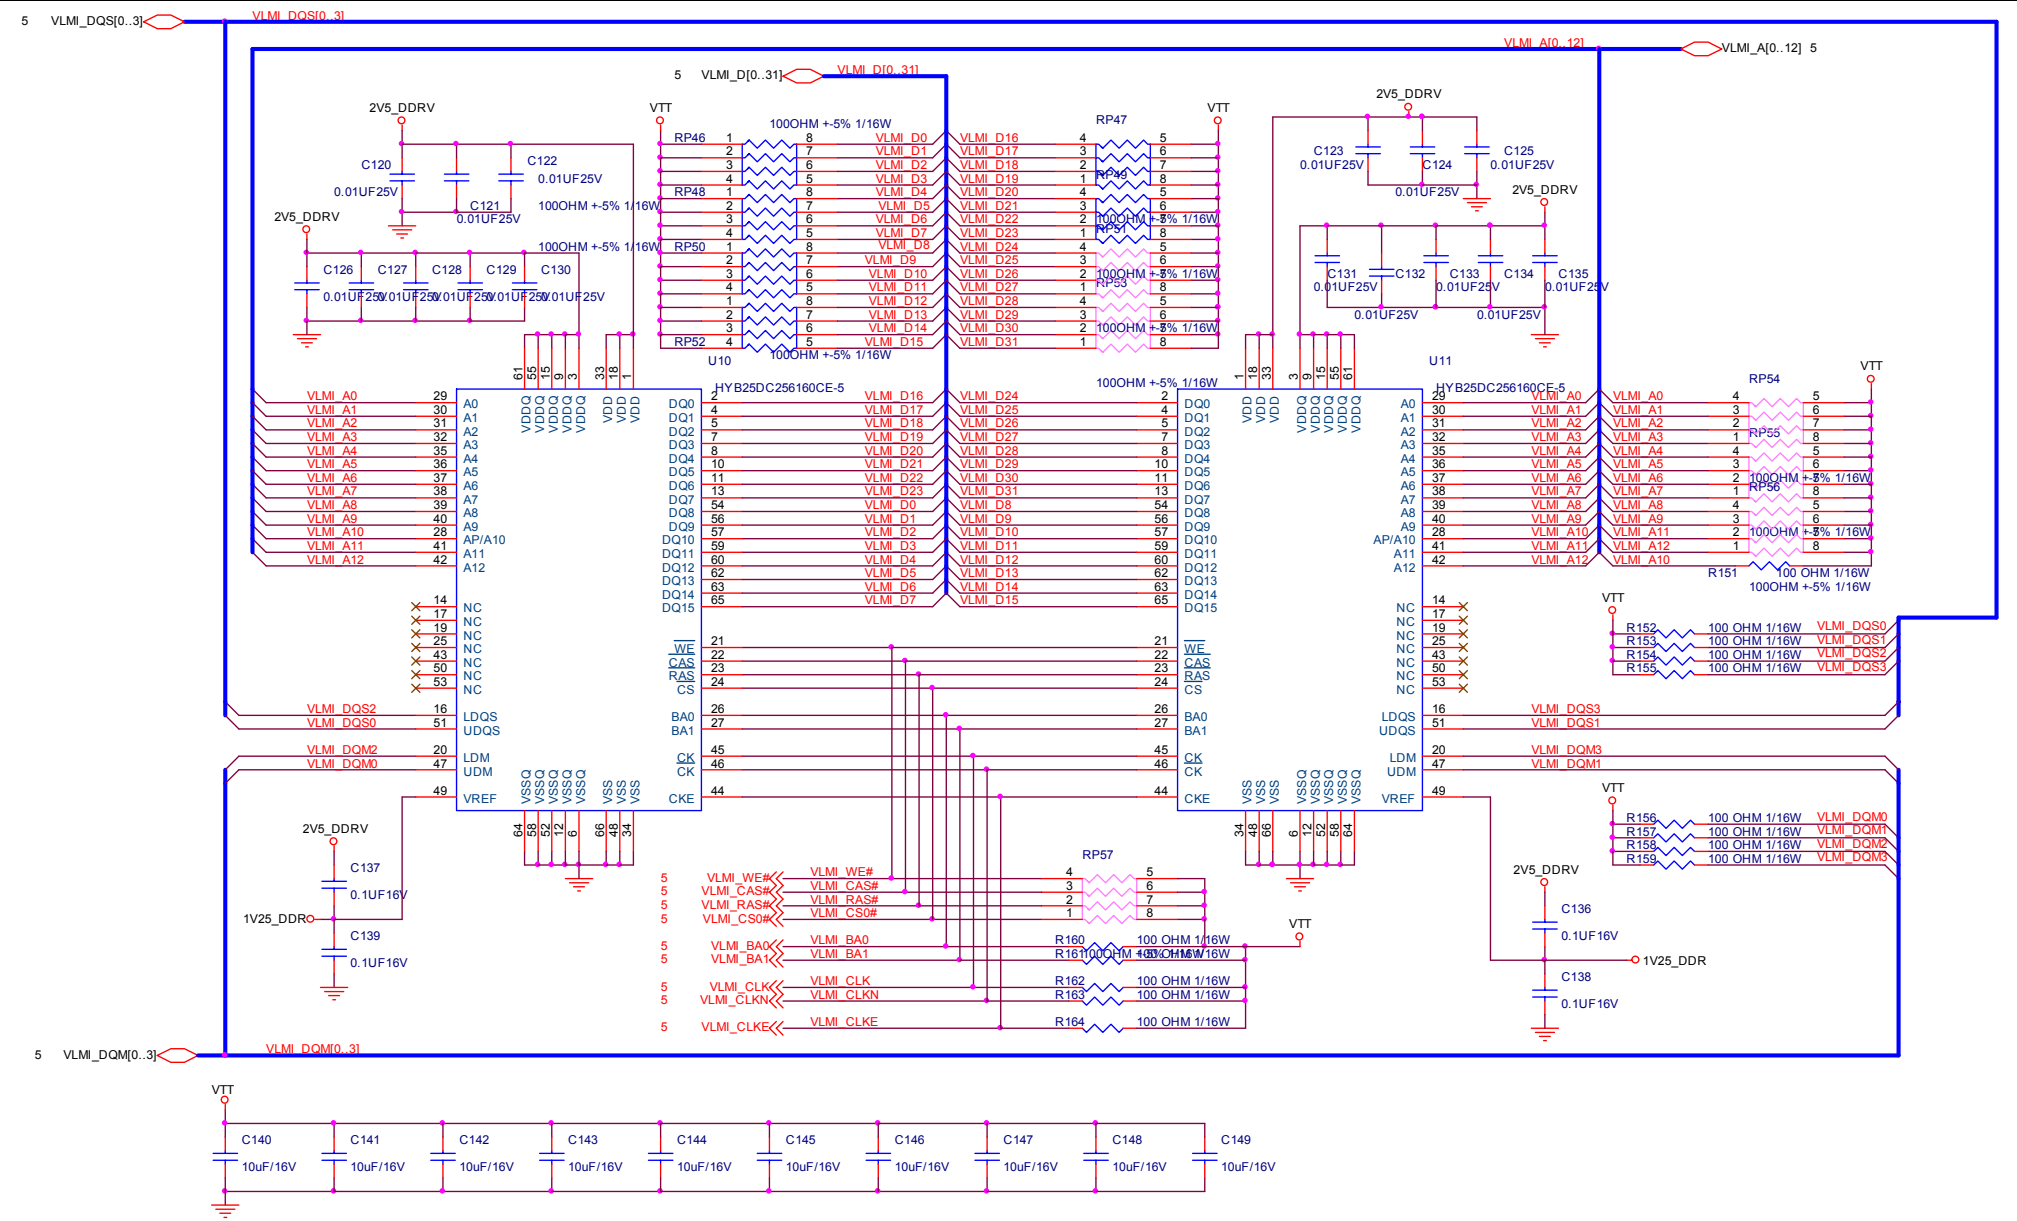


T P V (Top Victory Electronics Co. , Ltd.)	OEM MODEL		Size	C
經 隔 瓜 網 廠	T3176-B-X-X-1-080423	TPV MODEL	Rev	C
Key Component	06 VIDEO MEMORY	PCB NAME	715T3176-B	称 彦
Date	Saturday, July 26, 2008	Sheet	6 of 8	






9.4 Key Board

715T2876 1

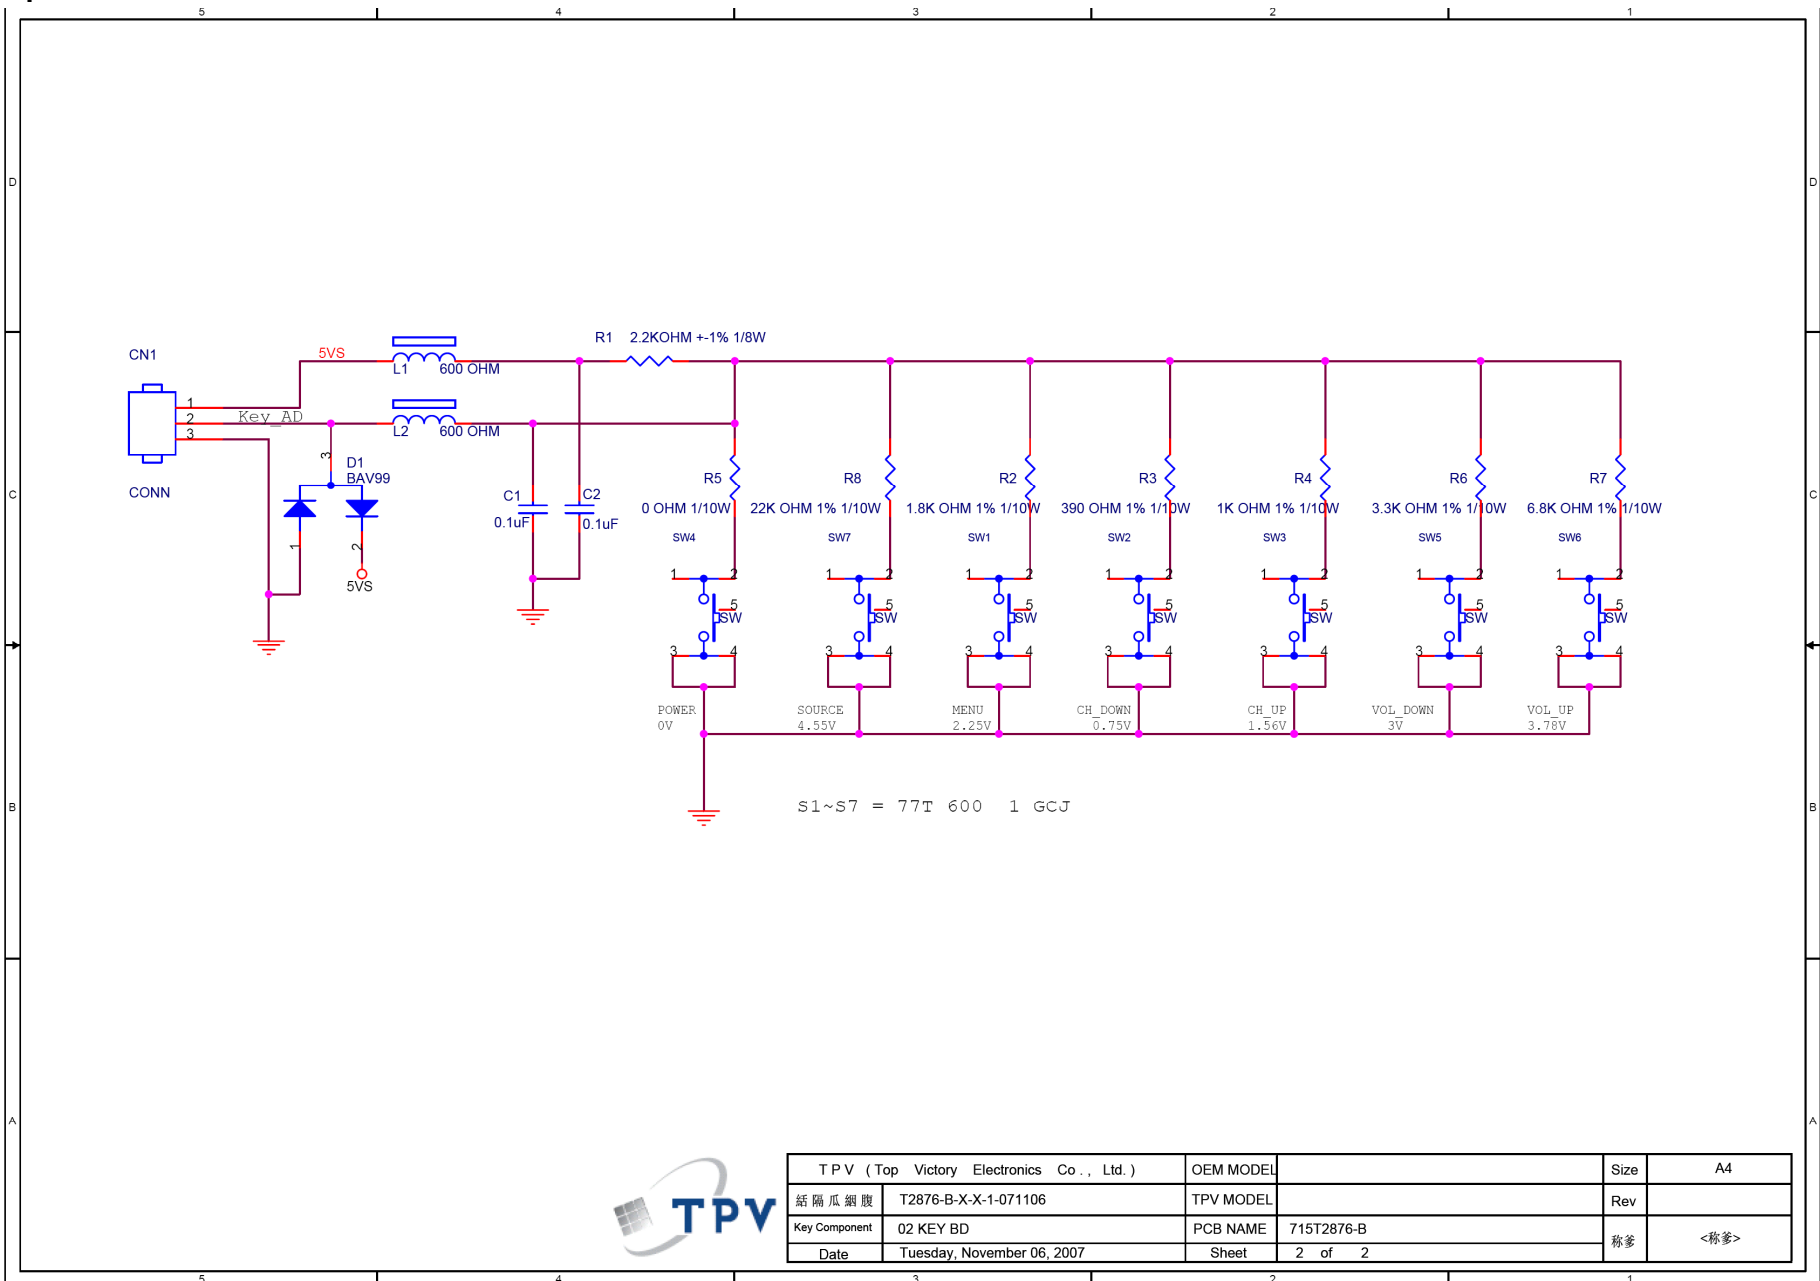


9.5 IR Board


715T3004 1

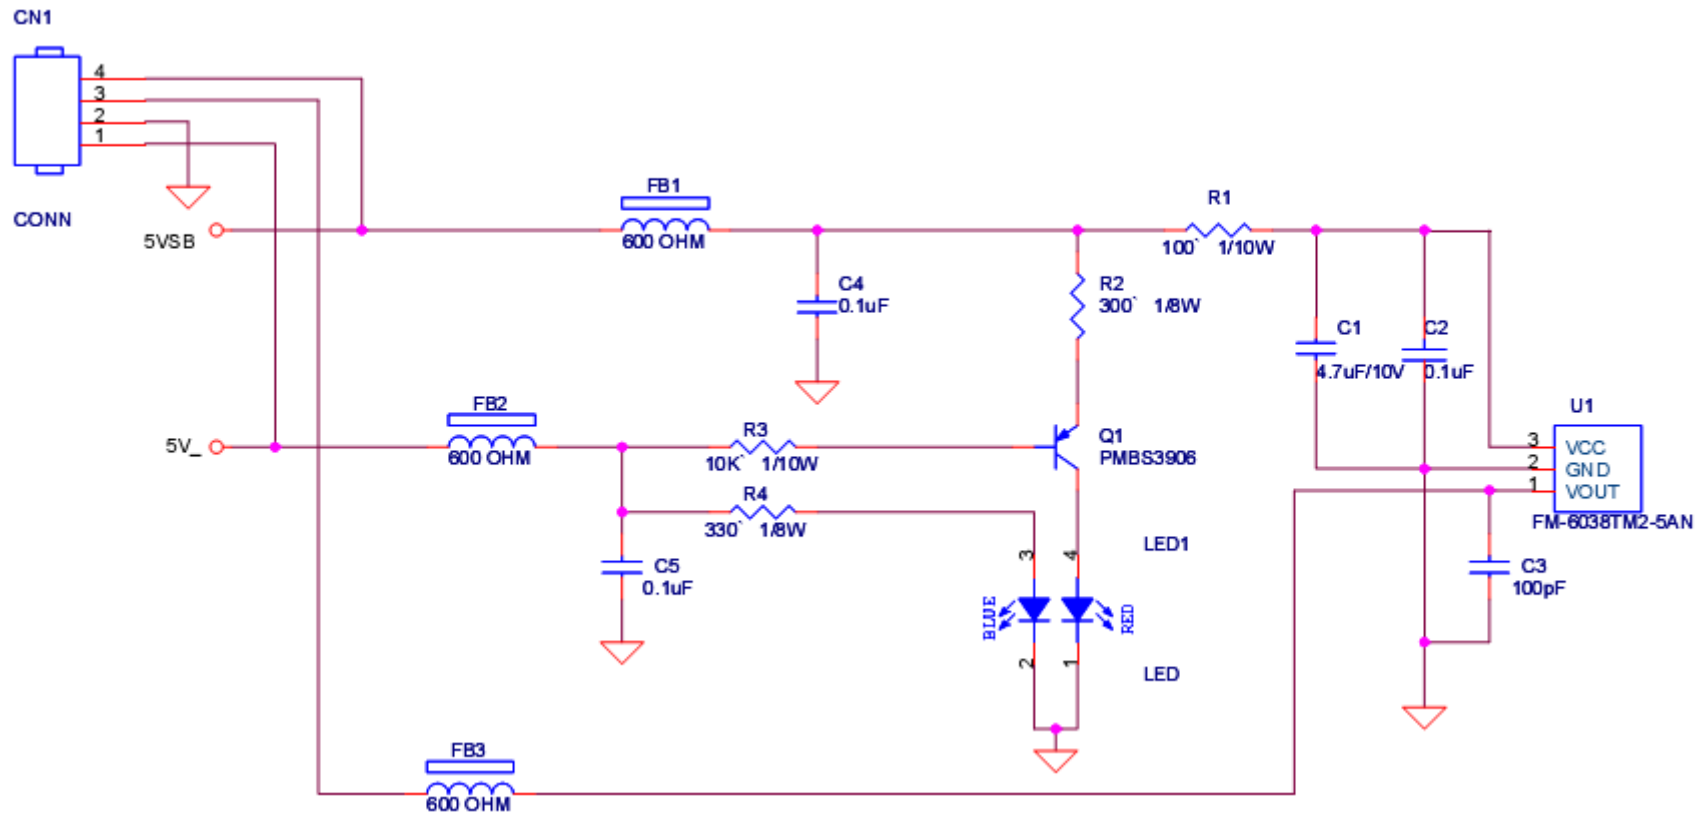


10. Exploded View

D32W831

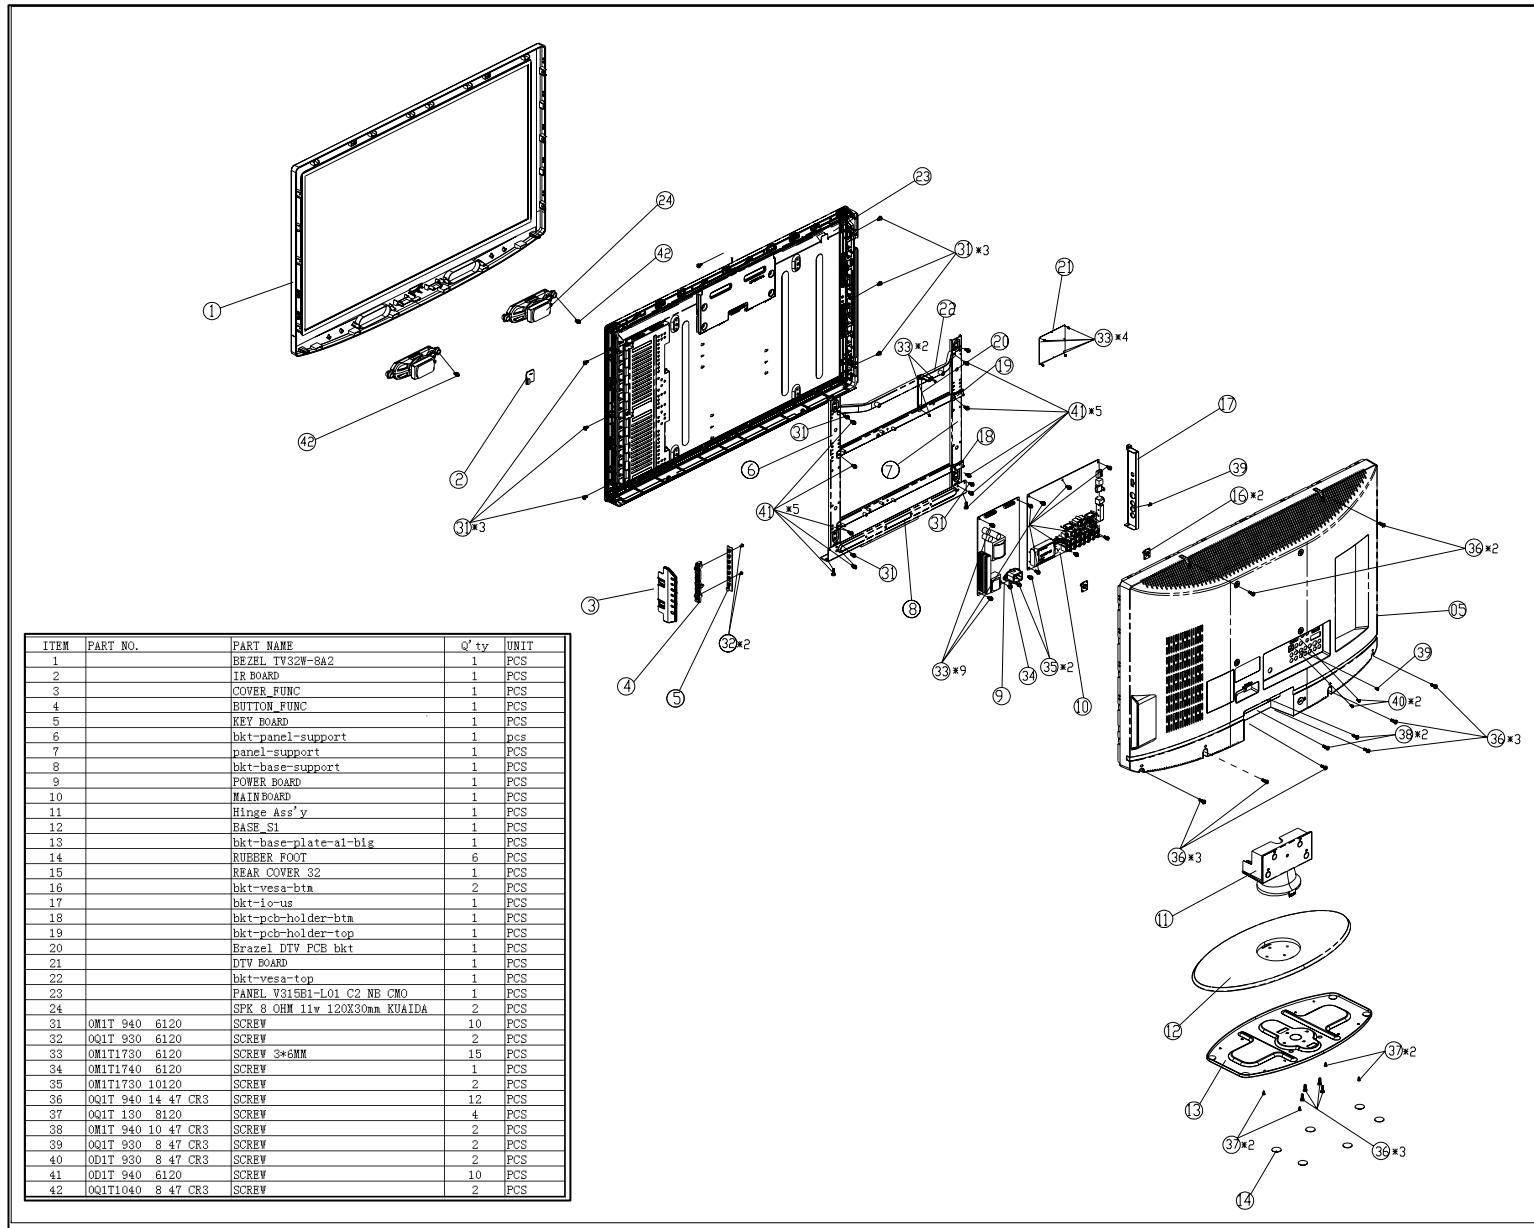

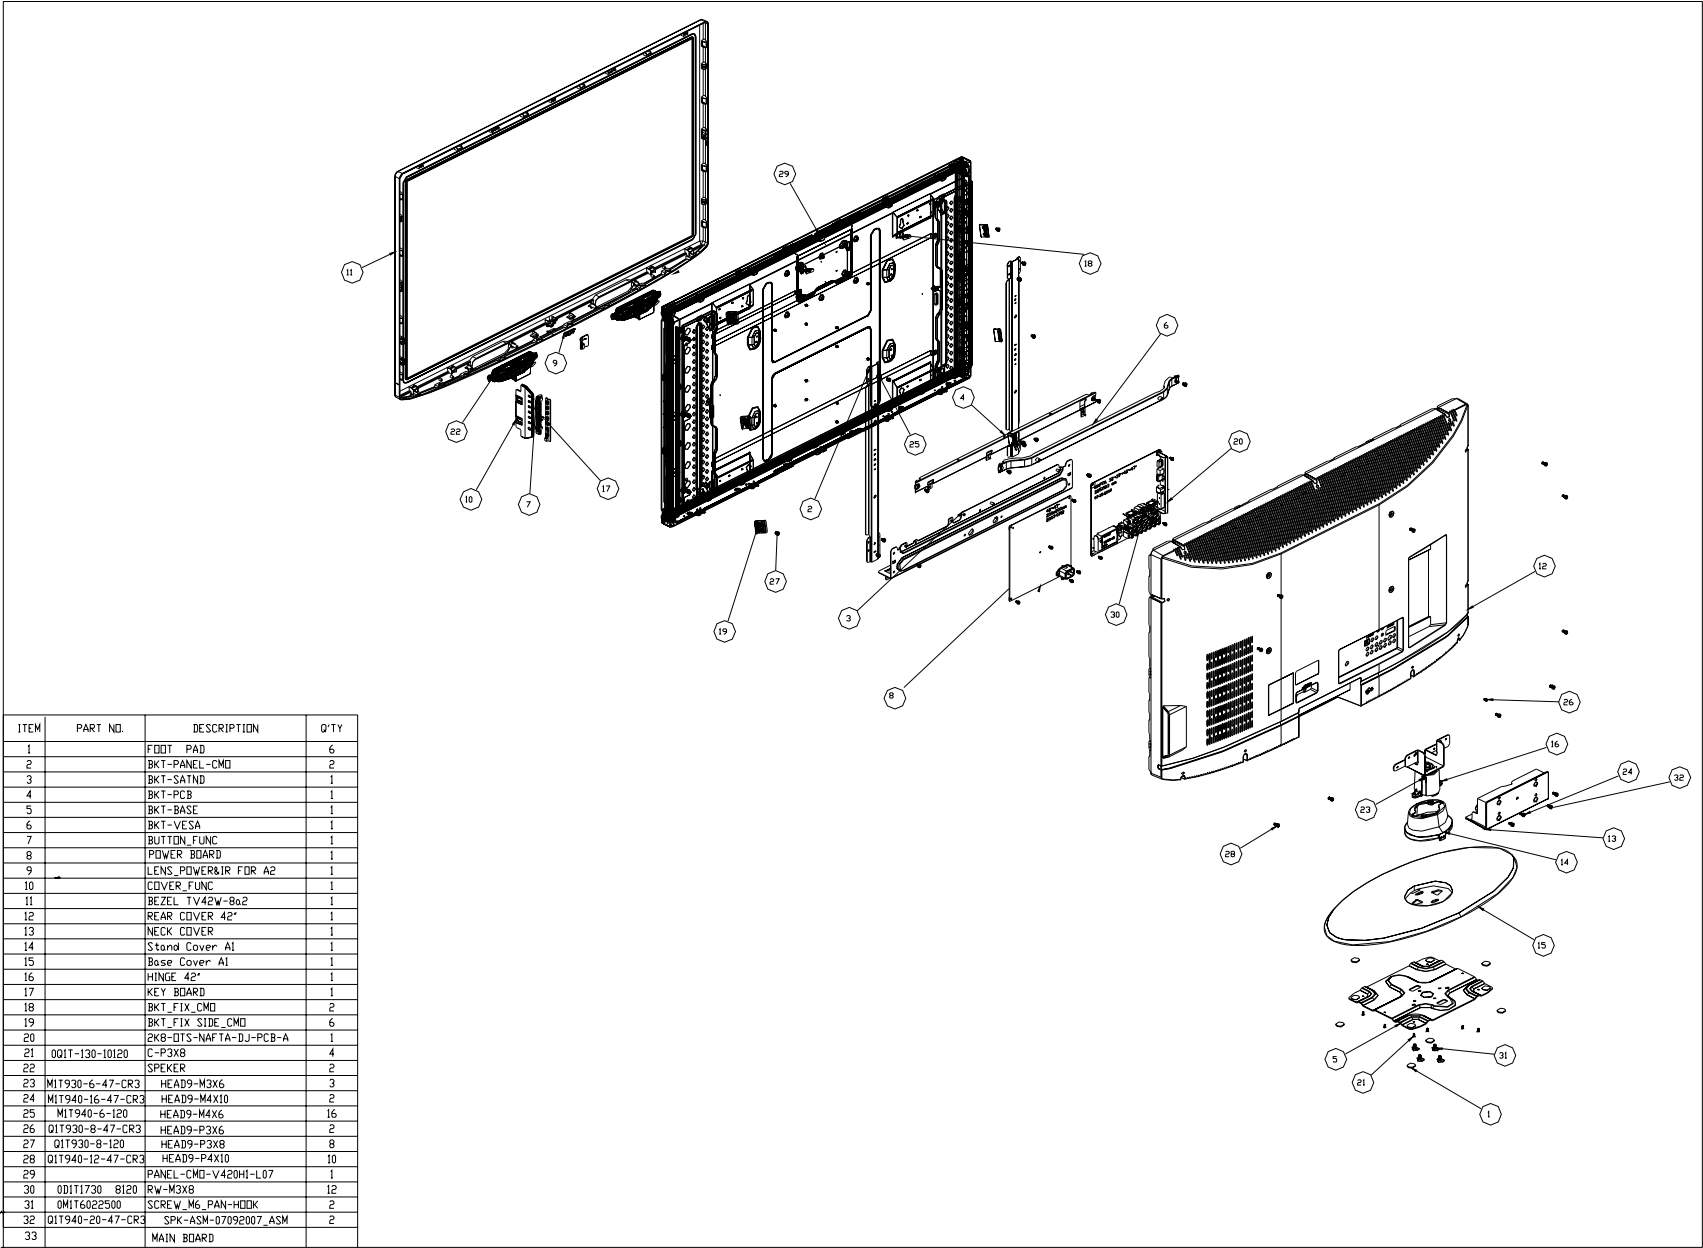

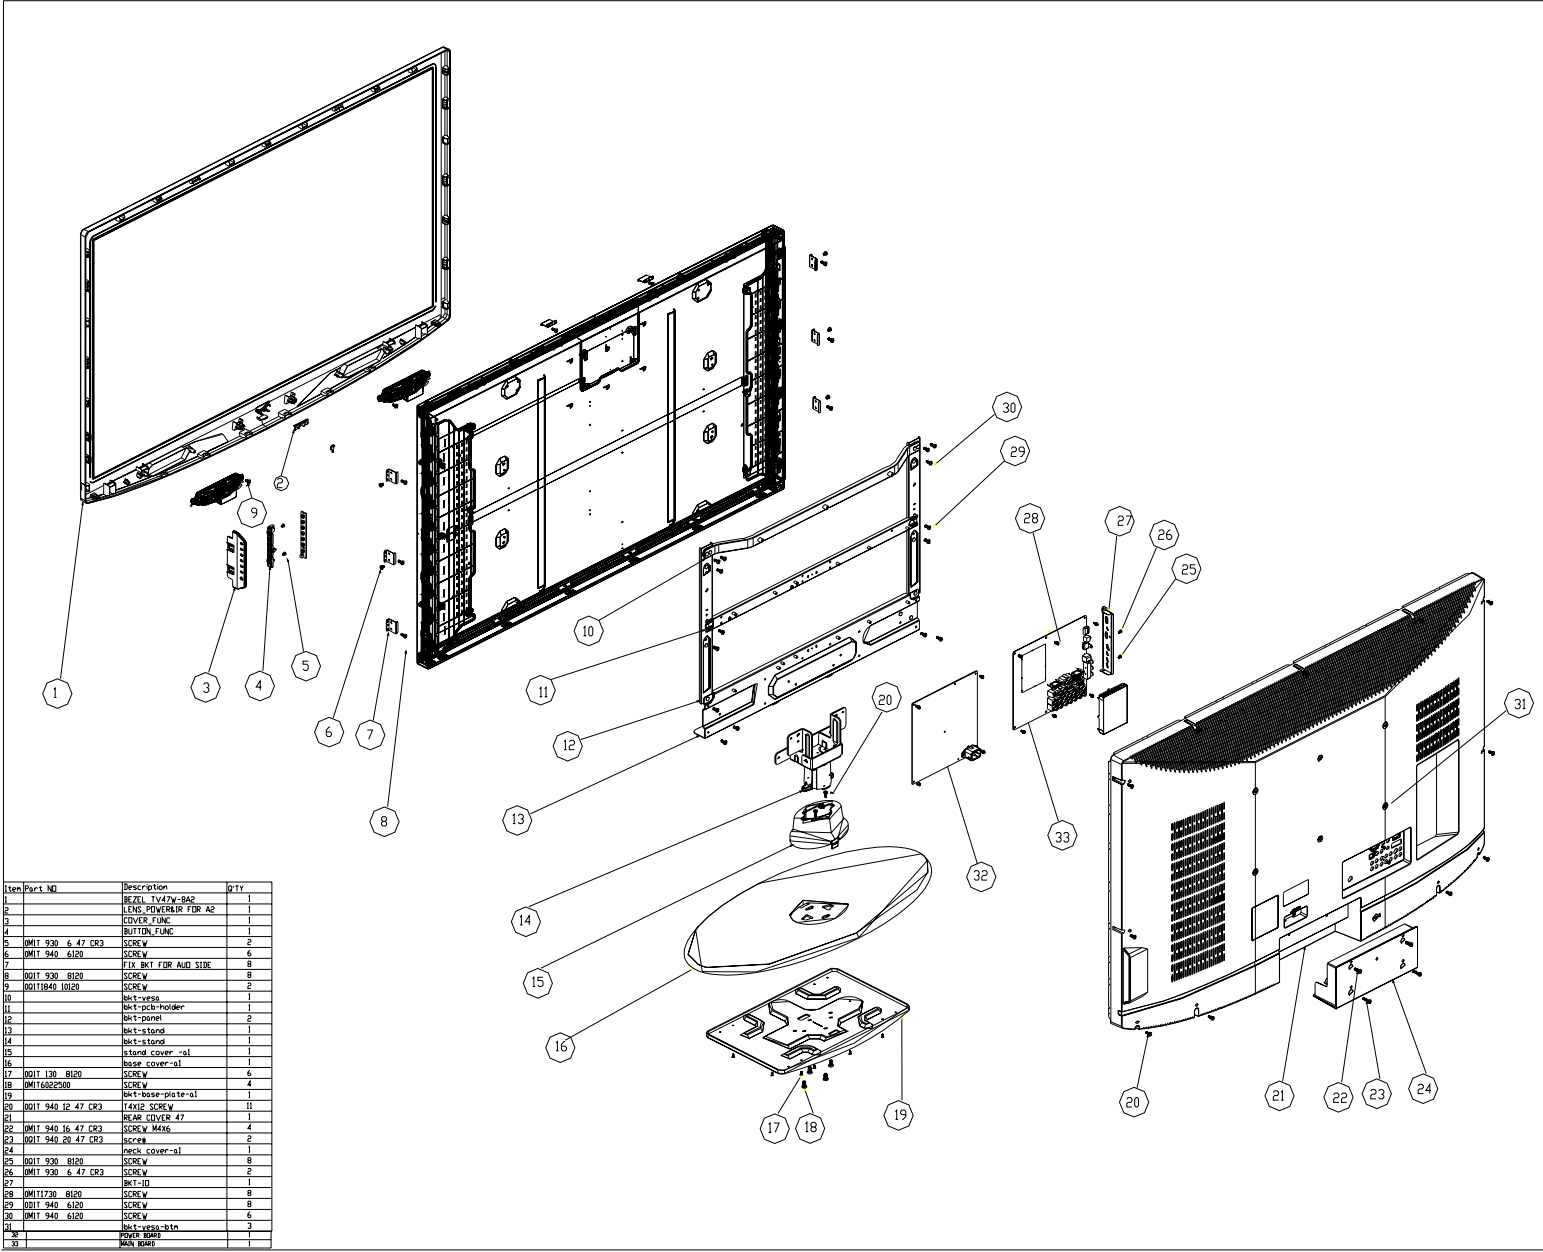

11. BOM List

D32W831 E32RMNNSW8AE2N

Location	Part No.	Description	Remark
	036T 600 18112	NONWOVEN FABRTC	
	040T 154501 1	HI-POT GND LABEL	
	040T 581689 4A	S/N LABEL	
	044T3231 15	EVA WASHER	
	045T 77500	RIBBON	
	045T 77501	RIBBON	
	049T 51 1A	ERADICATOR	
	050T 600 1 W	WHITE STRAPE	
	051T 2 14	FUSE GEL	
	051T6001 2	DESICCANT	
	052T 1150 C	BLACK TAPE	
	052T 1185	MIDDLE TAPE FOR CARTON	
	052T 1186	SMALL TAPE	
	052T 1211 A	ADHESIVE TYPE	
	052T 1211 B	ADHESIVE TYPE	
	052T 1211511	ALUMINUM FOIL TAPE	
	052T 2191 A	TAPE	
	052T6026 1	MESH PRINTTING PAPER	
	052T6026 2	MESH PRINTTING PAPER	
	055G 100615	TIN THREAD W/O PB	
	055T 100610	TIN CREAM W/O PB	
	078T 495501 K	SPK 8 OHM 11W 120X30MM KUAIDA	
	089T 173 56 31	AUDION CABLE	
E08909	089T 184LAA 7	HDMI CABLE 130MM WITH EXTERNAL TUBE	
E08909	089T 184MAA 6	HDMI CABLE 200MM	2nd source
	089T 725HAA DB	D-SUB	
	089T402A15NIS1	POWER CORD	
	095T8013 6D 32	HARNESS 6P-6P 150MM	
	095T801312D 48	HARNESS 12P-12P 120MM	
	095T8014 2D 21	HARNESS 2P-2P 250MM	
	095T8014 4D 40	HARNESS 4P-4P 250MM	
	095T8014 4D545	WIRE HARNESS 4P(PLUG)-B&R+B&W	
	095T8014 8D 72	HARNESS 8P-4P+3P 820MM	
	095T801414D107	HARNESS 13P-14P 280MM	
	095T801840D 2	HARNESS 30P-40P 210MM	
	0D1T 930 8 47 CR3	SCREW	
	0D1T 940 6120	SCREW	
	0M1T 940 6120	SCREW	
	0M1T 940 6120	SCREW	
	0M1T 940 10 47 CR3	SCREW	
	0M1T1730 6120	SCREW 3*6MM	
	0M1T1730 6120	SCREW 3*6MM	
	0M1T1730 10120	SCREW	
	0M1T1740 6120	SCREW	
	0Q1T 940 14 47 CR3	SCREW	
	0Q1T 940 14 47 CR3	SCREW	
	0Q1T1040 8 47 CR3	SCREW	
	705TQ833011	PLASTIC ASS'Y	
	0Q1T 930 6120	SCREW	
	A33T0304 GMA1L0100	COVER_FUNC	
	A33T0305 QV 1L0200	BUTTON_FUNC	
	705TQ834451	STAND ASS'Y	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

	Q01T 130 8120	SCREW	
	A15T0384201CKD	BKT-BASE-PLATE-A1-BIG	
	A34T0521 GM 1L0200	BASE_S1	
	Q12T6300 25 2	RUBBER FOOT	
M037	Q37T0078021 GM CKD	HINGE ASS'Y	
M037	SQ37T0078021C	HINGE ASSY	2nd source
	028F0848110	SHAFT	
	034F0520 GM 1L	TOP PLASTIC	
	034F0519 GM 1L	BOTTOM PLASTIC	
	002F7015 1	NUT	
	004F081510T 00	WASHER	
	004F180810M 00	WASHER	
	004F1808104 00	WASHER	
	004F1808104 01	WASHER	
	004F122515M 00	WASHER	
	705TQ834452	BEZEL ASS'Y	
	A33T0334AEU 1C0100	LENS_POWER&IR FOR A2	
	A34T0517 GMC2L0500	BEZEL TV32W-8A2	
	705TQ834649	REAR COVER ASS'Y	
	A15T0282101CKD	BKT-VESA-BTM	
	A34T0518 GM 2A0200	REAR COVER 32	
	Q36T 600 18113	CLOTH_GRIDDING	
	Q36T 600 37 36 GP	NONWOVEN FABRIC	
	750TVMM5B1112N	PANEL V315B1-L01 C2 NB CMO	
	756TQ8CB NS006	MAIN BOARD-CBPFRN3SQC	
U403	056T1125177	NT68F631ALG PLCC-44	
U510	056T1133526	IC MX25L4005AMC-12G SOP-8	
SMTF-U403	100TANMK001S12	MCU ASS'Y-056T1125177	
SMTF-U510	100TANMK002S12	MCU ASS'Y-056T1133526	
	756TQ8TU NS004	TUNER BOARD-TUPFRC1SQ1	
U7	056T1133123	IC S29GL064N90TFI040 TSOP-48	
STUP-U7	100TANMK003S11	MCU ASS'Y-056T1133123	
	A15T0279102CKD	BKT-PCB-HOLDER-BTM	
	A15T0280103CKD	PANEL SUPPORT	
	A15T0280301CKD	BKT-PANEL-SUPPORT	
	A15T0281201CKD	BKT-VESA-TOP	
	A15T0283102CKD	BKT-BASE-SUPPORT	
	A15T0456101CKD	BRAZEL DTV PCB BKT	
	ADPC24180BB1	ADAPTER BOARD T2804-1-X-X-1-080512	
	040G 45762412B	CBPC LABEL	
CN902	033T327812D	WAFER 12P PLUG	
CN903	033T380213B Y	CONNECTOR	
IC952	056T 139 3B	IC PC123Y82FZ0F	
IC934	056T 139 3B	IC PC123Y82FZ0F	
IC932	056T 139 3B	IC PC123Y82FZ0F	
Q932	057T 761 7	KTD1691P	
R915	061T153M10852T	RST MOFR 0.1 OHM +-5% 3WS	
C904	063T107K474 TS	CAP X2 0.47UF K 275VAC UTX	2nd source
C901	063T107K474 TS	CAP X2 0.47UF K 275VAC UTX	2nd source
C901	063T107K474 US	X2 CAP 0.47UF K 275VAC	
C904	063T107K474 US	X2 CAP 0.47UF K 275VAC	
C941	063T210J2735C2	MPP 27NF J 1000V	2nd source
C941	063T210J2735CC	CAP MPPS 27NF 1000V 5%	2nd source
C905	063T210K105BCN	MPP CAP 1UF 520V P=15MM	
C941	063T211J273 5C 10	0.027UF 5% 1000V P=15MM	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

C951	065T 1K103 2E6213	CAP CER 10NF K 1KV	2nd source
C952	065T 1K103 2E6213	CAP CER 10NF K 1KV	2nd source
C951	065T 1K103 2E6921	CAP CER 10NF K 1KV Y5P	
C952	065T 1K103 2E6921	CAP CER 10NF K 1KV Y5P	
C906	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C903	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C902	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C950	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C907	067G215S10115N	PAG450VB100-M-L18*35.5MM	2nd source
C926	067T215A1024KV	EC 1000UF 25V 12.5*20MM	
C943	067T215A1026KV	EC 1000UF 35V 12.5*25MM	
C928	067T215A4713KV	EC 470UF 16V M 10*12MM	
C944	067T215A4716KV	EC 470UF 35V M 10*16MM	
C946	067T215S4714KL	ELCAP 105°C 470UF M 25V	
L903	071T 55 21	IND BEAD 10.0*6.0	
FB906	071T 55 26 H	FERRITE BEAD 3.5*6.0*0.8	2nd source
FB901	071T 55 26 H	FERRITE BEAD 3.5*6.0*0.8	2nd source
FB906	071T 55 26 S	FERRITE CORE	
FB901	071T 55 26 S	FERRITE CORE	
L902	073T 174106 L	LINE FILTER 13MH LF-1008108	
L901	073T 174106 L	LINE FILTER 13MH LF-1008108	
L906	073T 174122 L	PFC CHOKE 230UH PT-009321	
L932	073T 253 91 H	CHOKE COIL	
L931	073T 253 91 H	CHOKE COIL	
L971	073T 253150 L	CHOCK	
T931	080TL32T 5 N	X'FMR 1.9MH YUVA-827	
T951	080TL40T 8 YS	X'FMR 600UH YS04160149	
CN901	087T 501 44 DL	AC SOCKET 3PIN + 2 SCREW HOLE V/T	
	705TQ757011	Q951 ASS'Y	
Q951	057T 611 9	FET 2SK4097LS 9.5A/500V TO-220FI(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ757012	Q952 ASS'Y	
Q952	057T 611 9	FET 2SK4097LS 9.5A/500V TO-220FI(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ757013	Q931 ASS'Y	
Q931	057T 667 52	FET 2SK4100LS-T 7A/650V TO-220FI(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ757022	Q901 ASS'Y	
Q901	057T 600 72	FET SPW16N50C3 16A/560V P-TO247	
	0M1T1730 10120	SCREW	
	Q12T 372 8	SILICON	
	Q90T0095 2	HEAT SINK	
	705TQ761021	NR901 ASS'Y	
NR901	061T 58030 WL	RST NTCR 3 OHM +-20% 5A THINKING	
	Q09T 203 8	PIN	
	705TQ793020	BD901 ASS'Y	
BD901	093T 50460 39	BRIDGE BU1006A-E3/45 10A/600V BU	
	0M1T1730 10120	SCREW	
	Q90T0095 2	HEAT SINK	
	705TQ793021	D902 ASS'Y	

32" & 42" & 47" Digital LCD TV
AOC D32W831&D42H831&D47H831

D902	093T 52 56	DIODE FMN-1106S 10A/600V TO-220	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ793022	D935 ASS'Y	
D935	093T 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ793023	D955/D956 ASS'Y	
	005T 42 1	CUSHION	
	032G3028 8	MICA	
	051G 200 1	OIL FOR DISAPPEAR	
D956	093T 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
D955	093T 60310	DIODE V30100C-E3/4W 30A/100V TO-220AB	
	0M1T1730 10120	SCREW	
	Q90T0087 2	HEAT SINK	
IC901	056T 368 12	IC FAN7529MX SOP-8	
IC931	056T 379 79	IC LD7522PS SOP-8	
IC951	056T 665 10 1	IC RESONANT L6599DTR SO-16N ST	
Q933	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
Q934	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
R973	061G0805196 1F	RST CHIP 1.96K 1/8W 1%	
R918	061T0805100	RST CHIPR 10 OHM +-5% 1/8W	
R924	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R931	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R943	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R970	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R916	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R927	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R944	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R950	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R936	061T0805150 3F	RST CHIPR 150 KOHM +-1% 1/8W	
R908	061T0805153	RST CHIPR 15 KOHM +-5% 1/8W	
R958	061T0805180 2F	RST CHIPR 18 KOHM +-1% 1/8W	
R972	061T0805205 2F	RST CHIPR 20.5KOHM +-1% 1/8W	
R919	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R928	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R960	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R962	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R946	061T0805240 1F	RST CHIPR 2.4 KOHM +-1% 1/8W	
R945	061T0805240 1F	RST CHIPR 2.4 KOHM +-1% 1/8W	
R935	061T0805240 3F	RST CHIPR 240 KOHM +-1% 1/8W	
R956	061T0805273	RST CHIPR 27 KOHM +-5% 1/8W	
R952	061T0805302	RST CHIPR 3 KOHM +-5% 1/8W	
R913	061T0805330 2F	RST CHIPR 33 KOHM +-1% 1/8W	
R909	061T0805470 2F	RST CHIPR 47 KOHM +-1% 1/8W	
R971	061T0805470 2F	RST CHIPR 47 KOHM +-1% 1/8W	
R963	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R961	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R930	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R959	061T0805514	RST CHIPR 510KOHM +-5% 1/8W	
R907	061T0805563	RST CHIPR 56 KOHM +-5% 1/8W	
R948	061T0805620 2F	RST CHIPR 62 KOHM +-1% 1/8W	
R914	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
R910	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R934	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R933	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R932	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R912	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R911	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R920	061T1206150 3F	RST CHIPR 150KOHM +-1% 1/4W	
R921	061T1206150 3F	RST CHIPR 150KOHM +-1% 1/4W	
R922	061T1206150 3F	RST CHIPR 150KOHM +-1% 1/4W	
R976	061T1206152	RST CHIPR 1.5 KOHM +-5% 1/4W	
R905	061T1206153	RST CHIPR 15 KOHM +-5% 1/4W	
R906	061T1206204	RST CHIPR 200 KOHM +-5% 1/4W	
R953	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R954	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R955	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R901	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R902	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R903	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R938	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R939	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R940	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R941	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R925	061T1206479	RST CHIPR 4.7 OHM +-5% 1/4W	
R974	061T1206512	RST CHIPR 5.1KOHM +-5% 1/4W	
R975	061T1206512	RST CHIPR 5.1KOHM +-5% 1/4W	
C919	065T0805102 31	1000PF 50V NPO	
C912	065T0805102 31	1000PF 50V NPO	
C940	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C925	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C924	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C913	065T0805103 32	10NF/50V/0805/X7R	
C915	065T0805103 32	10NF/50V/0805/X7R	
C914	065T0805104 32	CHIP 0.1UF 50V X7R	
C949	065T0805104 32	CHIP 0.1UF 50V X7R	
C920	065T0805104 32	CHIP 0.1UF 50V X7R	
C937	065T0805104 32	CHIP 0.1UF 50V X7R	
C911	065T0805104 32	CHIP 0.1UF 50V X7R	
C918	065T0805104 32	CHIP 0.1UF 50V X7R	
C929	065T0805104 32	CHIP 0.1UF 50V X7R	
C930	065T0805104 32	CHIP 0.1UF 50V X7R	
C932	065T0805104 32	CHIP 0.1UF 50V X7R	
C935	065T0805104 32	CHIP 0.1UF 50V X7R	
C936	065T0805104 32	CHIP 0.1UF 50V X7R	
C922	065T0805105 37	CHIP 1UF 50V Y5V	
C931	065T0805105 37	CHIP 1UF 50V Y5V	
C945	065T0805105 37	CHIP 1UF 50V Y5V	
C933	065T0805221 31	220PF 50V NPO	
C934	065T0805224 22	CAIP CAP 0.22 UF 25V X7R	
C942	065T0805472 32	MLCC 0805 CAP 4700PF K 50V X7R	
C910	065T0805560 31	MLCC 0805 CAP 56PF J 50V NPO	
ZD933	093T 39S 15 T	RLZ15B	
D903	093T 64S901 T	DIODE LS4148	
D931	093T 64S901 T	DIODE LS4148	
D952	093T 64S901 T	DIODE LS4148	
D951	093T 64S901 T	DIODE LS4148	
D932	093T 64S901 T	DIODE LS4148	
D934	093T 64S901 T	DIODE LS4148	
D939	093T 64S901 T	DIODE LS4148	
D938	093T 64S901 T	DIODE LS4148	
T951	006G 31 4	1.7MM RIVET	
	006G 31 4	1.7MM RIVET	

CN901	006G 31501	EYELET	
IC953	056T 158 10 T	IC AS431AZTR-E1 TO-92	
IC933	056T 158 10 T	IC AS431AZTR-E1 TO-92	
R969	061G 17233252T	3.3K 1/4W	
R929	061G 21047152T	470 OHM 1% 1/6W	
R937	061G208M10452T	RST MOF 100K 5% 1W	
R964	061T 17210252T	RST CFR 1KOHM +-5% 1/4W	
R949	061T 17210252T	RST CFR 1KOHM +-5% 1/4W	
R957	061T 17210352T	CFR 10KOHM +-5% 1/4W	
R923	061T 17210352T	CFR 10KOHM +-5% 1/4W	
R942	061T 17247152T	470OHM 5% 1/4W	
R947	061T 17256052T	RST CFR 56 OHM +-5% 1/4W	
R968	061T 17262252T	6.2KPHM 5% 1/4W	
R967	061T 20010152T	100 OHM 1% 1/4W	
R966	061T 20039252T	RST MFR 3.9KOHM +-1% 1/4W	
R951	061T 21030252T	3KOHM 1% 1/6W	
R917	061T 60247152T	470OHM +-5% 1/6W	
R926	061T152M12952T	RST MOFR 1.2OHM +-5% 2WS	
R965	061T152M33852T	RST MOFR 0.33 OHM +-5% 2WS	
C953	065G 1K471 2T	470PF 1KV Z5P +-10%	
C923	065T 1K222 2T6921	0.0022UF 1KV +-10%	
C916	067T215A1017KT	EC 100UF 50V 8*12MM	
C947	067T215A2214KT	EC 220UF 25V 8*12MM	
C939	067T215Y1007KT	EC105 10U 50V KEM50V	
C921	067T215Y1007KT	EC105 10U 50V KEM50V	
C917	067T215Y1007KT	EC105 10U 50V KEM50V	
C909	067T215Y1007KT	EC105 10U 50V KEM50V	
FB904	071G 55 9 T	FERRITE BEAD	
FB905	071G 55 9 T	FERRITE BEAD	
FB902	071G 55 9 T	FERRITE BEAD	
F901	084T 55 4	FUSE 382-5A 250V WICKMANN	
ZD931	093T 3916652T	MTZJ T-72 15B	
ZD932	093T 3917052T	MTZJT-72 27B	
D933	093T 5250S52T	AU02Z	
D937	093T1080 252T	DIODE SARSO1-V1 SANKEN	
	715T2804 2	POWER PCB CEM-1 130X200X1.6MM SS	
	Q51G 6 4509	GLUE_RTV	
L932	S73G25391V	CHOKE COIL ASS'Y	
L931	S73G25391V	CHOKE COIL ASS'Y	
L901	S73T174106V	TRANSFORMER ASS'Y	
	040FP174106 V	LABEL	
L902	S73T174106V	TRANSFORMER ASS'Y	
	040FP174106 V	LABEL	
CN9007	033T3278 6D	CONNECTOR 6P 2.5 DIP	
CN702	033T327812D	WAFER 12P PLUG	
CN9005	033T3802 2B Y	CONNECTOR	
CN401	033T3802 4B Y	CONNECTOR	
CN601	033T3802 4B Y	CONNECTOR	
CN701	033T3802 8B Y	CONNECTOR	
CN201	033T8027 40	WAFER 40P 2.0MM DIP	
U709	056T 665505 HD	IC VF45A3D HAODA	
U710	056T 665506 HD	IC AF45A3D HAODA	
R167	061T153M470 59	RST MOFR 47 OHM +-5% 3WS	
R168	061T153M470 59	RST MOFR 47 OHM +-5% 3WS	
C768	067T 305101 7P	105 RADIAL ECA PACTOR	
C171	067T215S1023KV	EC 105℃ CAP 1000UF M 16V	
C682	067T215S1026KV	EC CAP 1000UF 35V 12.5*25MM	

L604	073T 253158 H	CHOKE COIL 22UH+/-25%	
L605	073T 253158 H	CHOKE COIL 22UH+/-25%	
L606	073T 253158 H	CHOKE COIL 22UH+/-25%	
L607	073T 253158 H	CHOKE COIL 22UH+/-25%	
L722	073T 253195 L	CHOKE COIL 200UH CC-008305	
CN106	088T 78 1364C	RCA JACK 2*3 Y/W/R+Y/W/R V/A	
CN106	088T 78 1364S	RCA JACK 2*3 Y/W/R+Y/W/R V/A	
CN105	088T 78 1369C	RCA JACK 2*3 G/B/R+B/W/R	
CN105	088T 78 1369S	RCA JACK 2*3 G/B/R+BLK/W/R	
CN111	088T 7813A19C	RCA JACK 1*3 R/W/Y	
CN108	088T 100 11 ST	MINI DIN JACK 4P+ SWITCH 2MJ-0602-005	
CN103	088T 100 15 ST	MINI DIN JACK 4PIN V/A	
CN102	088T 30252S	PHONE JACK 3.5MM 3P V/A GREEN	
CN602	088T 302901 S	PHONE JACK 3.5MM 7P BLACK 2SJ-W48A-001	
CN101	088T 35315F FX	D-SUB 15PIN FEMALE VERTICAL 附螺絲	
CN101	088T 35315F VD	D-SUB 15PIN FEMALE VERTICAL WITH SCREW	
X403	093T 2251B J	NXS12.000AC30F-BT-2	
X503	093T 2251B J	NXS12.000AC30F-BT-2	
X601	093T 2264B J	XTL NXS27.000AC16F-KAB5 HC-49/US	
X502	093T 2279B H	CRYSTAL 28.322MHZ 14P HC-49S	
X701	093T 2286B J	XTL NXS4.000AC18F-KAB5 HC49/U-S	
TU701	094TNTSC MN 8L	TUNER TCL F14WP-4N-E	
	0Q1T 930 8 47 CR3	SCREW	
	705TQ815013	BRACKET ASS'Y	
	089T 17356L 56	RF CABLE 100MM	
	A15T0287401CKD	BKT_IO	
	Q40T000262497A	SIDE LABEL	
C6107	064T176J474 0T	0.47UF +-5% 50/63V	
C689	064T176J474 0T	0.47UF +-5% 50/63V	
C665	067T 305100 3T	10UF 16V	
C654	067T 305100 3T	10UF 16V	
C605	067T 305100 3T	10UF 16V	
C604	067T 305100 3T	10UF 16V	
C603	067T 305100 3T	10UF 16V	
C602	067T 305100 3T	10UF 16V	
C773	067T 305100 7T	10UF	
C724	067T 305100 7T	10UF	
C723	067T 305100 7T	10UF	
C169	067T 305100 7T	10UF	
C126	067T 305100 7T	10UF	
C125	067T 305100 7T	10UF	
C123	067T 305100 7T	10UF	
C121	067T 305100 7T	10UF	
C120	067T 305100 7T	10UF	
C771	067T 305101 3T	100UF 16V 105C	
C739	067T 305101 3T	100UF 16V 105C	
C736	067T 305101 3T	100UF 16V 105C	
C728	067T 305101 3T	100UF 16V 105C	
C726	067T 305101 3T	100UF 16V 105C	
C716	067T 305101 3T	100UF 16V 105C	
C711	067T 305101 3T	100UF 16V 105C	
C708	067T 305101 3T	100UF 16V 105C	
C638	067T 305101 3T	100UF 16V 105C	
C170	067T 305101 3T	100UF 16V 105C	
C201	067T 305101 3T	100UF 16V 105C	
C412	067T 305101 3T	100UF 16V 105C	

C449	067T 305101 3T	100UF 16V 105C	
C450	067T 305101 3T	100UF 16V 105C	
C6116	067T 305101 3T	100UF 16V 105C	
C620	067T 305101 3T	100UF 16V 105C	
C637	067T 305101 3T	100UF 16V 105C	
C754	067T 305221 2T	CAP 105°C 220UF M 10V	
C713	067T 305221 2T	CAP 105°C 220UF M 10V	
C718	067T 305221 2T	CAP 105°C 220UF M 10V	
C710	067T 305221 2T	CAP 105°C 220UF M 10V	
C621	067T 305221 2T	CAP 105°C 220UF M 10V	
C6115	067T 305331 3T	CAP 105°C 330UF 16V	
C677	067T 305470 3T	EC 105°C 47UF M 16V	
C674	067T 305470 3T	EC 105°C 47UF M 16V	
U704	056T 133 30AAC	IC AZ1117H-ADJ-E1	
U406	056T 158501	IC AS431AN-E1 SOT23	
U607	056T 158501	IC AS431AN-E1 SOT23	
U106	056T 379 36	MC34063A	
U601	056T 563 50	AP1117D18LA T0252-3L	
U707	056T 563 51	AP1117D50LA T0252-3L	
U703	056T 563 56	AP1084D18LA TO-252-3L	
U602	056T 563 75	G1084-33T43UF TO-252	
U705	056T 563 96	IC AIC1084-25PETR-R TO-252	
U701	056T 563121	IC G1084-33TU3UF TO-263T	
U603	056T 593 29 1	IC STV8318F TQFP-100	
U606	056T 593 32	IC STA335BW13TR POWERSSO36	
U103	056T 614 1	IC 74HC4052D PHILIPS	
U402	056T 615913	IC HYB25DC256160CE-5 TSOP166	
U605	056T 616 3	PT2308S SO-8 PTC	
U507	056T 634 19	IC PS321TQFP80G TQFP-80	
U105	056T 647 18	IC WM8521HCGED/RV SOIC-14	
U708	056T 647 24	IC TDA9885TS/V3 SSOP-24	
U506	056T 662 10	IC RCLAMP0524P.TCT	
U502	056T 662 10	IC RCLAMP0524P.TCT	
U503	056T 662 10	IC RCLAMP0524P.TCT	
U505	056T 662 10	IC RCLAMP0524P.TCT	
U403	056T1125177	NT68F631ALG PLCC-44	
U401	056T1126 35	IC NT7263 LQFP-256	
U509	056T1133 32	M24C04-WMN6TP	
U504	056T1133 34	M24C02-WMN6TP	
U501	056T1133 34	M24C02-WMN6TP	
U102	056T1133 34	M24C02-WMN6TP	
U510	056T1133526	IC MX25L4005AMC-12G SOP-8	
U404	056T113353A	M24C32-WMN6TP	
U101	056T4LVC 14 P	74LVC14ADT	
U608	056T4LVCG08 TI	IC SN74LVC1G08DCKR SC70-5	
U9001	056T4LVCG08 TI	IC SN74LVC1G08DCKR SC70-5	
U604	056T566N600	NDC7002N SOT-6 FAIRCHILD	
Q108	057T 417511	TRA MMBT3904 BLUE ROKET	
Q403	057T 417511	TRA MMBT3904 BLUE ROKET	
Q9001	057T 417511	TRA MMBT3904 BLUE ROKET	
Q710	057T 417511	TRA MMBT3904 BLUE ROKET	
Q707	057T 417511	TRA MMBT3904 BLUE ROKET	
Q705	057T 417511	TRA MMBT3904 BLUE ROKET	
Q704	057T 417511	TRA MMBT3904 BLUE ROKET	
Q702	057T 417511	TRA MMBT3904 BLUE ROKET	
Q607	057T 417511	TRA MMBT3904 BLUE ROKET	

Q606	057T 417511	TRA MMBT3904 BLUE ROKET	
Q605	057T 417511	TRA MMBT3904 BLUE ROKET	
Q604	057T 417511	TRA MMBT3904 BLUE ROKET	
Q603	057T 417511	TRA MMBT3904 BLUE ROKET	
Q602	057T 417511	TRA MMBT3904 BLUE ROKET	
Q601	057T 417511	TRA MMBT3904 BLUE ROKET	
Q503	057T 417511	TRA MMBT3904 BLUE ROKET	
Q502	057T 417511	TRA MMBT3904 BLUE ROKET	
Q501	057T 417511	TRA MMBT3904 BLUE ROKET	
Q404	057T 417511	TRA MMBT3904 BLUE ROKET	
Q608	057T 417512	TRA MMBT3906 BLUE ROKET	
Q105	057T 417512	TRA MMBT3906 BLUE ROKET	
Q106	057T 419 8 T	TRA 2SD1757K 0.5A/15V SC-59	
Q107	057T 419 8 T	TRA 2SD1757K 0.5A/15V SC-59	
Q401	057T 600 54	FET BSN20 SOT-23 PHILIPS	
Q402	057T 600 54	FET BSN20 SOT-23 PHILIPS	
Q701	057T 763 3	AO4411L SO-8 BY AOS SMT	
Q706	057T 763 3	AO4411L SO-8 BY AOS SMT	
Q708	057T 763 3	AO4411L SO-8 BY AOS SMT	
Q9002	057T 765 1	2SC2412KR	
RP413	061G 125222 8	RST CHIP AR 8P4R 2.2 KOHM +-5% 1/16W	
RP401	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP402	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP403	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP404	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP505	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP506	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP410	061T 125332 8	RST CHIPR AR 8P4R 3.3KOHM +-5% 1/16W	
RP412	061T 125332 8	RST CHIPR AR 8P4R 3.3KOHM +-5% 1/16W	
RP414	061T 125332 8	RST CHIPR AR 8P4R 3.3KOHM +-5% 1/16W	
RP405	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
RP406	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
RP407	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
RP408	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
R690	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R653	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R652	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R651	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R650	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R623	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R622	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R621	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R604	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R544	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R702	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R730	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R746	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R747	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R748	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R749	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R754	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R757	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R201	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R125	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R543	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
L600	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R120	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	

R124	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R130	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R131	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R140	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R191	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R217	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R218	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R227	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R518	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R516	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R461	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R433	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R431	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R430	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R429	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R428	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R405	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R404	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R420	061T0603100	CHIP 10OHM 1/16W	
R423	061T0603100	CHIP 10OHM 1/16W	
R774	061T0603100	CHIP 10OHM 1/16W	
R721	061T0603100 3F	RST CHIPR 100KOHM +-1% 1/10W	
R101	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R159	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R160	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R161	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R607	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R609	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R611	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R632	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R633	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R654	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R656	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R657	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R691	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R704	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R735	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R736	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R158	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R102	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R105	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R108	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R146	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R147	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R148	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R149	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R150	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R157	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R156	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R155	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R154	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R153	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R152	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R151	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R509	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R511	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R527	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	

R528	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R529	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R534	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R540	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R669	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R710	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R733	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R504	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R503	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R501	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R435	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R425	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R413	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R412	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R407	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R406	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R113	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R715	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R712	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R711	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R680	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R677	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R674	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R671	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R668	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R666	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R645	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R624	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R558	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R550	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R549	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R530	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R460	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R416	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R129	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R128	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R720	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R723	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R783	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R9001	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R732	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R717	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R706	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R638	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R629	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R427	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R414	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R118	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R542	061T0603105	RST CHIPR 1MOHM +-5% 1/10W	
R538	061T0603105	RST CHIPR 1MOHM +-5% 1/10W	
R417	061T0603105	RST CHIPR 1MOHM +-5% 1/10W	
R724	061T0603121	RST CHIPR 120 OHM +-5% 1/10W	
R741	061T0603122	RST CHIPR 1.2 KOHM +-5% 1/10W	
R672	061T0603123	RST CHIPR 12 KOHM +-5% 1/10W	
R731	061T0603123	RST CHIPR 12 KOHM +-5% 1/10W	
R773	061T0603123	RST CHIPR 12 KOHM +-5% 1/10W	
R776	061T0603151	RST CHIPR 150 OHM +-5% 1/10W	

R9005	061T0603151	RST CHIPR 150 OHM +-5% 1/10W	
R602	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R603	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R605	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R606	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R608	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R610	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R613	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R614	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R619	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R620	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R778	061T0603181	RST CHIPR 180 OHM +-5% 1/10W	
R777	061T0603182	CHIP 1.8K OHM 1/16W	
R196	061T0603183	RST CHIPR 18 KOHM +-5% 1/10W	
R506	061T0603183	RST CHIPR 18 KOHM +-5% 1/10W	
R171	061T0603201	RST CHIPR 200 OHM +-5% 1/10W	
R170	061T0603201	RST CHIPR 200 OHM +-5% 1/10W	
R502	061T0603203	CHIPR 20K OHM+-5% 1/10W	
R510	061T0603203	CHIPR 20K OHM+-5% 1/10W	
R452	061T0603220	CHIP 22OHM 1/10W	
R451	061T0603220	CHIP 22OHM 1/10W	
R432	061T0603220	CHIP 22OHM 1/10W	
R410	061T0603220	CHIP 22OHM 1/10W	
R409	061T0603220	CHIP 22OHM 1/10W	
R408	061T0603220	CHIP 22OHM 1/10W	
R403	061T0603220	CHIP 22OHM 1/10W	
R402	061T0603220	CHIP 22OHM 1/10W	
R401	061T0603220	CHIP 22OHM 1/10W	
R162	061T0603220	CHIP 22OHM 1/10W	
R531	061T0603220	CHIP 22OHM 1/10W	
R532	061T0603220	CHIP 22OHM 1/10W	
R789	061T0603220	CHIP 22OHM 1/10W	
R790	061T0603220	CHIP 22OHM 1/10W	
R791	061T0603220	CHIP 22OHM 1/10W	
R792	061T0603220	CHIP 22OHM 1/10W	
R411	061T0603221	CHIP 220OHM 1/16W	
R667	061T0603222	CHIP 2.2K OHM 1/16W	
R648	061T0603222	CHIP 2.2K OHM 1/16W	
R117	061T0603222	CHIP 2.2K OHM 1/16W	
R107	061T0603222	CHIP 2.2K OHM 1/16W	
R106	061T0603222	CHIP 2.2K OHM 1/16W	
R714	061T0603223	CHIP 22KOHM 1/16W	
R718	061T0603223	CHIP 22KOHM 1/16W	
R722	061T0603223	CHIP 22KOHM 1/16W	
R784	061T0603223	CHIP 22KOHM 1/16W	
R419	061T0603272	CHIP 2.7KOHM 1/16W	
R422	061T0603272	CHIP 2.7KOHM 1/16W	
R434	061T0603301	RST CHIPR 300OHM +-5% 1/10W	
R752	061T0603331	RST CHIPR 330 OHM +-5% 1/10W	
R719	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R681	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R459	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R458	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R457	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R456	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R455	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R454	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	

R453	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R446	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R436	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R114	061T0603333	RST CHIPR 33 KOHM +-5% 1/10W	
R601	061T0603339 F	RST CHIPR 3.3 OHM +-5% 1/10W FENGHUA	
R659	061T0603339 F	RST CHIPR 3.3 OHM +-5% 1/10W FENGHUA	
R551	061T0603363	RST CHIP 36K 1/10W 5%	
R552	061T0603363	RST CHIP 36K 1/10W 5%	
R627	061T0603392	CHIP 3.9KOHM 1/16W	
R635	061T0603392	CHIP 3.9KOHM 1/16W	
R636	061T0603392	CHIP 3.9KOHM 1/16W	
R640	061T0603392	CHIP 3.9KOHM 1/16W	
R612	061T0603470	RST CHIPR 47 OHM +-5% 1/10W	
R753	061T0603471	RST CHIPR 470OHM +-5% 1/10W	
R782	061T0603471	RST CHIPR 470OHM +-5% 1/10W	
R9004	061T0603471	RST CHIPR 470OHM +-5% 1/10W	
R185	061T0603472	CHIP 4.7KOHM 1/16W	
R187	061T0603472	CHIP 4.7KOHM 1/16W	
R194	061T0603472	CHIP 4.7KOHM 1/16W	
R195	061T0603472	CHIP 4.7KOHM 1/16W	
R415	061T0603472	CHIP 4.7KOHM 1/16W	
R426	061T0603472	CHIP 4.7KOHM 1/16W	
R557	061T0603472	CHIP 4.7KOHM 1/16W	
R9002	061T0603472	CHIP 4.7KOHM 1/16W	
R739	061T0603472	CHIP 4.7KOHM 1/16W	
R699	061T0603472	CHIP 4.7KOHM 1/16W	
R670	061T0603472	CHIP 4.7KOHM 1/16W	
R637	061T0603472	CHIP 4.7KOHM 1/16W	
R628	061T0603472	CHIP 4.7KOHM 1/16W	
R555	061T0603472	CHIP 4.7KOHM 1/16W	
R553	061T0603472	CHIP 4.7KOHM 1/16W	
R514	061T0603472	CHIP 4.7KOHM 1/16W	
R513	061T0603472	CHIP 4.7KOHM 1/16W	
R512	061T0603472	CHIP 4.7KOHM 1/16W	
R508	061T0603472	CHIP 4.7KOHM 1/16W	
R507	061T0603472	CHIP 4.7KOHM 1/16W	
R447	061T0603472	CHIP 4.7KOHM 1/16W	
R445	061T0603472	CHIP 4.7KOHM 1/16W	
R444	061T0603472	CHIP 4.7KOHM 1/16W	
R443	061T0603472	CHIP 4.7KOHM 1/16W	
R442	061T0603472	CHIP 4.7KOHM 1/16W	
R112	061T0603473	CHIP 47KOHM 1/16W	
R183	061T0603473	CHIP 47KOHM 1/16W	
R184	061T0603473	CHIP 47KOHM 1/16W	
R186	061T0603473	CHIP 47KOHM 1/16W	
R188	061T0603473	CHIP 47KOHM 1/16W	
R631	061T0603473	CHIP 47KOHM 1/16W	
R639	061T0603473	CHIP 47KOHM 1/16W	
R673	061T0603473	CHIP 47KOHM 1/16W	
R675	061T0603473	CHIP 47KOHM 1/16W	
R679	061T0603473	CHIP 47KOHM 1/16W	
R705	061T0603473	CHIP 47KOHM 1/16W	
R709	061T0603473	CHIP 47KOHM 1/16W	
R713	061T0603473	CHIP 47KOHM 1/16W	
R716	061T0603473	CHIP 47KOHM 1/16W	
R775	061T0603473	CHIP 47KOHM 1/16W	
R9003	061T0603473	CHIP 47KOHM 1/16W	

R616	061T0603474	RST CHIPR 470 KOHM +-5% 1/10W	
R520	061T0603510 0F	RST CHIPR 510OHM +-1% 1/10W	
R103	061T0603511	RST CHIPR 510 OHM +-5% 1/10W	
R104	061T0603511	RST CHIPR 510 OHM +-5% 1/10W	
R116	061T0603560 9F	RST CHIPR 56 OHM +-1% 1/10W	
R696	061T0603561	RST CHIPR 560 OHM +-5% 1/10W	
R745	061T0603562	RST CHIPR 5.6 KOHM +-5% 1/10W	
R181	061T0603681	RST CHIPR 680 OHM +-5% 1/10W	
R182	061T0603681	RST CHIPR 680 OHM +-5% 1/10W	
R701	061T0603681	RST CHIPR 680 OHM +-5% 1/10W	
R625	061T0603682	RST CHIPR 6.8KOHM +-5% 1/10W	
R630	061T0603682	RST CHIPR 6.8KOHM +-5% 1/10W	
R9006	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R190	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R189	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R141	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R119	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R132	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R133	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R136	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R137	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R138	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R139	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R111	061T0603750 9F	CHIP 75OHM 1/10W 1%	
R110	061T0603750 9F	CHIP 75OHM 1/10W 1%	
R109	061T0603750 9F	CHIP 75OHM 1/10W 1%	
R795	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R794	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R793	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R698	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R693	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R692	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R688	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R687	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R686	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R685	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R684	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R683	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R682	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R796	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R798	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R799	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R115	061T0805470	RST CHIPR 47 OHM +-5% 1/8W	
R219	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R220	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R221	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R222	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R223	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R225	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R226	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R228	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R229	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R230	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R231	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R797	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R216	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R215	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	

R214	061T1206000	F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R213	061T1206000	F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R212	061T1206000	F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R211	061T1206000	F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R210	061T1206000	F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R661	061T1206220		RST CHIPR 22 OHM +-5% 1/4W	
R643	061T1206220		RST CHIPR 22 OHM +-5% 1/4W	
R725	061T1206620	0F	RST CHIPR 620 OHM +-1% 1/4W	
R779	061T1206629		RST CHIP 6R2 1/4W 5%	
R665	061T1206629		RST CHIP 6R2 1/4W 5%	
R662	061T1206629		RST CHIP 6R2 1/4W 5%	
R649	061T1206629		RST CHIP 6R2 1/4W 5%	
R644	061T1206629		RST CHIP 6R2 1/4W 5%	
CP601	065T 600471	8T	CHIP ARRAY 470PF 8P	
C195	065T0603100	31 GP	CHIP 10PF 50V NPO	
C196	065T0603100	31 GP	CHIP 10PF 50V NPO	
C738	065T0603101	31	CHIP 100PF 50V NPO	
C701	065T0603101	31	CHIP 100PF 50V NPO	
C737	065T0603101	31	CHIP 100PF 50V NPO	
C741	065T0603102	31	CHIP 1000PF 50V NPO	
C753	065T0603102	31	CHIP 1000PF 50V NPO	
C118	065T0603102	31	CHIP 1000PF 50V NPO	
C117	065T0603102	31	CHIP 1000PF 50V NPO	
C601	065T0603102	32	CHIP 1000PF 50V X7R	
C6106	065T0603102	32	CHIP 1000PF 50V X7R	
C6108	065T0603102	32	CHIP 1000PF 50V X7R	
C6111	065T0603102	32	CHIP 1000PF 50V X7R	
C663	065T0603102	32	CHIP 1000PF 50V X7R	
C664	065T0603102	32	CHIP 1000PF 50V X7R	
C673	065T0603102	32	CHIP 1000PF 50V X7R	
C678	065T0603102	32	CHIP 1000PF 50V X7R	
C688	065T0603102	32	CHIP 1000PF 50V X7R	
C690	065T0603102	32	CHIP 1000PF 50V X7R	
C693	065T0603102	32	CHIP 1000PF 50V X7R	
C9002	065T0603103	32	CHIP 0.01UF 50V X7R	
C755	065T0603103	32	CHIP 0.01UF 50V X7R	
C748	065T0603103	32	CHIP 0.01UF 50V X7R	
C747	065T0603103	32	CHIP 0.01UF 50V X7R	
C666	065T0603103	32	CHIP 0.01UF 50V X7R	
C629	065T0603103	32	CHIP 0.01UF 50V X7R	
C628	065T0603103	32	CHIP 0.01UF 50V X7R	
C625	065T0603103	32	CHIP 0.01UF 50V X7R	
C624	065T0603103	32	CHIP 0.01UF 50V X7R	
C614	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C613	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C6122	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C612	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C6119	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C611	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C6104	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C6103	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C610	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C609	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C608	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C607	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C606	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	
C9001	065T0603104	12	MLCC 0603 0.1UF K 16V X7R	

C697	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C696	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C668	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C657	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C656	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C655	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C646	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C644	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C618	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C617	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C616	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C615	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C446	065T0603104 32	CHIP 0.1UF 50V X7R	
C447	065T0603104 32	CHIP 0.1UF 50V X7R	
C448	065T0603104 32	CHIP 0.1UF 50V X7R	
C451	065T0603104 32	CHIP 0.1UF 50V X7R	
C452	065T0603104 32	CHIP 0.1UF 50V X7R	
C454	065T0603104 32	CHIP 0.1UF 50V X7R	
C458	065T0603104 32	CHIP 0.1UF 50V X7R	
C459	065T0603104 32	CHIP 0.1UF 50V X7R	
C460	065T0603104 32	CHIP 0.1UF 50V X7R	
C714	065T0603104 32	CHIP 0.1UF 50V X7R	
C712	065T0603104 32	CHIP 0.1UF 50V X7R	
C709	065T0603104 32	CHIP 0.1UF 50V X7R	
C707	065T0603104 32	CHIP 0.1UF 50V X7R	
C706	065T0603104 32	CHIP 0.1UF 50V X7R	
C705	065T0603104 32	CHIP 0.1UF 50V X7R	
C704	065T0603104 32	CHIP 0.1UF 50V X7R	
C703	065T0603104 32	CHIP 0.1UF 50V X7R	
C702	065T0603104 32	CHIP 0.1UF 50V X7R	
C695	065T0603104 32	CHIP 0.1UF 50V X7R	
C694	065T0603104 32	CHIP 0.1UF 50V X7R	
C421	065T0603104 32	CHIP 0.1UF 50V X7R	
C422	065T0603104 32	CHIP 0.1UF 50V X7R	
C423	065T0603104 32	CHIP 0.1UF 50V X7R	
C424	065T0603104 32	CHIP 0.1UF 50V X7R	
C425	065T0603104 32	CHIP 0.1UF 50V X7R	
C426	065T0603104 32	CHIP 0.1UF 50V X7R	
C427	065T0603104 32	CHIP 0.1UF 50V X7R	
C429	065T0603104 32	CHIP 0.1UF 50V X7R	
C430	065T0603104 32	CHIP 0.1UF 50V X7R	
C431	065T0603104 32	CHIP 0.1UF 50V X7R	
C432	065T0603104 32	CHIP 0.1UF 50V X7R	
C434	065T0603104 32	CHIP 0.1UF 50V X7R	
C435	065T0603104 32	CHIP 0.1UF 50V X7R	
C436	065T0603104 32	CHIP 0.1UF 50V X7R	
C437	065T0603104 32	CHIP 0.1UF 50V X7R	
C438	065T0603104 32	CHIP 0.1UF 50V X7R	
C439	065T0603104 32	CHIP 0.1UF 50V X7R	
C442	065T0603104 32	CHIP 0.1UF 50V X7R	
C443	065T0603104 32	CHIP 0.1UF 50V X7R	
C444	065T0603104 32	CHIP 0.1UF 50V X7R	
C722	065T0603104 32	CHIP 0.1UF 50V X7R	
C720	065T0603104 32	CHIP 0.1UF 50V X7R	
C719	065T0603104 32	CHIP 0.1UF 50V X7R	
C717	065T0603104 32	CHIP 0.1UF 50V X7R	
C462	065T0603104 32	CHIP 0.1UF 50V X7R	

C463	065T0603104 32	CHIP 0.1UF 50V X7R	
C465	065T0603104 32	CHIP 0.1UF 50V X7R	
C467	065T0603104 32	CHIP 0.1UF 50V X7R	
C469	065T0603104 32	CHIP 0.1UF 50V X7R	
C471	065T0603104 32	CHIP 0.1UF 50V X7R	
C506	065T0603104 32	CHIP 0.1UF 50V X7R	
C507	065T0603104 32	CHIP 0.1UF 50V X7R	
C508	065T0603104 32	CHIP 0.1UF 50V X7R	
C509	065T0603104 32	CHIP 0.1UF 50V X7R	
C510	065T0603104 32	CHIP 0.1UF 50V X7R	
C511	065T0603104 32	CHIP 0.1UF 50V X7R	
C512	065T0603104 32	CHIP 0.1UF 50V X7R	
C513	065T0603104 32	CHIP 0.1UF 50V X7R	
C518	065T0603104 32	CHIP 0.1UF 50V X7R	
C6101	065T0603104 32	CHIP 0.1UF 50V X7R	
C691	065T0603104 32	CHIP 0.1UF 50V X7R	
C687	065T0603104 32	CHIP 0.1UF 50V X7R	
C684	065T0603104 32	CHIP 0.1UF 50V X7R	
C683	065T0603104 32	CHIP 0.1UF 50V X7R	
C671	065T0603104 32	CHIP 0.1UF 50V X7R	
C641	065T0603104 32	CHIP 0.1UF 50V X7R	
C640	065T0603104 32	CHIP 0.1UF 50V X7R	
C622	065T0603104 32	CHIP 0.1UF 50V X7R	
C6117	065T0603104 32	CHIP 0.1UF 50V X7R	
C6114	065T0603104 32	CHIP 0.1UF 50V X7R	
C6113	065T0603104 32	CHIP 0.1UF 50V X7R	
C6112	065T0603104 32	CHIP 0.1UF 50V X7R	
C6109	065T0603104 32	CHIP 0.1UF 50V X7R	
C6105	065T0603104 32	CHIP 0.1UF 50V X7R	
C6102	065T0603104 32	CHIP 0.1UF 50V X7R	
C740	065T0603104 32	CHIP 0.1UF 50V X7R	
C730	065T0603104 32	CHIP 0.1UF 50V X7R	
C729	065T0603104 32	CHIP 0.1UF 50V X7R	
C727	065T0603104 32	CHIP 0.1UF 50V X7R	
C725	065T0603104 32	CHIP 0.1UF 50V X7R	
C168	065T0603104 32	CHIP 0.1UF 50V X7R	
C166	065T0603104 32	CHIP 0.1UF 50V X7R	
C165	065T0603104 32	CHIP 0.1UF 50V X7R	
C164	065T0603104 32	CHIP 0.1UF 50V X7R	
C163	065T0603104 32	CHIP 0.1UF 50V X7R	
C162	065T0603104 32	CHIP 0.1UF 50V X7R	
C161	065T0603104 32	CHIP 0.1UF 50V X7R	
C160	065T0603104 32	CHIP 0.1UF 50V X7R	
C124	065T0603104 32	CHIP 0.1UF 50V X7R	
C122	065T0603104 32	CHIP 0.1UF 50V X7R	
C119	065T0603104 32	CHIP 0.1UF 50V X7R	
C116	065T0603104 32	CHIP 0.1UF 50V X7R	
C750	065T0603104 32	CHIP 0.1UF 50V X7R	
C766	065T0603104 32	CHIP 0.1UF 50V X7R	
C770	065T0603104 32	CHIP 0.1UF 50V X7R	
C772	065T0603104 32	CHIP 0.1UF 50V X7R	
C775	065T0603104 32	CHIP 0.1UF 50V X7R	
C420	065T0603104 32	CHIP 0.1UF 50V X7R	
C413	065T0603104 32	CHIP 0.1UF 50V X7R	
C411	065T0603104 32	CHIP 0.1UF 50V X7R	
C409	065T0603104 32	CHIP 0.1UF 50V X7R	
C408	065T0603104 32	CHIP 0.1UF 50V X7R	

C407	065T0603104 32	CHIP 0.1UF 50V X7R	
C406	065T0603104 32	CHIP 0.1UF 50V X7R	
C405	065T0603104 32	CHIP 0.1UF 50V X7R	
C403	065T0603104 32	CHIP 0.1UF 50V X7R	
C402	065T0603104 32	CHIP 0.1UF 50V X7R	
C401	065T0603104 32	CHIP 0.1UF 50V X7R	
C186	065T0603104 32	CHIP 0.1UF 50V X7R	
C185	065T0603104 32	CHIP 0.1UF 50V X7R	
C179	065T0603104 32	CHIP 0.1UF 50V X7R	
C178	065T0603104 32	CHIP 0.1UF 50V X7R	
C177	065T0603104 32	CHIP 0.1UF 50V X7R	
C176	065T0603104 32	CHIP 0.1UF 50V X7R	
C623	065T0603105 17	CHIP 1UF 16V Y5V	
C619	065T0603105 17	CHIP 1UF 16V Y5V	
C6118	065T0603105 25	CHIP 1UF 25V X5R	
C6121	065T0603105 25	CHIP 1UF 25V X5R	
C515	065T0603150 31	CHIP 15PF 50V NPO	
C516	065T0603150 31	CHIP 15PF 50V NPO	
C769	065T0603152 31	CHIP 1500PF 50V NPO	
C752	065T0603152 31	CHIP 1500PF 50V NPO	
C199	065T0603220 31	CHIP 22PF 50V NPO	
C653	065T0603220 31	CHIP 22PF 50V NPO	
C635	065T0603221 31	CHIP 220PF 50V NPO	
C634	065T0603221 31	CHIP 220PF 50V NPO	
C631	065T0603221 31	CHIP 220PF 50V NPO	
C630	065T0603221 31	CHIP 220PF 50V NPO	
C144	065T0603221 31	CHIP 220PF 50V NPO	
C143	065T0603221 31	CHIP 220PF 50V NPO	
C142	065T0603221 31	CHIP 220PF 50V NPO	
C141	065T0603221 31	CHIP 220PF 50V NPO	
C135	065T0603221 31	CHIP 220PF 50V NPO	
C134	065T0603221 31	CHIP 220PF 50V NPO	
C642	065T0603221 31	CHIP 220PF 50V NPO	
C643	065T0603221 31	CHIP 220PF 50V NPO	
C651	065T0603221 31	CHIP 220PF 50V NPO	
C652	065T0603221 31	CHIP 220PF 50V NPO	
C661	065T0603221 31	CHIP 220PF 50V NPO	
C662	065T0603221 31	CHIP 220PF 50V NPO	
C669	065T0603223 32	CHIP 0.022UF 50V X7R 0603	
C667	065T0603224 22	CHIP CAP 0.22UF 25V X7	
C198	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C502	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C504	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C522	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C751	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C521	065T0603225 17	CHIP 2.2UF 16V Y5V	
C658	065T0603225 17	CHIP 2.2UF 16V Y5V	
C476	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C626	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C627	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C632	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C633	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C636	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C639	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C649	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C650	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C659	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	

C660	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C648	065T0603300 31	CHIP 0603 30PF J 50V NPO	
C520	065T0603330 31	CHIP 33PF 50V NPO	
C519	065T0603330 31	CHIP 33PF 50V NPO	
C415	065T0603330 31	CHIP 33PF 50V NPO	
C416	065T0603330 31	CHIP 33PF 50V NPO	
C692	065T0603331 32	CHIP 330PF 50V X7R	
C6110	065T0603331 32	CHIP 330PF 50V X7R	
C746	065T0603391 31	CHIP 390PF 50V NPO	
C133	065T0603471 31	CHIP 470PF 50V NPO	
C132	065T0603471 31	CHIP 470PF 50V NPO	
C155	065T0603472 32	CHIP 4700PF 50V X7R	
C699	065T060347232K Y	CAP CHIP 0603 4700PF K 50V X7R	
C158	065T0603473 32	CHIP 0.047UF 50V X7R	
C157	065T0603473 32	CHIP 0.047UF 50V X7R	
C156	065T0603473 32	CHIP 0.047UF 50V X7R	
C154	065T0603473 32	CHIP 0.047UF 50V X7R	
C153	065T0603473 32	CHIP 0.047UF 50V X7R	
C152	065T0603473 32	CHIP 0.047UF 50V X7R	
C151	065T0603473 32	CHIP 0.047UF 50V X7R	
C150	065T0603473 32	CHIP 0.047UF 50V X7R	
C149	065T0603473 32	CHIP 0.047UF 50V X7R	
C148	065T0603473 32	CHIP 0.047UF 50V X7R	
C147	065T0603473 32	CHIP 0.047UF 50V X7R	
C146	065T0603473 32	CHIP 0.047UF 50V X7R	
C145	065T0603473 32	CHIP 0.047UF 50V X7R	
C749	065T0603474 27	CHIP 0.47UF 25V Y5V	
C776	065T060347931Y	MLCC 0603 4.7PF B/C 50V NPO	
C670	065T0603560 31	CHIP 56PF 50V NPO	
C192	065T0603569 31	CHIP 5.6PF 50V NPO	
C193	065T0603569 31	CHIP 5.6PF 50V NPO	
C194	065T0603569 31	CHIP 5.6PF 50V NPO	
C188	065T0603680 31	CHIP 68PF 50V NPO	
C187	065T0603680 31	CHIP 68PF 50V NPO	
C140	065T0603680 31	CHIP 68PF 50V NPO	
C139	065T0603680 31	CHIP 68PF 50V NPO	
C138	065T0603680 31	CHIP 68PF 50V NPO	
C137	065T0603680 31	CHIP 68PF 50V NPO	
C136	065T0603680 31	CHIP 68PF 50V NPO	
C128	065T0603680 31	CHIP 68PF 50V NPO	
C127	065T0603680 31	CHIP 68PF 50V NPO	
C129	065T0603680 32	CHIP 68PF 50V X7R	
C6100	065T0603681 21	CHIP 680PF 25V NPO	
C721	065T0603683 32	CHIP 0.068UF 50V X7R	
C685	065T0805105 37	CHIP 1UF 50V Y5V	
C686	065T0805105 37	CHIP 1UF 50V Y5V	
C672	065T0805106 15	CHIP 10UF 16V X5R 0805	
C681	065T0805106 15	CHIP 10UF 16V X5R 0805	
C404	065T0805106 A5	CHIP 10UF 10V X5R 0805	
C410	065T0805106 A5	CHIP 10UF 10V X5R 0805	
C414	065T0805106 A5	CHIP 10UF 10V X5R 0805	
C418	065T0805474 22	CHIP 0.47UF 25V X7R	
C680	065T0805475 15	CHIP 4.7UF 16V X5R	
C679	065T0805475 15	CHIP 4.7UF 16V X5R	
C676	065T0805475 15	CHIP 4.7UF 16V X5R	
C675	065T0805475 15	CHIP 4.7UF 16V X5R	
C517	065T0805475 15	CHIP 4.7UF 16V X5R	

C182	065T0805475 15	CHIP 4.7UF 16V X5R	
C181	065T0805475 15	CHIP 4.7UF 16V X5R	
C131	065T0805475 15	CHIP 4.7UF 16V X5R	
C130	065T0805475 15	CHIP 4.7UF 16V X5R	
C645	065T1206106 17	CHIP 10UF 16V Y5V	
C647	065T1206106 17	CHIP 10UF 16V Y5V	
C464	065T1206226 A5	CHIP 22UF 10V X5R	
C466	065T1206226 A5	CHIP 22UF 10V X5R	
C468	065T1206226 A5	CHIP 22UF 10V X5R	
C470	065T1206226 A5	CHIP 22UF 10V X5R	
C472	065T1206226 A5	CHIP 22UF 10V X5R	
C715	065T1206226 A5	CHIP 22UF 10V X5R	
C505	065T1206226 A5	CHIP 22UF 10V X5R	
C428	065T1206226 A5	CHIP 22UF 10V X5R	
C433	065T1206226 A5	CHIP 22UF 10V X5R	
C440	065T1206226 A5	CHIP 22UF 10V X5R	
C441	065T1206226 A5	CHIP 22UF 10V X5R	
C445	065T1206226 A5	CHIP 22UF 10V X5R	
C453	065T1206226 A5	CHIP 22UF 10V X5R	
C461	065T1206226 A5	CHIP 22UF 10V X5R	
CP601	065T600M471 8T	CHIP ARRAY 470PF 8P	
U509	070GHDCP500HDC	HDCP CODE	
LP701	071T 56A301 8K	CHIP BEAD ARRAY 300 OHM	
L101	071T 56F320 K	CHIP BEAD 32 OHM 0805	
L102	071T 56F320 K	CHIP BEAD 32 OHM 0805	
L103	071T 56F320 K	CHIP BEAD 32 OHM 0805	
L701	071T 56G151 B	BEAD 0805 150 OHM	
L105	071T 56G151 B	BEAD 0805 150 OHM	
L104	071T 56G151 B	BEAD 0805 150 OHM	
L418	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L417	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L415	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L414	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L413	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L412	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L411	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L410	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L408	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L407	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L406	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L405	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L404	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L403	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L201	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB609	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L509	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L721	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L724	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L705	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L127	071T 56U600	CHIP BEAD 60 OHM 0805	
L128	071T 56U600	CHIP BEAD 60 OHM 0805	
L9006	071T 56U600	CHIP BEAD 60 OHM 0805	
L703	071T 56Z601	CHIP BEAD 600 OHM	
L702	071T 56Z601	CHIP BEAD 600 OHM	
FB611	071T 56Z601	CHIP BEAD 600 OHM	
FB610	071T 56Z601	CHIP BEAD 600 OHM	
LP601	071T 57G601TSB	IND CHIP BEAD 1206 600OHM TECSTAR	

L126	071T 59B121 K	CHIP BEAD	
L409	071T 59B121 K	CHIP BEAD	
L510	071T 59B121 K	CHIP BEAD	
L601	071T 59B121 K	CHIP BEAD	
L713	071T 59B121 K	CHIP BEAD	
L720	071T 59B121 K	CHIP BEAD	
L727	071T 59B121 K	CHIP BEAD	
L728	071T 59B121 K	CHIP BEAD	
L729	071T 59B121 K	CHIP BEAD	
L730	071T 59B121 K	CHIP BEAD	
L125	071T 59B121 K	CHIP BEAD	
L106	071T 59B121 K	CHIP BEAD	
L107	071T 59B121 K	CHIP BEAD	
L108	071T 59B121 K	CHIP BEAD	
L109	071T 59B121 K	CHIP BEAD	
L110	071T 59B121 K	CHIP BEAD	
L115	071T 59B121 K	CHIP BEAD	
L116	071T 59B121 K	CHIP BEAD	
L117	071T 59B121 K	CHIP BEAD	
L118	071T 59B121 K	CHIP BEAD	
L119	071T 59B121 K	CHIP BEAD	
L124	071T 59B601 MA	CHIP BEAD	
L123	071T 59B601 MA	CHIP BEAD	
L121	071T 59B601 MA	CHIP BEAD	
L120	071T 59B601 MA	CHIP BEAD	
L114	071T 59B601 MA	CHIP BEAD	
L113	071T 59B601 MA	CHIP BEAD	
L112	071T 59B601 MA	CHIP BEAD	
L111	071T 59B601 MA	CHIP BEAD	
FB608	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB607	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB606	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB604	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB603	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB602	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB601	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
L602	073T 62181	180UH +-10%	
L603	073T 62181	180UH +-10%	
L723	073T 62181	180UH +-10%	
FB613	073T 6310010M	CHIP INDUCTOR 0603 10UH+-10% MICROGATE	
L501	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L502	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L503	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L504	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L505	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L506	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L507	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L508	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9002	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9003	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9004	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9005	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
CN502	088T 340 21 VD	HDMI HEADER 21P V/T	
CN501	088T 340 21 VD	HDMI HEADER 21P V/T	
CN502	088T 340 21 VN	HDMI HEADER 21P V/A	
CN501	088T 340 21 VN	HDMI HEADER 21P V/A	

CN9003	088T 34019A VD	HDMI HEADER 19P V/T	
CN9003	088T 34019CVMO	HDMI HEADER 19P V/T	
D105	093T 60230	BAT54C BY MCC	
D501	093T 60230	BAT54C BY MCC	
D502	093T 60230	BAT54C BY MCC	
ZD111	093T 64 37 N	V-PORT-0603-100K V05	
ZD112	093T 64 37 N	V-PORT-0603-100K V05	
ZD113	093T 64 37 N	V-PORT-0603-100K V05	
ZD114	093T 64 37 N	V-PORT-0603-100K V05	
ZD115	093T 64 37 N	V-PORT-0603-100K V05	
ZD116	093T 64 37 N	V-PORT-0603-100K V05	
ZD117	093T 64 37 N	V-PORT-0603-100K V05	
ZD118	093T 64 37 N	V-PORT-0603-100K V05	
ZD119	093T 64 37 N	V-PORT-0603-100K V05	
ZD120	093T 64 37 N	V-PORT-0603-100K V05	
ZD110	093T 64 37 N	V-PORT-0603-100K V05	
ZD109	093T 64 37 N	V-PORT-0603-100K V05	
ZD108	093T 64 37 N	V-PORT-0603-100K V05	
ZD101	093T 64 37 N	V-PORT-0603-100K V05	
ZD102	093T 64 37 N	V-PORT-0603-100K V05	
ZD103	093T 64 37 N	V-PORT-0603-100K V05	
ZD104	093T 64 37 N	V-PORT-0603-100K V05	
ZD105	093T 64 37 N	V-PORT-0603-100K V05	
ZD106	093T 64 37 N	V-PORT-0603-100K V05	
ZD107	093T 64 37 N	V-PORT-0603-100K V05	
ZD121	093T 64 37 N	V-PORT-0603-100K V05	
ZD122	093T 64 37 N	V-PORT-0603-100K V05	
ZD123	093T 64 37 N	V-PORT-0603-100K V05	
ZD124	093T 64 37 N	V-PORT-0603-100K V05	
ZD125	093T 64 37 N	V-PORT-0603-100K V05	
ZD601	093T 64 37 N	V-PORT-0603-100K V05	
ZD602	093T 64 37 N	V-PORT-0603-100K V05	
ZD603	093T 64 37 N	V-PORT-0603-100K V05	
D405	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D406	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D603	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D403	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D103	093T 6433S	DIODE BAV99 SEMTECH	
D104	093T 6433S	DIODE BAV99 SEMTECH	
D106	093T 6433S	DIODE BAV99 SEMTECH	
D601	093T 6433S	DIODE BAV99 SEMTECH	
ZD127	093T 39S 10 T	RLZ6.8B LLDS	
ZD126	093T 39S 10 T	RLZ6.8B LLDS	
ZD604	093T 39S 98 T	DIODE RLZ3.3B LL-34 ROHM	
D107	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D401	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D602	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D604	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D701	093T 64S3PH	BAS32L SOD80C	
	715T3115 H	MAIN-PCB 2-LAYER T1.6MM	
	Q85T0076101	SHIELDING	
	Q90T6068 2 GP	HEAT SINK	
	IRPF8QA7	IR BOARD T3004-D-X-X-1-080309	
U1	056T 627 7	FM-6038TM2-5AN	
CN1	033T8032 4F HR	CONNECTOR	
Q1	057T 417 6	PMBS3906/PHILIPS-SMT	
R1	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R5	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R3	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R2	061T0805301	RST CHIP 300R 1/8W 5%	
R4	061T0805331 Y	RST CHIPR 330 OHM +-5% 1/8W YAGEO	
C3	065T0603101 31	CHIP 100PF 50V NPO	
C5	065T0603104 32	CHIP 0.1UF 50V X7R	
C4	065T0603104 32	CHIP 0.1UF 50V X7R	
C2	065T0603104 32	CHIP 0.1UF 50V X7R	
C1	065T0805475 A5	CHIP 4.7UF 10V X5R	
FB2	071T 59B601 EA	CHIP BEAD 600OHM 0603 TB1608	
FB1	071T 59B601 EA	CHIP BEAD 600OHM 0603 TB1608	
FB3	071T 59B601 EA	CHIP BEAD 600OHM 0603 TB1608	
LED1	081T 14 24 EL	CHIP LED BLUE/DARK RED	
D1	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D2	093T 6432V	LL4148-GSO8 SMD BY VISHA	
	715T3004 1	IR PCB 30X24X1.6MM FR-4 D/S	
	KEPF8AA3	KEPC BOARD T2876-1-X-X-1-080309	
CN1	033T3802 3H	WAFER 3P RIGHT ANGLE	
SW4	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW5	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW6	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW7	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW2	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW3	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW1	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
R5	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R4	061T0603100 1F	RST CHIPR 1 KOHM +-1% 1/10W	
R2	061T0603180 1F	RST CHIPR 1.8 KOHM +-1% 1/10W	
R8	061T0603220 2F	RST CHIPR 22 KOHM +-1% 1/10W	
R6	061T0603330 1F	RST CHIPR 3.3 KOHM +-1% 1/10W	
R3	061T0603390 0F	RST CHIPR 390 OHM +-1% 1/10W	
R7	061T0603680 1F	RST CHIPR 6.8 KOHM +-1% 1/10W	
R1	061T08052201FF	RST CHIPR 2.2KOHM +-1% 1/8W FENGHUA	
C2	065T0603104 32	CHIP 0.1UF 50V X7R	
L2	071T 56U601 MA	CHIP BEAD 0805 600 OHM 1000MA	
L1	071T 56U601 MA	CHIP BEAD 0805 600 OHM 1000MA	
D1	093T 6433P	BAV99	
	715T2876 1	KEY PCB 111X15X1.6MM FR-1 S/S	
	Q11T5027 1	LEAD-CLAMPER	
	Q36T 600 18113	CLOTH_GRIDDING	
	Q36T 600 18114	CLOTH_GRIDDING	
	Q36T 600 18120	.LOTH_GRIDDING	
	Q36T 600 18120	.LOTH_GRIDDING	
	Q36T 600 36 9 GP	NONWOVEN FABRIC	
	Q36T 600 37 12 GP	NONWOVEN FABRIC	
	Q40T 32061549A	RATING LABEL	
	Q40T000262496A	IO LABEL	
	Q41T7800615A92	WARRANTY CARD	
	Q44TJ019101	CUSHION EPS 32	
	Q44TJ019201	CUSHION EPS 32	
	Q44TJ019301	CUSHION EPS 32	
	Q44TJ019401	CUSHION EPS 32	
	Q44TJ019615 9A	32" TV CARTON	
	Q44TJ020101	EPE TOP FOR CMO PANEL	
	Q44TJ020201	EPE BOTTOM FOR CMO PANEL	
	Q45G 77 5	PE PACKING	
	Q45T 76 28CK2 R	PE BAG	

	Q45T 76 28NV2 R	PE BAG FOR CLAMP	
	Q45T 99609 61	EPE COVER FOR MONITOR	
	Q45T 99609 79	EPE COVER FOR BASE	
	Q50T 500523	CABLE TIE	
	Q52T 1185 98	MIDDLE CARTON TAPE FOR AOC	
	Q52T 1185 99	BIG CARTON TAPE FOR AOC	
CN5	033T3278 6D	CONNECTOR 6P 2.5 DIP	
CN1	033T3802 2B Y	CONNECTOR	
CN9	033T3802 4B Y	CONNECTOR	
R243	061T152M270 64	27 OHM 5% 2W	
R242	061T152M330 64	33 OHM 5% 2W	
C151	067T 215221 3H	CAP 105°C 220UF M 16V	
C226	067T 305101 3T	100UF 16V 105C	
C219	067T 305101 7P	105 RADIAL ECA PACTOR	
C154	067T 305101 7P	105 RADIAL ECA PACTOR	
C209	067T215S1023KV	EC 105°C CAP 1000UF M 16V	
C181	067T215S471 3K	LOW ESR EC 470UF 16V	
C193	067T215S471 3K	LOW ESR EC 470UF 16V	
C178	067T215S471 3K	LOW ESR EC 470UF 16V	
C198	067T215V102 3N	EC 1000UF 16V NCC KY16VB	
C223	067T305M1003PT	E.C CAP 10UF M 16V 4*7	
L11	073T 253195 L	CHOKER COIL 200UH CC-008305	
TU1	094TISDB T 1A	TUNER ISDB-T TDHL5-002A	
C15	067T 305101 3T	100UF 16V 105C	
C14	067T 305101 3T	100UF 16V 105C	
C160	067T 305101 3T	100UF 16V 105C	
C222	067T 305101 3T	100UF 16V 105C	
C157	067T 305101 3T	100UF 16V 105C	
C150	067T 305101 3T	100UF 16V 105C	
C190	067T 305221 3T	220UF/16V	
C183	067T 305470 3T	EC 105°C 47UF M 16V	
C189	067T 305470 3T	EC 105°C 47UF M 16V	
U18	056T 379 36	MC34063A	
U16	056T 379125	IC G2992F1U SOP-8	
U14	056T 563126	IC G1117T63UF SOT-223	
U15	056T 563137	IC CLZ8831-RST SOP-8	
U12	056T 563137	IC CLZ8831-RST SOP-8	
U16	056T 563138	IC RT9173PS SOP-8	
U1	056T 575 13	IC ST-7101BWC PBGA-680	
U22	056T 581 9	IC G5250K1T1U SOT23-5	
U20	056T 585 11	AZ1117D-5.0-E1	
U13	056T 585 4A	AP1117E33LA	
U19	056T 614 1	IC 74HC4052D PHILIPS	
U9	056T 615 58	IC HYB25DC512160CE-5 512M PG-TSOPII-66-1	
U8	056T 615 58	IC HYB25DC512160CE-5 512M PG-TSOPII-66-1	
U11	056T 615913	IC HYB25DC256160CE-5 TSOPII66	
U10	056T 615913	IC HYB25DC256160CE-5 TSOPII66	
U4	056T 643500	EM6353BX2SP3B-2.9+ 3PIN SOT23-3	
U5	056T1133 83 1	IC M24C64-WMN6P 64K SO-8 ST	
U7	056T1133123	IC S29GL064N90TFI040 TSOP-48	
Q1	057T 417511	TRA MMBT3904 BLUE ROKET	
Q2	057T 417511	TRA MMBT3904 BLUE ROKET	
R198	061G0402100 1F	RST CHIPR 1KOHM +-1% 1/16W	
R202	061G0402100 1F	RST CHIPR 1KOHM +-1% 1/16W	
R185	061G0402125	RST CHIP 1M2 1/16W 5%	
R210	061G0402152	RST CHIP 1K5 1/16W 5%	
RP31	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	

32" & 42" & 47" Digital LCD TV**AOC D32W831 & D42H831 & D47H831**

RP30	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP29	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP28	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP27	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP26	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP25	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP24	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP23	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP22	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP57	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP56	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP55	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP54	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP53	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP52	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP51	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP50	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP49	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP48	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP47	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP46	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP33	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP32	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +5% 1/16W	
RP19	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP18	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP17	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP9	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP8	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP45	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP44	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP43	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP42	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP41	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP40	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP39	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP38	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP37	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP36	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP35	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP34	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP3	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP21	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP20	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP15	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP13	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP11	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP1	061T 126220 8	RST CHIP AR 8P4R 22 OHM +5% 1/16W	
RP10	061T 126470 8	RST CHIPR AR 8P4R 47 OHM +5% 1/16W	
RP12	061T 126470 8	RST CHIPR AR 8P4R 47 OHM +5% 1/16W	
RP14	061T 126470 8	RST CHIPR AR 8P4R 47 OHM +5% 1/16W	
RP16	061T 126470 8	RST CHIPR AR 8P4R 47 OHM +5% 1/16W	
RP2	061T 126470 8	RST CHIPR AR 8P4R 47 OHM +5% 1/16W	
RP4	061T 126470 8	RST CHIPR AR 8P4R 47 OHM +5% 1/16W	
RP5	061T 126470 8	RST CHIPR AR 8P4R 47 OHM +5% 1/16W	
RP6	061T 126470 8	RST CHIPR AR 8P4R 47 OHM +5% 1/16W	
RP7	061T 126470 8	RST CHIPR AR 8P4R 47 OHM +5% 1/16W	
R187	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	

R181	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R172	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R171	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R166	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R256	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R255	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R188	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R199	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R2	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R200	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R207	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R208	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R209	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R25	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R26	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R3	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R4	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R5	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R6	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R73	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R236	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R130	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R13	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R128	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R126	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R10	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R1	061T0402000	RST CHIP JUMP MAX 0R05 1/16W	
R157	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R156	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R155	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R154	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R153	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R152	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R151	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R125	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R120	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R119	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R118	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R117	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R116	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R168	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R167	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R191	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R67	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R179	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R178	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R164	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R163	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R162	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R161	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R160	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R159	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R158	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R107	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R108	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R109	061T0402101	RST CHIPR 100 OHM +5% 1/16W	
R110	061T0402101	RST CHIPR 100 OHM +5% 1/16W	

R111	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R112	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R113	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R114	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R115	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R235	061T0402102	RST CHIPR 1KOHM +-5% 1/16W	
R182	061T0402102	RST CHIPR 1KOHM +-5% 1/16W	
R32	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R30	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R29	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R28	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R27	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R224	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R223	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R21	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R18	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R34	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R36	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R37	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R44	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R56	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R90	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R94	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R95	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R96	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R97	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R183	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R169	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R165	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R124	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R14	061T0402104	RST CHIPR 100KOHM +-5% 1/16W	
R193	061T0402104	RST CHIPR 100KOHM +-5% 1/16W	
R131	061T0402120 3D	RST CHIPR 120KOHM +-0.5% 1/16W	
R79	061T0402120 3D	RST CHIPR 120KOHM +-0.5% 1/16W	
R194	061T0402200 3F	RST CHIPR 0402 200K OHM +-1% 1/16W	
R143	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R142	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R135	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R129	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R127	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R123	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R122	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R121	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R106	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R195	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R99	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R87	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R75	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R71	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R53	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R48	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R47	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R150	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R149	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R148	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R147	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R145	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	

32" & 42" & 47" Digital LCD TV**AOC D32W831 & D42H831 & D47H831**

R144	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R105	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R104	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R103	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R102	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R101	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R100	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R24	061T0402272	RST CHIP 2K7 1/16W 5%	
R23	061T0402272	RST CHIP 2K7 1/16W 5%	
R16	061T0402272	RST CHIP 2K7 1/16W 5%	
R15	061T0402272	RST CHIP 2K7 1/16W 5%	
R146	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R175	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R214	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R215	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R216	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R22	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R84	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R85	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R88	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R89	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R92	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R211	061T0402471	RST CHIPR 470 OHM +-5% 1/16W	
R220	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R218	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R237	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R91	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R83	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R81	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R80	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R78	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R77	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R76	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R72	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R70	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R69	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R68	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R63	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R60	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R50	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R49	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R222	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R20	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R19	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R12	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R180	061T0402561	RST CHIPR 560 OHM +-5% 1/16W	
R196	061T0402562	RST CHIPR 5.6KOHM +-5% 1/16W	
R7	061T0402680	RST CHIPR 68 OHM 1/16W +-5%	
R35	061T0402680	RST CHIPR 68 OHM 1/16W +-5%	
R41	061T0402750 9F	RST CHIP 75 OHM 1/16W 1%	
R40	061T0402750 9F	RST CHIP 75 OHM 1/16W 1%	
R139	061T0402822	RST CHIPR 8.2 KOHM +-5% 1/16W	
R137	061T0402822	RST CHIPR 8.2 KOHM +-5% 1/16W	
R233	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R227	061T0603100	CHIP 10OHM 1/16W	
R229	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R261	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R261	061T0603104 T	RST CHIP 100K 1/10W 5%	
R231	061T0603181	RST CHIPR 180 OHM +-5% 1/10W	
R230	061T0603182	CHIP 1.8K OHM 1/16W	
R260	061T0603223	CHIP 22KOHM 1/16W	
R225	061T0603272	CHIP 2.7KOHM 1/16W	
R226	061T0603272	CHIP 2.7KOHM 1/16W	
R189	061T0603390 2F	RST CHIPR 39 KOHM +-1% 1/10W	
R197	061T0603470 2F	RST CHIPR 47 KOHM +-1% 1/10W	
R197	061T06034702FF	RST CHIPR 47KOHM +-1% 1/10W FENGHUA	
R228	061T0603473	CHIP 47KOHM 1/16W	
R186	061T0603510 2F	RST CHIPR 51 KOHM +-1% 1/10W	
R134	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R234	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R206	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R205	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R204	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R203	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R201	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R190	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R177	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R176	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R141	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R246	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R247	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R248	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R249	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R244	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R245	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R213	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R133	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R132	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R232	061T1206629	RST CHIP 6R2 1/4W 5%	
C3	065T0402103 22	CHIP 0.01UF 25V X7R	
C31	065T0402103 22	CHIP 0.01UF 25V X7R	
C33	065T0402103 22	CHIP 0.01UF 25V X7R	
C35	065T0402103 22	CHIP 0.01UF 25V X7R	
C37	065T0402103 22	CHIP 0.01UF 25V X7R	
C39	065T0402103 22	CHIP 0.01UF 25V X7R	
C4	065T0402103 22	CHIP 0.01UF 25V X7R	
C41	065T0402103 22	CHIP 0.01UF 25V X7R	
C5	065T0402103 22	CHIP 0.01UF 25V X7R	
C53	065T0402103 22	CHIP 0.01UF 25V X7R	
C54	065T0402103 22	CHIP 0.01UF 25V X7R	
C172	065T0402103 22	CHIP 0.01UF 25V X7R	
C173	065T0402103 22	CHIP 0.01UF 25V X7R	
C18	065T0402103 22	CHIP 0.01UF 25V X7R	
C184	065T0402103 22	CHIP 0.01UF 25V X7R	
C19	065T0402103 22	CHIP 0.01UF 25V X7R	
C194	065T0402103 22	CHIP 0.01UF 25V X7R	
C196	065T0402103 22	CHIP 0.01UF 25V X7R	
C2	065T0402103 22	CHIP 0.01UF 25V X7R	
C20	065T0402103 22	CHIP 0.01UF 25V X7R	
C21	065T0402103 22	CHIP 0.01UF 25V X7R	
C27	065T0402103 22	CHIP 0.01UF 25V X7R	
C29	065T0402103 22	CHIP 0.01UF 25V X7R	
C99	065T0402103 22	CHIP 0.01UF 25V X7R	
C98	065T0402103 22	CHIP 0.01UF 25V X7R	

32"&42"&47"Digital LCD TV**AOC D32W831&D42H831&D47H831**

C96	065T0402103 22	CHIP 0.01UF 25V X7R	
C95	065T0402103 22	CHIP 0.01UF 25V X7R	
C78	065T0402103 22	CHIP 0.01UF 25V X7R	
C77	065T0402103 22	CHIP 0.01UF 25V X7R	
C76	065T0402103 22	CHIP 0.01UF 25V X7R	
C75	065T0402103 22	CHIP 0.01UF 25V X7R	
C74	065T0402103 22	CHIP 0.01UF 25V X7R	
C73	065T0402103 22	CHIP 0.01UF 25V X7R	
C72	065T0402103 22	CHIP 0.01UF 25V X7R	
C71	065T0402103 22	CHIP 0.01UF 25V X7R	
C70	065T0402103 22	CHIP 0.01UF 25V X7R	
C7	065T0402103 22	CHIP 0.01UF 25V X7R	
C69	065T0402103 22	CHIP 0.01UF 25V X7R	
C68	065T0402103 22	CHIP 0.01UF 25V X7R	
C67	065T0402103 22	CHIP 0.01UF 25V X7R	
C66	065T0402103 22	CHIP 0.01UF 25V X7R	
C65	065T0402103 22	CHIP 0.01UF 25V X7R	
C64	065T0402103 22	CHIP 0.01UF 25V X7R	
C63	065T0402103 22	CHIP 0.01UF 25V X7R	
C61	065T0402103 22	CHIP 0.01UF 25V X7R	
C6	065T0402103 22	CHIP 0.01UF 25V X7R	
C170	065T0402103 22	CHIP 0.01UF 25V X7R	
C128	065T0402103 22	CHIP 0.01UF 25V X7R	
C127	065T0402103 22	CHIP 0.01UF 25V X7R	
C126	065T0402103 22	CHIP 0.01UF 25V X7R	
C125	065T0402103 22	CHIP 0.01UF 25V X7R	
C124	065T0402103 22	CHIP 0.01UF 25V X7R	
C123	065T0402103 22	CHIP 0.01UF 25V X7R	
C122	065T0402103 22	CHIP 0.01UF 25V X7R	
C121	065T0402103 22	CHIP 0.01UF 25V X7R	
C120	065T0402103 22	CHIP 0.01UF 25V X7R	
C118	065T0402103 22	CHIP 0.01UF 25V X7R	
C111	065T0402103 22	CHIP 0.01UF 25V X7R	
C106	065T0402103 22	CHIP 0.01UF 25V X7R	
C101	065T0402103 22	CHIP 0.01UF 25V X7R	
C100	065T0402103 22	CHIP 0.01UF 25V X7R	
C129	065T0402103 22	CHIP 0.01UF 25V X7R	
C17	065T0402103 22	CHIP 0.01UF 25V X7R	
C168	065T0402103 22	CHIP 0.01UF 25V X7R	
C165	065T0402103 22	CHIP 0.01UF 25V X7R	
C163	065T0402103 22	CHIP 0.01UF 25V X7R	
C161	065T0402103 22	CHIP 0.01UF 25V X7R	
C158	065T0402103 22	CHIP 0.01UF 25V X7R	
C155	065T0402103 22	CHIP 0.01UF 25V X7R	
C130	065T0402103 22	CHIP 0.01UF 25V X7R	
C131	065T0402103 22	CHIP 0.01UF 25V X7R	
C132	065T0402103 22	CHIP 0.01UF 25V X7R	
C133	065T0402103 22	CHIP 0.01UF 25V X7R	
C134	065T0402103 22	CHIP 0.01UF 25V X7R	
C135	065T0402103 22	CHIP 0.01UF 25V X7R	
C152	065T0402103 22	CHIP 0.01UF 25V X7R	
C24	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C25	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C26	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C28	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C30	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C32	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	

C34	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C36	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C38	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C40	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C42	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C23	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C22	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C218	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C208	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C205	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C204	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C195	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C192	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C191	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C186	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C185	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C52	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C56	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C57	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C58	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C59	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C62	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C79	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C8	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C80	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C81	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C82	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C9	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C93	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C94	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C224	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C225	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C233	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C51	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C49	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C48	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C45	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C44	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C180	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C13	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C12	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C119	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C110	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C11	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C109	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C108	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C107	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C105	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C104	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C103	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C102	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C10	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C136	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C179	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C174	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C171	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C169	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

C166	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C164	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C162	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C159	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C156	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C153	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C139	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C138	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C137	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C197	065T0402222 32	MLCC 0402 2200PF K 50V X7R	
C187	065T0402222 32	MLCC 0402 2200PF K 50V X7R	
C115	065T0603101 32	CHIP 100PF 50V X7R	
C114	065T0603101 32	CHIP 100PF 50V X7R	
C221	065T0603104 32	CHIP 0.1UF 50V X7R	
C231	065T0603105 17	CHIP 1UF 16V Y5V	
C188	065T0603105 17	CHIP 1UF 16V Y5V	
C182	065T0603105 17	CHIP 1UF 16V Y5V	
C175	065T0603105 17	CHIP 1UF 16V Y5V	
C230	065T060310517Z Y	CAP CHIP 0603 1UF Z 16V Y5V	
C220	065T0603152 31	CHIP 1500PF 50V NPO	
C146	065T0805106 15	CHIP 10UF 16V X5R 0805	
C145	065T0805106 15	CHIP 10UF 16V X5R 0805	
C144	065T0805106 15	CHIP 10UF 16V X5R 0805	
C143	065T0805106 15	CHIP 10UF 16V X5R 0805	
C147	065T0805106 15	CHIP 10UF 16V X5R 0805	
C97	065T0805106 15	CHIP 10UF 16V X5R 0805	
C92	065T0805106 15	CHIP 10UF 16V X5R 0805	
C91	065T0805106 15	CHIP 10UF 16V X5R 0805	
C90	065T0805106 15	CHIP 10UF 16V X5R 0805	
C89	065T0805106 15	CHIP 10UF 16V X5R 0805	
C88	065T0805106 15	CHIP 10UF 16V X5R 0805	
C87	065T0805106 15	CHIP 10UF 16V X5R 0805	
C86	065T0805106 15	CHIP 10UF 16V X5R 0805	
C85	065T0805106 15	CHIP 10UF 16V X5R 0805	
C84	065T0805106 15	CHIP 10UF 16V X5R 0805	
C83	065T0805106 15	CHIP 10UF 16V X5R 0805	
C55	065T0805106 15	CHIP 10UF 16V X5R 0805	
C16	065T0805106 15	CHIP 10UF 16V X5R 0805	
C149	065T0805106 15	CHIP 10UF 16V X5R 0805	
C148	065T0805106 15	CHIP 10UF 16V X5R 0805	
C142	065T0805106 15	CHIP 10UF 16V X5R 0805	
C141	065T0805106 15	CHIP 10UF 16V X5R 0805	
C140	065T0805106 15	CHIP 10UF 16V X5R 0805	
C1	065T0805106 15	CHIP 10UF 16V X5R 0805	
FB12	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB14	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB15	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB2	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB3	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L14	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L1	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L15	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB1	071T 56K121 TA	CHIP BEAD 0805 120R/6000MA	
FB11	071T 56K121 TA	CHIP BEAD 0805 120R/6000MA	
FB32	071T 56K121 TA	CHIP BEAD 0805 120R/6000MA	
FB16	071T 59A121 TA	CHIP BEAD 120R/3000MA HCB1608KF-121T30	
FB17	071T 59A121 TA	CHIP BEAD 120R/3000MA HCB1608KF-121T30	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

FB21	071T 59A121 TA	CHIP BEAD 120R/3000MA HCB1608KF-121T30	
FB18	071T 59B121 K	CHIP BEAD	
FB19	071T 59B121 K	CHIP BEAD	
FB20	071T 59B121 K	CHIP BEAD	
FB22	071T 59B121 K	CHIP BEAD	
FB23	071T 59B121 K	CHIP BEAD	
FB24	071T 59B121 K	CHIP BEAD	
FB25	071T 59B121 K	CHIP BEAD	
FB26	071T 59B121 K	CHIP BEAD	
FB28	071T 59B121 K	CHIP BEAD	
FB29	071T 59B121 K	CHIP BEAD	
FB30	071T 59B121 K	CHIP BEAD	
FB4	071T 59B121 K	CHIP BEAD	
FB5	071T 59B121 K	CHIP BEAD	
FB6	071T 59B121 K	CHIP BEAD	
FB7	071T 59B121 K	CHIP BEAD	
FB8	071T 59B121 K	CHIP BEAD	
FB9	071T 59B121 K	CHIP BEAD	
FB31	071T 59B121 K	CHIP BEAD	
FB13	071T 59B121 K	CHIP BEAD	
FB10	071T 59B121 K	CHIP BEAD	
L13	073T 62181	180UH +/-10%	
L5	073T253S 57 H	SMD CHOKE 10UH 4A	2nd source
L4	073T253S 57 H	SMD CHOKE 10UH 4A	2nd source
L5	073T253S 57 K	SMD CHOKE 10UH 4A	
L4	073T253S 57 K	SMD CHOKE 10UH 4A	
CN6	088T 34019A VD	HDMI HEADER 19P V/T	
CN6	088T 34019CVMO	HDMI HEADER 19P V/T	2nd source
X1	093T 22S915 H	CRYSTAL / OSCILLATORS 27MHZ 7X5MM	
ZD1	093T 60S801	DIODE 3A/40V SSA34 VISHAY	
ZD2	093T 60S801	DIODE 3A/40V SSA34 VISHAY	
D3	093T 64S3PH	BAS32L SOD80C	
	715T3176 D	DTV MAIN-PCB 4-LAYER T1.6MM	
	0Q1T 930 8 47 CR3	SCREW	
	Q45T 99606 24 ESD	INSULATING PE BAG	
	Q45T 99606 24 ESD	INSULATING PE BAG	
	Q45T 99606 24 ESD	INSULATING PE BAG	
	A15T0278501CKD	BKT-PCB-HOLDER-TOP	

Location	Part No.	Description	Remark
	001T6021 1	SCREW	
	036T 600 18119 GP	NONWOVEN FABRTC	
	040T 154501 1	HI-POT GND LABEL	
	040T 581689 4A	S/N LABEL	
	044T3231 15	EVA WASHER	
	044T3231 15531	EVA	
	045T 77500	RIBBON	
	045T 77501	RIBBON	
	049T 51 1A	ERADICATOR	
	050T 500 1	CABLE TIE	
	050T 600 1 W	WHITE STRAPE	
	051T 2 14	FUSE GEL	
	051T6001 2	DESICCANT	
	052T 1150 C	BLACK TAPE	
	052T 1185	MIDDLE TAPE FOR CARTON	
	052T 1186	SMALL TAPE	
	052T 1211 A	ADHESIVE TYPE	
	052T 1211 B	ADHESIVE TYPE	
	052T 1211511	ALUMINUM FOIL TAPE	
	052T 2191 A	TAPE	
	052T6026 1	MESH PRINTTING PAPER	
	052T6026 2	MESH PRINTTING PAPER	
	055G 100615	TIN THREAD W/O PB	
	055T 100610	TIN CREAM W/O PB	
E07802	078T 498 2 G	SPEAKER 4 OHM 10W L: 180MM 47X24.5MM	
E07801	078T 499 2 G	SPEAKER 8 OHM 11W 156X30MM	2nd source
E07801	078T 499 2 K	SPEAKER 8 OHM 11W 156X30MM KUAIDA	
	089T 173 56 31	AUDION CABLE	
	089T 17356L 55	RF CABLE 160MM	
E08909	089T 184LAA 7	HDMI CABLE 130MM WITH EXTERNAL TUBE	
E08909	089T 184MAA 6	HDMI CABLE 200MM	2nd source
	089T 725HAA DB	D-SUB	
	089T402A15NIS1	POWER CORD	
	095T8013 6D 32	HARNESS 6P-6P 150MM	
	095T801312D 50	HARNESS 12P-12P 180MM	
	095T8014 2D 21	HARNESS 2P-2P 250MM	
	095T8014 4D 40	HARNESS 4P-4P 250MM	
	095T8014 4D547	WIRE HARNESS 4P(PLUG)-B&R+B&W	
	095T8014 8D 73	HARNESS 8P-4P+3P 1100MM	
	095T801413D 32	HARNESS 13P-12P 550MM	
	095T801414D130	HARNESS 13P-14P 500MM	
	095T801851D 5	HARNESS 51P-40 300MM	
	0D1T1730 8120	SCREW	
	0D1T1730 8120	SCREW	
	0D1T1730 8120	SCREW	
	0D1T1730 8120	SCREW	
	0M1T 930 6 47 CR3	SCREW	
	0M1T 930 6120	SCREW M3-0.5X6	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

	0M1T 940 6120	SCREW	
	0M1T 940 6120	SCREW	
	0M1T 940 16 47 CR3	SCREW M4X6	
	0M1T1730 10120	SCREW	
	0M1T6022500	SCREW	
	0Q1T 930 8 47 CR3	SCREW	
	0Q1T 930 8 47 CR3	SCREW	
	0Q1T 930 8120	SCREW	
	0Q1T 940 12 47 CR3	T4X12 SCREW	
	0Q1T 940 20 47 CR3	SCREW	
	0Q1T1030 10120	SCREW	
	705TQ834464	STAND/BASE ASS'Y 42"(SKD&CKD)	
	0M1T 130 6120	SCREW	
	0Q1T 130 10120	SCREW	
	A15T0301101CKD	BKT_BASE	
	A34T0544 GM 1L0100	STAND COVER A1	
	A34T0545 GM 1L0100	BASE COVER A1	
	A37T0060011CKD	HINGE 42"	
	Q12T6300 25 1	FOOT PAD	
	Q12T6300 25 1	FOOT PAD	
	705TQ834465	BEZEL ASS'Y 42"	
	0Q1T 930 6120	SCREW	
	A33T0304 GMA1L0100	COVER_FUNC	
	A33T0305 QV 1L0200	BUTTON_FUNC	
	A33T0334AEU 1C0100	LENS_POWER&IR FOR A2	
	A34T0541 GMB2L0100	BEZEL TV42W-8A2	
	750TVMT0H1732N	PANEL V420H1-L07 C2 FAB7.5 NB CMO	
	756TQ8CB NS008	MAIN BOARD-CBPFRN3SQB	
U403	056T1125177	NT68F631ALG PLCC-44	
U510	056T1133526	IC MX25L4005AMC-12G SOP-8	
SMTF-U403	100TANMM006S11	MCU ASS'Y-056T1125177	
SMTF-U510	100TANMM007S11	MCU ASS'Y-056T1133526	
	756TQ8TU NS005	TUNER BOARD-TUPFRC1SQ2	
U7	056T1133123	IC S29GL064N90TFI040 TSOP-48	
STUP-U7	100TANMK006S11	MCU ASS'Y-056T1133123	
	A15T0282101CKD	BKT-VESA-BTM	
	A15T0287401CKD	BKT_IO	
	A15T0297101CKD	BKT_PANEL_CMO	
	A15T0298101CKD	BKT_STAND	
	A15T0299401CKD	BKT_PCB	
	A15T0302201CKD	BKT_VESA	
	A15T0320101CKD	BKT_FIX_CMO	
	A15T0321101CKD	BKT_FIX SIDE_CMO	
	A15T0457101CKD	BKT_TUNER	
	A34T0542 GM 2A0100	REAR COVER 42"	
	A34T0543 GM 1L0100	NECK COVER	
	ADPC24250BB1	ADAPTER BOARD T2802-1-X-X-1-080812	
	040G 45762412B	CBPC LABEL	
	009T6005 1	GROUND TERMINAL	
CN903	033T327812D	WAFER 12P PLUG	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

CN902	033T380213B Y	CONNECTOR	
CN904	033T380213B Y	CONNECTOR	
IC904	056G 139 7 1	IC EL817MA M-TYPE	
IC905	056G 139 7 1	IC EL817MA M-TYPE	
IC907	056G 139 7 1	IC EL817MA M-TYPE	
R969	061G 3J158 59	0.15 OHM +-5% 3W	
RV901	061T 46 17	VARISTOR 560V TNR14V561K	
R913	061T153M108 59	RST MOFR 0.1 OHM +-5% 3WS	
R914	061T153M108 59	RST MOFR 0.1 OHM +-5% 3WS	
C904	063T107K474 TS	CAP X2 0.47UF K 275VAC UTX	2nd source
C901	063T107K474 TS	CAP X2 0.47UF K 275VAC UTX	2nd source
C904	063T107K474 US	X2 CAP 0.47UF K 275VAC	
C901	063T107K474 US	X2 CAP 0.47UF K 275VAC	
C948	063T210J2735C2	MPP 27NF J 1000V	
C948	063T210J2735CC	CAP MPPS 27NF 1000V 5%	2nd source
C905	063T210K105BCN	MPP CAP 1UF 520V P=15MM	
C905	063T213J105GFA	MPF CAP	2nd source
C905	063T213J105GFC	CAP MPE 1UF J 450V	2nd source
C958	065T305K2212E3	Y2 CAP 220PF / 250V 10%	
C957	065T305K2212E3	Y2 CAP 220PF / 250V 10%	
C903	065T305K2212E3	Y2 CAP 220PF / 250V 10%	
C902	065T305K2212E3	Y2 CAP 220PF / 250V 10%	
C958	065T305K2212EM	221PF 10% 250V BY MURATA	2nd source
C957	065T305K2212EM	221PF 10% 250V BY MURATA	2nd source
C903	065T305K2212EM	221PF 10% 250V BY MURATA	2nd source
C902	065T305K2212EM	221PF 10% 250V BY MURATA	2nd source
C956	065T306K6812BM	Y1 CAP 680PF 10% 250VAC KX	
C955	065T306K6812BM	Y1 CAP 680PF 10% 250VAC KX	
C955	065T306K6812BP	Y1 680PF M 250VAC	2nd source
C956	065T306K6812BP	Y1 680PF M 250VAC	2nd source
C933	065T306M1022B3	Y1 CAP 1000PF +-20% 250VAC CD SERIES	
C951	065T306M1022B3	Y1 CAP 1000PF +-20% 250VAC CD SERIES	
C921	067G215A1024KV	EC 1000UF 25V 12.5*20MM	
C936	067T215A1026KV	EC 1000UF 35V 12.5*25MM	
C935	067T215A1026KV	EC 1000UF 35V 12.5*25MM	
C923	067T215A4713KV	EC 470UF 16V M 10*12MM	
C918	067T215A4714KV	EC 470UF 25V 10*16MM	
C937	067T215A4716KV	EC 470UF 35V M 10*16MM	
C907	067T315Z12115K	CAP 105°C 120UF M 450V	
C908	067T315Z12115K	CAP 105°C 120UF M 450V	
L901	073L 174 49LSG	LINE FILTER	
L903	073L 174 49LSG	LINE FILTER	
L902	073L 174 52 LG	CHOKE COIL	
L904	073T 174119 L	PFC CHOKE 600UH PT-009490	2nd source
L904	073T 174119 N	PFC CHOKE 600UH YUVA-841	
L907	073T 253197 H	CHOKE COIL 3.0UH	2nd source
L907	073T 253197 L	CHOKE COIL 3.0UH CC-009425	
T901	080TL32T 5 L	X'FMR 1.9MH PT-009424	2nd source
T901	080TL32T 5 N	X'FMR 1.9MH YUVA-827	
T902	080TL42T 14 L	X'FMR 600UH PT-009533	2nd source

32" & 42" & 47" Digital LCD TV
AOC D32W831&D42H831&D47H831

T902	080TL42T 14 YS	X'FMR 600UH YS04160152	
CN901	087T 501 44 DL	AC SOCKET 3PIN + 2 SCREW HOLE V/T	
	705TQ757014	Q902/Q903 ASS'Y	
Q902	057T 667 24	STP20NM60 FP	
Q903	057T 667 24	STP20NM60 FP	
	0M1T1730 10120	SCREW	
	Q90G0099 1	HEAT SINK	
	705TQ757015	Q901 ASS'Y	
Q901	057T 667 52	FET 2SK4100LS-T 7A/650V TO-220FI(LS)	
	090G6084 1	HEAT SINK	
	0M1T1730 8120	SCREW	
	705TQ761020	NR901 ASS'Y	
NR901	061T 58050 WL GP	RST NTCR 5 OHM +-15% 5A 13MM THINKING	
	Q09T 203 8	PIN	
	705TQ793024	D904/D901 ASS'Y	
	012T 372 2	SILICON	
Q904	057T 667 25	STW20NM60	
D901	093T 220 20	STTH15R06FP TO-220FP	2nd source
D901	093T 220 33	DIODE FMXA-1106S	
	0M1T1730 10120	SCREW	
	0M1T1730 10120	SCREW	
	Q90T0097A01	HEAT SINK	
	705TQ793025	D907 ASS'Y	
	090G6084 1	HEAT SINK	
D907	093T 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
	0M1T1730 8120	SCREW	
	705TQ793026	BD901 ASS'Y	
BD901	093T 50460 18	D10XB60	
	0M1T1730 10120	SCREW	
	Q90T0148 1	HEAT SINK	
	705TQ793027	D916&D917&D906 ASS'Y	
D906	093T 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
D916	093T 60306	DIODE FMEN-230A 30A/100V TO-220	
D917	093T 60306	DIODE FMEN-230A 30A/100V TO-220	
D917	093T 60314	DIODE SBR25010JST 25A/100V TO-220ML(LS)	2nd source
D916	093T 60314	DIODE SBR25010JST 25A/100V TO-220ML(LS)	
	0M1T1730 10120	SCREW	
	Q90T0148 1	HEAT SINK	
IC902	056T 379 79	IC LD7522PS SOP-8	
IC901	056T 379104	IC ICE2PCS02G PG-DSO-8	
IC903	056T 665 10 1	IC RESONANT L6599DTR SO-16N ST	
Q906	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
Q907	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
Q908	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
R932	061G0805244	RST CHIPR 240 KOHM +-5% 1/8W	
R931	061G1206105	1M 1206	
R930	061G1206105	1M 1206	
R929	061G1206105	1M 1206	
R933	061G1206154	RST CHIPR 150K OHM +-5% 1/4W	
R934	061G1206154	RST CHIPR 150K OHM +-5% 1/4W	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

R935	061G1206154	RST CHIPR 150K OHM +-5% 1/4W	
R905	061G1206225	RST CHIPR 2.2 MOHM +-5% 1/4W	
R906	061G1206225	RST CHIPR 2.2 MOHM +-5% 1/4W	
R920	061G1206225	RST CHIPR 2.2 MOHM +-5% 1/4W	
R916	061G1206430 3F	RST CHIPR 430 KOHM +-1% 1/4W	
R918	061G1206430 3F	RST CHIPR 430 KOHM +-1% 1/4W	
R982	061G1206430 3F	RST CHIPR 430 KOHM +-1% 1/4W	
R980	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R961	061T0805100 2F	RST CHIPR 10 KOHM +-1% 1/8W	
R973	061T0805100 2F	RST CHIPR 10 KOHM +-1% 1/8W	
R919	061T0805100 2F	RST CHIPR 10 KOHM +-1% 1/8W	
R944	061T0805101	RST CHIPR 100 OHM +-5% 1/8W	
R964	061T0805101	RST CHIPR 100 OHM +-5% 1/8W	
R970	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R954	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R951	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R945	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R943	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R921	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R911	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R937	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R942	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R977	061T0805104	RST CHIPR 100 KOHM +-5% 1/8W	
R940	061T0805154	RST CHIPR 150 KOHM +-5% 1/8W	
R976	061T0805200 1F	RST CHIPR 2KOHM +-1% 1/8W	
R946	061T0805202	RST CHIPR 2 KOHM +-5% 1/8W	
R975	061T0805205 2F	RST CHIPR 20.5KOHM +-1% 1/8W	
R917	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R936	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R965	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R967	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R909	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R950	061T0805221	RST CHIPR 220 OHM +-5% 1/8W	
R952	061T0805221	RST CHIPR 220 OHM +-5% 1/8W	
R960	061T0805240 2F	RST CHIPR 24 KOHM +-1% 1/8W	
R947	061T0805242	RST CHIPR 2.4 KOHM +-5% 1/8W	
R949	061T0805242	RST CHIPR 2.4 KOHM +-5% 1/8W	
R953	061T0805272	RST CHIPR 2.7 KOHM +-5% 1/8W	
R959	061T0805273	RST CHIPR 27 KOHM +-5% 1/8W	
R904	061T0805332	RST CHIPR 3.3 KOHM +-5% 1/8W	
R979	061T0805332	RST CHIPR 3.3 KOHM +-5% 1/8W	
R963	061T0805390 1F	RST CHIPR 3.9KOHM +-1% 1/8W	
R939	061T0805471	RST CHIPR 470 OHM +-5% 1/8W	
R974	061T0805510 1F	RST CHIPR 5.1KOHM +-1% 1/8W	
R941	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R966	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R968	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R978	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R962	061T0805514	RST CHIPR 510KOHM +-5% 1/8W	
R948	061T0805560 2F	RST CHIPR 56KOHM +-1% 1/8W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R972	061T0805750 1F	RST CHIPR 7.5KOHM +-1% 1/8W	
JR901	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR902	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR903	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR904	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR905	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR906	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR907	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
R958	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R957	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R956	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R915	061T1206221	RST CHIPR 220 OHM +-5% 1/4W	
R901	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R902	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R903	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R928	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R927	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R924	061T1206479	RST CHIPR 4.7 OHM +-5% 1/4W	
R971	061T1206512	RST CHIPR 5.1KOHM +-5% 1/4W	
C952	065T0805102 31	1000PF 50V NPO	
C947	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C929	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C912	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C942	065T0805102 32 GP	CHIP 1000P 50VX7R 0805	
C950	065T0805103 32	10NF/50V/0805/X7R	
C931	065T0805104 22	0.1UF +-10% 25V X7R 0805	
C949	065T0805104 22	0.1UF +-10% 25V X7R 0805	
C934	065T0805104 22	0.1UF +-10% 25V X7R 0805	
C932	065T0805104 22	0.1UF +-10% 25V X7R 0805	
C926	065T0805104 22	0.1UF +-10% 25V X7R 0805	
C914	065T0805104 32	CHIP 0.1UF 50V X7R	
C944	065T0805104 32	CHIP 0.1UF 50V X7R	
C938	065T0805104 32	CHIP 0.1UF 50V X7R	
C924	065T0805104 32	CHIP 0.1UF 50V X7R	
C920	065T0805104 32	CHIP 0.1UF 50V X7R	
C911	065T0805105 22	CHIP 1UF 25V X7R 0805	
C943	065T0805105 22	CHIP 1UF 25V X7R 0805	
C925	065T0805105 22 GP	CHIP 1UF 25V X7R	
C922	065T0805105 37	CHIP 1UF 50V Y5V	
C939	065T0805105 37	CHIP 1UF 50V Y5V	
C940	065T0805221 31	220PF 50V NPO	
C913	065T0805223 22	CHIP 0.022UF 25V X7R 0805	
C941	065T0805224 32	0805.0.22UF.K.50V.X7R	
C910	065T0805472 22	CHIP 0.0047UF 25V X7R 0805	
C930	065T0805473 32	CHIP 0.047UF 50V X7R	
C917	065T1206102 72	CHIP 1000PF 500V X7R	
C945	065T1206104 32	CHIP 0.1UF 50V X7R 1206	
D915	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D914	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D913	093T 6432V	LL4148-GSO8 SMD BY VISHA	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

D912	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D911	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D909	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D908	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D902	093T 6432V	LL4148-GSO8 SMD BY VISHA	
ZD901	093T 39S 15 T	RLZ15B	
ZD905	093T 39S 15 T	RLZ15B	
ZD904	093T 39S 24 T	RLZ 5.6B LLDS	
L904	006G 31 4	1.7MM RIVET	
CN901	006G 31501	EYELET	
T902	006G 31502	1.5MM RIVET	
IC908	056T 158 12	KIA431A-AT/P	
IC906	056T 158 12	KIA431A-AT/P	
R922	061G 30347852T GP	RST FUSER 0.47OHM +-5% 1W	
R955	061T 30310852T GP	0.1 OHM 1W FUSE RESISTOR	
R923	061T152M10452T	RST MOFR 100KOHM +-5% 2WS	
R938	061T152M12952T	RST MOFR 1.2OHM +-5% 2WS	
C915	065G 2K152 1T6213	CAP CER 1500PF K 2KV	
C946	067G215A4704KT	EC 47UF 25V 5*11MM	
C909	067G215A4704KT	EC 47UF 25V 5*11MM	
C927	067T215A1007KT	EC 10UF 50V 5*11MM	
C928	067T215A1017KT	EC 100UF 50V 8*12MM	
C919	067T215A2214KT	EC 220UF 25V 8*12MM	
FB905	071T 55 9 T	BEAD 3.5*6*0.8	
FB904	071T 55 9 T	BEAD 3.5*6*0.8	
FB903	071T 55 9 T	BEAD 3.5*6*0.8	
FB907	071T 55 29	BEAD	
FB906	071T 55 29	BEAD	
FB901	071T 55 29	BEAD	
F901	084T 55 4	FUSE 382-5A 250V WICKMANN	
D910	093T 5250S52T	AU02Z	
D918	093T1080 252T	DIODE SARSO1-V1 SANKEN	
D905	093T1080 252T	DIODE SARSO1-V1 SANKEN	
J917	095T 90 23	JUMP WIRE	
J918	095T 90 23	JUMP WIRE	
J915	095T 90 23	JUMP WIRE	
J912	095T 90 23	JUMP WIRE	
J911	095T 90 23	JUMP WIRE	
J910	095T 90 23	JUMP WIRE	
J909	095T 90 23	JUMP WIRE	
J908	095T 90 23	JUMP WIRE	
J907	095T 90 23	JUMP WIRE	
J906	095T 90 23	JUMP WIRE	
J905	095T 90 23	JUMP WIRE	
J904	095T 90 23	JUMP WIRE	
J903	095T 90 23	JUMP WIRE	
J902	095T 90 23	JUMP WIRE	
J901	095T 90 23	JUMP WIRE	
J914	095T 90 23	JUMP WIRE	
J913	095T 90 23	JUMP WIRE	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

J919	095T 90 23	JUMP WIRE	
J940	095T 90 23	JUMP WIRE	
J939	095T 90 23	JUMP WIRE	
J938	095T 90 23	JUMP WIRE	
J937	095T 90 23	JUMP WIRE	
J936	095T 90 23	JUMP WIRE	
J934	095T 90 23	JUMP WIRE	
J933	095T 90 23	JUMP WIRE	
J932	095T 90 23	JUMP WIRE	
F902	095T 90 23	JUMP WIRE	
J941	095T 90 23	JUMP WIRE	
J931	095T 90 23	JUMP WIRE	
J929	095T 90 23	JUMP WIRE	
J927	095T 90 23	JUMP WIRE	
J926	095T 90 23	JUMP WIRE	
J925	095T 90 23	JUMP WIRE	
J924	095T 90 23	JUMP WIRE	
J923	095T 90 23	JUMP WIRE	
J922	095T 90 23	JUMP WIRE	
J921	095T 90 23	JUMP WIRE	
J920	095T 90 23	JUMP WIRE	
	715T2802 1	POWER PCB 200X200X1.6MM CEM-1 20Z S/S	
	006G 31 4	1.7MM RIVET	
	Q51G 6 4509	GLUE_RTV	
L906	S73G25391V	CHOKE COIL ASS'Y	
L905	S73G25391V	CHOKE COIL ASS'Y	
L907	S73T253197V	TRANSFORMER ASS'Y	
CN9007	033T3278 6D	CONNECTOR 6P 2.5 DIP	
CN702	033T327812D	WAFER 12P PLUG	
CN9005	033T3802 2B Y	CONNECTOR	
CN601	033T3802 4B Y	CONNECTOR	
CN401	033T3802 4B Y	CONNECTOR	
CN701	033T3802 8B Y	CONNECTOR	
CN201	033T8027 40	WAFER 40P 2.0MM DIP	
U709	056T 665505 HD	IC VF45A3D HAODA	
U710	056T 665506 HD	IC AF45A3D HAODA	
R168	061T153M470 59	RST MOFR 47 OHM +-5% 3WS	
R167	061T153M470 59	RST MOFR 47 OHM +-5% 3WS	
C768	067T 305101 7P	105 RADIAL ECA PACTOR	
C171	067T215S1023KV	EC 105°C CAP 1000UF M 16V	
C682	067T215S1026KV	EC CAP 1000UF 35V 12.5*25MM	
L604	073T 253158 H	CHOKE COIL 22UH+/-25%	
L605	073T 253158 H	CHOKE COIL 22UH+/-25%	
L606	073T 253158 H	CHOKE COIL 22UH+/-25%	
L607	073T 253158 H	CHOKE COIL 22UH+/-25%	
L722	073T 253195 L	CHOKE COIL 200UH CC-008305	
CN106	088T 78 1364C	RCA JACK 2*3 Y/W/R+Y/W/R V/A	
CN106	088T 78 1364S	RCA JACK 2*3 Y/W/R+Y/W/R V/A	
CN105	088T 78 1369C	RCA JACK 2*3 G/B/R+B/W/R	
CN105	088T 78 1369S	RCA JACK 2*3 G/B/R+BLK/W/R	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

CN111	088T 7813A19C	RCA JACK 1*3 R/W/Y	
CN108	088T 100 11 ST	MINI DIN JACK 4P+ SWITCH 2MJ-0602-005	
CN103	088T 100 15 ST	MINI DIN JACK 4PIN V/A	
CN102	088T 30252S	PHONE JACK 3.5MM 3P V/A GREEN	
CN602	088T 302901 S	PHONE JACK 3.5MM 7P BLACK 2SJ-W48A-001	
CN102	088T 302A17 YG	PHONE JACK 3.5MM 3P V/T GREEN	
CN101	088T 35315F FX	D-SUB 15PIN FEMALE VERTICAL 附螺絲	
CN101	088T 35315F VD	D-SUB 15PIN FEMALE VERTICAL WITH SCREW	
X403	093T 2251B J	NXS12.000AC30F-BT-2	
X503	093T 2251B J	NXS12.000AC30F-BT-2	
X601	093T 2264B J	XTL NXS27.000AC16F-KAB5 HC-49/US	
X502	093T 2279B H	CRYSTAL 28.322MHZ 14P HC-49S	
X701	093T 2286B J	XTL NXS4.000AC18F-KAB5 HC49/U-S	
TU701	094TNTSC MN 8L	TUNER TCL F14WP-4N-E	
C689	064T176J474 0T	0.47UF +-5% 50/63V	
C6107	064T176J474 0T	0.47UF +-5% 50/63V	
C665	067T 305100 3T	10UF 16V	
C654	067T 305100 3T	10UF 16V	
C605	067T 305100 3T	10UF 16V	
C604	067T 305100 3T	10UF 16V	
C603	067T 305100 3T	10UF 16V	
C602	067T 305100 3T	10UF 16V	
C773	067T 305100 7T	10UF	
C724	067T 305100 7T	10UF	
C723	067T 305100 7T	10UF	
C169	067T 305100 7T	10UF	
C126	067T 305100 7T	10UF	
C125	067T 305100 7T	10UF	
C123	067T 305100 7T	10UF	
C121	067T 305100 7T	10UF	
C120	067T 305100 7T	10UF	
C637	067T 305101 3T	100UF 16V 105C	
C620	067T 305101 3T	100UF 16V 105C	
C6116	067T 305101 3T	100UF 16V 105C	
C450	067T 305101 3T	100UF 16V 105C	
C449	067T 305101 3T	100UF 16V 105C	
C412	067T 305101 3T	100UF 16V 105C	
C201	067T 305101 3T	100UF 16V 105C	
C170	067T 305101 3T	100UF 16V 105C	
C638	067T 305101 3T	100UF 16V 105C	
C708	067T 305101 3T	100UF 16V 105C	
C711	067T 305101 3T	100UF 16V 105C	
C716	067T 305101 3T	100UF 16V 105C	
C726	067T 305101 3T	100UF 16V 105C	
C728	067T 305101 3T	100UF 16V 105C	
C736	067T 305101 3T	100UF 16V 105C	
C739	067T 305101 3T	100UF 16V 105C	
C771	067T 305101 3T	100UF 16V 105C	
C754	067T 305221 2T	CAP 105°C 220UF M 10V	
C718	067T 305221 2T	CAP 105°C 220UF M 10V	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

C713	067T 305221 2T	CAP 105°C 220UF M 10V	
C710	067T 305221 2T	CAP 105°C 220UF M 10V	
C621	067T 305221 2T	CAP 105°C 220UF M 10V	
C6115	067T 305331 3T	CAP 105°C 330UF 16V	
C674	067T 305470 3T	EC 105°C 47UF M 16V	
C677	067T 305470 3T	EC 105°C 47UF M 16V	
U704	056T 133 30AAC	IC AZ1117H-ADJ-E1	
U607	056T 158501	IC AS431AN-E1 SOT23	
U406	056T 158501	IC AS431AN-E1 SOT23	
U106	056T 379 36	MC34063A	
U601	056T 563 50	AP1117D18LA T0252-3L	
U707	056T 563 51	AP1117D50LA T0252-3L	
U703	056T 563 56	AP1084D18LA TO-252-3L	
U602	056T 563 75	G1084-33T43UF TO-252	
U705	056T 563 96	IC AIC1084-25PETR-R TO-252	
U701	056T 563121	IC G1084-33TU3UF TO-263T	
U603	056T 593 29 1	IC STV8318F TQFP-100	
U606	056T 593 32	IC STA335BW13TR POWERSSO36	
U103	056T 614 1	IC 74HC4052D PHILIPS	
U402	056T 615913	IC HYB25DC256160CE-5 TSOP166	
U605	056T 616 3	PT2308S SO-8 PTC	
U507	056T 634 19	IC PS321TQFP80G TQFP-80	
U105	056T 647 18	IC WM8521HCGED/RV SOIC-14	
U708	056T 647 24	IC TDA9885TS/V3 SSOP-24	
U502	056T 662 10	IC RCLAMP0524P.TCT	
U503	056T 662 10	IC RCLAMP0524P.TCT	
U505	056T 662 10	IC RCLAMP0524P.TCT	
U506	056T 662 10	IC RCLAMP0524P.TCT	
U403	056T1125177	NT68F631ALG PLCC-44	
U401	056T1126 35	IC NT7263 LQFP-256	
U509	056T1133 32	M24C04-WMN6TP	
U102	056T1133 34	M24C02-WMN6TP	
U501	056T1133 34	M24C02-WMN6TP	
U504	056T1133 34	M24C02-WMN6TP	
U510	056T1133526	IC MX25L4005AMC-12G SOP-8	
U404	056T113353A	M24C32-WMN6TP	
U101	056T4LVC 14 P	74LVC14ADT	
U9001	056T4LVCG08 TI	IC SN74LVC1G08DCKR SC70-5	
U608	056T4LVCG08 TI	IC SN74LVC1G08DCKR SC70-5	
U604	056T566N600	NDC7002N SOT-6 FAIRCHILD	
Q108	057T 417511	TRA MMBT3904 BLUE ROKET	
Q403	057T 417511	TRA MMBT3904 BLUE ROKET	
Q404	057T 417511	TRA MMBT3904 BLUE ROKET	
Q501	057T 417511	TRA MMBT3904 BLUE ROKET	
Q502	057T 417511	TRA MMBT3904 BLUE ROKET	
Q9001	057T 417511	TRA MMBT3904 BLUE ROKET	
Q710	057T 417511	TRA MMBT3904 BLUE ROKET	
Q707	057T 417511	TRA MMBT3904 BLUE ROKET	
Q705	057T 417511	TRA MMBT3904 BLUE ROKET	
Q704	057T 417511	TRA MMBT3904 BLUE ROKET	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

Q702	057T 417511	TRA MMBT3904 BLUE ROKET	
Q607	057T 417511	TRA MMBT3904 BLUE ROKET	
Q503	057T 417511	TRA MMBT3904 BLUE ROKET	
Q601	057T 417511	TRA MMBT3904 BLUE ROKET	
Q602	057T 417511	TRA MMBT3904 BLUE ROKET	
Q603	057T 417511	TRA MMBT3904 BLUE ROKET	
Q604	057T 417511	TRA MMBT3904 BLUE ROKET	
Q605	057T 417511	TRA MMBT3904 BLUE ROKET	
Q606	057T 417511	TRA MMBT3904 BLUE ROKET	
Q105	057T 417512	TRA MMBT3906 BLUE ROKET	
Q608	057T 417512	TRA MMBT3906 BLUE ROKET	
Q106	057T 419 8 T	TRA 2SD1757K 0.5A/15V SC-59	
Q107	057T 419 8 T	TRA 2SD1757K 0.5A/15V SC-59	
Q402	057T 600 54	FET BSN20 SOT-23 PHILIPS	
Q401	057T 600 54	FET BSN20 SOT-23 PHILIPS	
Q701	057T 763 3	AO4411L SO-8 BY AOS SMT	
Q706	057T 763 3	AO4411L SO-8 BY AOS SMT	
Q708	057T 763 3	AO4411L SO-8 BY AOS SMT	
Q9002	057T 765 1	2SC2412KR	
RP413	061G 125222 8	RST CHIP AR 8P4R 2.2 KOHM +-5% 1/16W	
RP506	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP505	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP404	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP403	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP402	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP401	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP410	061T 125332 8	RST CHIPR AR 8P4R 3.3KOHM +-5% 1/16W	
RP412	061T 125332 8	RST CHIPR AR 8P4R 3.3KOHM +-5% 1/16W	
RP414	061T 125332 8	RST CHIPR AR 8P4R 3.3KOHM +-5% 1/16W	
RP405	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
RP406	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
RP407	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
RP408	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
R622	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R623	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R650	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R651	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R652	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R653	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R690	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R702	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R730	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R746	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R747	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R748	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R749	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R754	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R757	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
L600	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R428	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	

32" & 42" & 47" Digital LCD TV**AOC D32W831 & D42H831 & D47H831**

R429	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R202	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R125	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R124	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R130	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R131	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R140	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R191	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R217	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R218	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R227	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R404	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R405	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R430	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R431	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R433	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R461	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R516	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R518	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R543	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R544	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R604	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R621	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R120	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R420	061T0603100	CHIP 10OHM 1/16W	
R423	061T0603100	CHIP 10OHM 1/16W	
R774	061T0603100	CHIP 10OHM 1/16W	
R721	061T0603100 3F	RST CHIPR 100KOHM +-1% 1/10W	
R735	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R736	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R153	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R152	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R151	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R150	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R149	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R148	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R147	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R146	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R108	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R105	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R102	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R101	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R154	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R155	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R156	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R157	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R158	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R159	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R160	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R161	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	

32" & 42" & 47" Digital LCD TV**AOC D32W831 & D42H831 & D47H831**

R607	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R609	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R611	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R632	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R633	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R654	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R656	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R657	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R691	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R704	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R733	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R710	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R113	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R406	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R407	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R412	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R413	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R425	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R435	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R501	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R503	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R504	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R509	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R511	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R527	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R528	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R529	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R534	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R540	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R669	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R128	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R129	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R416	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R460	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R530	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R549	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R550	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R558	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R624	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R645	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R666	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R668	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R671	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R674	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R677	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R680	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R711	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R712	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R715	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R720	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R723	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R783	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R9001	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R732	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R717	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R706	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R638	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R629	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R427	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R414	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R118	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R417	061T0603105	RST CHIPR 1MOHM +-5% 1/10W	
R538	061T0603105	RST CHIPR 1MOHM +-5% 1/10W	
R542	061T0603105	RST CHIPR 1MOHM +-5% 1/10W	
R724	061T0603121	RST CHIPR 120 OHM +-5% 1/10W	
R741	061T0603122	RST CHIPR 1.2 KOHM +-5% 1/10W	
R672	061T0603123	RST CHIPR 12 KOHM +-5% 1/10W	
R731	061T0603123	RST CHIPR 12 KOHM +-5% 1/10W	
R773	061T0603123	RST CHIPR 12 KOHM +-5% 1/10W	
R9005	061T0603151	RST CHIPR 150 OHM +-5% 1/10W	
R776	061T0603151	RST CHIPR 150 OHM +-5% 1/10W	
R620	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R619	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R614	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R613	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R610	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R608	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R606	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R605	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R603	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R602	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R778	061T0603181	RST CHIPR 180 OHM +-5% 1/10W	
R777	061T0603182	CHIP 1.8K OHM 1/16W	
R196	061T0603183	RST CHIPR 18 KOHM +-5% 1/10W	
R506	061T0603183	RST CHIPR 18 KOHM +-5% 1/10W	
R170	061T0603201	RST CHIPR 200 OHM +-5% 1/10W	
R171	061T0603201	RST CHIPR 200 OHM +-5% 1/10W	
R510	061T0603203	CHIPR 20K OHM+-5% 1/10W	
R502	061T0603203	CHIPR 20K OHM+-5% 1/10W	
R531	061T0603220	CHIP 22OHM 1/10W	
R532	061T0603220	CHIP 22OHM 1/10W	
R409	061T0603220	CHIP 22OHM 1/10W	
R410	061T0603220	CHIP 22OHM 1/10W	
R432	061T0603220	CHIP 22OHM 1/10W	
R451	061T0603220	CHIP 22OHM 1/10W	
R452	061T0603220	CHIP 22OHM 1/10W	
R408	061T0603220	CHIP 22OHM 1/10W	
R403	061T0603220	CHIP 22OHM 1/10W	
R402	061T0603220	CHIP 22OHM 1/10W	
R162	061T0603220	CHIP 22OHM 1/10W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R401	061T0603220	CHIP 22OHM 1/10W	
R792	061T0603220	CHIP 22OHM 1/10W	
R791	061T0603220	CHIP 22OHM 1/10W	
R790	061T0603220	CHIP 22OHM 1/10W	
R789	061T0603220	CHIP 22OHM 1/10W	
R411	061T0603221	CHIP 220OHM 1/16W	
R667	061T0603222	CHIP 2.2K OHM 1/16W	
R648	061T0603222	CHIP 2.2K OHM 1/16W	
R117	061T0603222	CHIP 2.2K OHM 1/16W	
R107	061T0603222	CHIP 2.2K OHM 1/16W	
R106	061T0603222	CHIP 2.2K OHM 1/16W	
R784	061T0603223	CHIP 22KOHM 1/16W	
R722	061T0603223	CHIP 22KOHM 1/16W	
R718	061T0603223	CHIP 22KOHM 1/16W	
R714	061T0603223	CHIP 22KOHM 1/16W	
R422	061T0603272	CHIP 2.7KOHM 1/16W	
R419	061T0603272	CHIP 2.7KOHM 1/16W	
R434	061T0603301	RST CHIPR 300OHM +-5% 1/10W	
R752	061T0603331	RST CHIPR 330 OHM +-5% 1/10W	
R453	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R446	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R436	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R719	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R681	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R459	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R458	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R457	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R456	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R455	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R454	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R114	061T0603333	RST CHIPR 33 KOHM +-5% 1/10W	
R601	061T0603339 F	RST CHIPR 3.3 OHM +-5% 1/10W FENGHUA	
R659	061T0603339 F	RST CHIPR 3.3 OHM +-5% 1/10W FENGHUA	
R551	061T0603363	RST CHIP 36K 1/10W 5%	
R552	061T0603363	RST CHIP 36K 1/10W 5%	
R627	061T0603392	CHIP 3.9KOHM 1/16W	
R635	061T0603392	CHIP 3.9KOHM 1/16W	
R636	061T0603392	CHIP 3.9KOHM 1/16W	
R640	061T0603392	CHIP 3.9KOHM 1/16W	
R612	061T0603470	RST CHIPR 47 OHM +-5% 1/10W	
R9004	061T0603471	RST CHIPR 470OHM +-5% 1/10W	
R782	061T0603471	RST CHIPR 470OHM +-5% 1/10W	
R753	061T0603471	RST CHIPR 470OHM +-5% 1/10W	
R445	061T0603472	CHIP 4.7KOHM 1/16W	
R447	061T0603472	CHIP 4.7KOHM 1/16W	
R507	061T0603472	CHIP 4.7KOHM 1/16W	
R508	061T0603472	CHIP 4.7KOHM 1/16W	
R512	061T0603472	CHIP 4.7KOHM 1/16W	
R513	061T0603472	CHIP 4.7KOHM 1/16W	
R514	061T0603472	CHIP 4.7KOHM 1/16W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R553	061T0603472	CHIP 4.7KOHM 1/16W	
R555	061T0603472	CHIP 4.7KOHM 1/16W	
R444	061T0603472	CHIP 4.7KOHM 1/16W	
R443	061T0603472	CHIP 4.7KOHM 1/16W	
R442	061T0603472	CHIP 4.7KOHM 1/16W	
R426	061T0603472	CHIP 4.7KOHM 1/16W	
R415	061T0603472	CHIP 4.7KOHM 1/16W	
R195	061T0603472	CHIP 4.7KOHM 1/16W	
R194	061T0603472	CHIP 4.7KOHM 1/16W	
R187	061T0603472	CHIP 4.7KOHM 1/16W	
R185	061T0603472	CHIP 4.7KOHM 1/16W	
R628	061T0603472	CHIP 4.7KOHM 1/16W	
R637	061T0603472	CHIP 4.7KOHM 1/16W	
R670	061T0603472	CHIP 4.7KOHM 1/16W	
R739	061T0603472	CHIP 4.7KOHM 1/16W	
R9002	061T0603472	CHIP 4.7KOHM 1/16W	
R699	061T0603472	CHIP 4.7KOHM 1/16W	
R557	061T0603472	CHIP 4.7KOHM 1/16W	
R705	061T0603473	CHIP 47KOHM 1/16W	
R709	061T0603473	CHIP 47KOHM 1/16W	
R713	061T0603473	CHIP 47KOHM 1/16W	
R716	061T0603473	CHIP 47KOHM 1/16W	
R775	061T0603473	CHIP 47KOHM 1/16W	
R9003	061T0603473	CHIP 47KOHM 1/16W	
R183	061T0603473	CHIP 47KOHM 1/16W	
R184	061T0603473	CHIP 47KOHM 1/16W	
R679	061T0603473	CHIP 47KOHM 1/16W	
R675	061T0603473	CHIP 47KOHM 1/16W	
R673	061T0603473	CHIP 47KOHM 1/16W	
R639	061T0603473	CHIP 47KOHM 1/16W	
R631	061T0603473	CHIP 47KOHM 1/16W	
R188	061T0603473	CHIP 47KOHM 1/16W	
R186	061T0603473	CHIP 47KOHM 1/16W	
R112	061T0603473	CHIP 47KOHM 1/16W	
R616	061T0603474	RST CHIPR 470 KOHM +-5% 1/10W	
R520	061T0603510 0F	RST CHIPR 510OHM +-1% 1/10W	
R104	061T0603511	RST CHIPR 510 OHM +-5% 1/10W	
R103	061T0603511	RST CHIPR 510 OHM +-5% 1/10W	
R116	061T0603560 9F	RST CHIPR 56 OHM +-1% 1/10W	
R696	061T0603561	RST CHIPR 560 OHM +-5% 1/10W	
R745	061T0603562	RST CHIPR 5.6 KOHM +-5% 1/10W	
R701	061T0603681	RST CHIPR 680 OHM +-5% 1/10W	
R182	061T0603681	RST CHIPR 680 OHM +-5% 1/10W	
R181	061T0603681	RST CHIPR 680 OHM +-5% 1/10W	
R625	061T0603682	RST CHIPR 6.8KOHM +-5% 1/10W	
R630	061T0603682	RST CHIPR 6.8KOHM +-5% 1/10W	
R119	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R132	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R133	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R136	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R137	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R138	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R139	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R141	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R189	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R190	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R9006	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R109	061T0603750 9F	CHIP 75OHM 1/10W 1%	
R110	061T0603750 9F	CHIP 75OHM 1/10W 1%	
R111	061T0603750 9F	CHIP 75OHM 1/10W 1%	
R795	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R794	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R793	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R799	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R798	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R796	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R698	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R693	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R682	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R683	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R684	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R685	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R686	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R692	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R688	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R687	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R115	061T0805470	RST CHIPR 47 OHM +-5% 1/8W	
R216	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R215	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R214	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R213	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R212	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R211	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R210	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R797	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R231	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R230	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R229	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R228	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R226	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R225	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R223	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R222	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R221	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R220	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R219	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R661	061T1206220	RST CHIPR 22 OHM +-5% 1/4W	
R643	061T1206220	RST CHIPR 22 OHM +-5% 1/4W	
R725	061T1206620 0F	RST CHIPR 620 OHM +-1% 1/4W	
R779	061T1206629	RST CHIP 6R2 1/4W 5%	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R665	061T1206629	RST CHIP 6R2 1/4W 5%	
R662	061T1206629	RST CHIP 6R2 1/4W 5%	
R649	061T1206629	RST CHIP 6R2 1/4W 5%	
R644	061T1206629	RST CHIP 6R2 1/4W 5%	
CP601	065T 600471 8T	CHIP ARRAY 470PF 8P	
C195	065T0603100 31 GP	CHIP 10PF 50V NPO	
C196	065T0603100 31 GP	CHIP 10PF 50V NPO	
C701	065T0603101 31	CHIP 100PF 50V NPO	
C737	065T0603101 31	CHIP 100PF 50V NPO	
C738	065T0603101 31	CHIP 100PF 50V NPO	
C753	065T0603102 31	CHIP 1000PF 50V NPO	
C741	065T0603102 31	CHIP 1000PF 50V NPO	
C118	065T0603102 31	CHIP 1000PF 50V NPO	
C117	065T0603102 31	CHIP 1000PF 50V NPO	
C693	065T0603102 32	CHIP 1000PF 50V X7R	
C601	065T0603102 32	CHIP 1000PF 50V X7R	
C6106	065T0603102 32	CHIP 1000PF 50V X7R	
C6108	065T0603102 32	CHIP 1000PF 50V X7R	
C6111	065T0603102 32	CHIP 1000PF 50V X7R	
C663	065T0603102 32	CHIP 1000PF 50V X7R	
C664	065T0603102 32	CHIP 1000PF 50V X7R	
C673	065T0603102 32	CHIP 1000PF 50V X7R	
C678	065T0603102 32	CHIP 1000PF 50V X7R	
C688	065T0603102 32	CHIP 1000PF 50V X7R	
C690	065T0603102 32	CHIP 1000PF 50V X7R	
C624	065T0603103 32	CHIP 0.01UF 50V X7R	
C625	065T0603103 32	CHIP 0.01UF 50V X7R	
C628	065T0603103 32	CHIP 0.01UF 50V X7R	
C629	065T0603103 32	CHIP 0.01UF 50V X7R	
C666	065T0603103 32	CHIP 0.01UF 50V X7R	
C747	065T0603103 32	CHIP 0.01UF 50V X7R	
C748	065T0603103 32	CHIP 0.01UF 50V X7R	
C755	065T0603103 32	CHIP 0.01UF 50V X7R	
C9002	065T0603103 32	CHIP 0.01UF 50V X7R	
C614	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C613	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C6122	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C612	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C6119	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C611	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C6104	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C6103	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C610	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C609	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C608	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C607	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C606	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C9001	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C697	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C696	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	

32"&42"&47"Digital LCD TV**AOC D32W831&D42H831&D47H831**

C668	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C657	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C656	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C655	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C646	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C644	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C618	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C617	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C616	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C615	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C459	065T0603104 32	CHIP 0.1UF 50V X7R	
C460	065T0603104 32	CHIP 0.1UF 50V X7R	
C462	065T0603104 32	CHIP 0.1UF 50V X7R	
C463	065T0603104 32	CHIP 0.1UF 50V X7R	
C465	065T0603104 32	CHIP 0.1UF 50V X7R	
C467	065T0603104 32	CHIP 0.1UF 50V X7R	
C469	065T0603104 32	CHIP 0.1UF 50V X7R	
C471	065T0603104 32	CHIP 0.1UF 50V X7R	
C506	065T0603104 32	CHIP 0.1UF 50V X7R	
C507	065T0603104 32	CHIP 0.1UF 50V X7R	
C508	065T0603104 32	CHIP 0.1UF 50V X7R	
C509	065T0603104 32	CHIP 0.1UF 50V X7R	
C510	065T0603104 32	CHIP 0.1UF 50V X7R	
C511	065T0603104 32	CHIP 0.1UF 50V X7R	
C512	065T0603104 32	CHIP 0.1UF 50V X7R	
C513	065T0603104 32	CHIP 0.1UF 50V X7R	
C518	065T0603104 32	CHIP 0.1UF 50V X7R	
C6101	065T0603104 32	CHIP 0.1UF 50V X7R	
C775	065T0603104 32	CHIP 0.1UF 50V X7R	
C430	065T0603104 32	CHIP 0.1UF 50V X7R	
C431	065T0603104 32	CHIP 0.1UF 50V X7R	
C432	065T0603104 32	CHIP 0.1UF 50V X7R	
C434	065T0603104 32	CHIP 0.1UF 50V X7R	
C435	065T0603104 32	CHIP 0.1UF 50V X7R	
C436	065T0603104 32	CHIP 0.1UF 50V X7R	
C437	065T0603104 32	CHIP 0.1UF 50V X7R	
C438	065T0603104 32	CHIP 0.1UF 50V X7R	
C439	065T0603104 32	CHIP 0.1UF 50V X7R	
C442	065T0603104 32	CHIP 0.1UF 50V X7R	
C443	065T0603104 32	CHIP 0.1UF 50V X7R	
C444	065T0603104 32	CHIP 0.1UF 50V X7R	
C446	065T0603104 32	CHIP 0.1UF 50V X7R	
C447	065T0603104 32	CHIP 0.1UF 50V X7R	
C448	065T0603104 32	CHIP 0.1UF 50V X7R	
C451	065T0603104 32	CHIP 0.1UF 50V X7R	
C452	065T0603104 32	CHIP 0.1UF 50V X7R	
C454	065T0603104 32	CHIP 0.1UF 50V X7R	
C458	065T0603104 32	CHIP 0.1UF 50V X7R	
C772	065T0603104 32	CHIP 0.1UF 50V X7R	
C703	065T0603104 32	CHIP 0.1UF 50V X7R	

32" & 42" & 47" Digital LCD TV**AOC D32W831 & D42H831 & D47H831**

C702	065T0603104 32	CHIP 0.1UF 50V X7R	
C695	065T0603104 32	CHIP 0.1UF 50V X7R	
C694	065T0603104 32	CHIP 0.1UF 50V X7R	
C691	065T0603104 32	CHIP 0.1UF 50V X7R	
C6102	065T0603104 32	CHIP 0.1UF 50V X7R	
C6105	065T0603104 32	CHIP 0.1UF 50V X7R	
C6109	065T0603104 32	CHIP 0.1UF 50V X7R	
C6112	065T0603104 32	CHIP 0.1UF 50V X7R	
C6113	065T0603104 32	CHIP 0.1UF 50V X7R	
C6114	065T0603104 32	CHIP 0.1UF 50V X7R	
C6117	065T0603104 32	CHIP 0.1UF 50V X7R	
C622	065T0603104 32	CHIP 0.1UF 50V X7R	
C640	065T0603104 32	CHIP 0.1UF 50V X7R	
C641	065T0603104 32	CHIP 0.1UF 50V X7R	
C671	065T0603104 32	CHIP 0.1UF 50V X7R	
C683	065T0603104 32	CHIP 0.1UF 50V X7R	
C684	065T0603104 32	CHIP 0.1UF 50V X7R	
C687	065T0603104 32	CHIP 0.1UF 50V X7R	
C770	065T0603104 32	CHIP 0.1UF 50V X7R	
C766	065T0603104 32	CHIP 0.1UF 50V X7R	
C750	065T0603104 32	CHIP 0.1UF 50V X7R	
C740	065T0603104 32	CHIP 0.1UF 50V X7R	
C730	065T0603104 32	CHIP 0.1UF 50V X7R	
C729	065T0603104 32	CHIP 0.1UF 50V X7R	
C727	065T0603104 32	CHIP 0.1UF 50V X7R	
C725	065T0603104 32	CHIP 0.1UF 50V X7R	
C722	065T0603104 32	CHIP 0.1UF 50V X7R	
C720	065T0603104 32	CHIP 0.1UF 50V X7R	
C719	065T0603104 32	CHIP 0.1UF 50V X7R	
C717	065T0603104 32	CHIP 0.1UF 50V X7R	
C714	065T0603104 32	CHIP 0.1UF 50V X7R	
C712	065T0603104 32	CHIP 0.1UF 50V X7R	
C709	065T0603104 32	CHIP 0.1UF 50V X7R	
C707	065T0603104 32	CHIP 0.1UF 50V X7R	
C706	065T0603104 32	CHIP 0.1UF 50V X7R	
C705	065T0603104 32	CHIP 0.1UF 50V X7R	
C704	065T0603104 32	CHIP 0.1UF 50V X7R	
C186	065T0603104 32	CHIP 0.1UF 50V X7R	
C185	065T0603104 32	CHIP 0.1UF 50V X7R	
C179	065T0603104 32	CHIP 0.1UF 50V X7R	
C178	065T0603104 32	CHIP 0.1UF 50V X7R	
C177	065T0603104 32	CHIP 0.1UF 50V X7R	
C176	065T0603104 32	CHIP 0.1UF 50V X7R	
C168	065T0603104 32	CHIP 0.1UF 50V X7R	
C166	065T0603104 32	CHIP 0.1UF 50V X7R	
C165	065T0603104 32	CHIP 0.1UF 50V X7R	
C164	065T0603104 32	CHIP 0.1UF 50V X7R	
C163	065T0603104 32	CHIP 0.1UF 50V X7R	
C162	065T0603104 32	CHIP 0.1UF 50V X7R	
C161	065T0603104 32	CHIP 0.1UF 50V X7R	

32" & 42" & 47" Digital LCD TV**AOC D32W831 & D42H831 & D47H831**

C160	065T0603104 32	CHIP 0.1UF 50V X7R	
C124	065T0603104 32	CHIP 0.1UF 50V X7R	
C122	065T0603104 32	CHIP 0.1UF 50V X7R	
C119	065T0603104 32	CHIP 0.1UF 50V X7R	
C116	065T0603104 32	CHIP 0.1UF 50V X7R	
C401	065T0603104 32	CHIP 0.1UF 50V X7R	
C429	065T0603104 32	CHIP 0.1UF 50V X7R	
C427	065T0603104 32	CHIP 0.1UF 50V X7R	
C426	065T0603104 32	CHIP 0.1UF 50V X7R	
C425	065T0603104 32	CHIP 0.1UF 50V X7R	
C424	065T0603104 32	CHIP 0.1UF 50V X7R	
C423	065T0603104 32	CHIP 0.1UF 50V X7R	
C422	065T0603104 32	CHIP 0.1UF 50V X7R	
C421	065T0603104 32	CHIP 0.1UF 50V X7R	
C420	065T0603104 32	CHIP 0.1UF 50V X7R	
C402	065T0603104 32	CHIP 0.1UF 50V X7R	
C403	065T0603104 32	CHIP 0.1UF 50V X7R	
C405	065T0603104 32	CHIP 0.1UF 50V X7R	
C406	065T0603104 32	CHIP 0.1UF 50V X7R	
C407	065T0603104 32	CHIP 0.1UF 50V X7R	
C408	065T0603104 32	CHIP 0.1UF 50V X7R	
C409	065T0603104 32	CHIP 0.1UF 50V X7R	
C411	065T0603104 32	CHIP 0.1UF 50V X7R	
C413	065T0603104 32	CHIP 0.1UF 50V X7R	
C619	065T0603105 17	CHIP 1UF 16V Y5V	
C623	065T0603105 17	CHIP 1UF 16V Y5V	
C6118	065T0603105 25	CHIP 1UF 25V X5R	
C6121	065T0603105 25	CHIP 1UF 25V X5R	
C515	065T0603150 31	CHIP 15PF 50V NPO	
C516	065T0603150 31	CHIP 15PF 50V NPO	
C752	065T0603152 31	CHIP 1500PF 50V NPO	
C769	065T0603152 31	CHIP 1500PF 50V NPO	
C653	065T0603220 31	CHIP 22PF 50V NPO	
C199	065T0603220 31	CHIP 22PF 50V NPO	
C652	065T0603221 31	CHIP 220PF 50V NPO	
C651	065T0603221 31	CHIP 220PF 50V NPO	
C643	065T0603221 31	CHIP 220PF 50V NPO	
C642	065T0603221 31	CHIP 220PF 50V NPO	
C635	065T0603221 31	CHIP 220PF 50V NPO	
C634	065T0603221 31	CHIP 220PF 50V NPO	
C631	065T0603221 31	CHIP 220PF 50V NPO	
C630	065T0603221 31	CHIP 220PF 50V NPO	
C144	065T0603221 31	CHIP 220PF 50V NPO	
C143	065T0603221 31	CHIP 220PF 50V NPO	
C142	065T0603221 31	CHIP 220PF 50V NPO	
C141	065T0603221 31	CHIP 220PF 50V NPO	
C661	065T0603221 31	CHIP 220PF 50V NPO	
C662	065T0603221 31	CHIP 220PF 50V NPO	
C134	065T0603221 31	CHIP 220PF 50V NPO	
C135	065T0603221 31	CHIP 220PF 50V NPO	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

C669	065T0603223 32	CHIP 0.022UF 50V X7R 0603	
C667	065T0603224 22	CHIP CAP 0.22UF 25V X7	
C751	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C522	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C504	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C502	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C198	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C521	065T0603225 17	CHIP 2.2UF 16V Y5V	
C658	065T0603225 17	CHIP 2.2UF 16V Y5V	
C660	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C659	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C650	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C649	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C639	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C636	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C633	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C632	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C627	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C626	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C476	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C648	065T0603300 31	CHIP 0603 30PF J 50V NPO	
C520	065T0603330 31	CHIP 33PF 50V NPO	
C519	065T0603330 31	CHIP 33PF 50V NPO	
C416	065T0603330 31	CHIP 33PF 50V NPO	
C415	065T0603330 31	CHIP 33PF 50V NPO	
C6110	065T0603331 32	CHIP 330PF 50V X7R	
C692	065T0603331 32	CHIP 330PF 50V X7R	
C746	065T0603391 31	CHIP 390PF 50V NPO	
C132	065T0603471 31	CHIP 470PF 50V NPO	
C133	065T0603471 31	CHIP 470PF 50V NPO	
C155	065T0603472 32	CHIP 4700PF 50V X7R	
C699	065T060347232K Y	CAP CHIP 0603 4700PF K 50V X7R	
C152	065T0603473 32	CHIP 0.047UF 50V X7R	
C151	065T0603473 32	CHIP 0.047UF 50V X7R	
C153	065T0603473 32	CHIP 0.047UF 50V X7R	
C154	065T0603473 32	CHIP 0.047UF 50V X7R	
C156	065T0603473 32	CHIP 0.047UF 50V X7R	
C150	065T0603473 32	CHIP 0.047UF 50V X7R	
C149	065T0603473 32	CHIP 0.047UF 50V X7R	
C148	065T0603473 32	CHIP 0.047UF 50V X7R	
C147	065T0603473 32	CHIP 0.047UF 50V X7R	
C146	065T0603473 32	CHIP 0.047UF 50V X7R	
C145	065T0603473 32	CHIP 0.047UF 50V X7R	
C157	065T0603473 32	CHIP 0.047UF 50V X7R	
C158	065T0603473 32	CHIP 0.047UF 50V X7R	
C749	065T0603474 27	CHIP 0.47UF 25V Y5V	
C776	065T060347931Y	MLCC 0603 4.7PF B/C 50V NPO	
C670	065T0603560 31	CHIP 56PF 50V NPO	
C194	065T0603569 31	CHIP 5.6PF 50V NPO	
C193	065T0603569 31	CHIP 5.6PF 50V NPO	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

C192	065T0603569 31	CHIP 5.6PF 50V NPO	
C188	065T0603680 31	CHIP 68PF 50V NPO	
C187	065T0603680 31	CHIP 68PF 50V NPO	
C140	065T0603680 31	CHIP 68PF 50V NPO	
C139	065T0603680 31	CHIP 68PF 50V NPO	
C138	065T0603680 31	CHIP 68PF 50V NPO	
C137	065T0603680 31	CHIP 68PF 50V NPO	
C136	065T0603680 31	CHIP 68PF 50V NPO	
C128	065T0603680 31	CHIP 68PF 50V NPO	
C127	065T0603680 31	CHIP 68PF 50V NPO	
C129	065T0603680 32	CHIP 68PF 50V X7R	
C6100	065T0603681 21	CHIP 680PF 25V NPO	
C721	065T0603683 32	CHIP 0.068UF 50V X7R	
C685	065T0805105 37	CHIP 1UF 50V Y5V	
C686	065T0805105 37	CHIP 1UF 50V Y5V	
C672	065T0805106 15	CHIP 10UF 16V X5R 0805	
C681	065T0805106 15	CHIP 10UF 16V X5R 0805	
C404	065T0805106 A5	CHIP 10UF 10V X5R 0805	
C410	065T0805106 A5	CHIP 10UF 10V X5R 0805	
C414	065T0805106 A5	CHIP 10UF 10V X5R 0805	
C418	065T0805474 22	CHIP 0.47UF 25V X7R	
C680	065T0805475 15	CHIP 4.7UF 16V X5R	
C679	065T0805475 15	CHIP 4.7UF 16V X5R	
C676	065T0805475 15	CHIP 4.7UF 16V X5R	
C675	065T0805475 15	CHIP 4.7UF 16V X5R	
C517	065T0805475 15	CHIP 4.7UF 16V X5R	
C182	065T0805475 15	CHIP 4.7UF 16V X5R	
C181	065T0805475 15	CHIP 4.7UF 16V X5R	
C131	065T0805475 15	CHIP 4.7UF 16V X5R	
C130	065T0805475 15	CHIP 4.7UF 16V X5R	
C645	065T1206106 17	CHIP 10UF 16V Y5V	
C647	065T1206106 17	CHIP 10UF 16V Y5V	
C464	065T1206226 A5	CHIP 22UF 10V X5R	
C466	065T1206226 A5	CHIP 22UF 10V X5R	
C468	065T1206226 A5	CHIP 22UF 10V X5R	
C470	065T1206226 A5	CHIP 22UF 10V X5R	
C472	065T1206226 A5	CHIP 22UF 10V X5R	
C715	065T1206226 A5	CHIP 22UF 10V X5R	
C505	065T1206226 A5	CHIP 22UF 10V X5R	
C461	065T1206226 A5	CHIP 22UF 10V X5R	
C453	065T1206226 A5	CHIP 22UF 10V X5R	
C445	065T1206226 A5	CHIP 22UF 10V X5R	
C441	065T1206226 A5	CHIP 22UF 10V X5R	
C440	065T1206226 A5	CHIP 22UF 10V X5R	
C433	065T1206226 A5	CHIP 22UF 10V X5R	
C428	065T1206226 A5	CHIP 22UF 10V X5R	
CP601	065T600M471 8T	CHIP ARRAY 470PF 8P	
U509	070GHDCP500HDC	HDCP CODE	
LP701	071T 56A301 8K	CHIP BEAD ARRAY 300 OHM	
L101	071T 56F320 K	CHIP BEAD 32 OHM 0805	

32" & 42" & 47" Digital LCD TV**AOC D32W831 & D42H831 & D47H831**

L102	071T 56F320 K	CHIP BEAD 32 OHM 0805	
L103	071T 56F320 K	CHIP BEAD 32 OHM 0805	
L104	071T 56G151 B	BEAD 0805 150 OHM	
L105	071T 56G151 B	BEAD 0805 150 OHM	
L701	071T 56G151 B	BEAD 0805 150 OHM	
L415	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L414	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L413	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L412	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L411	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L410	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L408	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L407	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L406	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L405	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L404	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L403	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L201	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB609	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L417	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L418	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L509	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L721	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L724	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L712	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L127	071T 56U600	CHIP BEAD 60 OHM 0805	
L128	071T 56U600	CHIP BEAD 60 OHM 0805	
L9006	071T 56U600	CHIP BEAD 60 OHM 0805	
L703	071T 56Z601	CHIP BEAD 600 OHM	
L702	071T 56Z601	CHIP BEAD 600 OHM	
FB611	071T 56Z601	CHIP BEAD 600 OHM	
FB610	071T 56Z601	CHIP BEAD 600 OHM	
LP601	071T 57G601TSB	IND CHIP BEAD 1206 600OHM TECSTAR	
L106	071T 59B121 K	CHIP BEAD	
L107	071T 59B121 K	CHIP BEAD	
L108	071T 59B121 K	CHIP BEAD	
L109	071T 59B121 K	CHIP BEAD	
L110	071T 59B121 K	CHIP BEAD	
L115	071T 59B121 K	CHIP BEAD	
L730	071T 59B121 K	CHIP BEAD	
L729	071T 59B121 K	CHIP BEAD	
L728	071T 59B121 K	CHIP BEAD	
L727	071T 59B121 K	CHIP BEAD	
L720	071T 59B121 K	CHIP BEAD	
L713	071T 59B121 K	CHIP BEAD	
L601	071T 59B121 K	CHIP BEAD	
L510	071T 59B121 K	CHIP BEAD	
L409	071T 59B121 K	CHIP BEAD	
L126	071T 59B121 K	CHIP BEAD	
L125	071T 59B121 K	CHIP BEAD	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

L119	071T 59B121 K	CHIP BEAD	
L118	071T 59B121 K	CHIP BEAD	
L117	071T 59B121 K	CHIP BEAD	
L116	071T 59B121 K	CHIP BEAD	
L113	071T 59B601 MA	CHIP BEAD	
L114	071T 59B601 MA	CHIP BEAD	
L120	071T 59B601 MA	CHIP BEAD	
L121	071T 59B601 MA	CHIP BEAD	
L123	071T 59B601 MA	CHIP BEAD	
L124	071T 59B601 MA	CHIP BEAD	
L112	071T 59B601 MA	CHIP BEAD	
L111	071T 59B601 MA	CHIP BEAD	
FB601	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB602	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB603	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB604	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB606	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB607	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB608	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
L602	073T 62181	180UH +-10%	
L603	073T 62181	180UH +-10%	
L723	073T 62181	180UH +-10%	
FB613	073T 6310010M	CHIP INDUCTOR 0603 10UH+-10% MICROGATE	
L501	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L502	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L503	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L504	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L505	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L506	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L507	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L508	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9002	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9003	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9004	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9005	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
CN502	088T 340 21 VD	HDMI HEADER 21P V/T	
CN501	088T 340 21 VD	HDMI HEADER 21P V/T	
CN502	088T 340 21 VN	HDMI HEADER 21P V/A	
CN501	088T 340 21 VN	HDMI HEADER 21P V/A	
CN9003	088T 34019A VD	HDMI HEADER 19P V/T	
CN9003	088T 34019CVMO	HDMI HEADER 19P V/T	
D502	093T 60230	BAT54C BY MCC	
D501	093T 60230	BAT54C BY MCC	
D105	093T 60230	BAT54C BY MCC	
ZD114	093T 64 37 N	V-PORT-0603-100K V05	
ZD113	093T 64 37 N	V-PORT-0603-100K V05	
ZD112	093T 64 37 N	V-PORT-0603-100K V05	
ZD111	093T 64 37 N	V-PORT-0603-100K V05	
ZD110	093T 64 37 N	V-PORT-0603-100K V05	
ZD109	093T 64 37 N	V-PORT-0603-100K V05	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

ZD108	093T 64 37 N	V-PORT-0603-100K V05	
ZD107	093T 64 37 N	V-PORT-0603-100K V05	
ZD106	093T 64 37 N	V-PORT-0603-100K V05	
ZD105	093T 64 37 N	V-PORT-0603-100K V05	
ZD104	093T 64 37 N	V-PORT-0603-100K V05	
ZD103	093T 64 37 N	V-PORT-0603-100K V05	
ZD102	093T 64 37 N	V-PORT-0603-100K V05	
ZD101	093T 64 37 N	V-PORT-0603-100K V05	
ZD603	093T 64 37 N	V-PORT-0603-100K V05	
ZD602	093T 64 37 N	V-PORT-0603-100K V05	
ZD601	093T 64 37 N	V-PORT-0603-100K V05	
ZD125	093T 64 37 N	V-PORT-0603-100K V05	
ZD124	093T 64 37 N	V-PORT-0603-100K V05	
ZD123	093T 64 37 N	V-PORT-0603-100K V05	
ZD122	093T 64 37 N	V-PORT-0603-100K V05	
ZD121	093T 64 37 N	V-PORT-0603-100K V05	
ZD120	093T 64 37 N	V-PORT-0603-100K V05	
ZD119	093T 64 37 N	V-PORT-0603-100K V05	
ZD118	093T 64 37 N	V-PORT-0603-100K V05	
ZD117	093T 64 37 N	V-PORT-0603-100K V05	
ZD116	093T 64 37 N	V-PORT-0603-100K V05	
ZD115	093T 64 37 N	V-PORT-0603-100K V05	
D403	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D405	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D406	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D603	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D103	093T 6433S	DIODE BAV99 SEMTECH	
D104	093T 6433S	DIODE BAV99 SEMTECH	
D106	093T 6433S	DIODE BAV99 SEMTECH	
D601	093T 6433S	DIODE BAV99 SEMTECH	
ZD126	093T 39S 10 T	RLZ6.8B LLDS	
ZD127	093T 39S 10 T	RLZ6.8B LLDS	
ZD604	093T 39S 98 T	DIODE RLZ3.3B LL-34 ROHM	
D602	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D401	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D107	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D604	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D701	093T 64S3PH	BAS32L SOD80C	
	715T3115 H	MAIN-PCB 2-LAYER T1.6MM	
	Q90T6068 2 GP	HEAT SINK	FOR U606
	IRPF8QAH	IR BOARD	
U1	056T 627 7	FM-6038TM2-5AN	
CN1	033T8032 4F HR	CONNECTOR	
Q1	057T 417 6	PMBS3906/PHILIPS-SMT	
R1	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R5	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R3	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R2	061T0805301	RST CHIP 300R 1/8W 5%	
R4	061T0805331 Y	RST CHIPR 330 OHM +-5% 1/8W YAGEO	
C3	065T0603101 31	CHIP 100PF 50V NPO	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

C5	065T0603104 32	CHIP 0.1UF 50V X7R	
C2	065T0603104 32	CHIP 0.1UF 50V X7R	
C4	065T0603104 32	CHIP 0.1UF 50V X7R	
C1	065T0805475 A5	CHIP 4.7UF 10V X5R	
FB1	071T 59B601 EA	CHIP BEAD 600OHM 0603 TB1608	
FB2	071T 59B601 EA	CHIP BEAD 600OHM 0603 TB1608	
FB3	071T 59B601 EA	CHIP BEAD 600OHM 0603 TB1608	
LED1	081T 14 24 EL	CHIP LED BLUE/DARK RED	
D2	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D1	093T 6432V	LL4148-GSO8 SMD BY VISHA	
	715T3004 1	IR PCB 30X24X1.6MM FR-4 D/S	
	KEPF8QAD	KEY BOARD	
CN1	033T3802 3H	WAFER 3P RIGHT ANGLE	
SW1	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW5	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW6	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW7	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW3	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW4	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW2	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
R5	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R4	061T0603100 1F	RST CHIPR 1 KOHM +-1% 1/10W	
R2	061T0603180 1F	RST CHIPR 1.8 KOHM +-1% 1/10W	
R8	061T0603220 2F	RST CHIPR 22 KOHM +-1% 1/10W	
R6	061T0603330 1F	RST CHIPR 3.3 KOHM +-1% 1/10W	
R3	061T0603390 0F	RST CHIPR 390 OHM +-1% 1/10W	
R7	061T0603680 1F	RST CHIPR 6.8 KOHM +-1% 1/10W	
R1	061T08052201FF	RST CHIPR 2.2KOHM +-1% 1/8W FENGHUA	
C2	065T0603104 32	CHIP 0.1UF 50V X7R	
L2	071T 56U601 MA	CHIP BEAD 0805 600 OHM 1000MA	
L1	071T 56U601 MA	CHIP BEAD 0805 600 OHM 1000MA	
D1	093T 6433P	BAV99	
	715T2876 1	KEY PCB 111X15X1.6MM FR-1 S/S	
	Q36T 600 35 17 GP	NONWOVEN FABRIC	
	Q36T 600 46 1	NONWOVEN FABRIC	
	Q40T 42061519A	RATING LABEL	
	Q40T000262497A	SIDE LABEL	
	Q40T000267360A	IO LABEL	
	Q41T7800615A92	WARRANTY CARD	
	Q44T3231 21 11	EVA WASHER	
	Q44T3231 21 30	EVA WASHER	
	Q44T3231 21 45	EVA WASHER	
	Q44TN005101	EPS CUSHION	
	Q44TN005201	EPS CUSHION	
	Q44TN005301	EPS CUSHION	
	Q44TN005401	EPS CUSHION	
	Q44TN00561515A B	42" TV BOTTOM CARTON	
	Q44TN00561515A T	42" TV TOP CARTON	
	Q45G 77 5	PE PACKING	
	Q45T 76 28CK2 R	PE BAG	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

	Q45T 76 28NV2 R	PE BAG FOR CLAMP	
	Q45T 99609 60	.PE COVER FOR BASE	
	Q45T 99609 71	EPE COVER FOR MONITOR	
	Q50T 500523	CABLE TIE	
	Q52T 1185 98	MIDDLE CARTON TAPE FOR AOC	
	Q52T 1185 99	BIG CARTON TAPE FOR AOC	
	Q85T0076101CKD	SHIELDING	
CN5	033T3278 6D	CONNECTOR 6P 2.5 DIP	
CN1	033T3802 2B Y	CONNECTOR	
CN9	033T3802 4B Y	CONNECTOR	
R243	061T152M270 64	27 OHM 5% 2W	
R242	061T152M330 64	33 OHM 5% 2W	
C151	067T 215221 3H	CAP 105°C 220UF M 16V	
C226	067T 305101 3T	100UF 16V 105C	
C219	067T 305101 7P	105 RADIAL ECA PACTOR	
C154	067T 305101 7P	105 RADIAL ECA PACTOR	
C209	067T215S1023KV	EC 105°C CAP 1000UF M 16V	
C178	067T215S471 3K	LOW ESR EC 470UF 16V	
C193	067T215S471 3K	LOW ESR EC 470UF 16V	
C181	067T215S471 3K	LOW ESR EC 470UF 16V	
C198	067T215V102 3N	EC 1000UF 16V NCC KY16VB	
C223	067T305M1003PT	E.C CAP 10UF M 16V 4*7	
L11	073T 253195 L	CHOKE COIL 200UH CC-008305	
TU1	094TISDB T 1A	TUNER ISDB-T TDHL5-002A	
C222	067T 305101 3T	100UF 16V 105C	
C160	067T 305101 3T	100UF 16V 105C	
C157	067T 305101 3T	100UF 16V 105C	
C150	067T 305101 3T	100UF 16V 105C	
C15	067T 305101 3T	100UF 16V 105C	
C14	067T 305101 3T	100UF 16V 105C	
C190	067T 305221 3T	220UF/16V	
C183	067T 305470 3T	EC 105°C 47UF M 16V	
C189	067T 305470 3T	EC 105°C 47UF M 16V	
U18	056T 379 36	MC34063A	
U16	056T 379125	IC G2992F1U SOP-8	
U14	056T 563126	IC G1117T63UF SOT-223	
U12	056T 563137	IC CLZ8831-RST SOP-8	
U15	056T 563137	IC CLZ8831-RST SOP-8	
U16	056T 563138	IC RT9173PS SOP-8	
U1	056T 575 13	IC ST-7101BWC PBGA-680	
U22	056T 581 9	IC G5250K1T1U SOT23-5	
U20	056T 585 11	AZ1117D-5.0-E1	
U13	056T 585 4A	AP1117E33LA	
U19	056T 614 1	IC 74HC4052D PHILIPS	
U9	056T 615 58	IC HYB25DC512160CE-5 512M PG-TSOPII-66-1	
U8	056T 615 58	IC HYB25DC512160CE-5 512M PG-TSOPII-66-1	
U11	056T 615913	IC HYB25DC256160CE-5 TSOPII66	
U10	056T 615913	IC HYB25DC256160CE-5 TSOPII66	
U4	056T 643500	EM6353BX2SP3B-2.9+ 3PIN SOT23-3	
U5	056T1133 83 1	IC M24C64-WMN6P 64K SO-8 ST	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

U7	056T1133123	IC S29GL064N90TFI040 TSOP-48	
Q1	057T 417511	TRA MMBT3904 BLUE ROKET	
Q2	057T 417511	TRA MMBT3904 BLUE ROKET	
R198	061G0402100 1F	RST CHIPR 1KOHM +-1% 1/16W	
R202	061G0402100 1F	RST CHIPR 1KOHM +-1% 1/16W	
R185	061G0402125	RST CHIP 1M2 1/16W 5%	
R210	061G0402152	RST CHIP 1K5 1/16W 5%	
RP47	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP46	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP33	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP48	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP49	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP50	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP51	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP52	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP53	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP54	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP55	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP56	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP57	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP32	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP22	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP23	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP24	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP25	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP26	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP27	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP28	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP29	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP30	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP31	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP35	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP36	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP37	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP38	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP39	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP40	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP41	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP42	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP43	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP44	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP9	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP8	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP45	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP34	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP1	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP11	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP13	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP15	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP17	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	

32" & 42" & 47" Digital LCD TV**AOC D32W831 & D42H831 & D47H831**

RP18	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP19	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP20	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP21	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP3	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP7	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP6	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP5	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP4	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP2	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP16	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP14	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP12	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP10	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
R2	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R200	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R207	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R208	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R209	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R25	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R26	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R3	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R4	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R5	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R6	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R73	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R236	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R255	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R256	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R199	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R1	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R10	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R126	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R128	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R13	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R130	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R166	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R171	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R172	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R181	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R187	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R188	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R160	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	
R159	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	
R158	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	
R157	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	
R156	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	
R155	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	
R154	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	
R153	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	

32"&42"&47"Digital LCD TV**AOC D32W831&D42H831&D47H831**

R152	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R161	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R162	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R163	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R164	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R178	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R179	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R67	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R168	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R167	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R191	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R107	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R108	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R109	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R110	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R111	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R112	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R113	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R114	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R151	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R125	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R120	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R119	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R118	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R117	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R116	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R115	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R182	061T0402102	RST CHIPR 1KOHM +-5% 1/16W	
R235	061T0402102	RST CHIPR 1KOHM +-5% 1/16W	
R44	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R37	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R36	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R34	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R32	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R30	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R56	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R90	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R94	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R95	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R96	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R97	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R29	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R183	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R124	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R165	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R169	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R18	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R21	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R223	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R224	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	

32"&42"&47"Digital LCD TV**AOC D32W831&D42H831&D47H831**

R27	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R28	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R193	061T0402104	RST CHIPR 100KOHM +-5% 1/16W	
R14	061T0402104	RST CHIPR 100KOHM +-5% 1/16W	
R131	061T0402120 3D	RST CHIPR 120KOHM +-0.5% 1/16W	
R79	061T0402120 3D	RST CHIPR 120KOHM +-0.5% 1/16W	
R194	061T0402200 3F	RST CHIPR 0402 200K OHM +-1% 1/16W	
R142	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R143	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R144	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R145	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R147	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R148	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R149	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R150	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R47	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R48	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R53	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R71	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R75	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R87	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R99	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R195	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R100	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R101	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R102	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R103	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R104	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R105	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R106	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R121	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R122	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R123	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R127	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R129	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R135	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R24	061T0402272	RST CHIP 2K7 1/16W 5%	
R23	061T0402272	RST CHIP 2K7 1/16W 5%	
R16	061T0402272	RST CHIP 2K7 1/16W 5%	
R15	061T0402272	RST CHIP 2K7 1/16W 5%	
R84	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R22	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R216	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R85	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R88	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R89	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R92	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R215	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R214	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R175	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R146	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R211	061T0402471	RST CHIPR 470 OHM +-5% 1/16W	
R68	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R69	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R70	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R72	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R76	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R77	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R78	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R80	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R81	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R237	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R91	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R83	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R63	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R12	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R19	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R20	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R218	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R220	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R222	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R49	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R50	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R60	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R180	061T0402561	RST CHIPR 560 OHM +-5% 1/16W	
R196	061T0402562	RST CHIPR 5.6KOHM +-5% 1/16W	
R7	061T0402680	RST CHIPR 68 OHM 1/16W +-5%	
R35	061T0402680	RST CHIPR 68 OHM 1/16W +-5%	
R41	061T0402750 9F	RST CHIP 75 OHM 1/16W 1%	
R40	061T0402750 9F	RST CHIP 75 OHM 1/16W 1%	
R139	061T0402822	RST CHIPR 8.2 KOHM +-5% 1/16W	
R137	061T0402822	RST CHIPR 8.2 KOHM +-5% 1/16W	
R233	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R227	061T0603100	CHIP 10OHM 1/16W	
R229	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R261	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R261	061T0603104 T	RST CHIP 100K 1/10W 5%	
R231	061T0603181	RST CHIPR 180 OHM +-5% 1/10W	
R230	061T0603182	CHIP 1.8K OHM 1/16W	
R260	061T0603223	CHIP 22KOHM 1/16W	
R226	061T0603272	CHIP 2.7KOHM 1/16W	
R225	061T0603272	CHIP 2.7KOHM 1/16W	
R189	061T0603390 2F	RST CHIPR 39 KOHM +-1% 1/10W	
R197	061T0603470 2F	RST CHIPR 47 KOHM +-1% 1/10W	
R197	061T06034702FF	RST CHIPR 47KOHM +-1% 1/10W FENGHUA	
R228	061T0603473	CHIP 47KOHM 1/16W	
R186	061T0603510 2F	RST CHIPR 51 KOHM +-1% 1/10W	
R204	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R205	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R206	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	

32" & 42" & 47" Digital LCD TV**AOC D32W831 & D42H831 & D47H831**

R213	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R234	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R244	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R245	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R246	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R247	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R248	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R249	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R203	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R132	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R133	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R134	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R141	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R176	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R177	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R190	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R201	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R232	061T1206629	RST CHIP 6R2 1/4W 5%	
C39	065T0402103 22	CHIP 0.01UF 25V X7R	
C4	065T0402103 22	CHIP 0.01UF 25V X7R	
C41	065T0402103 22	CHIP 0.01UF 25V X7R	
C5	065T0402103 22	CHIP 0.01UF 25V X7R	
C53	065T0402103 22	CHIP 0.01UF 25V X7R	
C54	065T0402103 22	CHIP 0.01UF 25V X7R	
C6	065T0402103 22	CHIP 0.01UF 25V X7R	
C61	065T0402103 22	CHIP 0.01UF 25V X7R	
C63	065T0402103 22	CHIP 0.01UF 25V X7R	
C37	065T0402103 22	CHIP 0.01UF 25V X7R	
C35	065T0402103 22	CHIP 0.01UF 25V X7R	
C33	065T0402103 22	CHIP 0.01UF 25V X7R	
C31	065T0402103 22	CHIP 0.01UF 25V X7R	
C3	065T0402103 22	CHIP 0.01UF 25V X7R	
C29	065T0402103 22	CHIP 0.01UF 25V X7R	
C27	065T0402103 22	CHIP 0.01UF 25V X7R	
C21	065T0402103 22	CHIP 0.01UF 25V X7R	
C20	065T0402103 22	CHIP 0.01UF 25V X7R	
C2	065T0402103 22	CHIP 0.01UF 25V X7R	
C64	065T0402103 22	CHIP 0.01UF 25V X7R	
C99	065T0402103 22	CHIP 0.01UF 25V X7R	
C98	065T0402103 22	CHIP 0.01UF 25V X7R	
C96	065T0402103 22	CHIP 0.01UF 25V X7R	
C95	065T0402103 22	CHIP 0.01UF 25V X7R	
C78	065T0402103 22	CHIP 0.01UF 25V X7R	
C77	065T0402103 22	CHIP 0.01UF 25V X7R	
C76	065T0402103 22	CHIP 0.01UF 25V X7R	
C75	065T0402103 22	CHIP 0.01UF 25V X7R	
C74	065T0402103 22	CHIP 0.01UF 25V X7R	
C73	065T0402103 22	CHIP 0.01UF 25V X7R	
C72	065T0402103 22	CHIP 0.01UF 25V X7R	
C71	065T0402103 22	CHIP 0.01UF 25V X7R	

32"&42"&47"Digital LCD TV**AOC D32W831&D42H831&D47H831**

C70	065T0402103 22	CHIP 0.01UF 25V X7R	
C7	065T0402103 22	CHIP 0.01UF 25V X7R	
C69	065T0402103 22	CHIP 0.01UF 25V X7R	
C68	065T0402103 22	CHIP 0.01UF 25V X7R	
C67	065T0402103 22	CHIP 0.01UF 25V X7R	
C66	065T0402103 22	CHIP 0.01UF 25V X7R	
C65	065T0402103 22	CHIP 0.01UF 25V X7R	
C196	065T0402103 22	CHIP 0.01UF 25V X7R	
C132	065T0402103 22	CHIP 0.01UF 25V X7R	
C131	065T0402103 22	CHIP 0.01UF 25V X7R	
C130	065T0402103 22	CHIP 0.01UF 25V X7R	
C129	065T0402103 22	CHIP 0.01UF 25V X7R	
C128	065T0402103 22	CHIP 0.01UF 25V X7R	
C127	065T0402103 22	CHIP 0.01UF 25V X7R	
C126	065T0402103 22	CHIP 0.01UF 25V X7R	
C125	065T0402103 22	CHIP 0.01UF 25V X7R	
C124	065T0402103 22	CHIP 0.01UF 25V X7R	
C123	065T0402103 22	CHIP 0.01UF 25V X7R	
C122	065T0402103 22	CHIP 0.01UF 25V X7R	
C121	065T0402103 22	CHIP 0.01UF 25V X7R	
C120	065T0402103 22	CHIP 0.01UF 25V X7R	
C118	065T0402103 22	CHIP 0.01UF 25V X7R	
C111	065T0402103 22	CHIP 0.01UF 25V X7R	
C106	065T0402103 22	CHIP 0.01UF 25V X7R	
C101	065T0402103 22	CHIP 0.01UF 25V X7R	
C100	065T0402103 22	CHIP 0.01UF 25V X7R	
C194	065T0402103 22	CHIP 0.01UF 25V X7R	
C19	065T0402103 22	CHIP 0.01UF 25V X7R	
C184	065T0402103 22	CHIP 0.01UF 25V X7R	
C18	065T0402103 22	CHIP 0.01UF 25V X7R	
C173	065T0402103 22	CHIP 0.01UF 25V X7R	
C172	065T0402103 22	CHIP 0.01UF 25V X7R	
C170	065T0402103 22	CHIP 0.01UF 25V X7R	
C17	065T0402103 22	CHIP 0.01UF 25V X7R	
C168	065T0402103 22	CHIP 0.01UF 25V X7R	
C133	065T0402103 22	CHIP 0.01UF 25V X7R	
C134	065T0402103 22	CHIP 0.01UF 25V X7R	
C135	065T0402103 22	CHIP 0.01UF 25V X7R	
C152	065T0402103 22	CHIP 0.01UF 25V X7R	
C155	065T0402103 22	CHIP 0.01UF 25V X7R	
C158	065T0402103 22	CHIP 0.01UF 25V X7R	
C161	065T0402103 22	CHIP 0.01UF 25V X7R	
C163	065T0402103 22	CHIP 0.01UF 25V X7R	
C165	065T0402103 22	CHIP 0.01UF 25V X7R	
C32	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C34	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C36	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C38	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C40	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C42	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	

32" & 42" & 47" Digital LCD TV**AOC D32W831 & D42H831 & D47H831**

C44	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C45	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C48	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C30	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C28	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C26	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C25	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C24	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C23	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C22	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C218	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C208	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C49	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C224	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C225	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C233	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C94	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C93	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C9	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C82	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C81	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C80	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C8	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C79	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C62	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C59	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C58	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C57	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C56	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C52	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C51	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C205	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C139	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C138	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C137	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C136	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C13	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C12	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C119	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C110	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C11	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C109	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C108	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C107	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C105	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C104	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C103	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C102	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C10	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C204	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

C195	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C192	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C191	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C186	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C185	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C180	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C179	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C174	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C171	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C169	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C166	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C164	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C162	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C159	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C156	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C153	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C197	065T0402222 32	MLCC 0402 2200PF K 50V X7R	
C187	065T0402222 32	MLCC 0402 2200PF K 50V X7R	
C114	065T0603101 32	CHIP 100PF 50V X7R	
C115	065T0603101 32	CHIP 100PF 50V X7R	
C221	065T0603104 32	CHIP 0.1UF 50V X7R	
C231	065T0603105 17	CHIP 1UF 16V Y5V	
C188	065T0603105 17	CHIP 1UF 16V Y5V	
C175	065T0603105 17	CHIP 1UF 16V Y5V	
C182	065T0603105 17	CHIP 1UF 16V Y5V	
C230	065T060310517Z Y	CAP CHIP 0603 1UF Z 16V Y5V	
C220	065T0603152 31	CHIP 1500PF 50V NPO	
C16	065T0805106 15	CHIP 10UF 16V X5R 0805	
C55	065T0805106 15	CHIP 10UF 16V X5R 0805	
C83	065T0805106 15	CHIP 10UF 16V X5R 0805	
C84	065T0805106 15	CHIP 10UF 16V X5R 0805	
C85	065T0805106 15	CHIP 10UF 16V X5R 0805	
C86	065T0805106 15	CHIP 10UF 16V X5R 0805	
C87	065T0805106 15	CHIP 10UF 16V X5R 0805	
C88	065T0805106 15	CHIP 10UF 16V X5R 0805	
C89	065T0805106 15	CHIP 10UF 16V X5R 0805	
C90	065T0805106 15	CHIP 10UF 16V X5R 0805	
C91	065T0805106 15	CHIP 10UF 16V X5R 0805	
C92	065T0805106 15	CHIP 10UF 16V X5R 0805	
C97	065T0805106 15	CHIP 10UF 16V X5R 0805	
C149	065T0805106 15	CHIP 10UF 16V X5R 0805	
C1	065T0805106 15	CHIP 10UF 16V X5R 0805	
C140	065T0805106 15	CHIP 10UF 16V X5R 0805	
C141	065T0805106 15	CHIP 10UF 16V X5R 0805	
C142	065T0805106 15	CHIP 10UF 16V X5R 0805	
C143	065T0805106 15	CHIP 10UF 16V X5R 0805	
C144	065T0805106 15	CHIP 10UF 16V X5R 0805	
C145	065T0805106 15	CHIP 10UF 16V X5R 0805	
C146	065T0805106 15	CHIP 10UF 16V X5R 0805	
C147	065T0805106 15	CHIP 10UF 16V X5R 0805	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

C148	065T0805106 15	CHIP 10UF 16V X5R 0805	
L1	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L15	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L14	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB3	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB2	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB15	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB14	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB12	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB1	071T 56K121 TA	CHIP BEAD 0805 120R/6000MA	
FB11	071T 56K121 TA	CHIP BEAD 0805 120R/6000MA	
FB32	071T 56K121 TA	CHIP BEAD 0805 120R/6000MA	
FB21	071T 59A121 TA	CHIP BEAD 120R/3000MA HCB1608KF-121T30	
FB17	071T 59A121 TA	CHIP BEAD 120R/3000MA HCB1608KF-121T30	
FB16	071T 59A121 TA	CHIP BEAD 120R/3000MA HCB1608KF-121T30	
FB31	071T 59B121 K	CHIP BEAD	
FB9	071T 59B121 K	CHIP BEAD	
FB8	071T 59B121 K	CHIP BEAD	
FB7	071T 59B121 K	CHIP BEAD	
FB6	071T 59B121 K	CHIP BEAD	
FB5	071T 59B121 K	CHIP BEAD	
FB4	071T 59B121 K	CHIP BEAD	
FB30	071T 59B121 K	CHIP BEAD	
FB29	071T 59B121 K	CHIP BEAD	
FB28	071T 59B121 K	CHIP BEAD	
FB26	071T 59B121 K	CHIP BEAD	
FB25	071T 59B121 K	CHIP BEAD	
FB24	071T 59B121 K	CHIP BEAD	
FB23	071T 59B121 K	CHIP BEAD	
FB22	071T 59B121 K	CHIP BEAD	
FB20	071T 59B121 K	CHIP BEAD	
FB19	071T 59B121 K	CHIP BEAD	
FB18	071T 59B121 K	CHIP BEAD	
FB13	071T 59B121 K	CHIP BEAD	
FB10	071T 59B121 K	CHIP BEAD	
L13	073T 62181	180UH +-10%	
L5	073T253S 57 H	SMD CHOKE 10UH 4A	2nd source
L4	073T253S 57 H	SMD CHOKE 10UH 4A	2nd source
L5	073T253S 57 K	SMD CHOKE 10UH 4A	
L4	073T253S 57 K	SMD CHOKE 10UH 4A	
CN6	088T 34019A VD	HDMI HEADER 19P V/T	
CN6	088T 34019CVM0	HDMI HEADER 19P V/T	2nd source
X1	093T 22S915 H	CRYSTAL / OSCILLATORS 27MHZ 7X5MM	
ZD1	093T 60S801	DIODE 3A/40V SSA34 VISHAY	
ZD2	093T 60S801	DIODE 3A/40V SSA34 VISHAY	
D3	093T 64S3PH	BAS32L SOD80C	
	715T3176 D	DTV MAIN-PCB 4-LAYER T1.6MM	
	Q45T 99606 24 ESD	INSULATING PE BAG	

Location	Part No.	Description	Remark
	033T 465 1	CLIP JIONTER	
	044T6002709 3A	PAPER BOARD	
	045T 77 3	PE PACKING	
	049T 51 1A	ERADICATOR	
	052T 1150 C	BLACK TAPE	
	052T 1185	MIDDLE TAPE FOR CARTON	
	052T 1186	SMALL TAPE	
	052T 1211 A	ADHESIVE TYPE	
	052T 1211 B	ADHESIVE TYPE	
	052T 1211511	ALUMINUM FOIL TAPE	
	052T 2191 A	TAPE	
	078T 498 2 G	SPEAKER 4 OHM 10W L: 180MM 47X24.5MM	
	078T 499 2 G	SPEAKER 8 OHM 11W 156X30MM	
	089T 17356G553	AUDIO CABLE	
	089T 17356L 57	RF CABLE 220MM	
E08909	089T 184LAA 7	HDMI CABLE 130MM WITH EXTERNAL TUBE	
E08909	089T 184MAA 6	HDMI CABLE 200MM	2nd source
	089T 725HAA DB	D-SUB	
	089T402A15NIS1	POWER CORD	
E092	092TB1JX1A2WGM	BATTERY LR6 FOR ALL EXPORT MODE	
E092	092TB1JX1A2WGM	BATTERY LR6 FOR ALL EXPORT MODE	2nd source
	095T8013 6D 32	HARNESS 6P-6P 150MM	
	095T801312D 51	HARNESS 12P-12P 200MM	
	095T8014 2D 21	HARNESS 2P-2P 250MM	
	095T8014 4D 40	HARNESS 4P-4P 250MM	
	095T8014 4D547	WIRE HARNESS 4P(PLUG)-B&R+B&W	
	095T8014 8D 74	HARNESS 8P-4P+3P 1240MM	
	095T801413D 34	HARNESS 13P-12P 650MM	
	095T801414D130	HARNESS 13P-14P 500MM	
	095T801851D 6	HARNESS 51P-40 400MM	
	098TRABD1NEACP	REMOTE CONTROL FOR 32"AOC RC1124141/01	
	0D1T 930 8120	M3X8 SCREW	
	0D1T 940 6120	SCREW	
	0M1T 930 6 47 CR3	SCREW	
	0M1T 940 6120	SCREW	
	0M1T 940 6120	SCREW	
	0M1T 940 6120	SCREW	
	0M1T 940 16 47 CR3	SCREW M4X6	
	0M1T 940 16 47 CR3	SCREW M4X6	
	0M1T1730 8120	SCREW	
	0M1T1730 8120	SCREW	
	0M1T1730 8120	SCREW	
	0M1T1730 8120	SCREW	
	0M1T1730 10120	SCREW	
	0Q1T 930 6120	SCREW	
	0Q1T 930 8 47 CR3	SCREW	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

	0Q1T 930 8 47 CR3	SCREW	
	0Q1T 930 8120	SCREW	
	0Q1T 940 12 47 CR3	T4X12 SCREW	
	0Q1T 940 20 47 CR3	SCREW	
	0Q1T1030 8120	TAPPING SCREW 3X8	
	0Q1T1840 10120	SCREW	
	705TQ834460	BEZEL TV47W-8A2	
	0Q1T 930 6120	SCREW	
	A33T0304 GMA1L0100	COVER_FUNC	
	A33T0305 QV 1L0200	BUTTON_FUNC	
	A33T0334AEU 1C0100	LENS_POWER&IR FOR A2	
	A34T0583 GMK2L0130	BEZEL TV47W-8A2	
	KEPF8AA3	KEPC T2876-1-X-X-1-080309	
CN1	033T3802 3H	WAFER 3P RIGHT ANGLE	
SW4	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW5	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW6	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW7	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW2	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW3	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW1	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
R5	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R4	061T0603100 1F	RST CHIPR 1 KOHM +-1% 1/10W	
R2	061T0603180 1F	RST CHIPR 1.8 KOHM +-1% 1/10W	
R8	061T0603220 2F	RST CHIPR 22 KOHM +-1% 1/10W	
R6	061T0603330 1F	RST CHIPR 3.3 KOHM +-1% 1/10W	
R3	061T0603390 0F	RST CHIPR 390 OHM +-1% 1/10W	
R7	061T0603680 1F	RST CHIPR 6.8 KOHM +-1% 1/10W	
R1	061T08052201FF	RST CHIPR 2.2KOHM +-1% 1/8W FENGHUA	
C2	065T0603104 32	CHIP 0.1UF 50V X7R	
L2	071T 56U601 MA	CHIP BEAD 0805 600 OHM 1000MA	
L1	071T 56U601 MA	CHIP BEAD 0805 600 OHM 1000MA	
D1	093T 6433P	BAV99	
	715T2876 1	KEY PCB 111X15X1.6MM FR-1 S/S	
	705TQ834461	REAR COVER ASS'Y 47	
	036T 600 18118	NONWOVEN FABRTC	
	A34T0584 GM 2A0200	REAR COVER 47	
	Q36T 600 18120	.LOTH_GRIDDING	
	Q36T 600 37 6 GP	NONWOVEN FABRIC	
	705TQ834462	STAND ASS'Y 47	
	0M1T 930 6120	SCREW M3-0.5X6	
	0Q1T 130 8120	SCREW	
	A15T0349101	BKT-BASE-PLATE-A1	
	A34T0585 GM 1L0100	NECK COVER-A1	
	A34T0586 GM 1L0100	STAND COVER -A1	
	A34T0587 GM 1L0120	BASE COVER-A1	
	A37T0067011	SWIVEL ASSEMBLY	
	Q12T6300 25 1	FOOT PAD	

	750TVMW0H0322N	PAENL V470H1-L03 C2 NB CMO	
	756TQ8CB NS003	MAIN BOARD-CBPFRN3SQ5	
U403	056T1125177	NT68F631ALG PLCC-44	
U510	056T1133526	IC MX25L4005AMC-12G SOP-8	
SMTF-U403	100TANMP001S11	MCU ASS'Y-056T1125177	
SMTF-U510	100TANMP002S11	MCU ASS'Y-056T1133526	
	756TQ8TU NS003	TUNER BOARD-TUPFRC1SQ1	
U7	056T1133123	IC S29GL064N90TFI040 TSOP-48	
STUP-U7	100TANMP003S11	MCU ASS'Y-056T1133123	
	A15T0282101	BKT-VESA-BTM	
	A15T0287401	BKT-IO	
	A15T0303102	FIX BKT FOR AUO SIDE	
	A15T0345501	BKT PCB HOLDER	
	A15T0346102	BKT-PANEL	
	A15T0347201	BKT VESA	
	A15T0348101	BKT-STAND	
	A15T0458101	47" BRAZEL DTV PCB BKT	
	ADPC24330BB1	POWER BOARD T2802-1-X-X-2-080812	
	040G 45762412B	CBPC LABEL	
	009T6005 1	GROUND TERMINAL	
CN903	033T327812D	WAFER 12P PLUG	
CN902	033T380213B Y	CONNECTOR	
CN904	033T380213B Y	CONNECTOR	
IC904	056G 139 7 1	IC EL817MA M-TYPE	
IC905	056G 139 7 1	IC EL817MA M-TYPE	
IC907	056G 139 7 1	IC EL817MA M-TYPE	
R969	061G 3J158 59	0.15 OHM +-5% 3W	
RV901	061T 46 17	VARISTOR 560V TNR14V561K	
R913	061T153M108 59	RST MOFR 0.1 OHM +-5% 3WS	
R914	061T153M108 59	RST MOFR 0.1 OHM +-5% 3WS	
C904	063T107K474 TS	CAP X2 0.47UF K 275VAC UTX	2nd source
C901	063T107K474 TS	CAP X2 0.47UF K 275VAC UTX	2nd source
C904	063T107K474 US	X2 CAP 0.47UF K 275VAC	
C901	063T107K474 US	X2 CAP 0.47UF K 275VAC	
C948	063T210J2735C2	MPP 27NF J 1000V	
C948	063T210J2735CC	CAP MPPS 27NF 1000V 5%	2nd source
C905	063T210K105BCN	MPP CAP 1UF 520V P=15MM	
C948	063T211J273 5C 10	0.027UF 5% 1000V P=15MM	2nd source
C905	063T213J105GFA	MPF CAP	2nd source
C905	063T213J105GFC	CAP MPE 1UF J 450V	2nd source
C958	065T305K2212E3	Y2 CAP 220PF / 250V 10%	
C957	065T305K2212E3	Y2 CAP 220PF / 250V 10%	
C903	065T305K2212E3	Y2 CAP 220PF / 250V 10%	
C902	065T305K2212E3	Y2 CAP 220PF / 250V 10%	
C958	065T305K2212EM	221PF 10% 250V BY MURATA	2nd source
C957	065T305K2212EM	221PF 10% 250V BY MURATA	2nd source
C903	065T305K2212EM	221PF 10% 250V BY MURATA	2nd source
C902	065T305K2212EM	221PF 10% 250V BY MURATA	2nd source

32" & 42" & 47" Digital LCD TV
AOC D32W831&D42H831&D47H831

C956	065T306K6812BM	Y1 CAP 680PF 10% 250VAC KX	
C955	065T306K6812BM	Y1 CAP 680PF 10% 250VAC KX	
C956	065T306K6812BP	Y1 680PF M 250VAC	2nd source
C955	065T306K6812BP	Y1 680PF M 250VAC	2nd source
C951	065T306M1022B3	Y1 CAP 1000PF +-20% 250VAC CD SERIES	
C933	065T306M1022B3	Y1 CAP 1000PF +-20% 250VAC CD SERIES	
C921	067G215A1024KV	EC 1000UF 25V 12.5*20MM	
C908	067T 41Z15115K	EC 150UF M 450V 20*45MM	
C907	067T 41Z15115K	EC 150UF M 450V 20*45MM	
C935	067T215A1026KV	EC 1000UF 35V 12.5*25MM	
C936	067T215A1026KV	EC 1000UF 35V 12.5*25MM	
C923	067T215A4713KV	EC 470UF 16V M 10*12MM	
C918	067T215A4714KV	EC 470UF 25V 10*16MM	
C937	067T215A4716KV	EC 470UF 35V M 10*16MM	
L903	073L 174 49LSG	LINE FILTER	
L901	073L 174 49LSG	LINE FILTER	
L902	073L 174 52 LG	CHOKE COIL	
L904	073T 174119 L	PFC CHOKE 600UH PT-009490	2nd source
L904	073T 174119 N	PFC CHOKE 600UH YUVA-841	
L907	073T 253197 H	CHOKE COIL 3.0UH	2nd source
L907	073T 253197 L	CHOKE COIL 3.0UH CC-009425	
T901	080TL32T 5 L	X'FMR 1.9MH PT-009424	2nd source
T901	080TL32T 5 N	X'FMR 1.9MH YUVA-827	
T902	080TL42T 14 L	X'FMR 600UH PT-009533	2nd source
T902	080TL42T 14 YS	X'FMR 600UH YS04160152	
CN901	087T 501 44 DL	AC SOCKET 3PIN + 2 SCREW HOLE V/T	
	705TQ757015	Q901 ASS'Y	
Q901	057T 667 52	FET 2SK4100LS-T 7A/650V TO-220FI(LS)	
	090G6084 1	HEAT SINK	
	0M1T1730 8120	SCREW	
	705TQ761020	NR901 ASS'Y	
NR901	061T 58050 WL GP	RST NTCR 5 OHM +-15% 5A 13MM THINKING	
	Q09T 203 8	PIN	
	705TQ793025	D907 ASS'Y	
	090G6084 1	HEAT SINK	
D907	093T 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
	0M1T1730 8120	SCREW	
	705TQ793026	BD901 ASS'Y	
BD901	093T 50460 18	D10XB60	
	0M1T1730 10120	SCREW	
	Q90T0148 1	HEAT SINK	
	705TQ793071	D904/D901 ASS'Y	
	012T 372 2	SILICON	
Q904	057T 667 25	STW20NM60	
D901	093T 220 20	STTH15R06FP TO-220FP	2nd source
D901	093T 220 33	DIODE FMXA-1106S	
	0M1T1730 10120	SCREW	
	0M1T1730 10120	SCREW	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

	Q90T0097A01	HEAT SINK	
	705TQ793072	D916/D917/D906 ASS'Y	
	005T 42 1	CUSHION	
	032G3028 8	MICA	
D906	093T 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
D916	093T 60315	DIODE V40100C-E3/4W 20A*2/100V TO-220AB	
D917	093T 60315	DIODE V40100C-E3/4W 20A*2/100V TO-220AB	
	0M1T1730 10120	SCREW	
	Q90T0148 1	HEAT SINK	
	705TQ857002	Q902/Q903 ASS'Y	
Q902	057T 667 24	STP20NM60 FP	
Q903	057T 667 24	STP20NM60 FP	
	0M1T1730 10120	SCREW	
	Q90G0099 1	HEAT SINK	
IC902	056T 379 79	IC LD7522PS SOP-8	
IC901	056T 379104	IC ICE2PCS02G PG-DSO-8	
IC903	056T 665 10 1	IC RESONANT L6599DTR SO-16N ST	
Q907	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
Q906	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
Q908	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
R932	061G0805244	RST CHIPR 240 KOHM +-5% 1/8W	
R929	061G1206105	1M 1206	
R930	061G1206105	1M 1206	
R931	061G1206105	1M 1206	
R935	061G1206154	RST CHIPR 150K OHM +-5% 1/4W	
R934	061G1206154	RST CHIPR 150K OHM +-5% 1/4W	
R933	061G1206154	RST CHIPR 150K OHM +-5% 1/4W	
R905	061G1206225	RST CHIPR 2.2 MOHM +-5% 1/4W	
R906	061G1206225	RST CHIPR 2.2 MOHM +-5% 1/4W	
R920	061G1206225	RST CHIPR 2.2 MOHM +-5% 1/4W	
R918	061G1206430 3F	RST CHIPR 430 KOHM +-1% 1/4W	
R982	061G1206430 3F	RST CHIPR 430 KOHM +-1% 1/4W	
R916	061G1206430 3F	RST CHIPR 430 KOHM +-1% 1/4W	
R980	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R961	061T0805100 2F	RST CHIPR 10 KOHM +-1% 1/8W	
R973	061T0805100 2F	RST CHIPR 10 KOHM +-1% 1/8W	
R919	061T0805100 2F	RST CHIPR 10 KOHM +-1% 1/8W	
R944	061T0805101	RST CHIPR 100 OHM +-5% 1/8W	
R964	061T0805101	RST CHIPR 100 OHM +-5% 1/8W	
R921	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R943	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R945	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R951	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R954	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R970	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R942	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R937	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R911	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R977	061T0805104	RST CHIPR 100 KOHM +-5% 1/8W	
R940	061T0805154	RST CHIPR 150 KOHM +-5% 1/8W	
R976	061T0805200 1F	RST CHIPR 2KOHM +-1% 1/8W	
R946	061T0805202	RST CHIPR 2 KOHM +-5% 1/8W	
R975	061T0805205 2F	RST CHIPR 20.5KOHM +-1% 1/8W	
R917	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R936	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R965	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R967	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R909	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R950	061T0805221	RST CHIPR 220 OHM +-5% 1/8W	
R952	061T0805221	RST CHIPR 220 OHM +-5% 1/8W	
R960	061T0805240 2F	RST CHIPR 24 KOHM +-1% 1/8W	
R947	061T0805242	RST CHIPR 2.4 KOHM +-5% 1/8W	
R949	061T0805242	RST CHIPR 2.4 KOHM +-5% 1/8W	
R953	061T0805272	RST CHIPR 2.7 KOHM +-5% 1/8W	
R959	061T0805273	RST CHIPR 27 KOHM +-5% 1/8W	
R904	061T0805332	RST CHIPR 3.3 KOHM +-5% 1/8W	
R979	061T0805332	RST CHIPR 3.3 KOHM +-5% 1/8W	
R963	061T0805390 1F	RST CHIPR 3.9KOHM +-1% 1/8W	
R939	061T0805471	RST CHIPR 470 OHM +-5% 1/8W	
R974	061T0805510 1F	RST CHIPR 5.1KOHM +-1% 1/8W	
R941	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R966	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R968	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R978	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R962	061T0805514	RST CHIPR 510KOHM +-5% 1/8W	
R948	061T0805560 2F	RST CHIPR 56KOHM +-1% 1/8W	
R972	061T0805750 1F	RST CHIPR 7.5KOHM +-1% 1/8W	
JR907	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR906	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR905	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR904	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR903	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR902	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
JR901	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
R958	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R957	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R956	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R915	061T1206221	RST CHIPR 220 OHM +-5% 1/4W	
R903	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R902	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R901	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R928	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R927	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R924	061T1206479	RST CHIPR 4.7 OHM +-5% 1/4W	
R971	061T1206512	RST CHIPR 5.1KOHM +-5% 1/4W	
C952	065T0805102 31	1000PF 50V NPO	

32" & 42" & 47" Digital LCD TV
AOC D32W831&D42H831&D47H831

C912	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C929	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C947	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C942	065T0805102 32 GP	CHIP 1000P 50VX7R 0805	
C950	065T0805103 32	10NF/50V/0805/X7R	
C931	065T0805104 22	0.1UF +-10% 25V X7R 0805	
C949	065T0805104 22	0.1UF +-10% 25V X7R 0805	
C934	065T0805104 22	0.1UF +-10% 25V X7R 0805	
C932	065T0805104 22	0.1UF +-10% 25V X7R 0805	
C926	065T0805104 22	0.1UF +-10% 25V X7R 0805	
C914	065T0805104 32	CHIP 0.1UF 50V X7R	
C944	065T0805104 32	CHIP 0.1UF 50V X7R	
C938	065T0805104 32	CHIP 0.1UF 50V X7R	
C924	065T0805104 32	CHIP 0.1UF 50V X7R	
C920	065T0805104 32	CHIP 0.1UF 50V X7R	
C911	065T0805105 22	CHIP 1UF 25V X7R 0805	
C943	065T0805105 22	CHIP 1UF 25V X7R 0805	
C925	065T0805105 22 GP	CHIP 1UF 25V X7R	
C922	065T0805105 37	CHIP 1UF 50V Y5V	
C939	065T0805105 37	CHIP 1UF 50V Y5V	
C940	065T0805221 31	220PF 50V NPO	
C913	065T0805223 22	CHIP 0.022UF 25V X7R 0805	
C941	065T0805224 32	0805.0.22UF.K.50V.X7R	
C910	065T0805472 22	CHIP 0.0047UF 25V X7R 0805	
C930	065T0805473 32	CHIP 0.047UF 50V X7R	
C917	065T1206102 72	CHIP 1000PF 500V X7R	
C945	065T1206104 32	CHIP 0.1UF 50V X7R 1206	
D915	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D914	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D913	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D912	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D911	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D909	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D908	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D902	093T 6432V	LL4148-GSO8 SMD BY VISHA	
ZD901	093T 39S 15 T	RLZ15B	
ZD905	093T 39S 15 T	RLZ15B	
ZD904	093T 39S 24 T	RLZ 5.6B LLDS	
L904	006G 31 4	1.7MM RIVET	
CN901	006G 31501	EYELET	
T902	006G 31502	1.5MM RIVET	
IC906	056T 158 12	KIA431A-AT/P	
IC908	056T 158 12	KIA431A-AT/P	
R922	061G 30347852T GP	RST FUSER 0.47OHM +-5% 1W	
R955	061T 30310852T GP	0.1 OHM 1W FUSE RESISTOR	
R923	061T152M10452T	RST MOFR 100KOHM +-5% 2WS	
R938	061T152M12952T	RST MOFR 1.2OHM +-5% 2WS	
C915	065G 2K152 1T6213	CAP CER 1500PF K 2KV	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

C909	067G215A4704KT	EC 47UF 25V 5*11MM	
C946	067G215A4704KT	EC 47UF 25V 5*11MM	
C927	067T215A1007KT	EC 10UF 50V 5*11MM	
C928	067T215A1017KT	EC 100UF 50V 8*12MM	
C919	067T215A2214KT	EC 220UF 25V 8*12MM	
FB905	071T 55 9 T	BEAD 3.5*6*0.8	
FB904	071T 55 9 T	BEAD 3.5*6*0.8	
FB903	071T 55 9 T	BEAD 3.5*6*0.8	
FB907	071T 55 29	BEAD	
FB906	071T 55 29	BEAD	
FB901	071T 55 29	BEAD	
F901	084T 55 4	FUSE 382-5A 250V WICKMANN	
D910	093T 5250S52T	AU02Z	
D918	093T1080 252T	DIODE SARSO1-V1 SANKEN	
D905	093T1080 252T	DIODE SARSO1-V1 SANKEN	
J920	095T 90 23	JUMP WIRE	
J919	095T 90 23	JUMP WIRE	
J918	095T 90 23	JUMP WIRE	
J917	095T 90 23	JUMP WIRE	
J915	095T 90 23	JUMP WIRE	
J914	095T 90 23	JUMP WIRE	
J913	095T 90 23	JUMP WIRE	
J912	095T 90 23	JUMP WIRE	
J911	095T 90 23	JUMP WIRE	
J910	095T 90 23	JUMP WIRE	
J909	095T 90 23	JUMP WIRE	
J908	095T 90 23	JUMP WIRE	
J907	095T 90 23	JUMP WIRE	
J906	095T 90 23	JUMP WIRE	
J905	095T 90 23	JUMP WIRE	
J904	095T 90 23	JUMP WIRE	
J903	095T 90 23	JUMP WIRE	
J902	095T 90 23	JUMP WIRE	
J901	095T 90 23	JUMP WIRE	
F902	095T 90 23	JUMP WIRE	
J941	095T 90 23	JUMP WIRE	
J940	095T 90 23	JUMP WIRE	
J939	095T 90 23	JUMP WIRE	
J938	095T 90 23	JUMP WIRE	
J937	095T 90 23	JUMP WIRE	
J936	095T 90 23	JUMP WIRE	
J934	095T 90 23	JUMP WIRE	
J933	095T 90 23	JUMP WIRE	
J932	095T 90 23	JUMP WIRE	
J931	095T 90 23	JUMP WIRE	
J929	095T 90 23	JUMP WIRE	
J927	095T 90 23	JUMP WIRE	
J926	095T 90 23	JUMP WIRE	

32" & 42" & 47" Digital LCD TV
AOC D32W831&D42H831&D47H831

J925	095T 90 23	JUMP WIRE	
J924	095T 90 23	JUMP WIRE	
J923	095T 90 23	JUMP WIRE	
J922	095T 90 23	JUMP WIRE	
J921	095T 90 23	JUMP WIRE	
	715T2802 1	POWER PCB 200X200X1.6MM CEM-1 20Z S/S	
	006G 31 4	1.7MM RIVET	
	Q51G 6 4509	GLUE_RTV	
L905	S73G25391V	CHOKE COIL ASS'Y	
L906	S73G25391V	CHOKE COIL ASS'Y	
L907	S73T253197V	TRANSFORMER ASS'Y	
CN9007	033T3278 6D	CONNECTOR 6P 2.5 DIP	
CN702	033T327812D	WAFER 12P PLUG	
CN9005	033T3802 2B Y	CONNECTOR	
CN401	033T3802 4B Y	CONNECTOR	
CN601	033T3802 4B Y	CONNECTOR	
CN701	033T3802 8B Y	CONNECTOR	
CN201	033T8027 40	WAFER 40P 2.0MM DIP	
U709	056T 665505 HD	IC VF45A3D HAODA	
U710	056T 665506 HD	IC AF45A3D HAODA	
R168	061T153M470 59	RST MOFR 47 OHM +-5% 3WS	
R167	061T153M470 59	RST MOFR 47 OHM +-5% 3WS	
C768	067T 305101 7P	105 RADIAL ECA PACTOR	
C171	067T215S1023KV	EC 105°C CAP 1000UF M 16V	
C682	067T215S1026KV	EC CAP 1000UF 35V 12.5*25MM	
L607	073T 253158 H	CHOKE COIL 22UH+/-25%	
L606	073T 253158 H	CHOKE COIL 22UH+/-25%	
L605	073T 253158 H	CHOKE COIL 22UH+/-25%	
L604	073T 253158 H	CHOKE COIL 22UH+/-25%	
L722	073T 253195 L	CHOKE COIL 200UH CC-008305	
CN106	088T 78 1364C	RCA JACK 2*3 Y/W/R+Y/W/R V/A	
CN106	088T 78 1364S	RCA JACK 2*3 Y/W/R+Y/W/R V/A	
CN105	088T 78 1369C	RCA JACK 2*3 G/B/R+B/W/R	
CN105	088T 78 1369S	RCA JACK 2*3 G/B/R+BLK/W/R	2nd source
CN111	088T 7813A19C	RCA JACK 1*3 R/W/Y	
CN108	088T 100 11 ST	MINI DIN JACK 4P+ SWITCH 2MJ-0602-005	
CN103	088T 100 15 ST	MINI DIN JACK 4PIN V/A	
CN102	088T 30252S	PHONE JACK 3.5MM 3P V/A GREEN	
CN602	088T 302901 S	PHONE JACK 3.5MM 7P BLACK 2SJ-W48A-001	
CN101	088T 35315F FX	D-SUB 15PIN FEMALE VERTICAL 附螺絲	
CN101	088T 35315F VD	D-SUB 15PIN FEMALE VERTICAL WITH SCREW	2nd source
X503	093T 2251B J	NXS12.000AC30F-BT-2	
X403	093T 2251B J	NXS12.000AC30F-BT-2	
X601	093T 2264B J	XTL NXS27.000AC16F-KAB5 HC-49/US	
X502	093T 2279B H	CRYSTAL 28.322MHZ 14P HC-49S	
X701	093T 2286B J	XTL NXS4.000AC18F-KAB5 HC49/U-S	
TU701	094TNTSC MN 8L	TUNER TCL F14WP-4N-E	
C689	064T176J474 0T	0.47UF +-5% 50/63V	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

C6107	064T176J474 0T	0.47UF +-5% 50/63V	
C665	067T 305100 3T	10UF 16V	
C654	067T 305100 3T	10UF 16V	
C605	067T 305100 3T	10UF 16V	
C604	067T 305100 3T	10UF 16V	
C603	067T 305100 3T	10UF 16V	
C602	067T 305100 3T	10UF 16V	
C773	067T 305100 7T	10UF	
C724	067T 305100 7T	10UF	
C723	067T 305100 7T	10UF	
C169	067T 305100 7T	10UF	
C126	067T 305100 7T	10UF	
C125	067T 305100 7T	10UF	
C123	067T 305100 7T	10UF	
C121	067T 305100 7T	10UF	
C120	067T 305100 7T	10UF	
C726	067T 305101 3T	100UF 16V 105C	
C716	067T 305101 3T	100UF 16V 105C	
C711	067T 305101 3T	100UF 16V 105C	
C449	067T 305101 3T	100UF 16V 105C	
C412	067T 305101 3T	100UF 16V 105C	
C201	067T 305101 3T	100UF 16V 105C	
C708	067T 305101 3T	100UF 16V 105C	
C638	067T 305101 3T	100UF 16V 105C	
C637	067T 305101 3T	100UF 16V 105C	
C620	067T 305101 3T	100UF 16V 105C	
C6116	067T 305101 3T	100UF 16V 105C	
C450	067T 305101 3T	100UF 16V 105C	
C170	067T 305101 3T	100UF 16V 105C	
C728	067T 305101 3T	100UF 16V 105C	
C736	067T 305101 3T	100UF 16V 105C	
C739	067T 305101 3T	100UF 16V 105C	
C771	067T 305101 3T	100UF 16V 105C	
C621	067T 305221 2T	CAP 105°C 220UF M 10V	
C710	067T 305221 2T	CAP 105°C 220UF M 10V	
C754	067T 305221 2T	CAP 105°C 220UF M 10V	
C718	067T 305221 2T	CAP 105°C 220UF M 10V	
C713	067T 305221 2T	CAP 105°C 220UF M 10V	
C6115	067T 305331 3T	CAP 105°C 330UF 16V	
C674	067T 305470 3T	EC 105°C 47UF M 16V	
C677	067T 305470 3T	EC 105°C 47UF M 16V	
U704	056T 133 30AAC	IC AZ1117H-ADJ-E1	
U406	056T 158501	IC AS431AN-E1 SOT23	
U607	056T 158501	IC AS431AN-E1 SOT23	
U106	056T 379 36	MC34063A	
U601	056T 563 50	AP1117D18LA T0252-3L	
U707	056T 563 51	AP1117D50LA T0252-3L	
U703	056T 563 56	AP1084D18LA TO-252-3L	

U602	056T 563 75	G1084-33T43UF TO-252	
U705	056T 563 96	IC AIC1084-25PETR-R TO-252	
U701	056T 563121	IC G1084-33TU3UF TO-263T	
U603	056T 593 29 1	IC STV8318F TQFP-100	
U606	056T 593 32	IC STA335BW13TR POWERSSO36	
U103	056T 614 1	IC 74HC4052D PHILIPS	
U402	056T 615913	IC HYB25DC256160CE-5 TSOP166	
U605	056T 616 3	PT2308S SO-8 PTC	
U507	056T 634 19	IC PS321TQFP80G TQFP-80	
U105	056T 647 18	IC WM8521HCGED/RV SOIC-14	
U708	056T 647 24	IC TDA9885TS/V3 SSOP-24	
U506	056T 662 10	IC RCLAMP0524P.TCT	
U505	056T 662 10	IC RCLAMP0524P.TCT	
U503	056T 662 10	IC RCLAMP0524P.TCT	
U502	056T 662 10	IC RCLAMP0524P.TCT	
U403	056T1125177	NT68F631ALG PLCC-44	
U401	056T1126 35	IC NT7263 LQFP-256	
U509	056T1133 32	M24C04-WMN6TP	
U102	056T1133 34	M24C02-WMN6TP	
U501	056T1133 34	M24C02-WMN6TP	
U504	056T1133 34	M24C02-WMN6TP	
U510	056T1133526	IC MX25L4005AMC-12G SOP-8	
U404	056T113353A	M24C32-WMN6TP	
U101	056T4LVC 14 P	74LVC14ADT	
U608	056T4LVCG08 TI	IC SN74LVC1G08DCKR SC70-5	
U9001	056T4LVCG08 TI	IC SN74LVC1G08DCKR SC70-5	
U604	056T566N600	NDC7002N SOT-6 FAIRCHILD	
Q605	057T 417511	TRA MMBT3904 BLUE ROKET	
Q606	057T 417511	TRA MMBT3904 BLUE ROKET	
Q607	057T 417511	TRA MMBT3904 BLUE ROKET	
Q702	057T 417511	TRA MMBT3904 BLUE ROKET	
Q704	057T 417511	TRA MMBT3904 BLUE ROKET	
Q705	057T 417511	TRA MMBT3904 BLUE ROKET	
Q707	057T 417511	TRA MMBT3904 BLUE ROKET	
Q710	057T 417511	TRA MMBT3904 BLUE ROKET	
Q9001	057T 417511	TRA MMBT3904 BLUE ROKET	
Q604	057T 417511	TRA MMBT3904 BLUE ROKET	
Q603	057T 417511	TRA MMBT3904 BLUE ROKET	
Q602	057T 417511	TRA MMBT3904 BLUE ROKET	
Q601	057T 417511	TRA MMBT3904 BLUE ROKET	
Q503	057T 417511	TRA MMBT3904 BLUE ROKET	
Q502	057T 417511	TRA MMBT3904 BLUE ROKET	
Q501	057T 417511	TRA MMBT3904 BLUE ROKET	
Q404	057T 417511	TRA MMBT3904 BLUE ROKET	
Q403	057T 417511	TRA MMBT3904 BLUE ROKET	
Q108	057T 417511	TRA MMBT3904 BLUE ROKET	
Q105	057T 417512	TRA MMBT3906 BLUE ROKET	
Q608	057T 417512	TRA MMBT3906 BLUE ROKET	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

Q106	057T 419 8 T	TRA 2SD1757K 0.5A/15V SC-59	
Q107	057T 419 8 T	TRA 2SD1757K 0.5A/15V SC-59	
Q401	057T 600 54	FET BSN20 SOT-23 PHILIPS	
Q402	057T 600 54	FET BSN20 SOT-23 PHILIPS	
Q701	057T 763 3	AO4411L SO-8 BY AOS SMT	
Q706	057T 763 3	AO4411L SO-8 BY AOS SMT	
Q708	057T 763 3	AO4411L SO-8 BY AOS SMT	
Q9002	057T 765 1	2SC2412KR	
RP413	061G 125222 8	RST CHIP AR 8P4R 2.2 KOHM +-5% 1/16W	
RP401	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP402	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP403	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP404	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP505	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP506	061T 125220 8	CHIP ARRAY 220HM 1/16W 8P4R	
RP414	061T 125332 8	RST CHIPR AR 8P4R 3.3KOHM +-5% 1/16W	
RP412	061T 125332 8	RST CHIPR AR 8P4R 3.3KOHM +-5% 1/16W	
RP410	061T 125332 8	RST CHIPR AR 8P4R 3.3KOHM +-5% 1/16W	
RP405	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
RP406	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
RP407	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
RP408	061T 125750 8	RST CHIP AR 8P4R 75 OHM +-5% 1/16W	
R405	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R404	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R227	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R218	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R217	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R191	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R140	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R131	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R130	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R124	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R120	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R653	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R690	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R702	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R730	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R746	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R747	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R748	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R749	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R754	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R757	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
L600	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R428	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R429	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R202	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R125	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R430	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R431	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R433	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R461	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R516	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R518	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R543	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R544	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R604	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R621	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R622	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R623	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R650	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R651	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R652	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R420	061T0603100	CHIP 10OHM 1/16W	
R423	061T0603100	CHIP 10OHM 1/16W	
R774	061T0603100	CHIP 10OHM 1/16W	
R721	061T0603100 3F	RST CHIPR 100KOHM +-1% 1/10W	
R156	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R155	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R154	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R153	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R152	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R151	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R150	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R149	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R148	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R147	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R146	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R108	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R105	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R102	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R101	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R157	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R736	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R735	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R704	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R691	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R657	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R656	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R654	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R633	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R632	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R611	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R609	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R607	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R161	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	

R160	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R159	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R158	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R733	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R710	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R113	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R406	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R407	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R412	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R413	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R425	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R435	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R501	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R669	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R540	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R534	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R529	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R528	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R527	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R511	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R509	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R504	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R503	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R128	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R129	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R416	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R460	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R530	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R549	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R9001	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R783	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R723	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R720	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R715	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R712	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R711	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R680	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R677	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R550	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R558	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R624	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R645	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R666	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R668	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R671	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R674	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R732	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R717	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	

R706	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R638	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R629	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R427	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R414	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R118	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R417	061T0603105	RST CHIPR 1MOHM +-5% 1/10W	
R538	061T0603105	RST CHIPR 1MOHM +-5% 1/10W	
R542	061T0603105	RST CHIPR 1MOHM +-5% 1/10W	
R724	061T0603121	RST CHIPR 120 OHM +-5% 1/10W	
R741	061T0603122	RST CHIPR 1.2 KOHM +-5% 1/10W	
R672	061T0603123	RST CHIPR 12 KOHM +-5% 1/10W	
R731	061T0603123	RST CHIPR 12 KOHM +-5% 1/10W	
R773	061T0603123	RST CHIPR 12 KOHM +-5% 1/10W	
R776	061T0603151	RST CHIPR 150 OHM +-5% 1/10W	
R9005	061T0603151	RST CHIPR 150 OHM +-5% 1/10W	
R602	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R603	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R605	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R606	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R608	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R610	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R613	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R614	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R619	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R620	061T0603153	RST CHIPR 15 KOHM +-5% 1/10W	
R778	061T0603181	RST CHIPR 180 OHM +-5% 1/10W	
R777	061T0603182	CHIP 1.8K OHM 1/16W	
R196	061T0603183	RST CHIPR 18 KOHM +-5% 1/10W	
R506	061T0603183	RST CHIPR 18 KOHM +-5% 1/10W	
R170	061T0603201	RST CHIPR 200 OHM +-5% 1/10W	
R171	061T0603201	RST CHIPR 200 OHM +-5% 1/10W	
R502	061T0603203	CHIPR 20K OHM+-5% 1/10W	
R510	061T0603203	CHIPR 20K OHM+-5% 1/10W	
R162	061T0603220	CHIP 22OHM 1/10W	
R401	061T0603220	CHIP 22OHM 1/10W	
R402	061T0603220	CHIP 22OHM 1/10W	
R403	061T0603220	CHIP 22OHM 1/10W	
R408	061T0603220	CHIP 22OHM 1/10W	
R409	061T0603220	CHIP 22OHM 1/10W	
R410	061T0603220	CHIP 22OHM 1/10W	
R432	061T0603220	CHIP 22OHM 1/10W	
R451	061T0603220	CHIP 22OHM 1/10W	
R452	061T0603220	CHIP 22OHM 1/10W	
R531	061T0603220	CHIP 22OHM 1/10W	
R532	061T0603220	CHIP 22OHM 1/10W	
R789	061T0603220	CHIP 22OHM 1/10W	
R790	061T0603220	CHIP 22OHM 1/10W	

R791	061T0603220	CHIP 22OHM 1/10W	
R792	061T0603220	CHIP 22OHM 1/10W	
R411	061T0603221	CHIP 220OHM 1/16W	
R648	061T0603222	CHIP 2.2K OHM 1/16W	
R117	061T0603222	CHIP 2.2K OHM 1/16W	
R107	061T0603222	CHIP 2.2K OHM 1/16W	
R106	061T0603222	CHIP 2.2K OHM 1/16W	
R667	061T0603222	CHIP 2.2K OHM 1/16W	
R784	061T0603223	CHIP 22KOHM 1/16W	
R722	061T0603223	CHIP 22KOHM 1/16W	
R718	061T0603223	CHIP 22KOHM 1/16W	
R714	061T0603223	CHIP 22KOHM 1/16W	
R419	061T0603272	CHIP 2.7KOHM 1/16W	
R422	061T0603272	CHIP 2.7KOHM 1/16W	
R434	061T0603301	RST CHIPR 300OHM +-5% 1/10W	
R752	061T0603331	RST CHIPR 330 OHM +-5% 1/10W	
R436	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R446	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R453	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R454	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R455	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R719	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R681	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R459	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R458	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R457	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R456	061T0603332	RST CHIPR 3.3 KOHM +-5% 1/10W	
R114	061T0603333	RST CHIPR 33 KOHM +-5% 1/10W	
R601	061T0603339 F	RST CHIPR 3.3 OHM +-5% 1/10W FENGHUA	
R659	061T0603339 F	RST CHIPR 3.3 OHM +-5% 1/10W FENGHUA	
R552	061T0603363	RST CHIP 36K 1/10W 5%	
R551	061T0603363	RST CHIP 36K 1/10W 5%	
R640	061T0603392	CHIP 3.9KOHM 1/16W	
R636	061T0603392	CHIP 3.9KOHM 1/16W	
R635	061T0603392	CHIP 3.9KOHM 1/16W	
R627	061T0603392	CHIP 3.9KOHM 1/16W	
R612	061T0603470	RST CHIPR 47 OHM +-5% 1/10W	
R753	061T0603471	RST CHIPR 470OHM +-5% 1/10W	
R782	061T0603471	RST CHIPR 470OHM +-5% 1/10W	
R9004	061T0603471	RST CHIPR 470OHM +-5% 1/10W	
R507	061T0603472	CHIP 4.7KOHM 1/16W	
R447	061T0603472	CHIP 4.7KOHM 1/16W	
R445	061T0603472	CHIP 4.7KOHM 1/16W	
R444	061T0603472	CHIP 4.7KOHM 1/16W	
R443	061T0603472	CHIP 4.7KOHM 1/16W	
R442	061T0603472	CHIP 4.7KOHM 1/16W	
R426	061T0603472	CHIP 4.7KOHM 1/16W	
R415	061T0603472	CHIP 4.7KOHM 1/16W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R195	061T0603472	CHIP 4.7KOHM 1/16W	
R194	061T0603472	CHIP 4.7KOHM 1/16W	
R185	061T0603472	CHIP 4.7KOHM 1/16W	
R187	061T0603472	CHIP 4.7KOHM 1/16W	
R508	061T0603472	CHIP 4.7KOHM 1/16W	
R512	061T0603472	CHIP 4.7KOHM 1/16W	
R513	061T0603472	CHIP 4.7KOHM 1/16W	
R514	061T0603472	CHIP 4.7KOHM 1/16W	
R553	061T0603472	CHIP 4.7KOHM 1/16W	
R555	061T0603472	CHIP 4.7KOHM 1/16W	
R628	061T0603472	CHIP 4.7KOHM 1/16W	
R637	061T0603472	CHIP 4.7KOHM 1/16W	
R670	061T0603472	CHIP 4.7KOHM 1/16W	
R739	061T0603472	CHIP 4.7KOHM 1/16W	
R9002	061T0603472	CHIP 4.7KOHM 1/16W	
R699	061T0603472	CHIP 4.7KOHM 1/16W	
R557	061T0603472	CHIP 4.7KOHM 1/16W	
R184	061T0603473	CHIP 47KOHM 1/16W	
R183	061T0603473	CHIP 47KOHM 1/16W	
R9003	061T0603473	CHIP 47KOHM 1/16W	
R775	061T0603473	CHIP 47KOHM 1/16W	
R716	061T0603473	CHIP 47KOHM 1/16W	
R713	061T0603473	CHIP 47KOHM 1/16W	
R709	061T0603473	CHIP 47KOHM 1/16W	
R705	061T0603473	CHIP 47KOHM 1/16W	
R679	061T0603473	CHIP 47KOHM 1/16W	
R675	061T0603473	CHIP 47KOHM 1/16W	
R112	061T0603473	CHIP 47KOHM 1/16W	
R186	061T0603473	CHIP 47KOHM 1/16W	
R188	061T0603473	CHIP 47KOHM 1/16W	
R631	061T0603473	CHIP 47KOHM 1/16W	
R639	061T0603473	CHIP 47KOHM 1/16W	
R673	061T0603473	CHIP 47KOHM 1/16W	
R616	061T0603474	RST CHIPR 470 KOHM +-5% 1/10W	
R520	061T0603510 0F	RST CHIPR 510OHM +-1% 1/10W	
R103	061T0603511	RST CHIPR 510 OHM +-5% 1/10W	
R104	061T0603511	RST CHIPR 510 OHM +-5% 1/10W	
R116	061T0603560 9F	RST CHIPR 56 OHM +-1% 1/10W	
R696	061T0603561	RST CHIPR 560 OHM +-5% 1/10W	
R745	061T0603562	RST CHIPR 5.6 KOHM +-5% 1/10W	
R181	061T0603681	RST CHIPR 680 OHM +-5% 1/10W	
R182	061T0603681	RST CHIPR 680 OHM +-5% 1/10W	
R701	061T0603681	RST CHIPR 680 OHM +-5% 1/10W	
R630	061T0603682	RST CHIPR 6.8KOHM +-5% 1/10W	
R625	061T0603682	RST CHIPR 6.8KOHM +-5% 1/10W	
R9006	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R190	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R189	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	

R141	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R139	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R138	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R137	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R136	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R133	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R132	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R119	061T0603750	RST CHIPR 75 OHM +-5% 1/10W	
R109	061T0603750 9F	CHIP 75OHM 1/10W 1%	
R110	061T0603750 9F	CHIP 75OHM 1/10W 1%	
R111	061T0603750 9F	CHIP 75OHM 1/10W 1%	
R682	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R683	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R684	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R685	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R686	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R687	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R688	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R692	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R693	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R698	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R793	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R794	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R795	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R796	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R798	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R799	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R115	061T0805470	RST CHIPR 47 OHM +-5% 1/8W	
R210	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R211	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R212	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R213	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R214	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R215	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R216	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R219	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R220	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R221	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R222	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R223	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R225	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R226	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R228	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R229	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R230	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R231	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R797	061T1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
R661	061T1206220	RST CHIPR 22 OHM +-5% 1/4W	

R643	061T1206220	RST CHIPR 22 OHM +-5% 1/4W	
R725	061T1206620 0F	RST CHIPR 620 OHM +-1% 1/4W	
R779	061T1206629	RST CHIP 6R2 1/4W 5%	
R665	061T1206629	RST CHIP 6R2 1/4W 5%	
R662	061T1206629	RST CHIP 6R2 1/4W 5%	
R644	061T1206629	RST CHIP 6R2 1/4W 5%	
R649	061T1206629	RST CHIP 6R2 1/4W 5%	
CP601	065T 600471 8T	CHIP ARRAY 470PF 8P	
C195	065T0603100 31 GP	CHIP 10PF 50V NPO	
C196	065T0603100 31 GP	CHIP 10PF 50V NPO	
C701	065T0603101 31	CHIP 100PF 50V NPO	
C737	065T0603101 31	CHIP 100PF 50V NPO	
C738	065T0603101 31	CHIP 100PF 50V NPO	
C741	065T0603102 31	CHIP 1000PF 50V NPO	
C118	065T0603102 31	CHIP 1000PF 50V NPO	
C117	065T0603102 31	CHIP 1000PF 50V NPO	
C753	065T0603102 31	CHIP 1000PF 50V NPO	
C664	065T0603102 32	CHIP 1000PF 50V X7R	
C663	065T0603102 32	CHIP 1000PF 50V X7R	
C6111	065T0603102 32	CHIP 1000PF 50V X7R	
C6108	065T0603102 32	CHIP 1000PF 50V X7R	
C6106	065T0603102 32	CHIP 1000PF 50V X7R	
C673	065T0603102 32	CHIP 1000PF 50V X7R	
C678	065T0603102 32	CHIP 1000PF 50V X7R	
C688	065T0603102 32	CHIP 1000PF 50V X7R	
C690	065T0603102 32	CHIP 1000PF 50V X7R	
C693	065T0603102 32	CHIP 1000PF 50V X7R	
C601	065T0603102 32	CHIP 1000PF 50V X7R	
C624	065T0603103 32	CHIP 0.01UF 50V X7R	
C625	065T0603103 32	CHIP 0.01UF 50V X7R	
C9002	065T0603103 32	CHIP 0.01UF 50V X7R	
C755	065T0603103 32	CHIP 0.01UF 50V X7R	
C748	065T0603103 32	CHIP 0.01UF 50V X7R	
C747	065T0603103 32	CHIP 0.01UF 50V X7R	
C666	065T0603103 32	CHIP 0.01UF 50V X7R	
C629	065T0603103 32	CHIP 0.01UF 50V X7R	
C628	065T0603103 32	CHIP 0.01UF 50V X7R	
C9001	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C697	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C696	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C668	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C657	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C656	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C655	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C646	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C644	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C618	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C617	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	

C616	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C615	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C6104	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C6103	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C610	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C609	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C608	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C607	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C606	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C611	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C6119	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C612	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C6122	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C613	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C614	065T0603104 12	MLCC 0603 0.1UF K 16V X7R	
C463	065T0603104 32	CHIP 0.1UF 50V X7R	
C465	065T0603104 32	CHIP 0.1UF 50V X7R	
C467	065T0603104 32	CHIP 0.1UF 50V X7R	
C469	065T0603104 32	CHIP 0.1UF 50V X7R	
C471	065T0603104 32	CHIP 0.1UF 50V X7R	
C506	065T0603104 32	CHIP 0.1UF 50V X7R	
C507	065T0603104 32	CHIP 0.1UF 50V X7R	
C508	065T0603104 32	CHIP 0.1UF 50V X7R	
C509	065T0603104 32	CHIP 0.1UF 50V X7R	
C510	065T0603104 32	CHIP 0.1UF 50V X7R	
C511	065T0603104 32	CHIP 0.1UF 50V X7R	
C512	065T0603104 32	CHIP 0.1UF 50V X7R	
C513	065T0603104 32	CHIP 0.1UF 50V X7R	
C518	065T0603104 32	CHIP 0.1UF 50V X7R	
C6101	065T0603104 32	CHIP 0.1UF 50V X7R	
C6102	065T0603104 32	CHIP 0.1UF 50V X7R	
C6105	065T0603104 32	CHIP 0.1UF 50V X7R	
C6109	065T0603104 32	CHIP 0.1UF 50V X7R	
C435	065T0603104 32	CHIP 0.1UF 50V X7R	
C436	065T0603104 32	CHIP 0.1UF 50V X7R	
C437	065T0603104 32	CHIP 0.1UF 50V X7R	
C438	065T0603104 32	CHIP 0.1UF 50V X7R	
C439	065T0603104 32	CHIP 0.1UF 50V X7R	
C442	065T0603104 32	CHIP 0.1UF 50V X7R	
C443	065T0603104 32	CHIP 0.1UF 50V X7R	
C444	065T0603104 32	CHIP 0.1UF 50V X7R	
C446	065T0603104 32	CHIP 0.1UF 50V X7R	
C447	065T0603104 32	CHIP 0.1UF 50V X7R	
C448	065T0603104 32	CHIP 0.1UF 50V X7R	
C451	065T0603104 32	CHIP 0.1UF 50V X7R	
C452	065T0603104 32	CHIP 0.1UF 50V X7R	
C454	065T0603104 32	CHIP 0.1UF 50V X7R	
C458	065T0603104 32	CHIP 0.1UF 50V X7R	

C459	065T0603104 32	CHIP 0.1UF 50V X7R	
C460	065T0603104 32	CHIP 0.1UF 50V X7R	
C462	065T0603104 32	CHIP 0.1UF 50V X7R	
C6112	065T0603104 32	CHIP 0.1UF 50V X7R	
C707	065T0603104 32	CHIP 0.1UF 50V X7R	
C709	065T0603104 32	CHIP 0.1UF 50V X7R	
C712	065T0603104 32	CHIP 0.1UF 50V X7R	
C714	065T0603104 32	CHIP 0.1UF 50V X7R	
C717	065T0603104 32	CHIP 0.1UF 50V X7R	
C719	065T0603104 32	CHIP 0.1UF 50V X7R	
C720	065T0603104 32	CHIP 0.1UF 50V X7R	
C722	065T0603104 32	CHIP 0.1UF 50V X7R	
C725	065T0603104 32	CHIP 0.1UF 50V X7R	
C727	065T0603104 32	CHIP 0.1UF 50V X7R	
C729	065T0603104 32	CHIP 0.1UF 50V X7R	
C730	065T0603104 32	CHIP 0.1UF 50V X7R	
C740	065T0603104 32	CHIP 0.1UF 50V X7R	
C750	065T0603104 32	CHIP 0.1UF 50V X7R	
C766	065T0603104 32	CHIP 0.1UF 50V X7R	
C770	065T0603104 32	CHIP 0.1UF 50V X7R	
C772	065T0603104 32	CHIP 0.1UF 50V X7R	
C775	065T0603104 32	CHIP 0.1UF 50V X7R	
C6113	065T0603104 32	CHIP 0.1UF 50V X7R	
C6114	065T0603104 32	CHIP 0.1UF 50V X7R	
C6117	065T0603104 32	CHIP 0.1UF 50V X7R	
C622	065T0603104 32	CHIP 0.1UF 50V X7R	
C640	065T0603104 32	CHIP 0.1UF 50V X7R	
C641	065T0603104 32	CHIP 0.1UF 50V X7R	
C671	065T0603104 32	CHIP 0.1UF 50V X7R	
C683	065T0603104 32	CHIP 0.1UF 50V X7R	
C684	065T0603104 32	CHIP 0.1UF 50V X7R	
C687	065T0603104 32	CHIP 0.1UF 50V X7R	
C691	065T0603104 32	CHIP 0.1UF 50V X7R	
C694	065T0603104 32	CHIP 0.1UF 50V X7R	
C695	065T0603104 32	CHIP 0.1UF 50V X7R	
C702	065T0603104 32	CHIP 0.1UF 50V X7R	
C703	065T0603104 32	CHIP 0.1UF 50V X7R	
C704	065T0603104 32	CHIP 0.1UF 50V X7R	
C705	065T0603104 32	CHIP 0.1UF 50V X7R	
C706	065T0603104 32	CHIP 0.1UF 50V X7R	
C434	065T0603104 32	CHIP 0.1UF 50V X7R	
C402	065T0603104 32	CHIP 0.1UF 50V X7R	
C401	065T0603104 32	CHIP 0.1UF 50V X7R	
C186	065T0603104 32	CHIP 0.1UF 50V X7R	
C185	065T0603104 32	CHIP 0.1UF 50V X7R	
C179	065T0603104 32	CHIP 0.1UF 50V X7R	
C178	065T0603104 32	CHIP 0.1UF 50V X7R	
C177	065T0603104 32	CHIP 0.1UF 50V X7R	

C176	065T0603104 32	CHIP 0.1UF 50V X7R	
C168	065T0603104 32	CHIP 0.1UF 50V X7R	
C166	065T0603104 32	CHIP 0.1UF 50V X7R	
C165	065T0603104 32	CHIP 0.1UF 50V X7R	
C164	065T0603104 32	CHIP 0.1UF 50V X7R	
C163	065T0603104 32	CHIP 0.1UF 50V X7R	
C162	065T0603104 32	CHIP 0.1UF 50V X7R	
C161	065T0603104 32	CHIP 0.1UF 50V X7R	
C160	065T0603104 32	CHIP 0.1UF 50V X7R	
C124	065T0603104 32	CHIP 0.1UF 50V X7R	
C122	065T0603104 32	CHIP 0.1UF 50V X7R	
C119	065T0603104 32	CHIP 0.1UF 50V X7R	
C116	065T0603104 32	CHIP 0.1UF 50V X7R	
C432	065T0603104 32	CHIP 0.1UF 50V X7R	
C431	065T0603104 32	CHIP 0.1UF 50V X7R	
C430	065T0603104 32	CHIP 0.1UF 50V X7R	
C429	065T0603104 32	CHIP 0.1UF 50V X7R	
C427	065T0603104 32	CHIP 0.1UF 50V X7R	
C426	065T0603104 32	CHIP 0.1UF 50V X7R	
C425	065T0603104 32	CHIP 0.1UF 50V X7R	
C424	065T0603104 32	CHIP 0.1UF 50V X7R	
C423	065T0603104 32	CHIP 0.1UF 50V X7R	
C422	065T0603104 32	CHIP 0.1UF 50V X7R	
C421	065T0603104 32	CHIP 0.1UF 50V X7R	
C420	065T0603104 32	CHIP 0.1UF 50V X7R	
C413	065T0603104 32	CHIP 0.1UF 50V X7R	
C411	065T0603104 32	CHIP 0.1UF 50V X7R	
C409	065T0603104 32	CHIP 0.1UF 50V X7R	
C408	065T0603104 32	CHIP 0.1UF 50V X7R	
C407	065T0603104 32	CHIP 0.1UF 50V X7R	
C406	065T0603104 32	CHIP 0.1UF 50V X7R	
C405	065T0603104 32	CHIP 0.1UF 50V X7R	
C403	065T0603104 32	CHIP 0.1UF 50V X7R	
C619	065T0603105 17	CHIP 1UF 16V Y5V	
C623	065T0603105 17	CHIP 1UF 16V Y5V	
C6118	065T0603105 25	CHIP 1UF 25V X5R	
C6121	065T0603105 25	CHIP 1UF 25V X5R	
C515	065T0603150 31	CHIP 15PF 50V NPO	
C516	065T0603150 31	CHIP 15PF 50V NPO	
C769	065T0603152 31	CHIP 1500PF 50V NPO	
C752	065T0603152 31	CHIP 1500PF 50V NPO	
C653	065T0603220 31	CHIP 22PF 50V NPO	
C199	065T0603220 31	CHIP 22PF 50V NPO	
C662	065T0603221 31	CHIP 220PF 50V NPO	
C661	065T0603221 31	CHIP 220PF 50V NPO	
C652	065T0603221 31	CHIP 220PF 50V NPO	
C651	065T0603221 31	CHIP 220PF 50V NPO	
C643	065T0603221 31	CHIP 220PF 50V NPO	

C642	065T0603221 31	CHIP 220PF 50V NPO	
C635	065T0603221 31	CHIP 220PF 50V NPO	
C634	065T0603221 31	CHIP 220PF 50V NPO	
C144	065T0603221 31	CHIP 220PF 50V NPO	
C143	065T0603221 31	CHIP 220PF 50V NPO	
C142	065T0603221 31	CHIP 220PF 50V NPO	
C141	065T0603221 31	CHIP 220PF 50V NPO	
C135	065T0603221 31	CHIP 220PF 50V NPO	
C134	065T0603221 31	CHIP 220PF 50V NPO	
C630	065T0603221 31	CHIP 220PF 50V NPO	
C631	065T0603221 31	CHIP 220PF 50V NPO	
C669	065T0603223 32	CHIP 0.022UF 50V X7R 0603	
C667	065T0603224 22	CHIP CAP 0.22UF 25V X7	
C198	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C502	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C504	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C522	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C751	065T0603224 32	MLCC 0603 0.22UF K 50V X7R	
C658	065T0603225 17	CHIP 2.2UF 16V Y5V	
C521	065T0603225 17	CHIP 2.2UF 16V Y5V	
C660	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C659	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C650	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C649	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C639	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C636	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C633	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C632	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C627	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C626	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C476	065T0603225A5K Y	CAP CHIP 0603 2.2UF K 10V X5R	
C648	065T0603300 31	CHIP 0603 30PF J 50V NPO	
C415	065T0603330 31	CHIP 33PF 50V NPO	
C416	065T0603330 31	CHIP 33PF 50V NPO	
C519	065T0603330 31	CHIP 33PF 50V NPO	
C520	065T0603330 31	CHIP 33PF 50V NPO	
C6110	065T0603331 32	CHIP 330PF 50V X7R	
C692	065T0603331 32	CHIP 330PF 50V X7R	
C746	065T0603391 31	CHIP 390PF 50V NPO	
C132	065T0603471 31	CHIP 470PF 50V NPO	
C133	065T0603471 31	CHIP 470PF 50V NPO	
C155	065T0603472 32	CHIP 4700PF 50V X7R	
C699	065T060347232K Y	CAP CHIP 0603 4700PF K 50V X7R	
C145	065T0603473 32	CHIP 0.047UF 50V X7R	
C146	065T0603473 32	CHIP 0.047UF 50V X7R	
C147	065T0603473 32	CHIP 0.047UF 50V X7R	
C148	065T0603473 32	CHIP 0.047UF 50V X7R	
C149	065T0603473 32	CHIP 0.047UF 50V X7R	

C150	065T0603473 32	CHIP 0.047UF 50V X7R	
C151	065T0603473 32	CHIP 0.047UF 50V X7R	
C152	065T0603473 32	CHIP 0.047UF 50V X7R	
C153	065T0603473 32	CHIP 0.047UF 50V X7R	
C154	065T0603473 32	CHIP 0.047UF 50V X7R	
C156	065T0603473 32	CHIP 0.047UF 50V X7R	
C157	065T0603473 32	CHIP 0.047UF 50V X7R	
C158	065T0603473 32	CHIP 0.047UF 50V X7R	
C749	065T0603474 27	CHIP 0.47UF 25V Y5V	
C776	065T060347931Y	MLCC 0603 4.7PF B/C 50V NPO	
C670	065T0603560 31	CHIP 56PF 50V NPO	
C192	065T0603569 31	CHIP 5.6PF 50V NPO	
C193	065T0603569 31	CHIP 5.6PF 50V NPO	
C194	065T0603569 31	CHIP 5.6PF 50V NPO	
C127	065T0603680 31	CHIP 68PF 50V NPO	
C128	065T0603680 31	CHIP 68PF 50V NPO	
C136	065T0603680 31	CHIP 68PF 50V NPO	
C137	065T0603680 31	CHIP 68PF 50V NPO	
C138	065T0603680 31	CHIP 68PF 50V NPO	
C139	065T0603680 31	CHIP 68PF 50V NPO	
C140	065T0603680 31	CHIP 68PF 50V NPO	
C187	065T0603680 31	CHIP 68PF 50V NPO	
C188	065T0603680 31	CHIP 68PF 50V NPO	
C129	065T0603680 32	CHIP 68PF 50V X7R	
C6100	065T0603681 21	CHIP 680PF 25V NPO	
C721	065T0603683 32	CHIP 0.068UF 50V X7R	
C686	065T0805105 37	CHIP 1UF 50V Y5V	
C685	065T0805105 37	CHIP 1UF 50V Y5V	
C681	065T0805106 15	CHIP 10UF 16V X5R 0805	
C672	065T0805106 15	CHIP 10UF 16V X5R 0805	
C414	065T0805106 A5	CHIP 10UF 10V X5R 0805	
C404	065T0805106 A5	CHIP 10UF 10V X5R 0805	
C410	065T0805106 A5	CHIP 10UF 10V X5R 0805	
C418	065T0805474 22	CHIP 0.47UF 25V X7R	
C131	065T0805475 15	CHIP 4.7UF 16V X5R	
C181	065T0805475 15	CHIP 4.7UF 16V X5R	
C182	065T0805475 15	CHIP 4.7UF 16V X5R	
C517	065T0805475 15	CHIP 4.7UF 16V X5R	
C675	065T0805475 15	CHIP 4.7UF 16V X5R	
C676	065T0805475 15	CHIP 4.7UF 16V X5R	
C679	065T0805475 15	CHIP 4.7UF 16V X5R	
C680	065T0805475 15	CHIP 4.7UF 16V X5R	
C130	065T0805475 15	CHIP 4.7UF 16V X5R	
C645	065T1206106 17	CHIP 10UF 16V Y5V	
C647	065T1206106 17	CHIP 10UF 16V Y5V	
C505	065T1206226 A5	CHIP 22UF 10V X5R	
C468	065T1206226 A5	CHIP 22UF 10V X5R	
C466	065T1206226 A5	CHIP 22UF 10V X5R	

C464	065T1206226 A5	CHIP 22UF 10V X5R	
C461	065T1206226 A5	CHIP 22UF 10V X5R	
C453	065T1206226 A5	CHIP 22UF 10V X5R	
C445	065T1206226 A5	CHIP 22UF 10V X5R	
C441	065T1206226 A5	CHIP 22UF 10V X5R	
C440	065T1206226 A5	CHIP 22UF 10V X5R	
C433	065T1206226 A5	CHIP 22UF 10V X5R	
C428	065T1206226 A5	CHIP 22UF 10V X5R	
C470	065T1206226 A5	CHIP 22UF 10V X5R	
C472	065T1206226 A5	CHIP 22UF 10V X5R	
C715	065T1206226 A5	CHIP 22UF 10V X5R	
CP601	065T600M471 8T	CHIP ARRAY 470PF 8P	
U509	070GHDCP500HDC	HDCP CODE	
LP701	071T 56A301 8K	CHIP BEAD ARRAY 300 OHM	
L103	071T 56F320 K	CHIP BEAD 32 OHM 0805	
L102	071T 56F320 K	CHIP BEAD 32 OHM 0805	
L101	071T 56F320 K	CHIP BEAD 32 OHM 0805	
L701	071T 56G151 B	BEAD 0805 150 OHM	
L105	071T 56G151 B	BEAD 0805 150 OHM	
L104	071T 56G151 B	BEAD 0805 150 OHM	
L413	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L412	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L411	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L410	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L408	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L407	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L406	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L405	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L404	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L403	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L414	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L415	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L417	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L418	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L509	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L721	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L724	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L712	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L201	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB609	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L127	071T 56U600	CHIP BEAD 60 OHM 0805	
L128	071T 56U600	CHIP BEAD 60 OHM 0805	
L9006	071T 56U600	CHIP BEAD 60 OHM 0805	
L703	071T 56Z601	CHIP BEAD 600 OHM	
L702	071T 56Z601	CHIP BEAD 600 OHM	
FB611	071T 56Z601	CHIP BEAD 600 OHM	
FB610	071T 56Z601	CHIP BEAD 600 OHM	
LP601	071T 57G601TSB	IND CHIP BEAD 1206 600OHM TECSTAR	

L117	071T 59B121 K	CHIP BEAD	
L118	071T 59B121 K	CHIP BEAD	
L119	071T 59B121 K	CHIP BEAD	
L125	071T 59B121 K	CHIP BEAD	
L126	071T 59B121 K	CHIP BEAD	
L409	071T 59B121 K	CHIP BEAD	
L510	071T 59B121 K	CHIP BEAD	
L116	071T 59B121 K	CHIP BEAD	
L115	071T 59B121 K	CHIP BEAD	
L110	071T 59B121 K	CHIP BEAD	
L109	071T 59B121 K	CHIP BEAD	
L108	071T 59B121 K	CHIP BEAD	
L107	071T 59B121 K	CHIP BEAD	
L106	071T 59B121 K	CHIP BEAD	
L601	071T 59B121 K	CHIP BEAD	
L713	071T 59B121 K	CHIP BEAD	
L720	071T 59B121 K	CHIP BEAD	
L727	071T 59B121 K	CHIP BEAD	
L728	071T 59B121 K	CHIP BEAD	
L729	071T 59B121 K	CHIP BEAD	
L730	071T 59B121 K	CHIP BEAD	
L124	071T 59B601 MA	CHIP BEAD	
L123	071T 59B601 MA	CHIP BEAD	
L121	071T 59B601 MA	CHIP BEAD	
L120	071T 59B601 MA	CHIP BEAD	
L114	071T 59B601 MA	CHIP BEAD	
L113	071T 59B601 MA	CHIP BEAD	
L112	071T 59B601 MA	CHIP BEAD	
L111	071T 59B601 MA	CHIP BEAD	
FB601	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB602	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB603	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB604	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB606	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB607	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
FB608	071T2012221 2Y	CHIP BEAD 0805 220OHM +-25% 2A	
L602	073T 62181	180UH +-10%	
L603	073T 62181	180UH +-10%	
L723	073T 62181	180UH +-10%	
FB613	073T 6310010M	CHIP INDUCTOR 0603 10UH+-10% MICROGATE	
L501	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L502	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L503	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L504	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L505	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L506	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L507	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L508	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	

L9002	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9003	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9004	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
L9005	073T253S 6 T	SMD CHOKE 90 OHM ACM2012D-900-2P-T00	
CN501	088T 340 21 VD	HDMI HEADER 21P V/T	
CN502	088T 340 21 VD	HDMI HEADER 21P V/T	
CN501	088T 340 21 VN	HDMI HEADER 21P V/A	
CN502	088T 340 21 VN	HDMI HEADER 21P V/A	
CN9003	088T 34019A VD	HDMI HEADER 19P V/T	
CN9003	088T 34019CVM0	HDMI HEADER 19P V/T	
D105	093T 60230	BAT54C BY MCC	
D501	093T 60230	BAT54C BY MCC	
D502	093T 60230	BAT54C BY MCC	
ZD111	093T 64 37 N	V-PORT-0603-100K V05	
ZD110	093T 64 37 N	V-PORT-0603-100K V05	
ZD109	093T 64 37 N	V-PORT-0603-100K V05	
ZD108	093T 64 37 N	V-PORT-0603-100K V05	
ZD107	093T 64 37 N	V-PORT-0603-100K V05	
ZD106	093T 64 37 N	V-PORT-0603-100K V05	
ZD105	093T 64 37 N	V-PORT-0603-100K V05	
ZD104	093T 64 37 N	V-PORT-0603-100K V05	
ZD103	093T 64 37 N	V-PORT-0603-100K V05	
ZD102	093T 64 37 N	V-PORT-0603-100K V05	
ZD101	093T 64 37 N	V-PORT-0603-100K V05	
ZD112	093T 64 37 N	V-PORT-0603-100K V05	
ZD603	093T 64 37 N	V-PORT-0603-100K V05	
ZD602	093T 64 37 N	V-PORT-0603-100K V05	
ZD601	093T 64 37 N	V-PORT-0603-100K V05	
ZD125	093T 64 37 N	V-PORT-0603-100K V05	
ZD124	093T 64 37 N	V-PORT-0603-100K V05	
ZD123	093T 64 37 N	V-PORT-0603-100K V05	
ZD122	093T 64 37 N	V-PORT-0603-100K V05	
ZD121	093T 64 37 N	V-PORT-0603-100K V05	
ZD120	093T 64 37 N	V-PORT-0603-100K V05	
ZD119	093T 64 37 N	V-PORT-0603-100K V05	
ZD118	093T 64 37 N	V-PORT-0603-100K V05	
ZD117	093T 64 37 N	V-PORT-0603-100K V05	
ZD116	093T 64 37 N	V-PORT-0603-100K V05	
ZD115	093T 64 37 N	V-PORT-0603-100K V05	
ZD114	093T 64 37 N	V-PORT-0603-100K V05	
ZD113	093T 64 37 N	V-PORT-0603-100K V05	
D403	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D405	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D406	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D603	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D103	093T 6433S	DIODE BAV99 SEMTECH	
D104	093T 6433S	DIODE BAV99 SEMTECH	
D106	093T 6433S	DIODE BAV99 SEMTECH	

D601	093T 6433S	DIODE BAV99 SEMTECH	
ZD126	093T 39S 10 T	RLZ6.8B LLDS	
ZD127	093T 39S 10 T	RLZ6.8B LLDS	
ZD604	093T 39S 98 T	DIODE RLZ3.3B LL-34 ROHM	
D604	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D602	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D401	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D107	093T 60S 34 T	DIODE SCS140V 1A/40V SC-76	
D701	093T 64S3PH	BAS32L SOD80C	
	715T3115 H	MAIN-PCB 2-LAYER T1.6MM	
	Q85T0076101	SHIELDING	
	Q90T6068 2 GP	HEAT SINK	
	IRPF8QA7	IR BOARD T3004-D-X-X-1-080309	
U1	056T 627 7	FM-6038TM2-5AN	
CN1	033T8032 4F HR	CONNECTOR	
Q1	057T 417 6	PMBS3906/PHILIPS-SMT	
R1	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R5	061T0603102	RST CHIPR 1KOHM +-5% 1/10W	
R3	061T0603103	RST CHIPR 10KOHM +-5% 1/10W	
R2	061T0805301	RST CHIP 300R 1/8W 5%	
R4	061T0805331 Y	RST CHIPR 330 OHM +-5% 1/8W YAGEO	
C3	065T0603101 31	CHIP 100PF 50V NPO	
C5	065T0603104 32	CHIP 0.1UF 50V X7R	
C2	065T0603104 32	CHIP 0.1UF 50V X7R	
C4	065T0603104 32	CHIP 0.1UF 50V X7R	
C1	065T0805475 A5	CHIP 4.7UF 10V X5R	
FB2	071T 59B601 EA	CHIP BEAD 600OHM 0603 TB1608	
FB3	071T 59B601 EA	CHIP BEAD 600OHM 0603 TB1608	
FB1	071T 59B601 EA	CHIP BEAD 600OHM 0603 TB1608	
LED1	081T 14 24 EL	CHIP LED BLUE/DARK RED	
D1	093T 6432V	LL4148-GSO8 SMD BY VISHA	
D2	093T 6432V	LL4148-GSO8 SMD BY VISHA	
	715T3004 1	IR PCB 30X24X1.6MM FR-4 D/S	
	Q11T6039 2	WIRE HOLDER	
	Q26T 800504 2	BARCODE	
	Q36T 600 30 5	NONWOVEN FABRIC	
	Q36T 600 30 9	HIMERON	
	Q36T 600 37 35 GP	NONWOVEN FABRIC	
	Q36T 600 43 1	NONWOVEN FABRIC	
	Q40T 470615 5A	RATING LABEL	
	Q40T000262496A	IO LABEL	
	Q40T000262497A	SIDE LABEL	
	Q44TS002001	U TYPE CARTON	
	Q44TS002101	EPS	
	Q44TS002201	EPS	
	Q44TS002301	EPS	
	Q44TS002401	EPS	
	Q44TS002501	EPS	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

	Q44TS002615 9A B	47" TV AOC CARTON BOTTOM	
	Q44TS002615 9A T	47" TV AOC CARTON TOP	
	Q44TS002BLO001	PAPER SHEET	
	Q45T 99609 70	EPE COVER FOR BASE	
	Q45T 99609 83	EPE COVER FOR MONITOR	
	Q50T 500523	CABLE TIE	
CN5	033T3278 6D	CONNECTOR 6P 2.5 DIP	
CN1	033T3802 2B Y	CONNECTOR	
CN9	033T3802 4B Y	CONNECTOR	
R243	061T152M270 64	27 OHM 5% 2W	
R242	061T152M330 64	33 OHM 5% 2W	
C151	067T 215221 3H	CAP 105°C 220UF M 16V	
C226	067T 305101 3T	100UF 16V 105C	
C154	067T 305101 7P	105 RADIAL ECA PACTOR	
C219	067T 305101 7P	105 RADIAL ECA PACTOR	
C209	067T215S1023KV	EC 105°C CAP 1000UF M 16V	
C178	067T215S471 3K	LOW ESR EC 470UF 16V	
C193	067T215S471 3K	LOW ESR EC 470UF 16V	
C181	067T215S471 3K	LOW ESR EC 470UF 16V	
C198	067T215V102 3N	EC 1000UF 16V NCC KY16VB	
C223	067T305M1003PT	E.C CAP 10UF M 16V 4*7	
L11	073T 253195 L	CHOKE COIL 200UH CC-008305	
TU1	094TISDB T 1A	TUNER ISDB-T TDHL5-002A	
C222	067T 305101 3T	100UF 16V 105C	
C160	067T 305101 3T	100UF 16V 105C	
C157	067T 305101 3T	100UF 16V 105C	
C150	067T 305101 3T	100UF 16V 105C	
C15	067T 305101 3T	100UF 16V 105C	
C14	067T 305101 3T	100UF 16V 105C	
C190	067T 305221 3T	220UF/16V	
C183	067T 305470 3T	EC 105°C 47UF M 16V	
C189	067T 305470 3T	EC 105°C 47UF M 16V	
U18	056T 379 36	MC34063A	
U16	056T 379125	IC G2992F1U SOP-8	
U14	056T 563126	IC G1117T63UF SOT-223	
U12	056T 563137	IC CLZ8831-RST SOP-8	
U15	056T 563137	IC CLZ8831-RST SOP-8	
U16	056T 563138	IC RT9173PS SOP-8	
U1	056T 575 13	IC ST-7101BWC PBGA-680	
U22	056T 581 9	IC G5250K1T1U SOT23-5	
U20	056T 585 11	AZ1117D-5.0-E1	
U13	056T 585 4A	AP1117E33LA	
U19	056T 614 1	IC 74HC4052D PHILIPS	
U9	056T 615 58	IC HYB25DC512160CE-5 512M PG-TSOPII-66-1	
U8	056T 615 58	IC HYB25DC512160CE-5 512M PG-TSOPII-66-1	
U11	056T 615913	IC HYB25DC256160CE-5 TSOPII66	
U10	056T 615913	IC HYB25DC256160CE-5 TSOPII66	
U4	056T 643500	EM6353BX2SP3B-2.9+ 3PIN SOT23-3	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

U5	056T1133 83 1	IC M24C64-WMN6P 64K SO-8 ST	
U7	056T1133123	IC S29GL064N90TFI040 TSOP-48	
Q1	057T 417511	TRA MMBT3904 BLUE ROCKET	
Q2	057T 417511	TRA MMBT3904 BLUE ROCKET	
R198	061G0402100 1F	RST CHIPR 1KOHM +-1% 1/16W	
R202	061G0402100 1F	RST CHIPR 1KOHM +-1% 1/16W	
R185	061G0402125	RST CHIP 1M2 1/16W 5%	
R210	061G0402152	RST CHIP 1K5 1/16W 5%	
RP31	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP32	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP33	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP46	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP47	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP48	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP49	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP50	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP51	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP57	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP56	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP55	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP54	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP53	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP52	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP22	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP23	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP24	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP25	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP26	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP27	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP28	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP29	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP30	061T 126101 8Y	RST CHIP AR 8P4R 100OHM +-5% 1/16W	
RP3	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP34	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP35	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP36	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP37	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP38	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP39	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP40	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP41	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP9	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP8	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP45	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP44	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP43	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP42	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP1	061T 126220 8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	

32" & 42" & 47" Digital LCD TV**AOC D32W831&D42H831&D47H831**

RP11	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP13	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP15	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP17	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP18	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP19	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP20	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP21	061T 126220	8	RST CHIP AR 8P4R 22 OHM +-5% 1/16W	
RP7	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP6	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP5	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP4	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP2	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP16	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP14	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP12	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
RP10	061T 126470	8	RST CHIPR AR 8P4R 47 OHM +-5% 1/16W	
R188	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R199	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R2	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R200	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R207	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R208	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R209	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R25	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R26	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R3	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R4	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R5	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R6	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R73	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R236	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R255	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R256	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R1	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R10	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R126	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R128	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R13	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R130	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R166	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R171	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R172	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R181	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R187	061T0402000		RST CHIP JUMP MAX 0R05 1/16W	
R160	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	
R159	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	
R158	061T0402101		RST CHIPR 100 OHM +-5% 1/16W	

R157	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R156	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R155	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R154	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R153	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R152	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R151	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R161	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R162	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R163	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R164	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R168	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R167	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R191	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R67	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R179	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R178	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R125	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R107	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R108	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R109	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R110	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R111	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R112	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R113	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R114	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R115	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R116	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R117	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R118	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R119	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R120	061T0402101	RST CHIPR 100 OHM +-5% 1/16W	
R235	061T0402102	RST CHIPR 1KOHM +-5% 1/16W	
R182	061T0402102	RST CHIPR 1KOHM +-5% 1/16W	
R44	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R37	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R36	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R34	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R32	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R30	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R29	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R56	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R183	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R97	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R96	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R95	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R94	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R90	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R28	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R27	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R224	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R223	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R21	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R18	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R169	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R165	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R124	061T0402103	RST CHIPR 10KOHM +-5% 1/16W	
R193	061T0402104	RST CHIPR 100KOHM +-5% 1/16W	
R14	061T0402104	RST CHIPR 100KOHM +-5% 1/16W	
R131	061T0402120 3D	RST CHIPR 120KOHM +-0.5% 1/16W	
R79	061T0402120 3D	RST CHIPR 120KOHM +-0.5% 1/16W	
R194	061T0402200 3F	RST CHIPR 0402 200K OHM +-1% 1/16W	
R135	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R142	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R143	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R144	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R145	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R147	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R148	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R149	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R150	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R47	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R48	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R195	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R99	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R53	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R71	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R75	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R87	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R129	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R100	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R101	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R102	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R103	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R104	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R105	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R106	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R121	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R122	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R123	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R127	061T0402220	RST CHIPR 22 OHM +-5% 1/16W	
R24	061T0402272	RST CHIP 2K7 1/16W 5%	
R23	061T0402272	RST CHIP 2K7 1/16W 5%	
R16	061T0402272	RST CHIP 2K7 1/16W 5%	
R15	061T0402272	RST CHIP 2K7 1/16W 5%	
R92	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	

32" & 42" & 47" Digital LCD TV
AOC D32W831 & D42H831 & D47H831

R89	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R88	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R85	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R84	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R22	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R216	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R215	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R214	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R175	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R146	061T0402470 9F	RST CHIPR 0402 47 OHM +-1% 1/16W	
R211	061T0402471	RST CHIPR 470 OHM +-5% 1/16W	
R60	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R63	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R68	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R69	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R70	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R72	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R76	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R77	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R237	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R80	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R78	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R81	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R83	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R91	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R12	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R19	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R20	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R218	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R220	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R222	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R49	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R50	061T0402472	RST CHIPR 4.7KOHM +-5% 1/16W	
R180	061T0402561	RST CHIPR 560 OHM +-5% 1/16W	
R196	061T0402562	RST CHIPR 5.6KOHM +-5% 1/16W	
R7	061T0402680	RST CHIPR 68 OHM 1/16W +-5%	
R35	061T0402680	RST CHIPR 68 OHM 1/16W +-5%	
R41	061T0402750 9F	RST CHIP 75 OHM 1/16W 1%	
R40	061T0402750 9F	RST CHIP 75 OHM 1/16W 1%	
R137	061T0402822	RST CHIPR 8.2 KOHM +-5% 1/16W	
R139	061T0402822	RST CHIPR 8.2 KOHM +-5% 1/16W	
R233	061T0603000	RST CHIPR 0 OHM +-5% 1/10W	
R227	061T0603100	CHIP 10OHM 1/16W	
R229	061T0603101	RST CHIPR 100 OHM +-5% 1/10W	
R261	061T0603104	RST CHIPR 100KOHM +-5% 1/10W	
R261	061T0603104 T	RST CHIP 100K 1/10W 5%	
R231	061T0603181	RST CHIPR 180 OHM +-5% 1/10W	
R230	061T0603182	CHIP 1.8K OHM 1/16W	

R260	061T0603223	CHIP 22KOHM 1/16W	
R226	061T0603272	CHIP 2.7KOHM 1/16W	
R225	061T0603272	CHIP 2.7KOHM 1/16W	
R189	061T0603390 2F	RST CHIPR 39 KOHM +-1% 1/10W	
R197	061T0603470 2F	RST CHIPR 47 KOHM +-1% 1/10W	
R197	061T06034702FF	RST CHIPR 47KOHM +-1% 1/10W FENGHUA	
R228	061T0603473	CHIP 47KOHM 1/16W	
R186	061T0603510 2F	RST CHIPR 51 KOHM +-1% 1/10W	
R201	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R203	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R204	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R205	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R206	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R213	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R234	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R246	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R245	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R244	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R249	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R248	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R247	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R190	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R177	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R176	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R141	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R134	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R133	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R132	061T0805000	RST CHIPR 0 OHM +-5% 1/8W	
R232	061T1206629	RST CHIP 6R2 1/4W 5%	
C61	065T0402103 22	CHIP 0.01UF 25V X7R	
C6	065T0402103 22	CHIP 0.01UF 25V X7R	
C54	065T0402103 22	CHIP 0.01UF 25V X7R	
C53	065T0402103 22	CHIP 0.01UF 25V X7R	
C5	065T0402103 22	CHIP 0.01UF 25V X7R	
C41	065T0402103 22	CHIP 0.01UF 25V X7R	
C4	065T0402103 22	CHIP 0.01UF 25V X7R	
C39	065T0402103 22	CHIP 0.01UF 25V X7R	
C37	065T0402103 22	CHIP 0.01UF 25V X7R	
C35	065T0402103 22	CHIP 0.01UF 25V X7R	
C33	065T0402103 22	CHIP 0.01UF 25V X7R	
C31	065T0402103 22	CHIP 0.01UF 25V X7R	
C3	065T0402103 22	CHIP 0.01UF 25V X7R	
C29	065T0402103 22	CHIP 0.01UF 25V X7R	
C194	065T0402103 22	CHIP 0.01UF 25V X7R	
C27	065T0402103 22	CHIP 0.01UF 25V X7R	
C21	065T0402103 22	CHIP 0.01UF 25V X7R	
C20	065T0402103 22	CHIP 0.01UF 25V X7R	
C2	065T0402103 22	CHIP 0.01UF 25V X7R	

C196	065T0402103 22	CHIP 0.01UF 25V X7R	
C63	065T0402103 22	CHIP 0.01UF 25V X7R	
C99	065T0402103 22	CHIP 0.01UF 25V X7R	
C98	065T0402103 22	CHIP 0.01UF 25V X7R	
C96	065T0402103 22	CHIP 0.01UF 25V X7R	
C95	065T0402103 22	CHIP 0.01UF 25V X7R	
C78	065T0402103 22	CHIP 0.01UF 25V X7R	
C77	065T0402103 22	CHIP 0.01UF 25V X7R	
C76	065T0402103 22	CHIP 0.01UF 25V X7R	
C75	065T0402103 22	CHIP 0.01UF 25V X7R	
C74	065T0402103 22	CHIP 0.01UF 25V X7R	
C73	065T0402103 22	CHIP 0.01UF 25V X7R	
C72	065T0402103 22	CHIP 0.01UF 25V X7R	
C71	065T0402103 22	CHIP 0.01UF 25V X7R	
C70	065T0402103 22	CHIP 0.01UF 25V X7R	
C7	065T0402103 22	CHIP 0.01UF 25V X7R	
C69	065T0402103 22	CHIP 0.01UF 25V X7R	
C68	065T0402103 22	CHIP 0.01UF 25V X7R	
C67	065T0402103 22	CHIP 0.01UF 25V X7R	
C66	065T0402103 22	CHIP 0.01UF 25V X7R	
C65	065T0402103 22	CHIP 0.01UF 25V X7R	
C64	065T0402103 22	CHIP 0.01UF 25V X7R	
C131	065T0402103 22	CHIP 0.01UF 25V X7R	
C130	065T0402103 22	CHIP 0.01UF 25V X7R	
C129	065T0402103 22	CHIP 0.01UF 25V X7R	
C128	065T0402103 22	CHIP 0.01UF 25V X7R	
C127	065T0402103 22	CHIP 0.01UF 25V X7R	
C126	065T0402103 22	CHIP 0.01UF 25V X7R	
C125	065T0402103 22	CHIP 0.01UF 25V X7R	
C124	065T0402103 22	CHIP 0.01UF 25V X7R	
C123	065T0402103 22	CHIP 0.01UF 25V X7R	
C122	065T0402103 22	CHIP 0.01UF 25V X7R	
C121	065T0402103 22	CHIP 0.01UF 25V X7R	
C120	065T0402103 22	CHIP 0.01UF 25V X7R	
C118	065T0402103 22	CHIP 0.01UF 25V X7R	
C111	065T0402103 22	CHIP 0.01UF 25V X7R	
C106	065T0402103 22	CHIP 0.01UF 25V X7R	
C101	065T0402103 22	CHIP 0.01UF 25V X7R	
C100	065T0402103 22	CHIP 0.01UF 25V X7R	
C132	065T0402103 22	CHIP 0.01UF 25V X7R	
C19	065T0402103 22	CHIP 0.01UF 25V X7R	
C184	065T0402103 22	CHIP 0.01UF 25V X7R	
C18	065T0402103 22	CHIP 0.01UF 25V X7R	
C173	065T0402103 22	CHIP 0.01UF 25V X7R	
C172	065T0402103 22	CHIP 0.01UF 25V X7R	
C170	065T0402103 22	CHIP 0.01UF 25V X7R	
C17	065T0402103 22	CHIP 0.01UF 25V X7R	
C168	065T0402103 22	CHIP 0.01UF 25V X7R	

C165	065T0402103 22	CHIP 0.01UF 25V X7R	
C133	065T0402103 22	CHIP 0.01UF 25V X7R	
C134	065T0402103 22	CHIP 0.01UF 25V X7R	
C135	065T0402103 22	CHIP 0.01UF 25V X7R	
C152	065T0402103 22	CHIP 0.01UF 25V X7R	
C155	065T0402103 22	CHIP 0.01UF 25V X7R	
C158	065T0402103 22	CHIP 0.01UF 25V X7R	
C161	065T0402103 22	CHIP 0.01UF 25V X7R	
C163	065T0402103 22	CHIP 0.01UF 25V X7R	
C30	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C32	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C34	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C36	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C38	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C40	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C42	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C44	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C45	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C28	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C26	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C25	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C24	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C23	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C22	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C218	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C208	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C205	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C204	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C48	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C9	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C93	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C94	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C224	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C225	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C233	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C82	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C81	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C80	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C8	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C79	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C62	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C59	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C58	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C57	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C56	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C52	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C51	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C49	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	

32"&42"&47"Digital LCD TV
AOC D32W831&D42H831&D47H831

C138	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C137	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C136	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C13	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C12	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C119	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C110	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C11	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C109	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C108	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C107	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C105	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C104	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C103	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C102	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C10	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C139	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C195	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C192	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C191	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C186	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C185	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C180	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C179	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C174	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C153	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C156	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C159	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C162	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C164	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C166	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C169	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C171	065T0402104 15	MLCC 0402 0.1UF K 16V X5R	
C197	065T0402222 32	MLCC 0402 2200PF K 50V X7R	
C187	065T0402222 32	MLCC 0402 2200PF K 50V X7R	
C115	065T0603101 32	CHIP 100PF 50V X7R	
C114	065T0603101 32	CHIP 100PF 50V X7R	
C221	065T0603104 32	CHIP 0.1UF 50V X7R	
C182	065T0603105 17	CHIP 1UF 16V Y5V	
C188	065T0603105 17	CHIP 1UF 16V Y5V	
C231	065T0603105 17	CHIP 1UF 16V Y5V	
C175	065T0603105 17	CHIP 1UF 16V Y5V	
C230	065T060310517Z Y	CAP CHIP 0603 1UF Z 16V Y5V	
C220	065T0603152 31	CHIP 1500PF 50V NPO	
C85	065T0805106 15	CHIP 10UF 16V X5R 0805	
C84	065T0805106 15	CHIP 10UF 16V X5R 0805	
C83	065T0805106 15	CHIP 10UF 16V X5R 0805	
C55	065T0805106 15	CHIP 10UF 16V X5R 0805	

C16	065T0805106 15	CHIP 10UF 16V X5R 0805	
C149	065T0805106 15	CHIP 10UF 16V X5R 0805	
C148	065T0805106 15	CHIP 10UF 16V X5R 0805	
C86	065T0805106 15	CHIP 10UF 16V X5R 0805	
C87	065T0805106 15	CHIP 10UF 16V X5R 0805	
C88	065T0805106 15	CHIP 10UF 16V X5R 0805	
C89	065T0805106 15	CHIP 10UF 16V X5R 0805	
C90	065T0805106 15	CHIP 10UF 16V X5R 0805	
C91	065T0805106 15	CHIP 10UF 16V X5R 0805	
C92	065T0805106 15	CHIP 10UF 16V X5R 0805	
C97	065T0805106 15	CHIP 10UF 16V X5R 0805	
C1	065T0805106 15	CHIP 10UF 16V X5R 0805	
C140	065T0805106 15	CHIP 10UF 16V X5R 0805	
C141	065T0805106 15	CHIP 10UF 16V X5R 0805	
C142	065T0805106 15	CHIP 10UF 16V X5R 0805	
C143	065T0805106 15	CHIP 10UF 16V X5R 0805	
C144	065T0805106 15	CHIP 10UF 16V X5R 0805	
C145	065T0805106 15	CHIP 10UF 16V X5R 0805	
C146	065T0805106 15	CHIP 10UF 16V X5R 0805	
C147	065T0805106 15	CHIP 10UF 16V X5R 0805	
L1	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L15	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
L14	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB3	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB2	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB15	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB14	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB12	071T 56G301 EA	CHIP BEAD 300 OHM 0805	
FB32	071T 56K121 TA	CHIP BEAD 0805 120R/6000MA	
FB11	071T 56K121 TA	CHIP BEAD 0805 120R/6000MA	
FB1	071T 56K121 TA	CHIP BEAD 0805 120R/6000MA	
FB21	071T 59A121 TA	CHIP BEAD 120R/3000MA HCB1608KF-121T30	
FB17	071T 59A121 TA	CHIP BEAD 120R/3000MA HCB1608KF-121T30	
FB16	071T 59A121 TA	CHIP BEAD 120R/3000MA HCB1608KF-121T30	
FB24	071T 59B121 K	CHIP BEAD	
FB25	071T 59B121 K	CHIP BEAD	
FB26	071T 59B121 K	CHIP BEAD	
FB28	071T 59B121 K	CHIP BEAD	
FB29	071T 59B121 K	CHIP BEAD	
FB30	071T 59B121 K	CHIP BEAD	
FB4	071T 59B121 K	CHIP BEAD	
FB8	071T 59B121 K	CHIP BEAD	
FB9	071T 59B121 K	CHIP BEAD	
FB31	071T 59B121 K	CHIP BEAD	
FB5	071T 59B121 K	CHIP BEAD	
FB6	071T 59B121 K	CHIP BEAD	
FB7	071T 59B121 K	CHIP BEAD	
FB10	071T 59B121 K	CHIP BEAD	

32"&42"&47"Digital LCD TV**AOC D32W831&D42H831&D47H831**

FB13	071T 59B121 K	CHIP BEAD	
FB18	071T 59B121 K	CHIP BEAD	
FB19	071T 59B121 K	CHIP BEAD	
FB20	071T 59B121 K	CHIP BEAD	
FB22	071T 59B121 K	CHIP BEAD	
FB23	071T 59B121 K	CHIP BEAD	
L13	073T 62181	180UH +-10%	
L4	073T253S 57 H	SMD CHOKE 10UH 4A	2nd source
L5	073T253S 57 H	SMD CHOKE 10UH 4A	2nd source
L5	073T253S 57 K	SMD CHOKE 10UH 4A	
L4	073T253S 57 K	SMD CHOKE 10UH 4A	
CN6	088T 34019A VD	HDMI HEADER 19P V/T	
CN6	088T 34019CVMO	HDMI HEADER 19P V/T	2nd source
X1	093T 22S915 H	CRYSTAL / OSCILLATORS 27MHZ 7X5MM	
ZD1	093T 60S801	DIODE 3A/40V SSA34 VISHAY	
ZD2	093T 60S801	DIODE 3A/40V SSA34 VISHAY	
D3	093T 64S3PH	BAS32L SOD80C	
	715T3176 D	DTV MAIN-PCB 4-LAYER T1.6MM	
	045T 76 28 C	PE BAG FOR MANUAL	
	0M1T6022500	SCREW	
	Q41T4701615 2A	MANUAL	
	Q41T7830615 2A	WARRANTY CARD	
	Q45T 76 28NV2 R	PE BAG FOR CLAMP	
	040T 58162435A	LABEL	

12. Different Parts List**D32W831**

Diversity of E32RMNNSW8AE6N compared with E32RMNNSW8AE2N		
Location	Part No.	Description
	756TQ8CB NS007	MAIN BOARD-CBPFRN3SQA
SMTF-U403	100TANMK004S11	MCU ASSY-056T1125177
SMTF-U510	100TANMK005S11	MCU ASSY-056T1133526
	756TQ8TU NS005	TUNER BOARD-TUPFRC1SQ2
STUP-U7	100TANMK006S11	MCU ASSY-056T1133123
CN102	088T 302A17 YG	PHONE JACK 3.5mm 3P V/T GREEN
	IRPF8QAH	IR BOARD
	KEPF8QAD	KEY BOARD
	Q44T 10 1	BIG CARTON FOR IC
	Q44T6000 4E	CARTON
	Q85T0076101CKD	SHIELDING