

Service
Service
Service

Service Manual

Horizontal Frequency
31~60 KHz

TABLE OF CONTENTS

Description	Page	Description	Page
Table of Contents.....	1	6.4 IR Board.....	41
Important Safety Notice.....	2	6.5 LVDS to FFC Board.....	43
Revision List.....	3	7. Adjustment.....	44
1. General Specification.....	4	8. Block Diagram.....	46
2. Operating Instructions.....	5	9. Schematic Diagram.....	48
3. Input/Output Specification.....	6	9.1 Main Board.....	48
4. Mechanical Instructions.....	9	9.2 Power Board.....	65
5. Repair Flow Chart	18	9.3 Key Board.....	73
6. PCB Layout	25	9.4 IR Board.....	75
6.1 Main Board.....	25	9.5 LVDS to FFC Board.....	78
6.2 Power Board.....	27	10. Exploded View.....	79
6.3 Key Board.....	41	11. BOM List.....	87

SAFETY NOTICE

ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS
AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING
ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

Important Safety Notice

Proper service and repair is important to the safe, reliable operation of all AOC Company Equipment. The service procedures recommended by AOC and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It is also important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. AOC could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, AOC has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by AOC must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

Hereafter throughout this manual, AOC Company will be referred to as AOC.

WARNING

Use of substitute replacement parts, which do not have the same, specified safety characteristics might create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from AOC. AOC assumes no liability, express or implied, arising out of any unauthorized modification of design.

Servicer assumes all liability.

FOR PRODUCTS CONTAINING LASER:

DANGER-Invisible laser radiations when open AVOID DIRECT EXPOSURE TO BEAM.

CAUTION-Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION -The use of optical instruments with this product will increase eye hazard.

TO ENSURE THE CONTINUED RELIABILITY OF THIS PRODUCT, USE ONLY ORIGINAL MANUFACTURER'S REPLACEMENT PARTS, WHICH ARE LISTED WITH THEIR PART NUMBERS IN THE PARTS LIST SECTION OF THIS SERVICE MANUAL.

Take care during handling the LCD module with backlight unit

- Must mount the module using mounting holes arranged in four corners.
- Do not press on the panel, edge of the frame strongly or electric shock as this will result in damage to the screen.
- Do not scratch or press on the panel with any sharp objects, such as pencil or pen as this may result in damage to the panel.
- Protect the module from the ESD as it may damage the electronic circuit (C-MOS).
- Make certain that treatment person's body is grounded through wristband.
- Do not leave the module in high temperature and in areas of high humidity for a long time.
- Avoid contact with water as it may a short circuit within the module.
- If the surface of panel becomes dirty, please wipe it off with a soft material. (Cleaning with a dirty or rough cloth may damage the panel.)

Revision List

[illegible]

1. General Specification

Please refer to user manual.

2. Operating Instructions

Please refer to user manual.

3. Input/Output Specification


3.1 RGB Signal Input



15 - Pin Color Display Signal Cable

Pin No.	Description	Pin No.	Description
1	Red Video	9	No Pin
2	Green Video	10	Sync Ground
3	Blue Video	11	SDA(Remote Control)
4	SCL(Remote Control)	12	Serial Data for DDC
5	Ground	13	H-Sync.
6	Red Video Ground	14	V-Sync.
7	Green Video Ground	15	Serial Clock for DDC
8	Blue Video Ground		

3.2 HDMI Digital Connector Pin Assignments

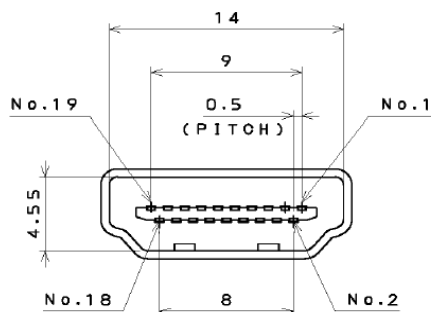

Pin No.	Description	Pin No.	Description
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	NC
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		

3.3 Compatible Mode Table

Analog RGB Input Signal Timing

D26W931/D32W931/LC42H053

Dots × Lines	Horizontal Frequency (kHz)	Vertical Frequency (Hz)	Sync Polarity		Presence		Screen Mode	
			Horizontal	Vertical	Horizontal	Vertical	Normal (4:3)	Full (16:9)
720×400	31.47	70.00	NEG	POS	YES	YES	YES	YES
640×480	31.47	59.94	NEG	NEG	YES	YES	YES	YES
640×480	37.50	75.00	NEG	NEG	YES	YES	YES	YES
640×480	37.86	72.81	NEG	NEG	YES	YES	YES	YES
800×600	37.88	60.32	POS	POS	YES	YES	YES	YES
800×600	46.88	75.00	POS	POS	YES	YES	YES	YES
800×600	48.08	72.19	POS	POS	YES	YES	YES	YES
832×624	49.73	74.55	NEG	NEG	YES	YES	YES	YES
1024×768	48.40	60.00	NEG	NEG	YES	YES	YES	YES
1024×768	60.02	75.03	POS	POS	YES	YES	YES	YES
1024×768	56.48	70.07	NEG	NEG	YES	YES	YES	YES
1360×768	47.70	60.00	POS	POS	YES	YES	YES	YES

LC32W053

VESA MODES							
Mode	Resolution	Total	Horizontal		Vertical		Nominal Pixel Clock (MHz)
			Nominal Frequency (KHz)	Sync Polarity	Nominal Freq. (Hz)	Sync Polarity	
VGA	640x480@60Hz	800 x 525	31.469	N	59.940	N	25.175
	640x480@72Hz	832 x 520	37.861	N	72.809	N	31.500
	640x480@75Hz	840 x 500	37.5	N	75	N	31.500
	720x400@70Hz	900 x 449	31.469	N	70.087	P	28.322
SVGA	800x600@56Hz	1024 x 625	35.156	P	56.25	P	36.000
	800x600@60Hz	1056 x 628	37.879	P	60.317	P	40.000
	800x600@72Hz	1040 x 666	48.097	P	72.188	P	40.000
	800x600@75Hz	1056 x 625	46.875	P	75	P	49.5
XGA	1024x768@60Hz	1344x806	48.363	N	60.004	N	65.000
	1024x768@70Hz	1328x806	56.476	N	70.069	N	75.000
	1024x768@75Hz	1312x800	60.023	P	75.029	P	78.750
WXGA	1360x768@60Hz	1792X795	47.712	P	60.015	P	85.5

HDMI Input Signal Timing

D26W931/D32W931

VESA MODES							
			Horizontal		Vertical		
Mode	Resolution	Total	Nominal Frequency (KHz)	Sync Polarity	Nominal Freq. (Hz)	Sync Polarity	Nominal Pixel Clock (MHz)
720P	1280×720P		45.00		60		74.25
1080i	1920X1080i		33.75		60		74.25
480P	720X480P		31.54		60		27.00
480i	720X480i		15.75		60		13.51

LC32W053/LC42H053

Mode	Resolution	Total	Nominal Horizontal Frequency (KHz)	Nominal Vertical Frequency (Hz)	Nominal Pixel Clock (MHz)
1080P	1920X1080		67.5	60	148.50
720P	1280×720	1650 x 750	45.00	60	74.25
1080i	1920X1080	2200 x 1125	33.75	60	74.25
480P	720X480	858 x 525	31.50	60	27.03
480i	720X480	1716 x 525	15.75	60	13.51


4. Mechanical Instructions

D26W931

1. Remove the screws to remove the rear cover ass'y and stand ass'y.



2. Remove the screws to remove main board, power board, bracket and speakers and separate panel and bezel.

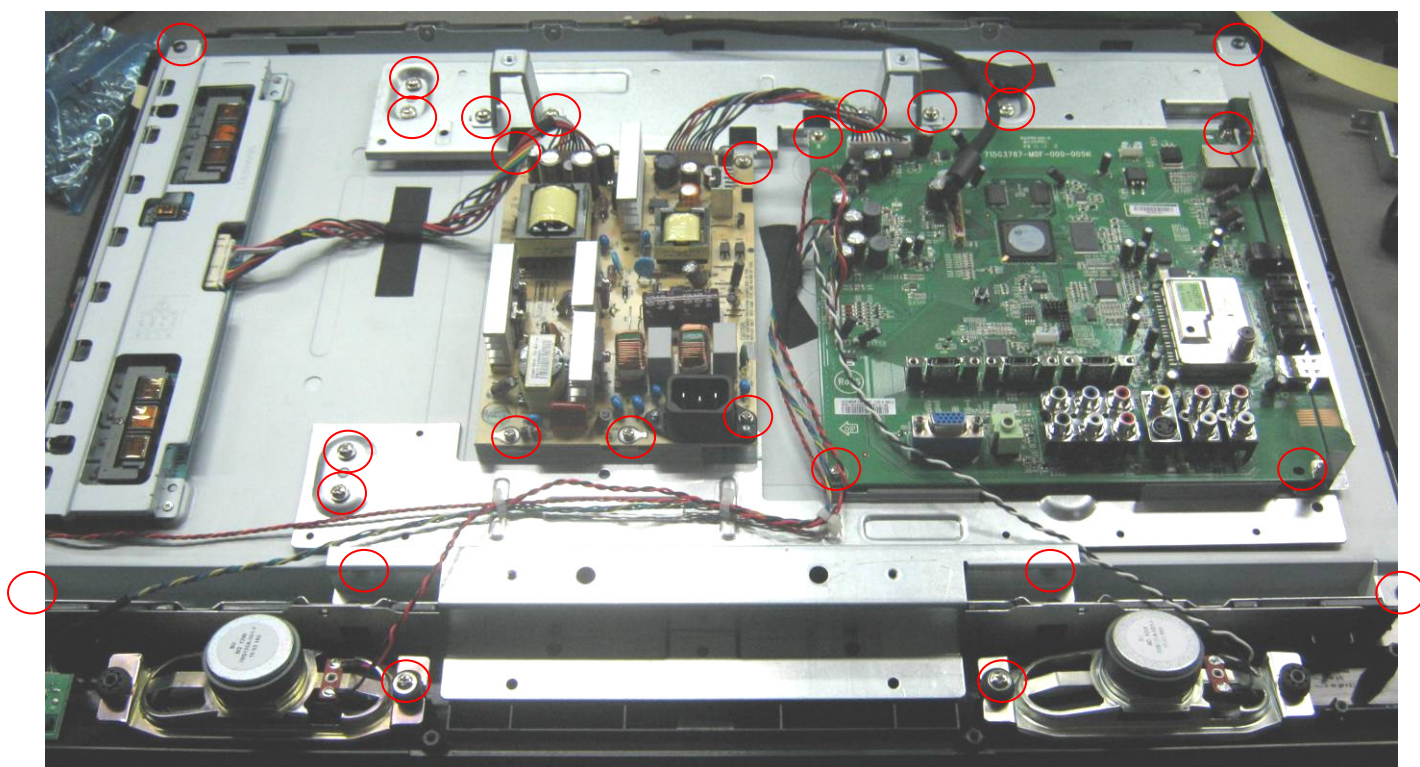

3. Remove the screws to remove IR board and key board.




D32W931


1. Remove the screws to remove the rear cover ass'y and base ass'y.



2. Remove the screws to remove main board, power board and bracket.

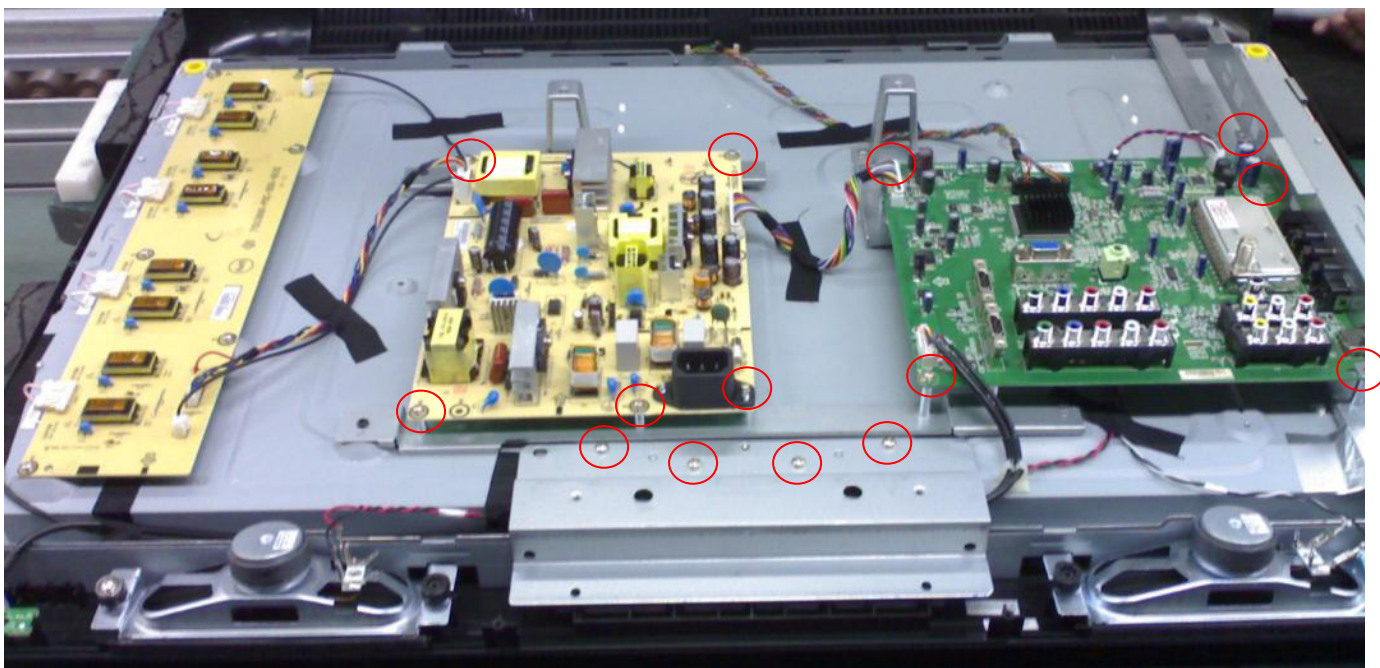

3. Remove the screws to remove inverter board, speakers and bracket and separate panel and bezel.

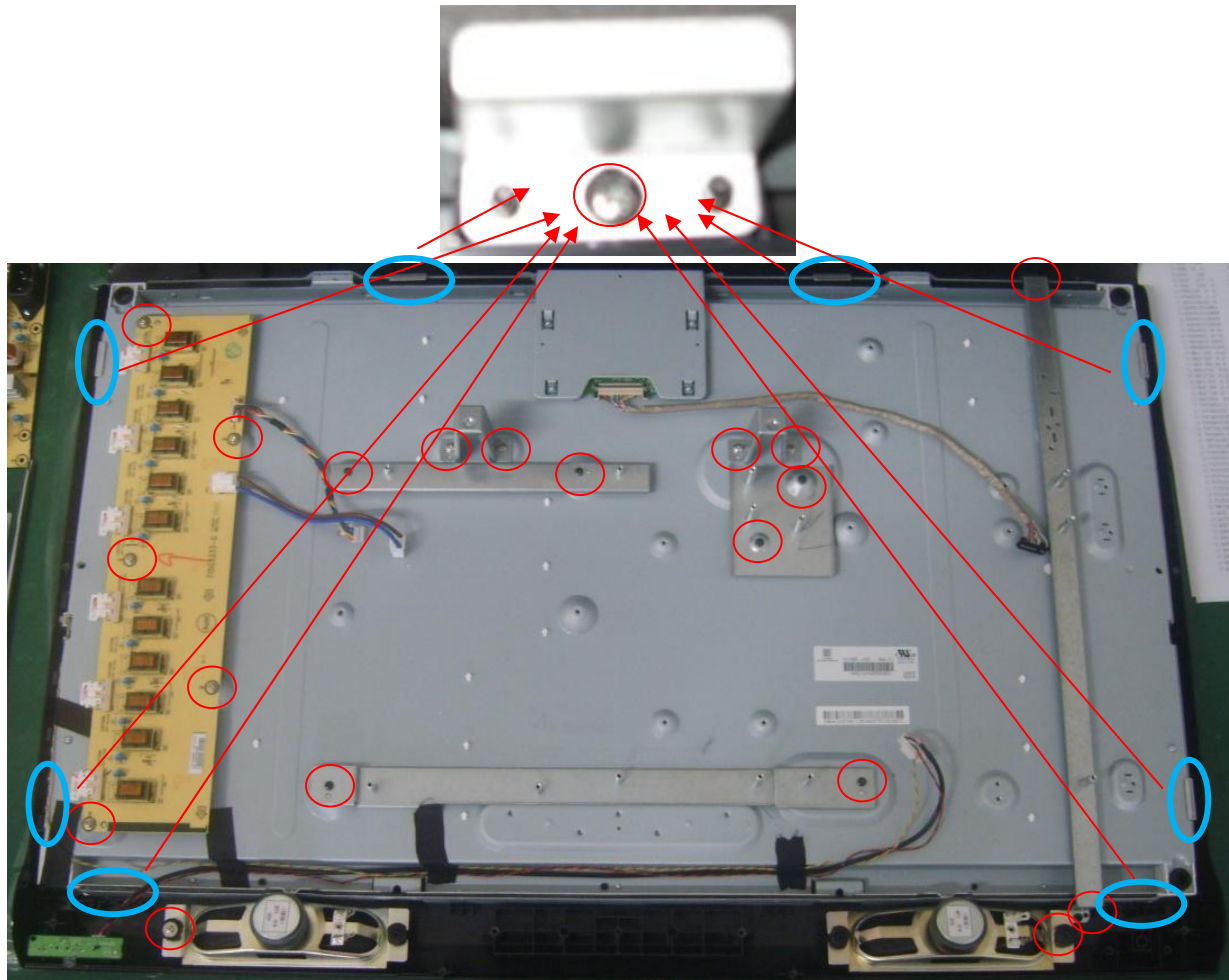

4. Remove the screws to remove key board and IR board.




LC32W053


1. Remove the screws to remove the rear cover.



2. Remove the screws to remove the stand base, main board, power board, inverter board and LVDS to FFC board.

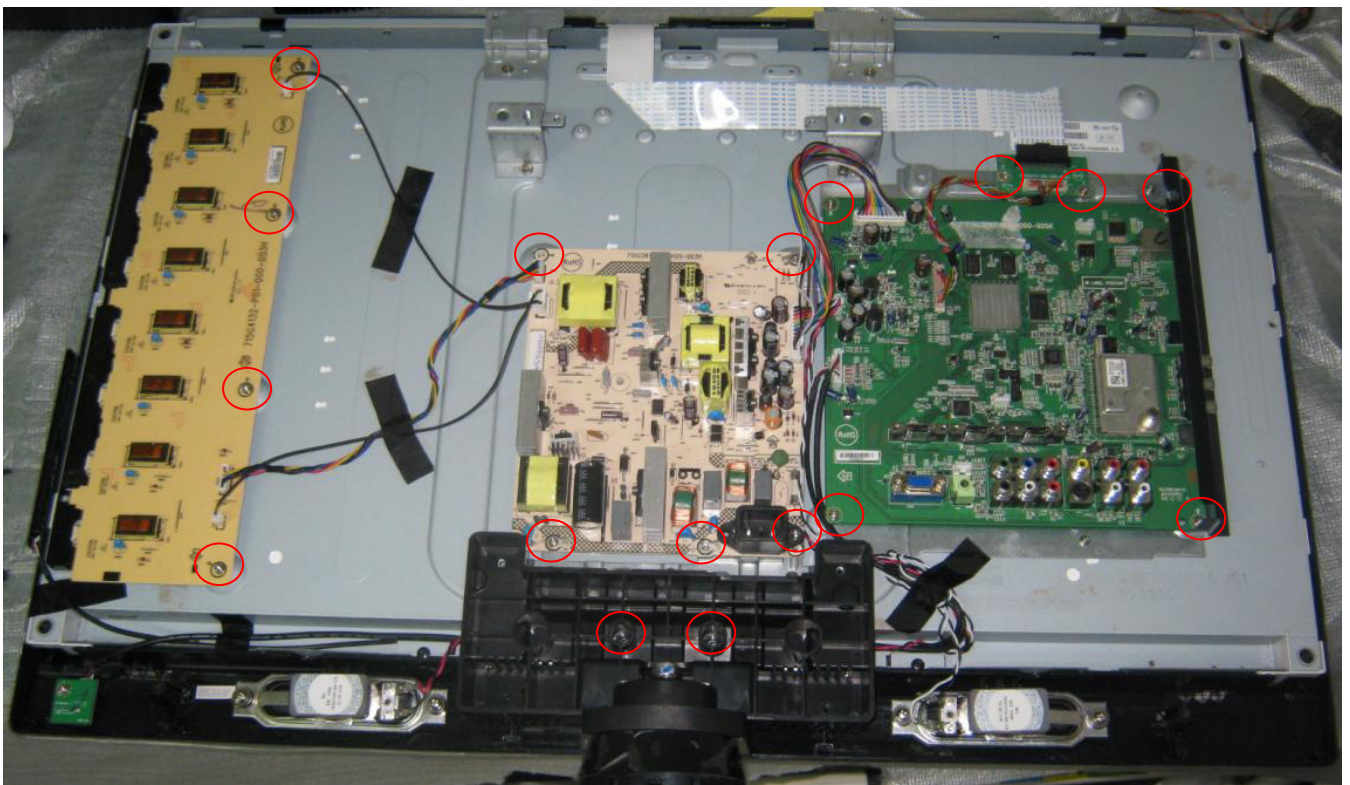

3. Remove the screws to remove the bracket and separate panel and bezel.

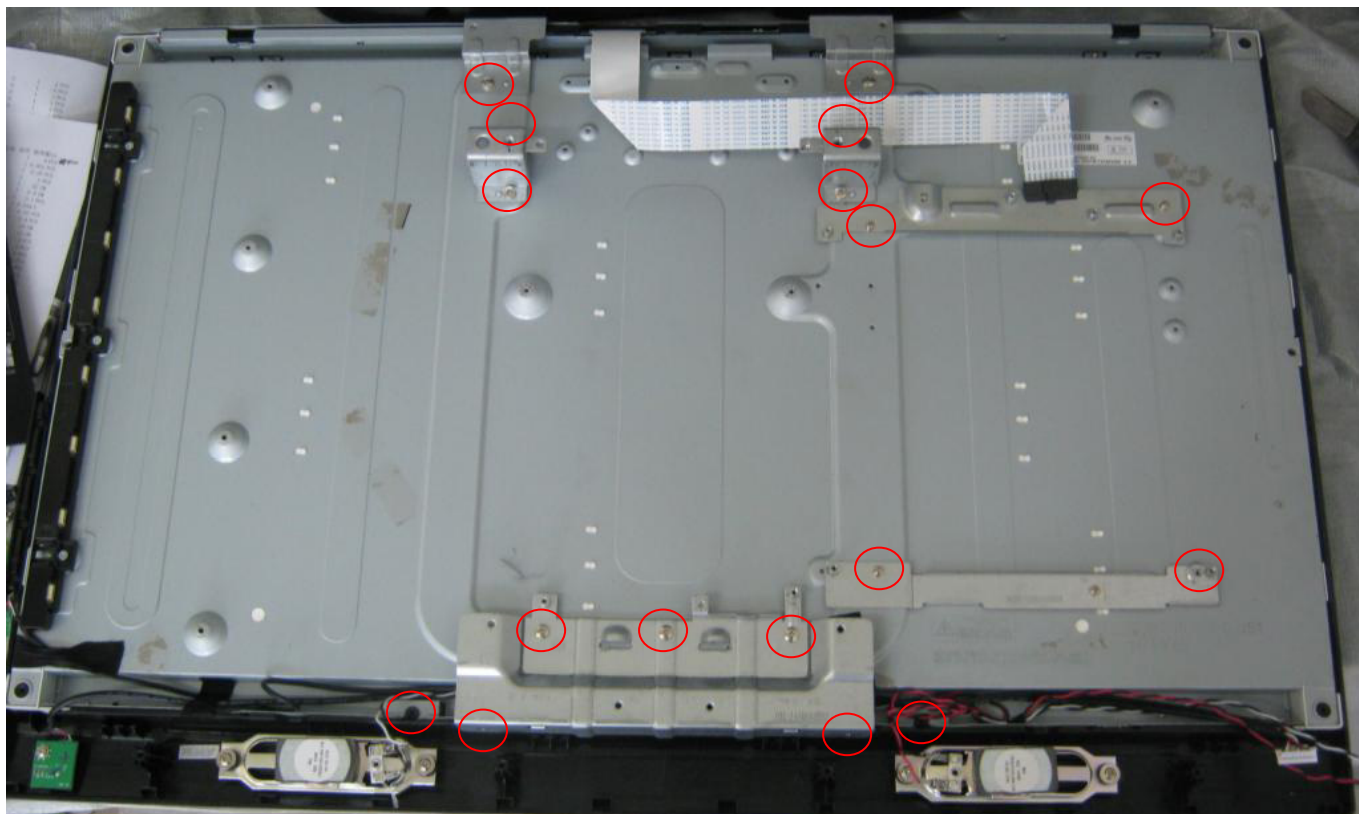

4. Remove the screws to remove IR board, key board and speakers.



LC42H053

1. Remove the screws to remove the rear cover.




2. Remove the screws to remove the stand base.



3. Remove the screws to remove main board and power board.



4. Remove the screws to remove the bracket and speakers and separate the panel and bezel.

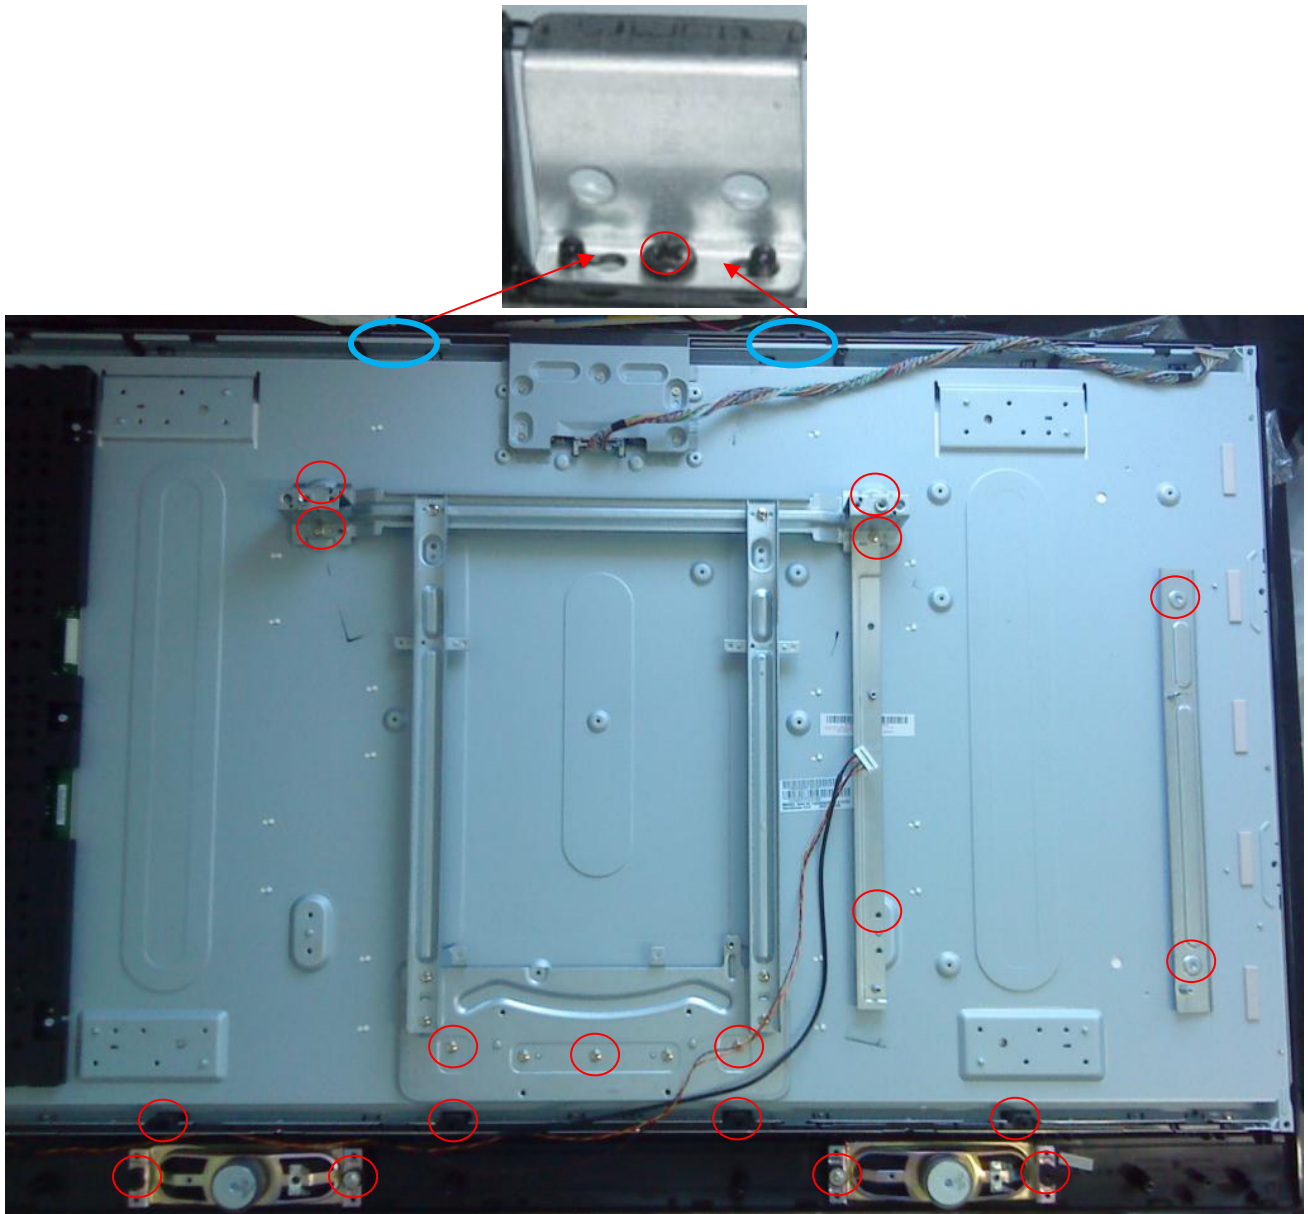


5. Remove the screws to remove key board and IR board.




5. Repair Flow Chart


1. No power

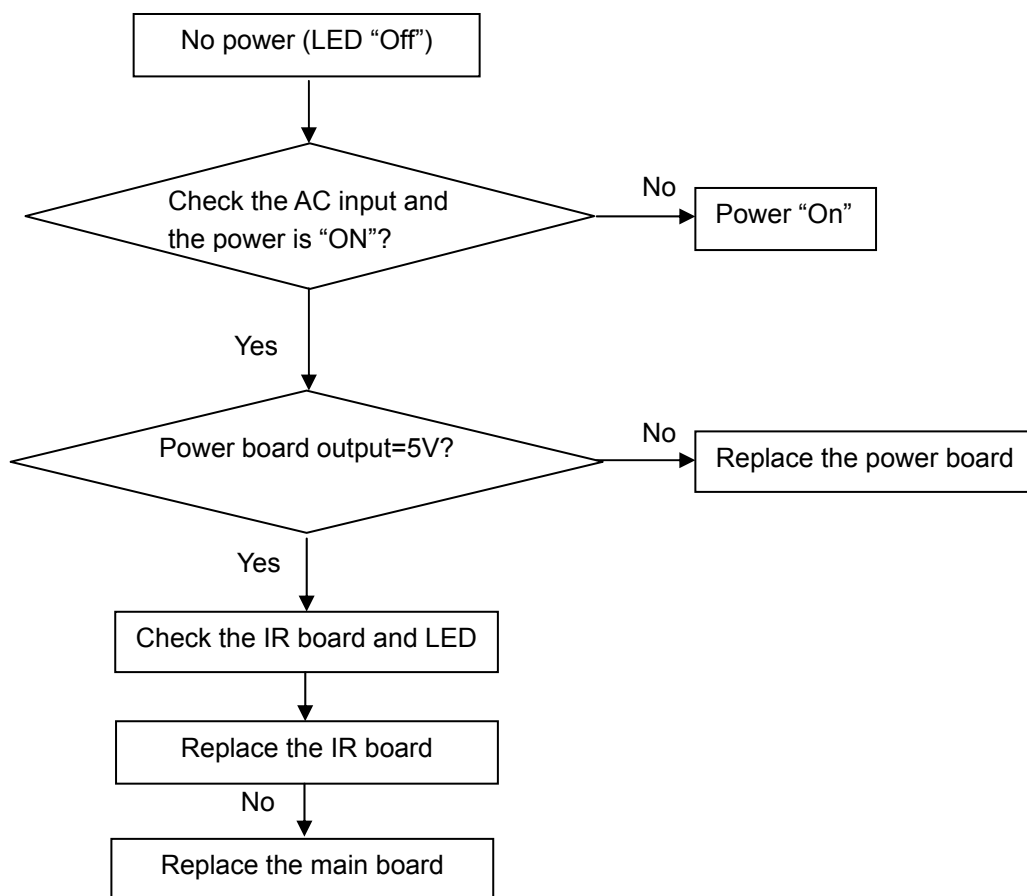


2. Can't start

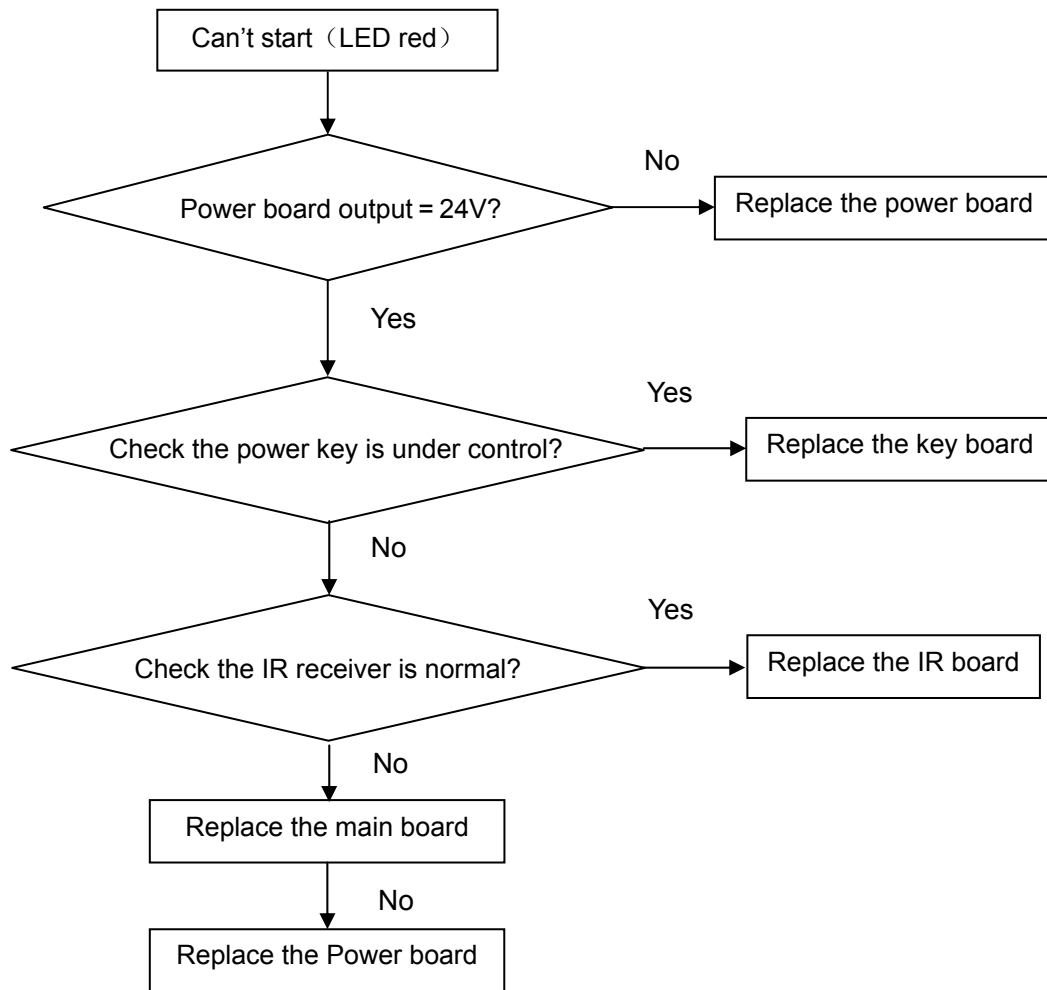


3. Abnormal Display

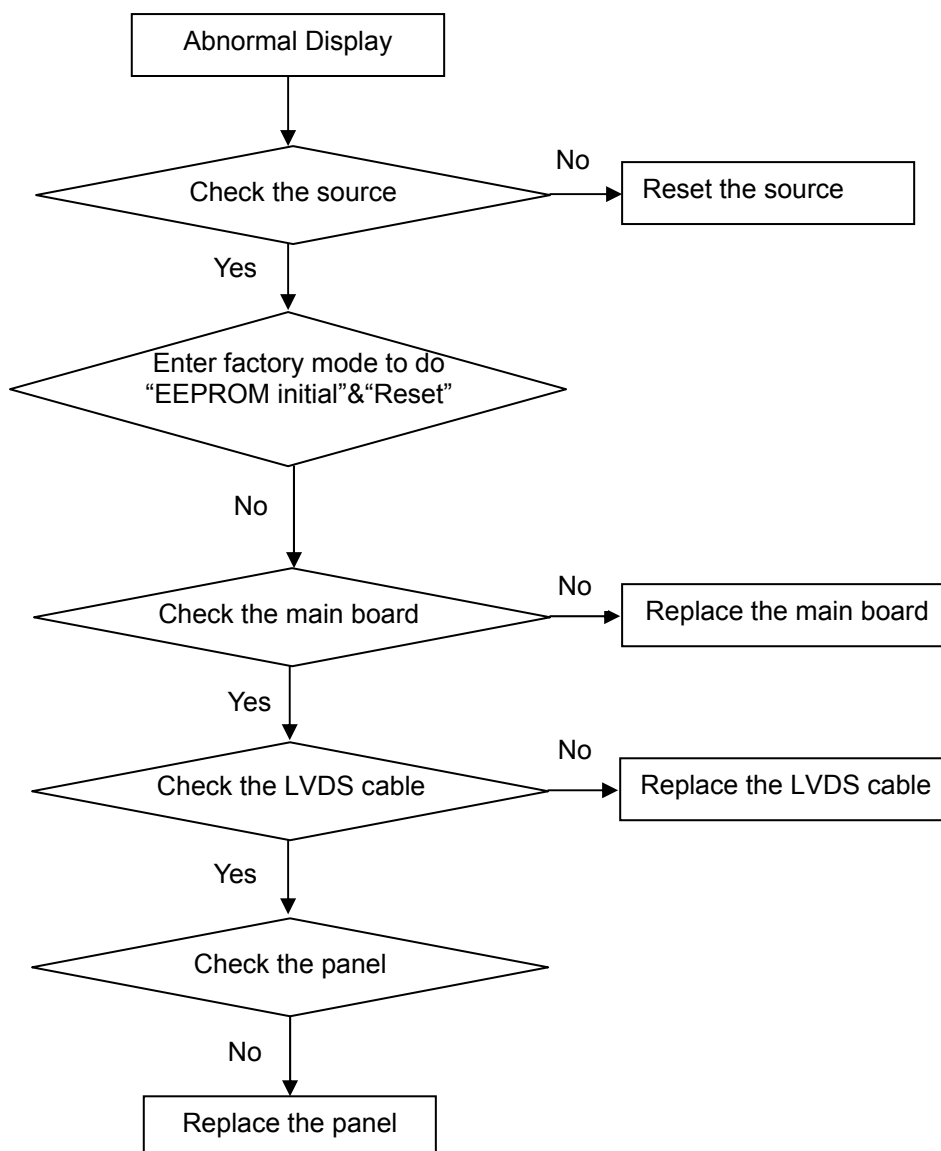


4. No display

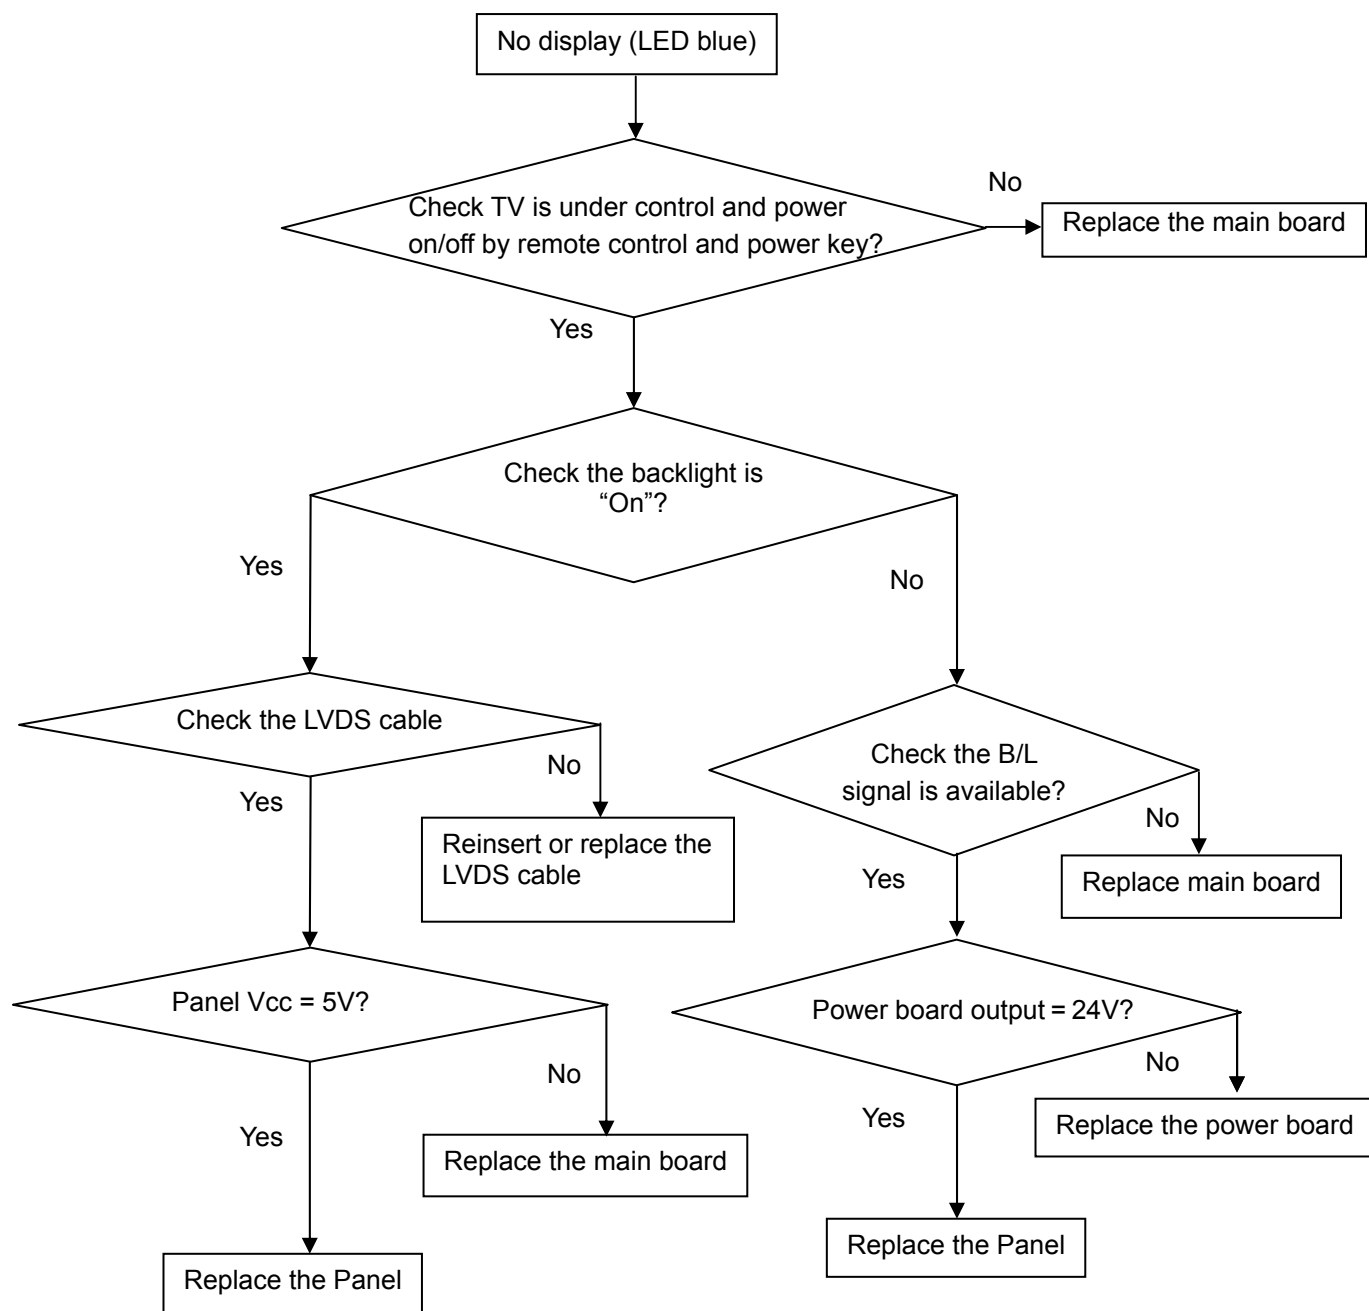


5. Sound problem

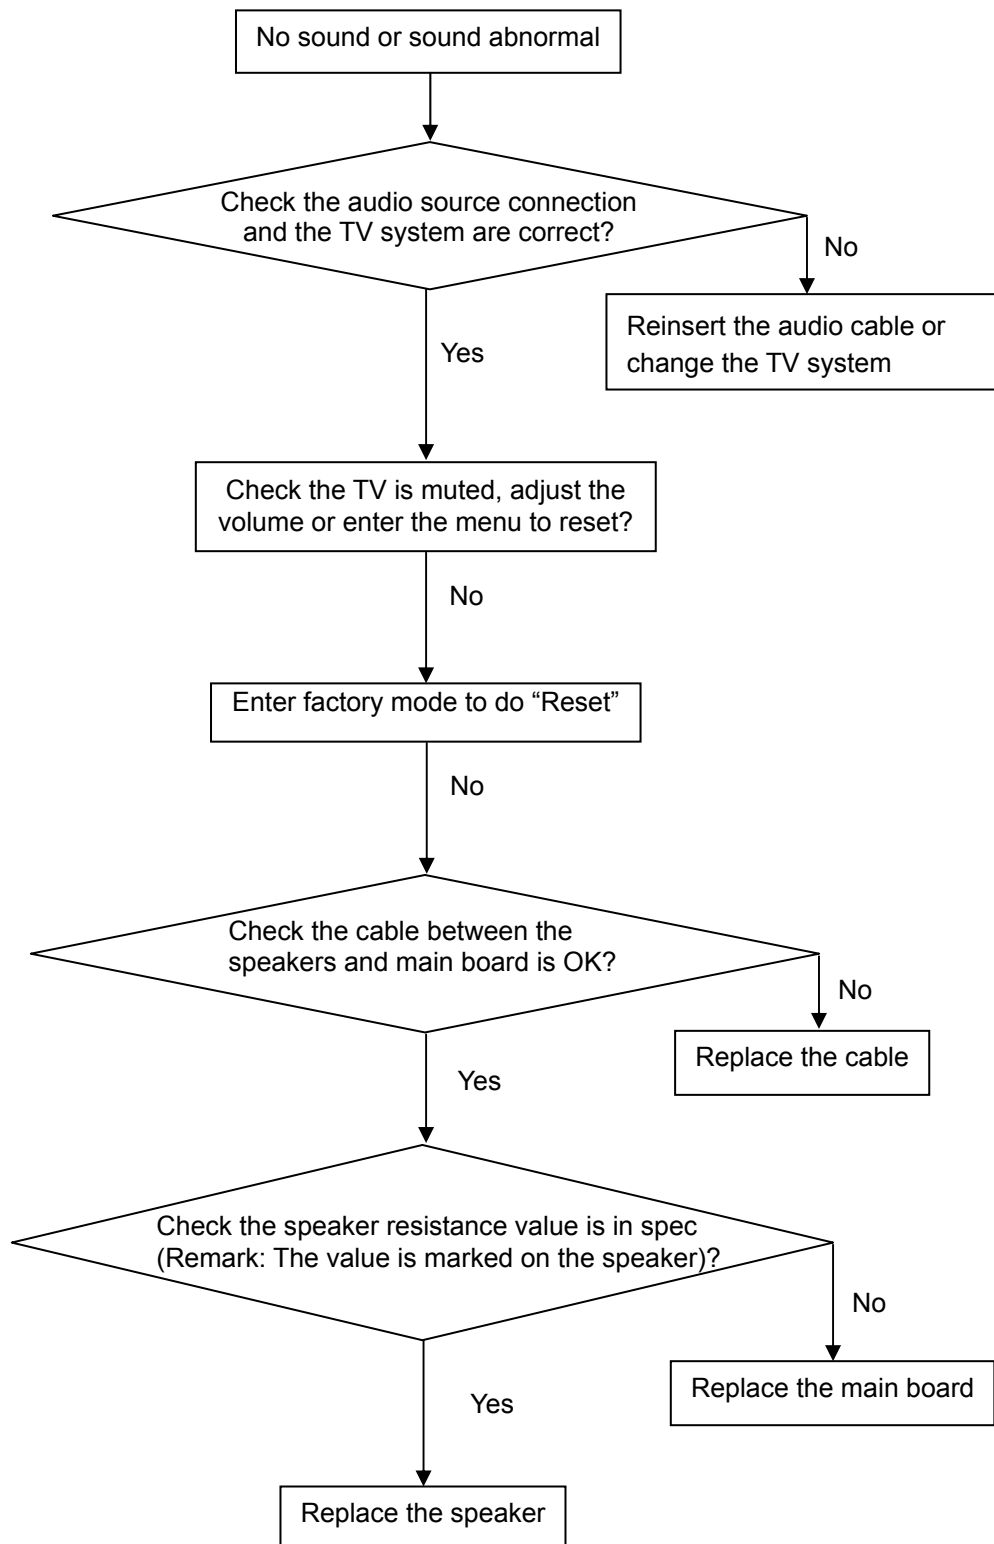

6. Remote control malfunction

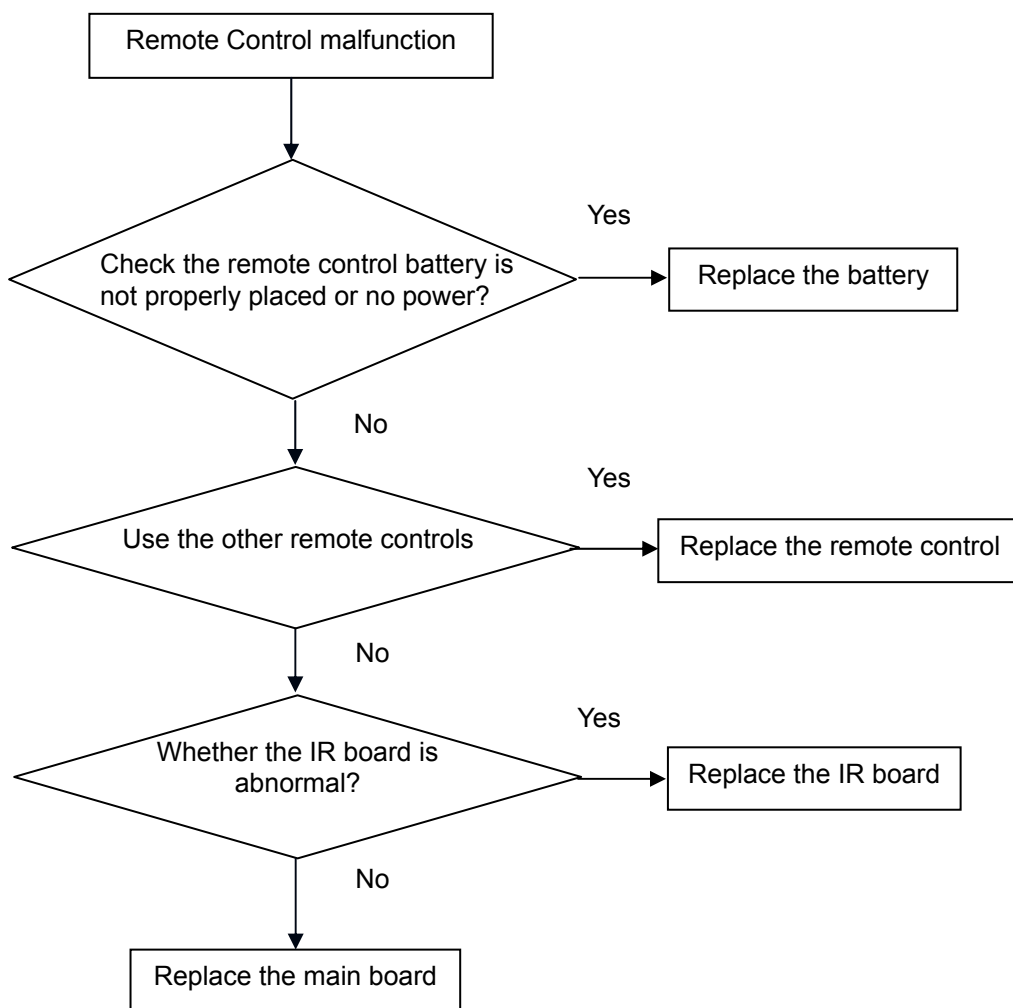


7. OSD is unstable or can't work normally

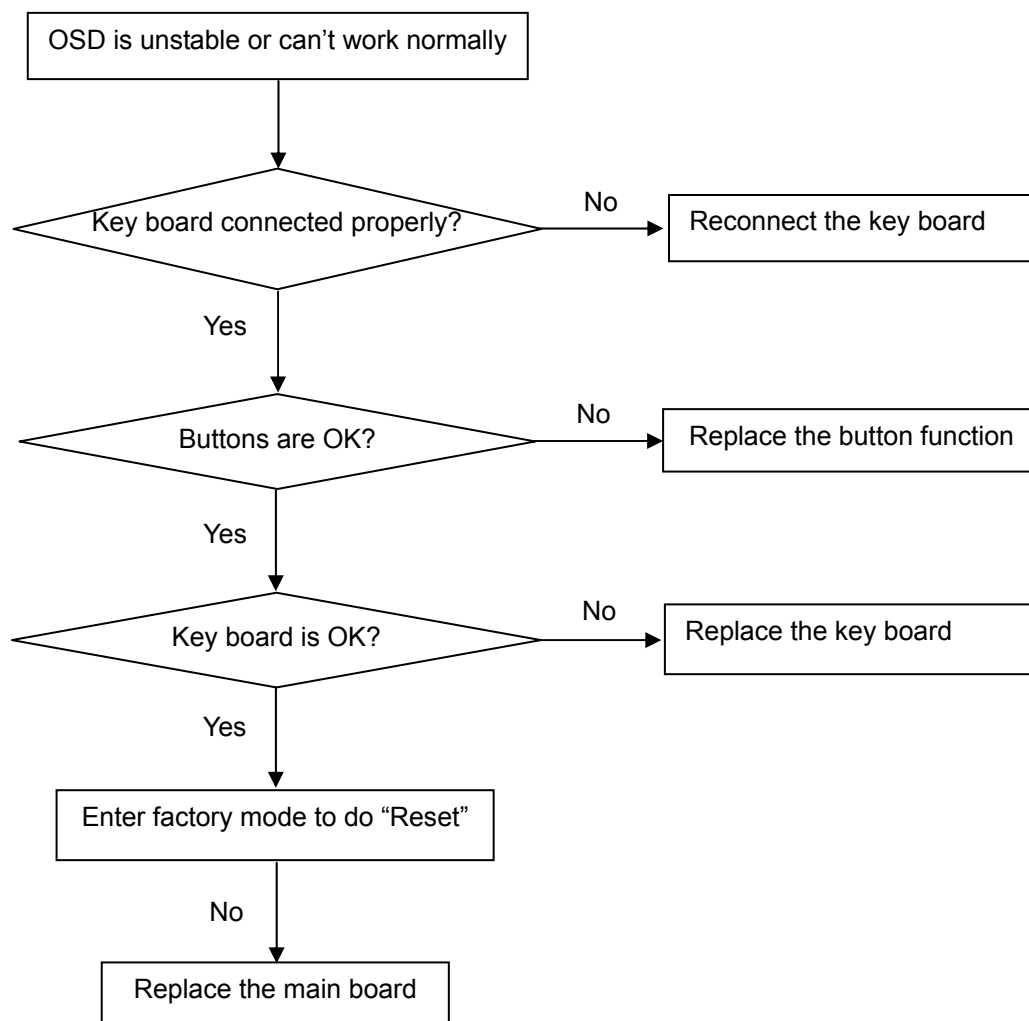

6.1 Main Board


715G3787M0G000005K





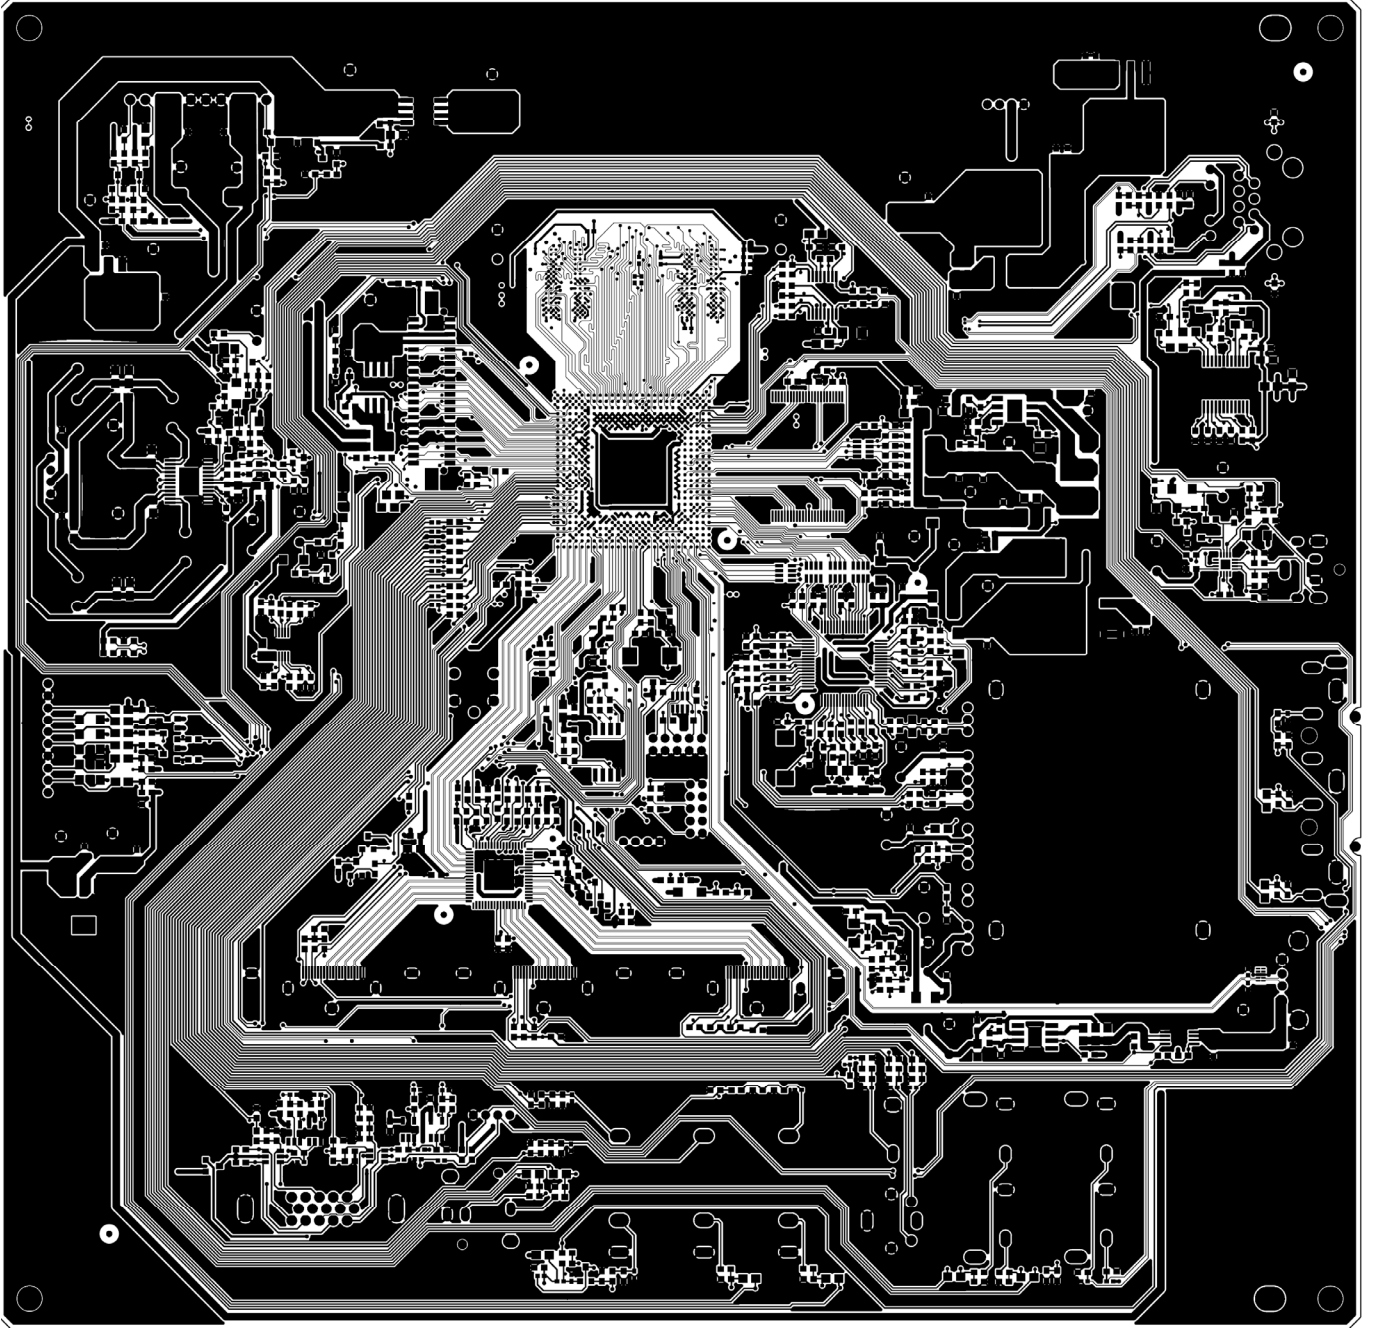


D26W931	715G2907	1	3
---------	----------	---	---





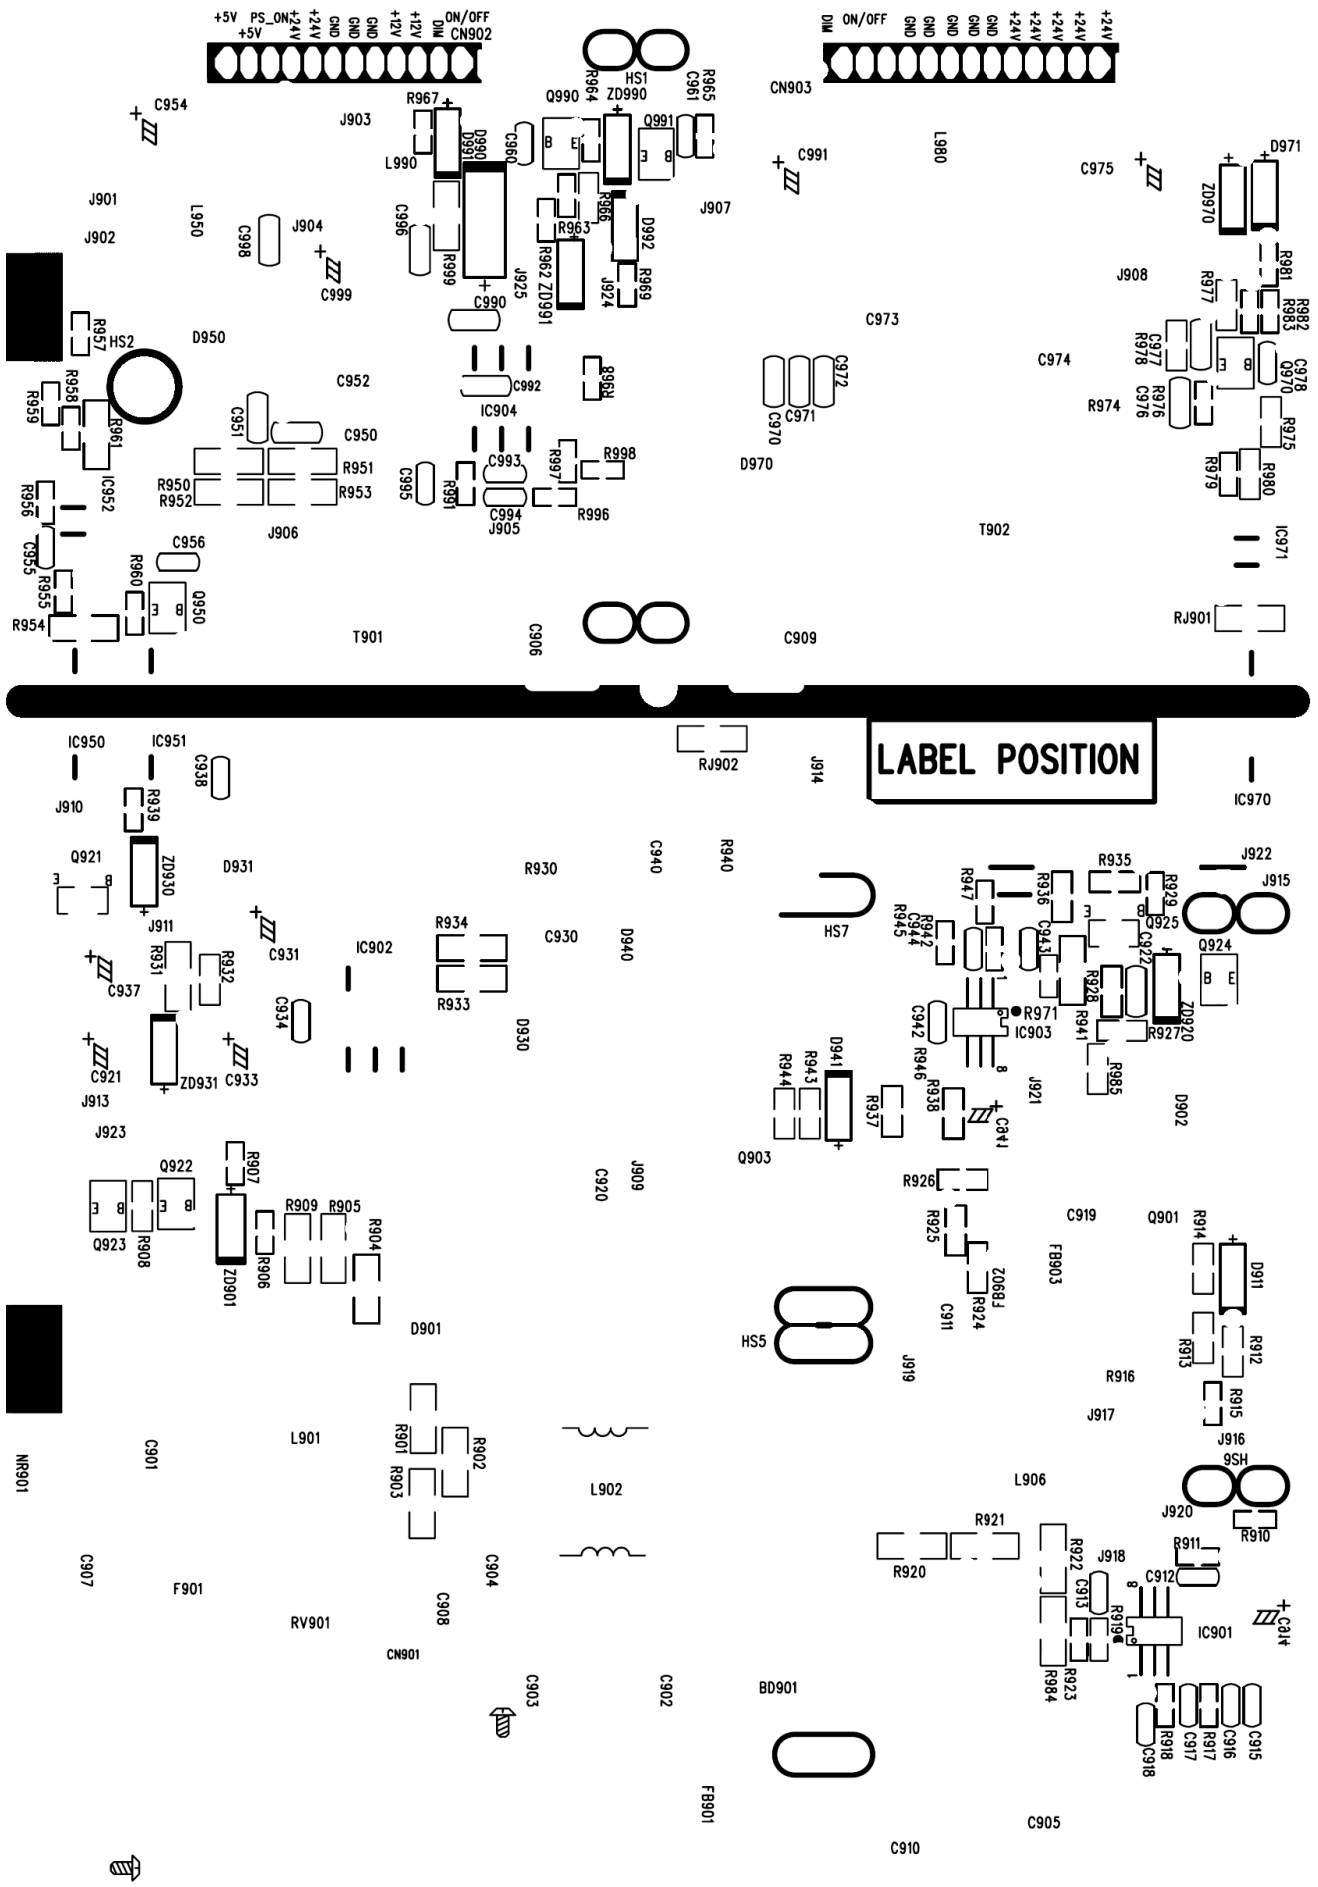


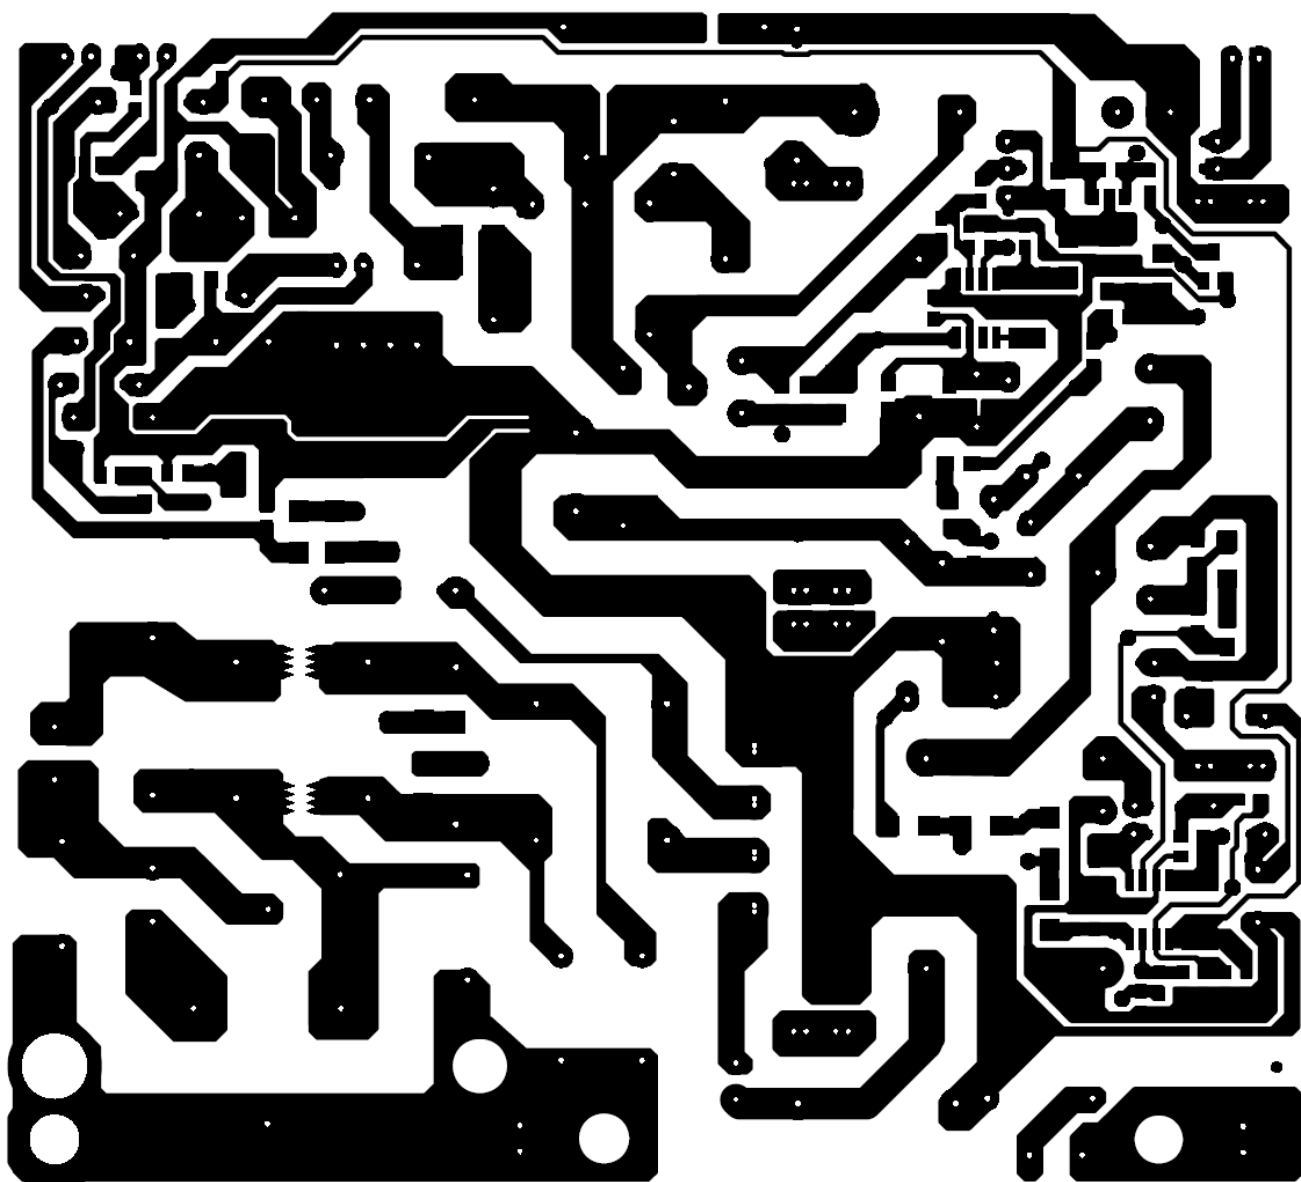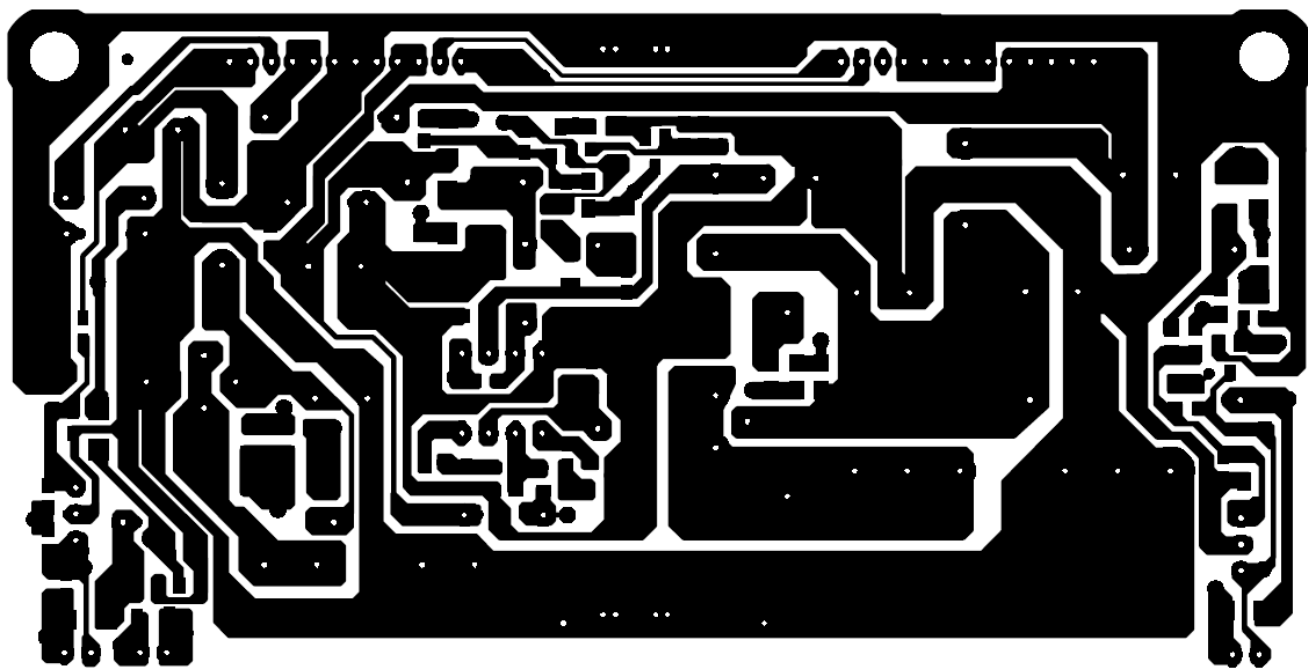


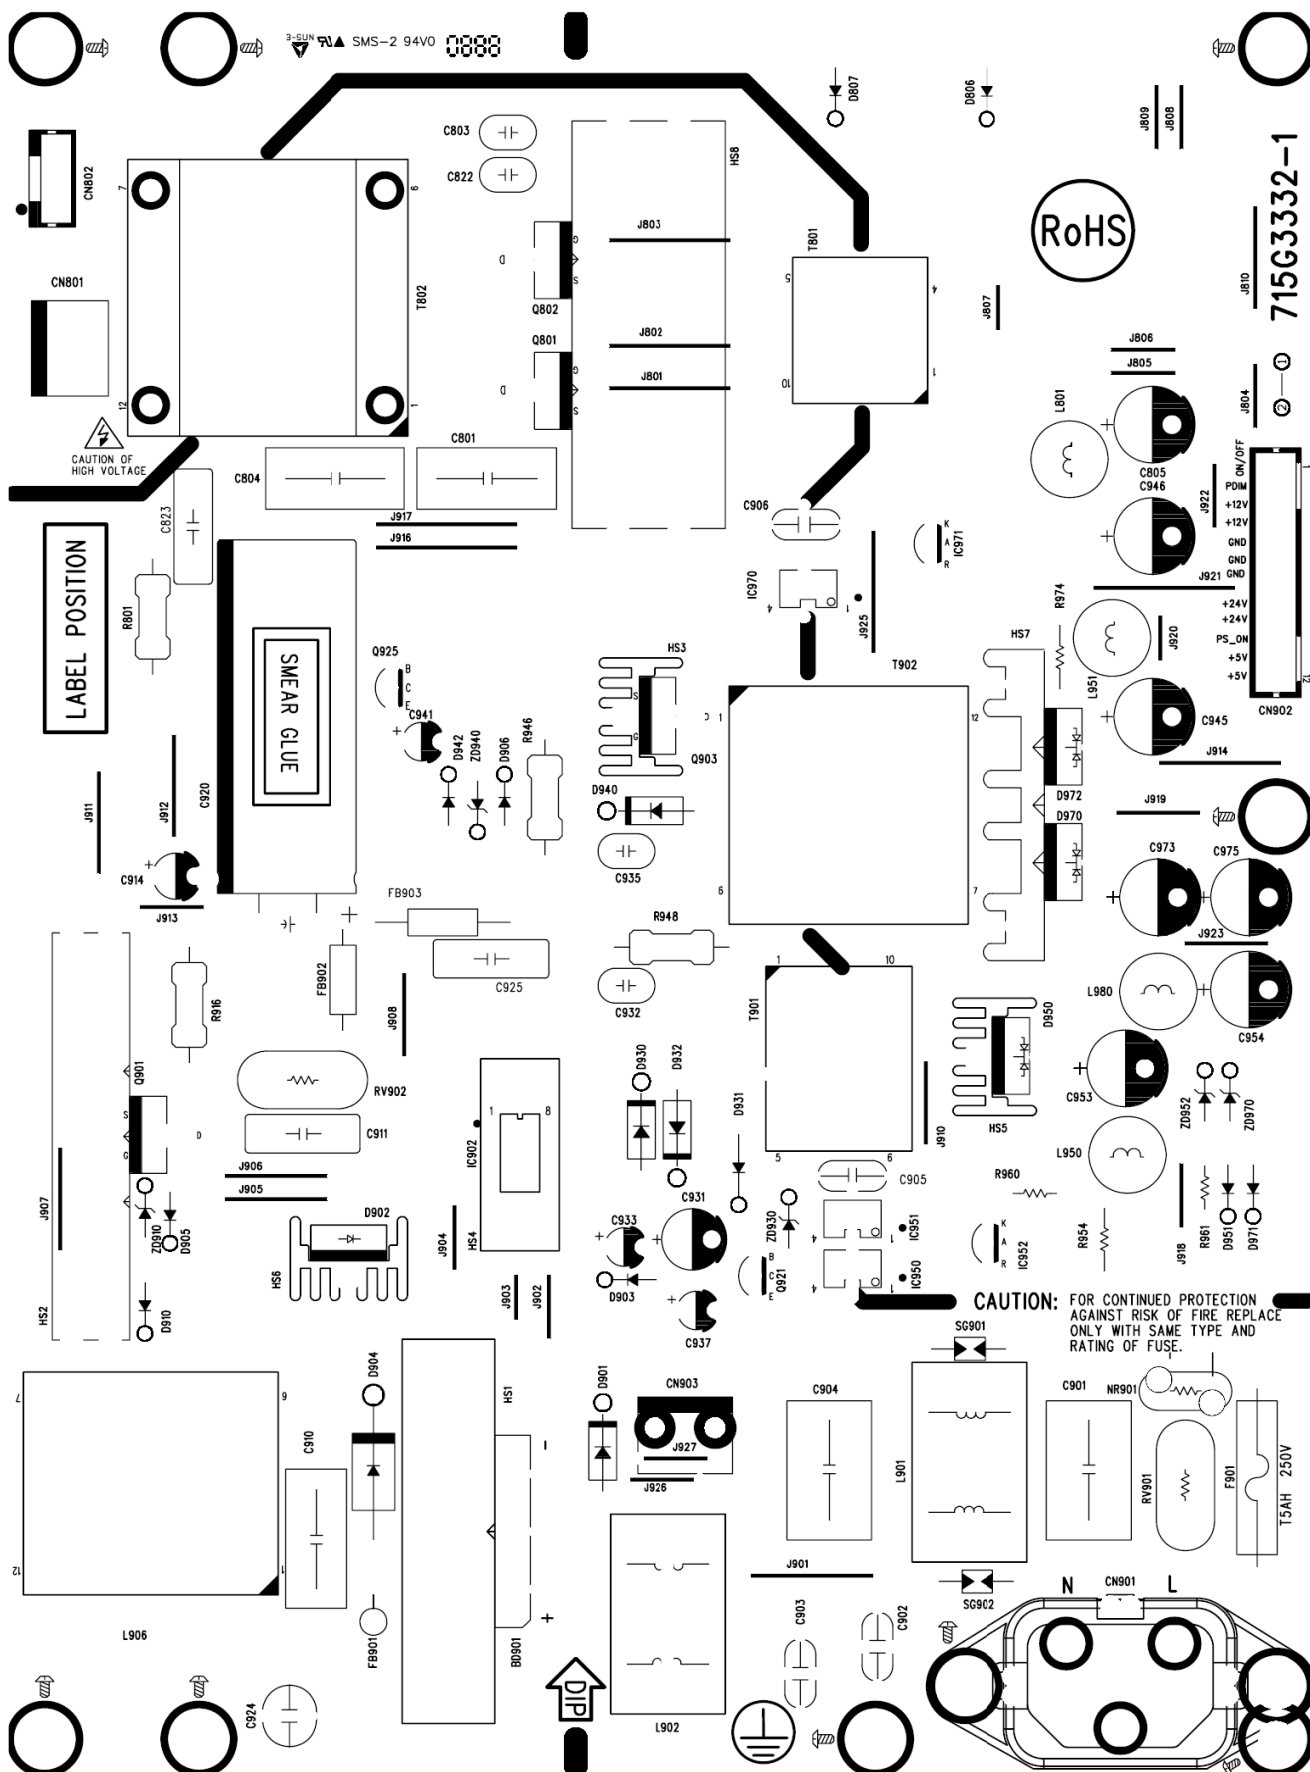





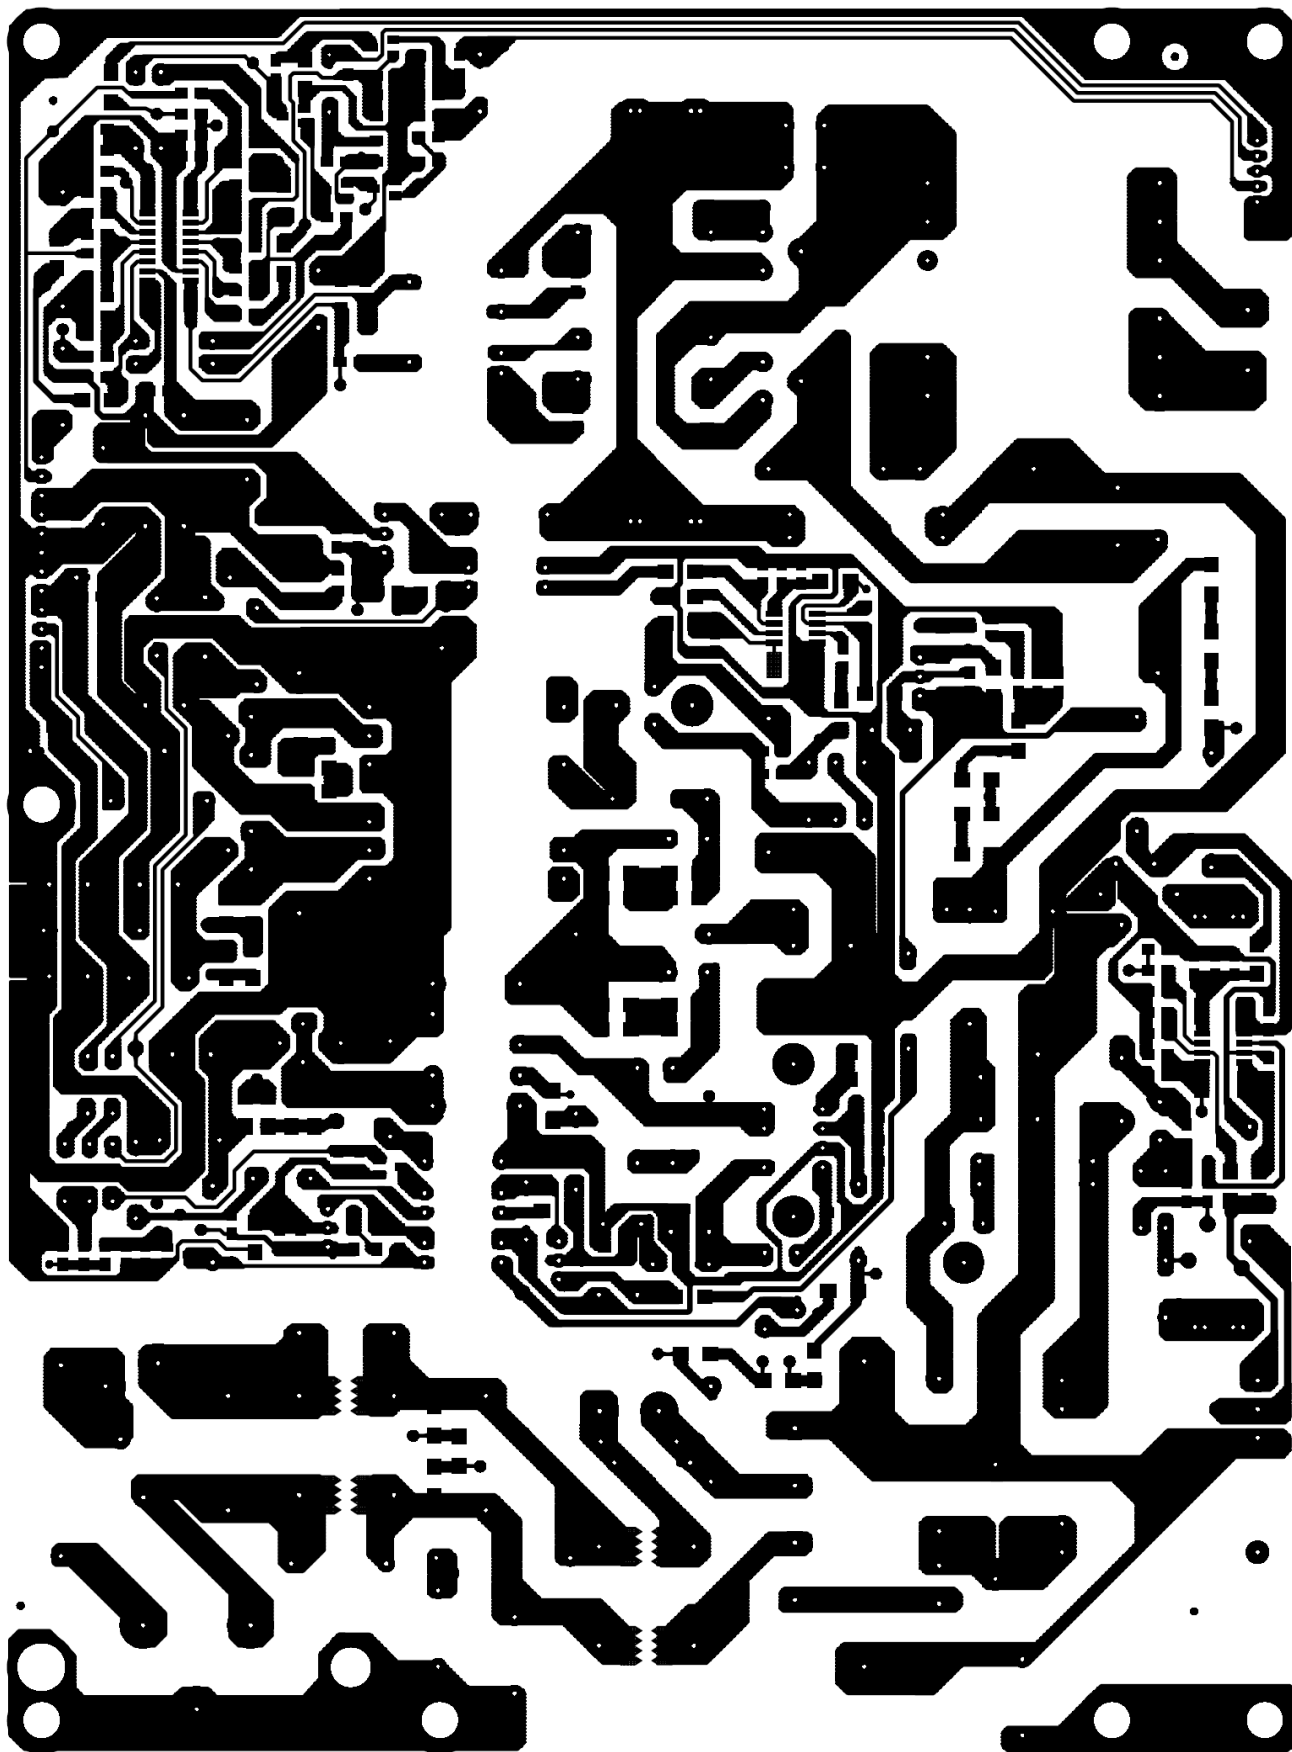


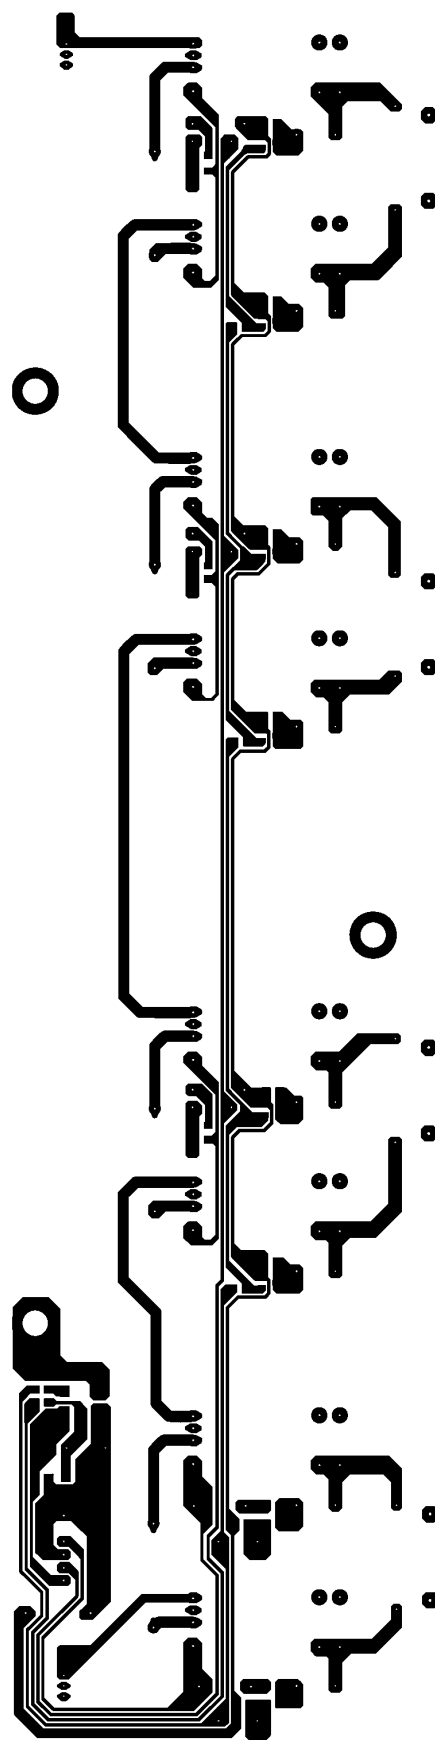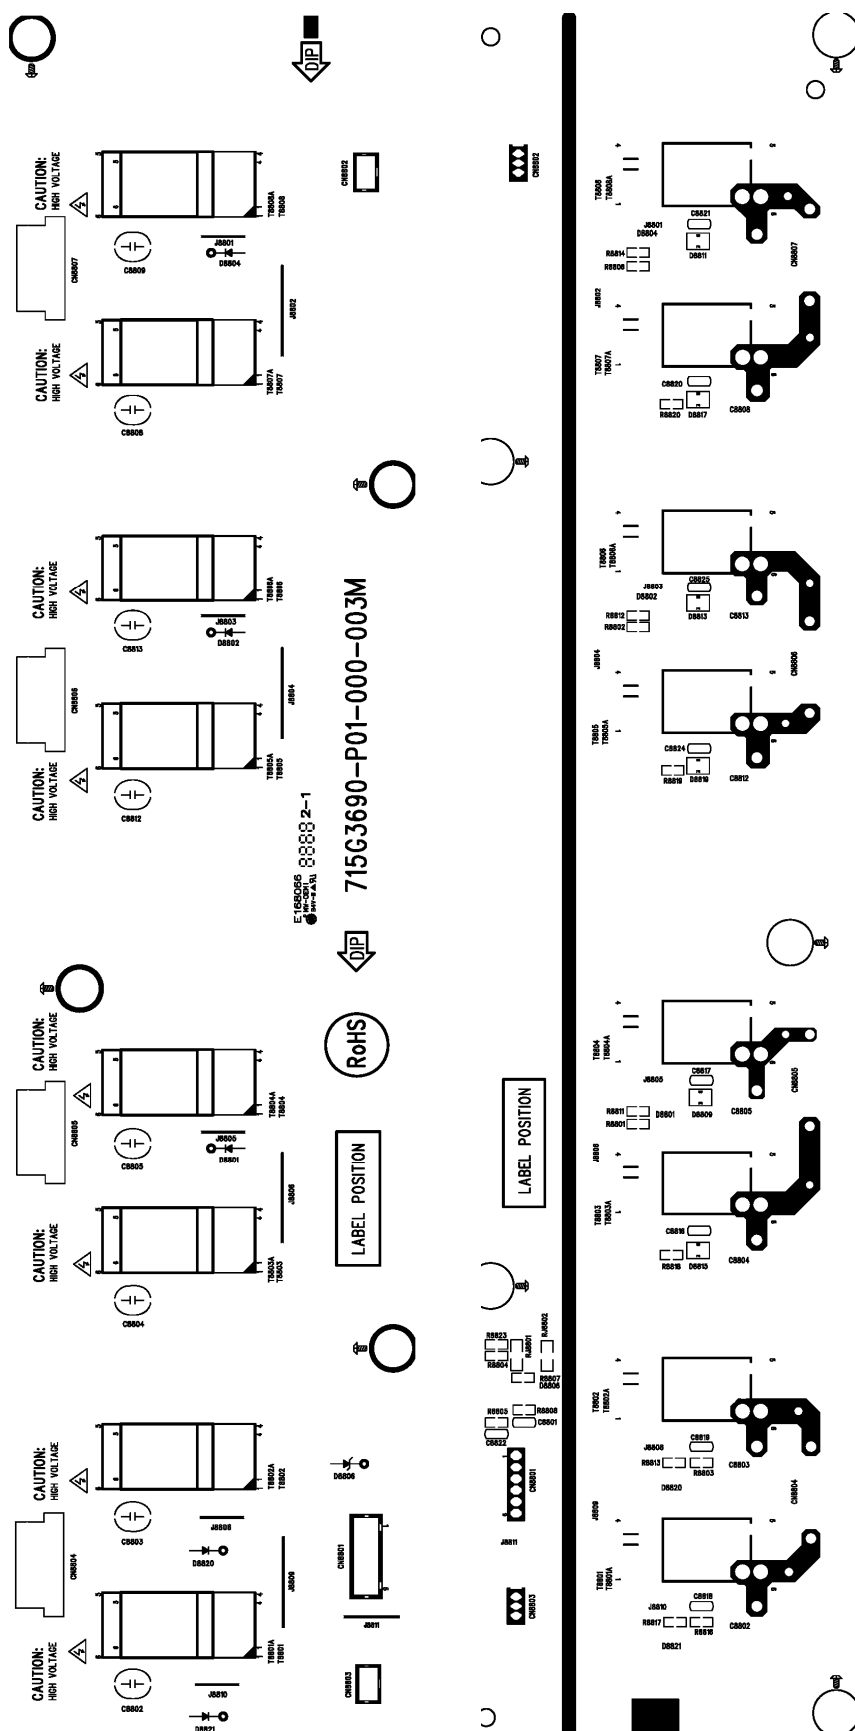


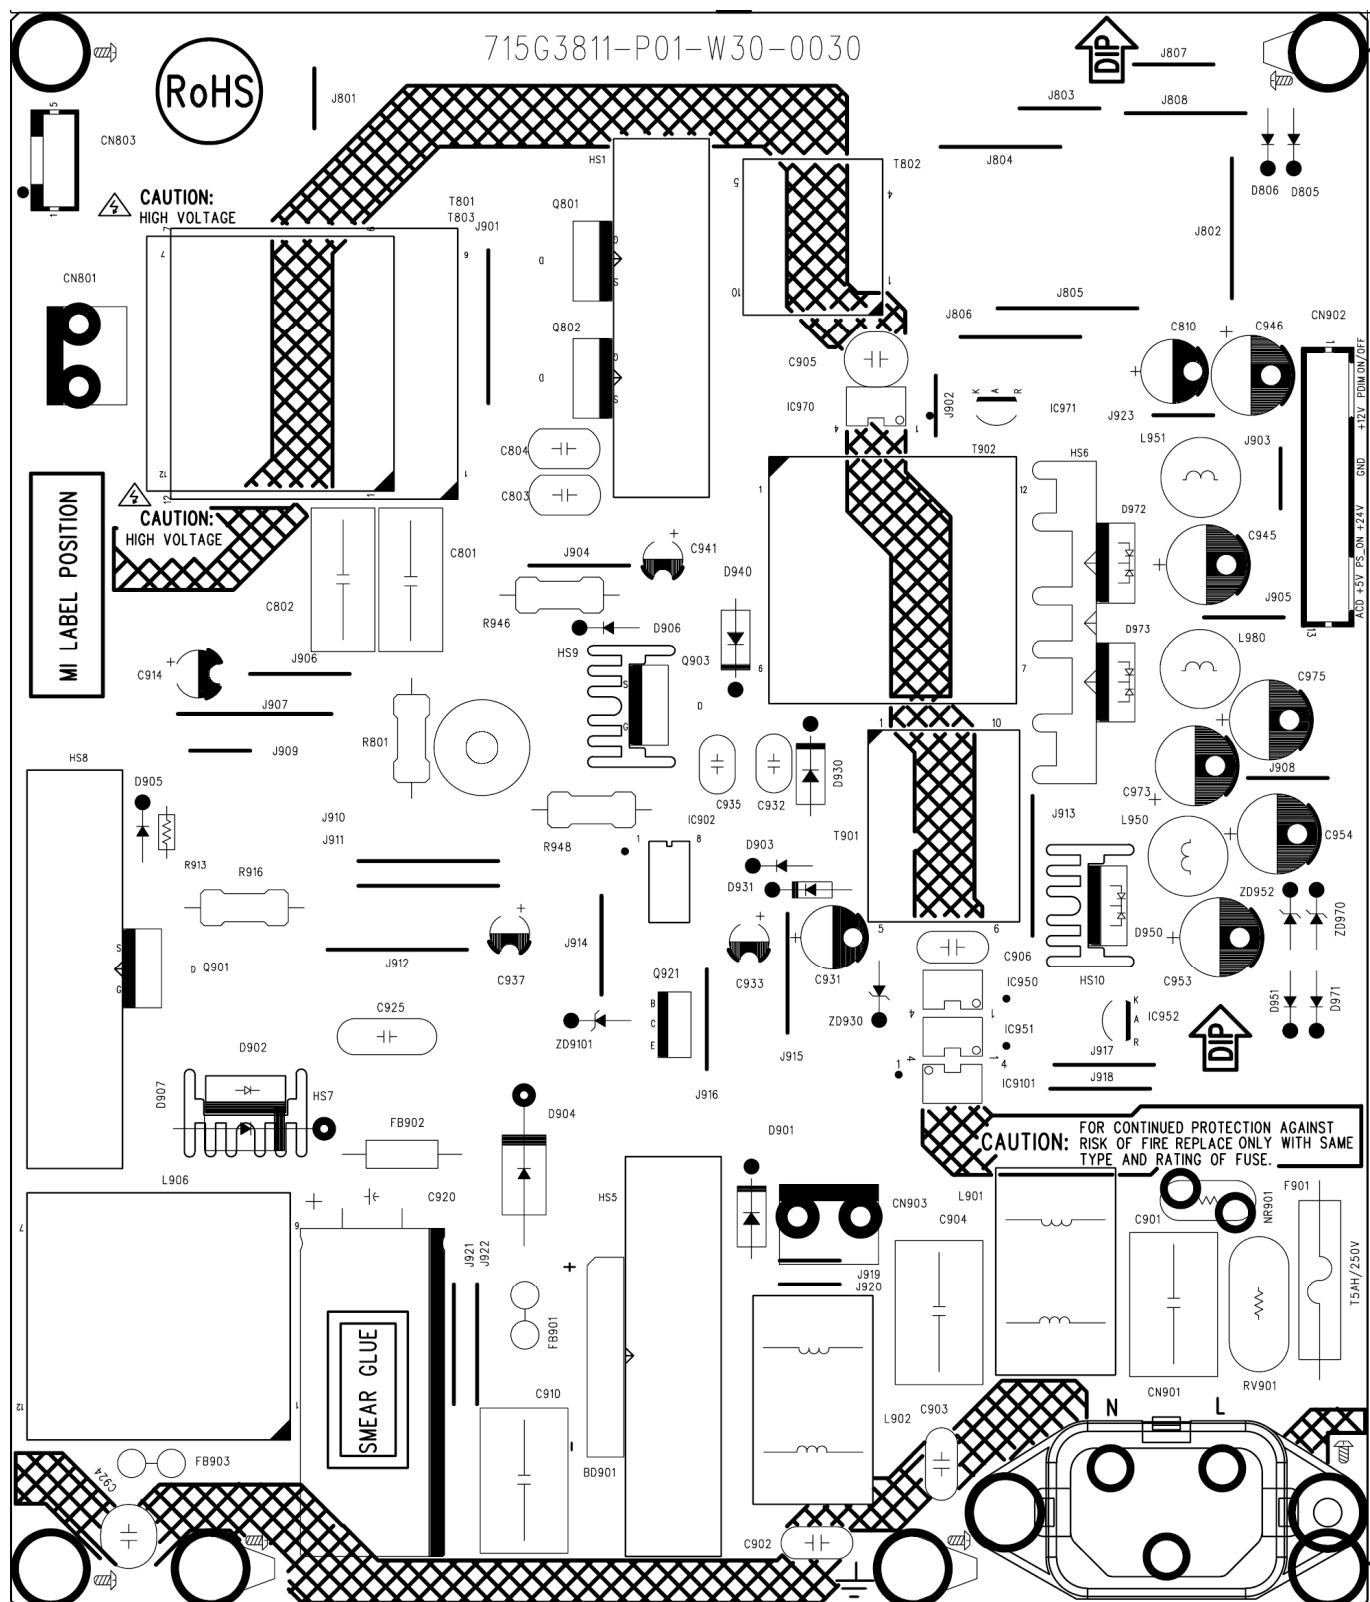


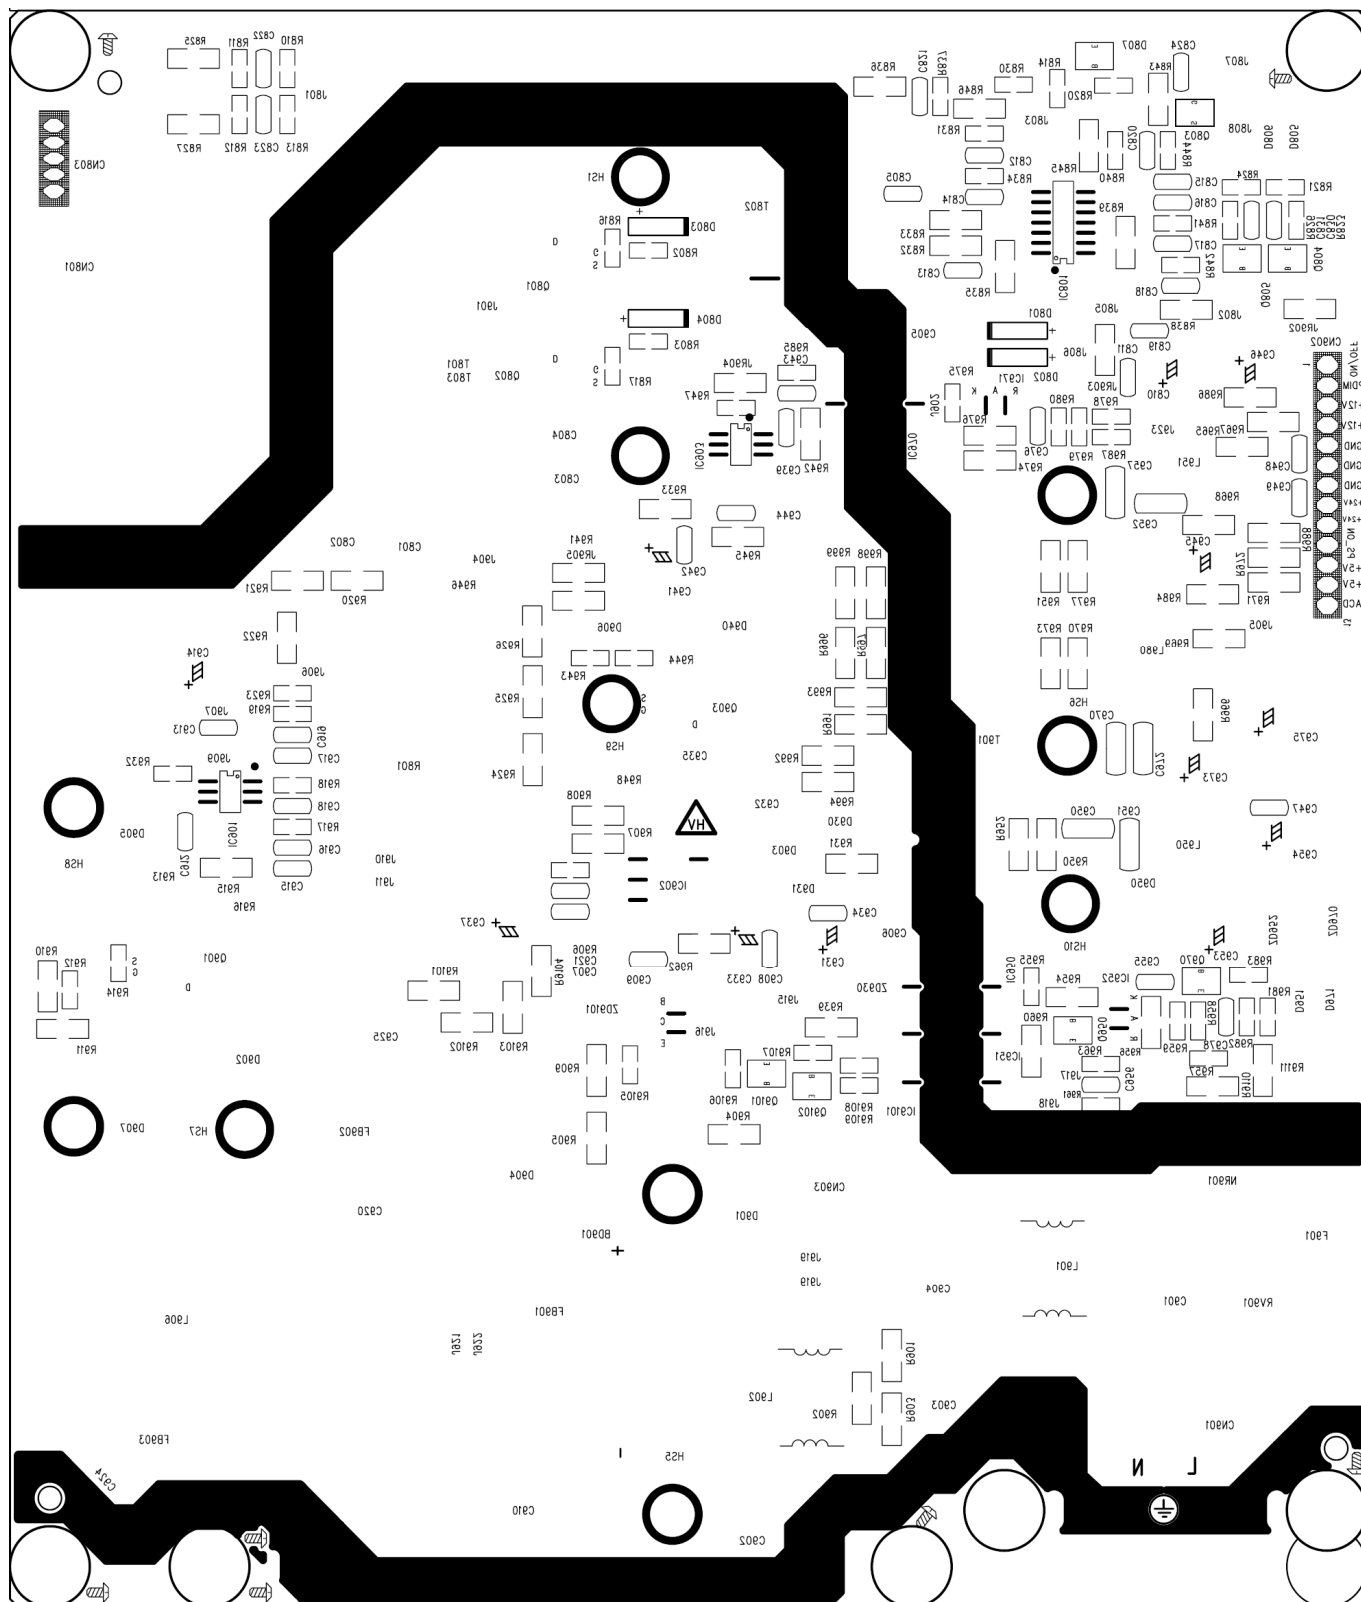

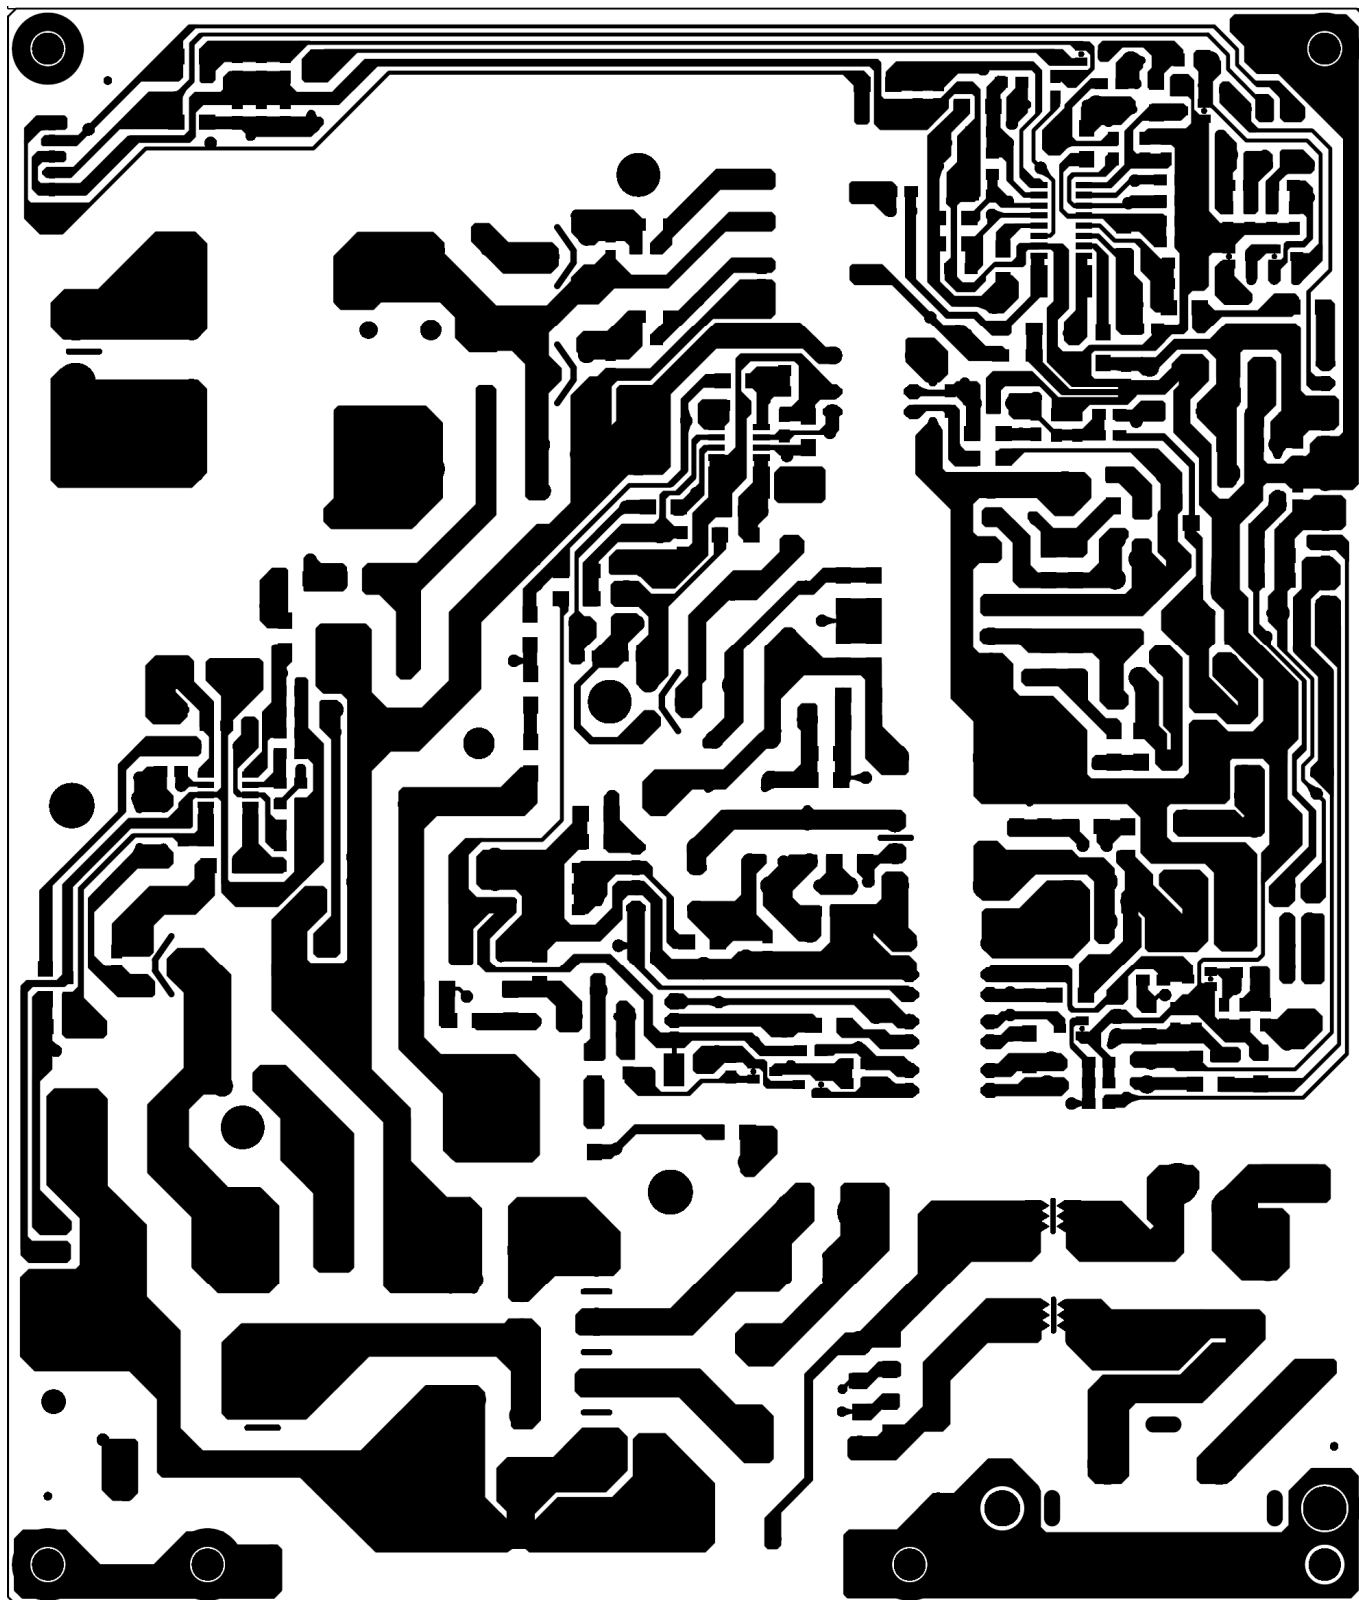

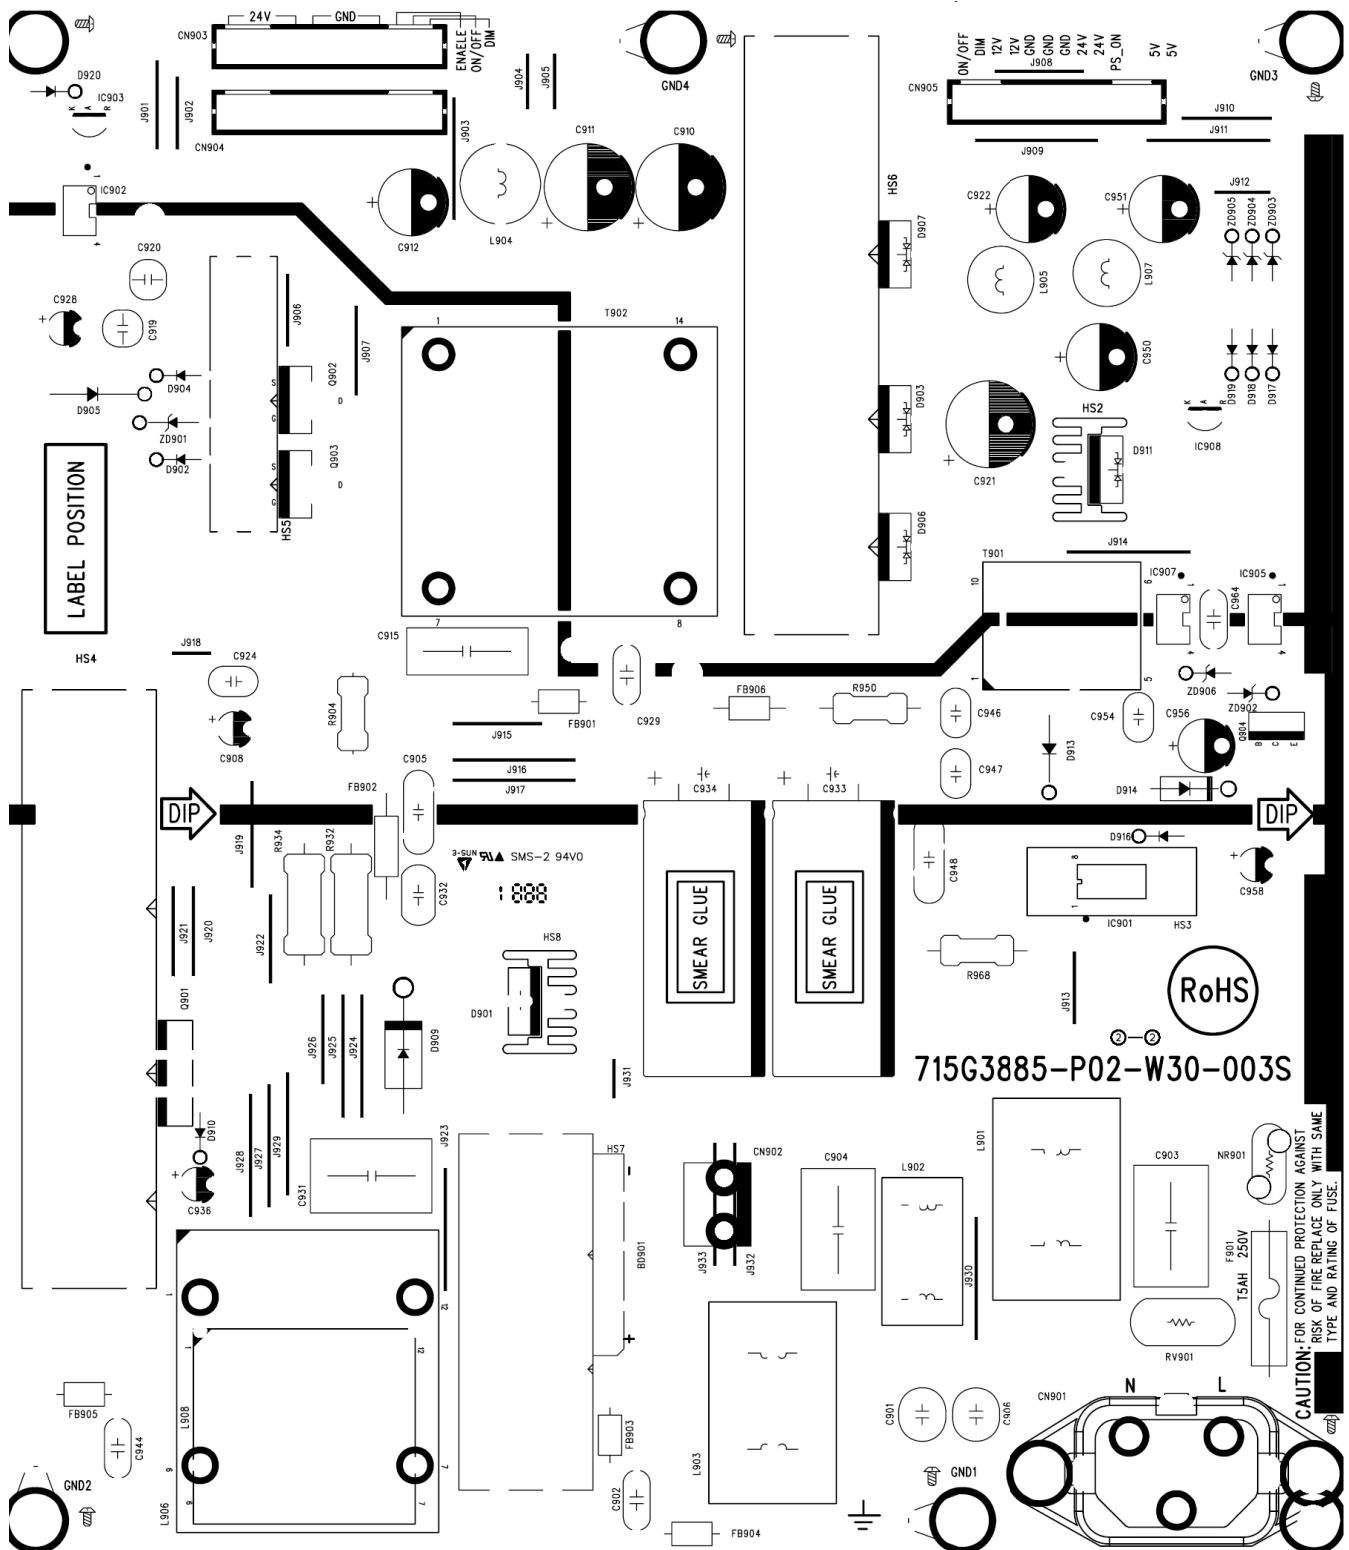


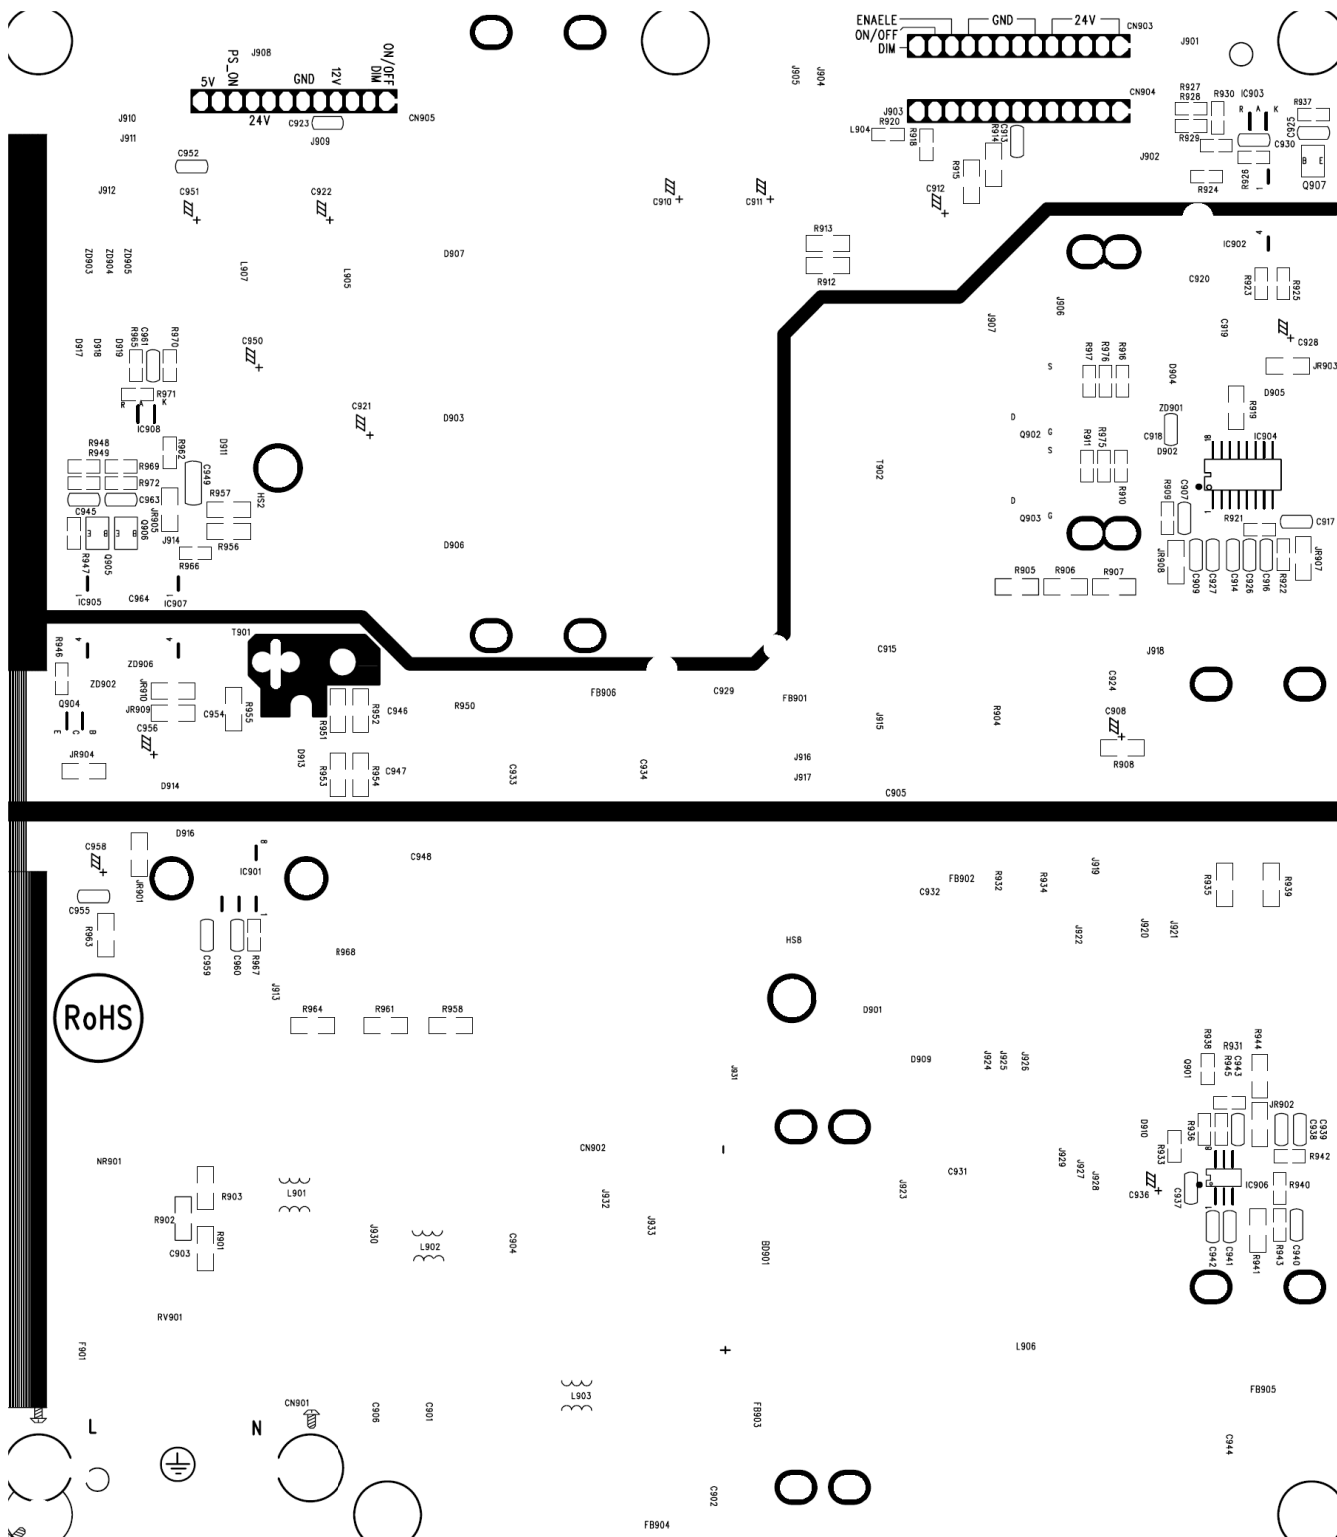

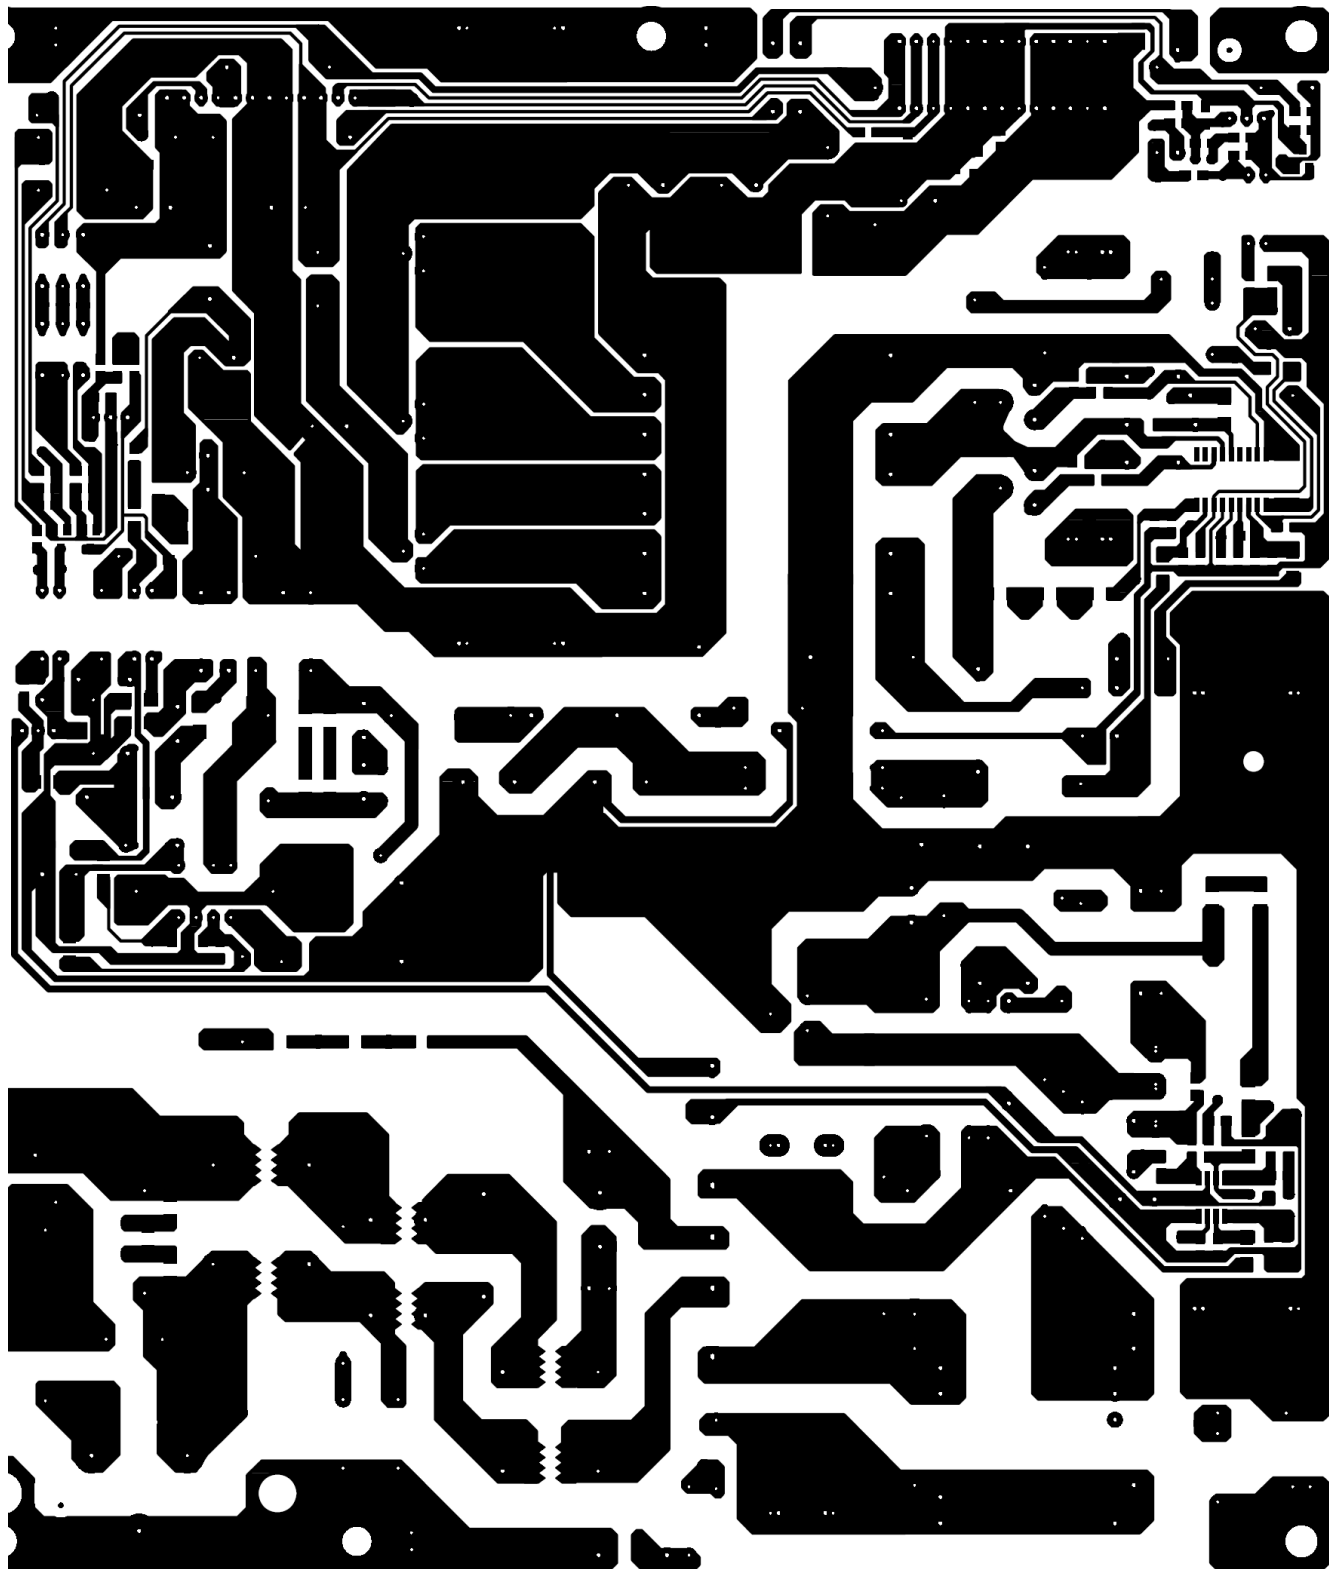


6.3 Key Board

D26W931/D32W931 715G4151K01000001S

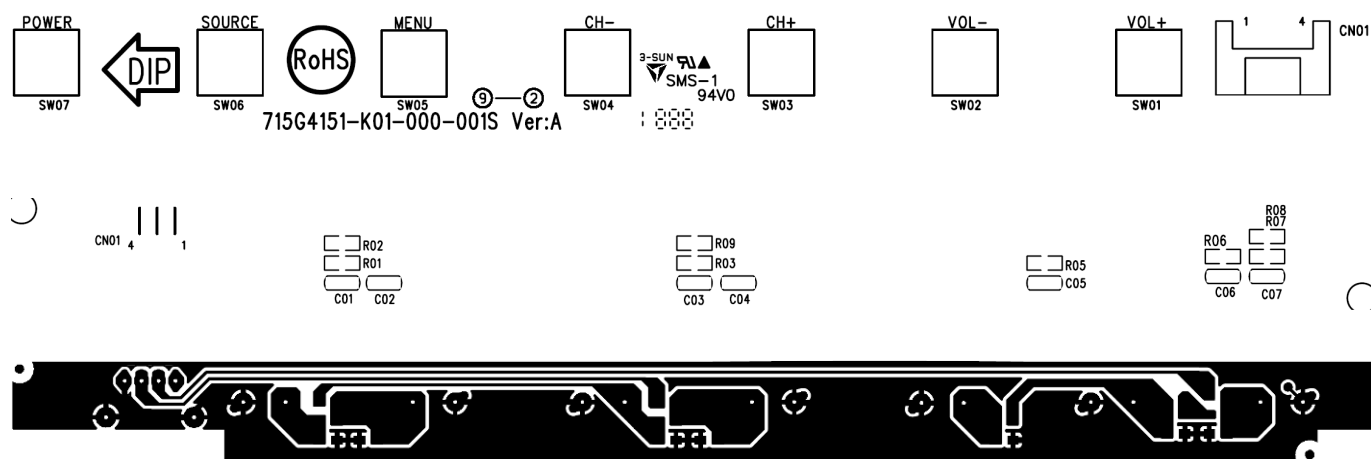


LC32W053/LC42H053 715G3814K01003004S


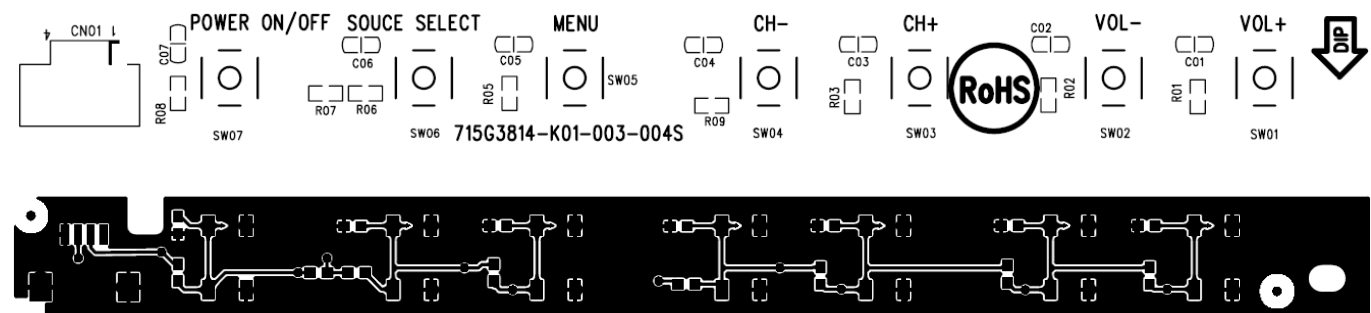


6.4 IR Board



D26W931 715G3304 1

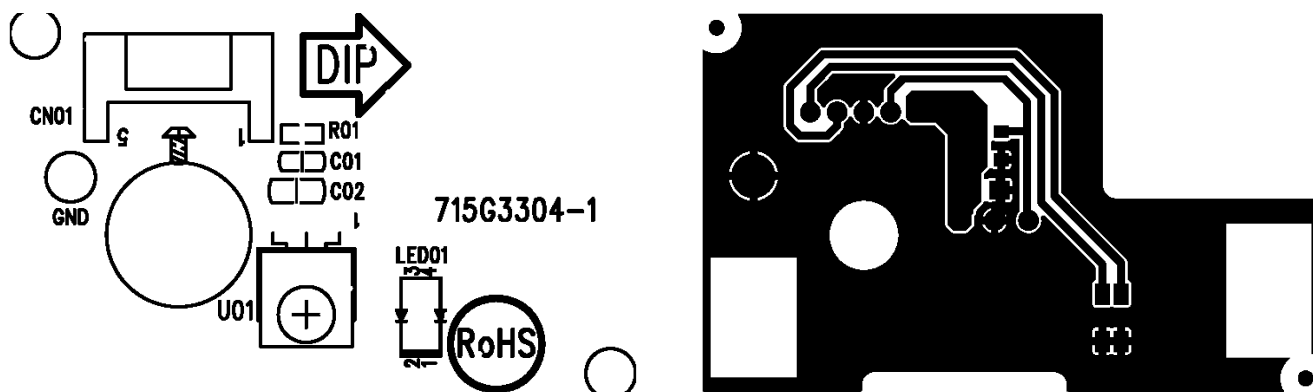

D32W931 715G3394 2

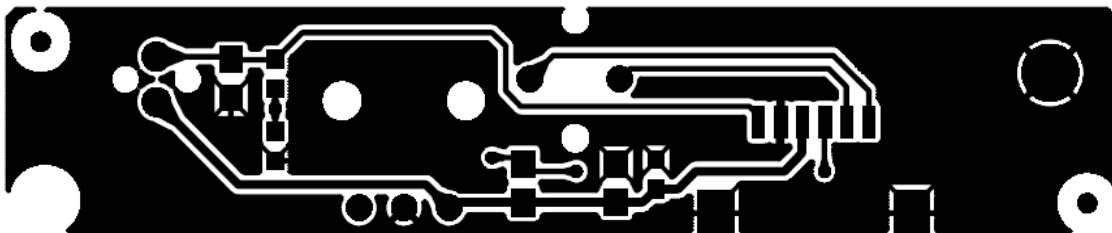
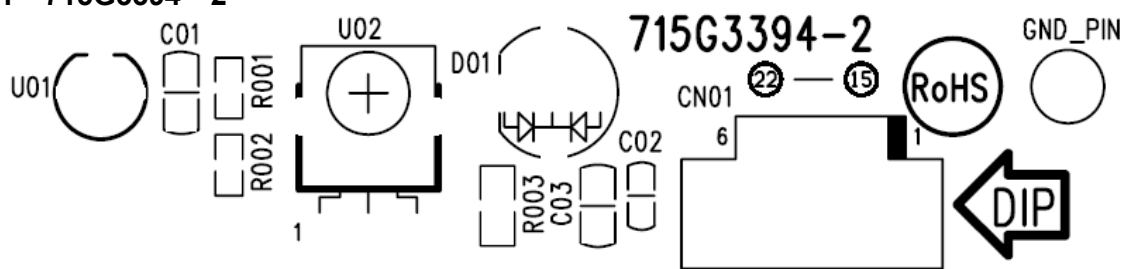


LC32W053/LC42H053 715G3821R01000004M

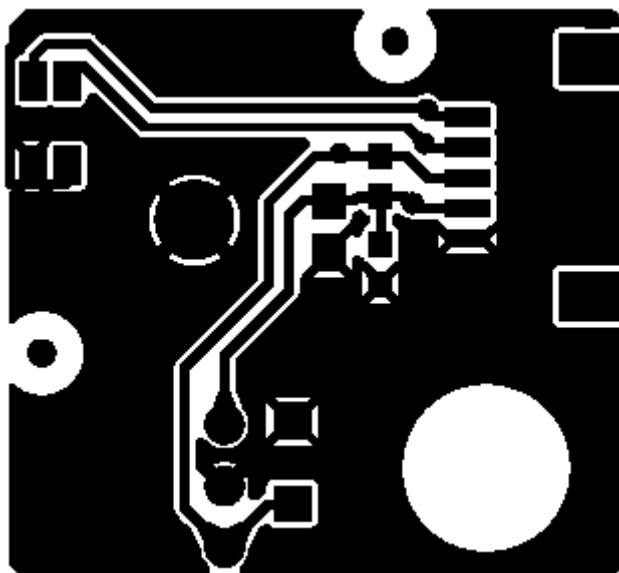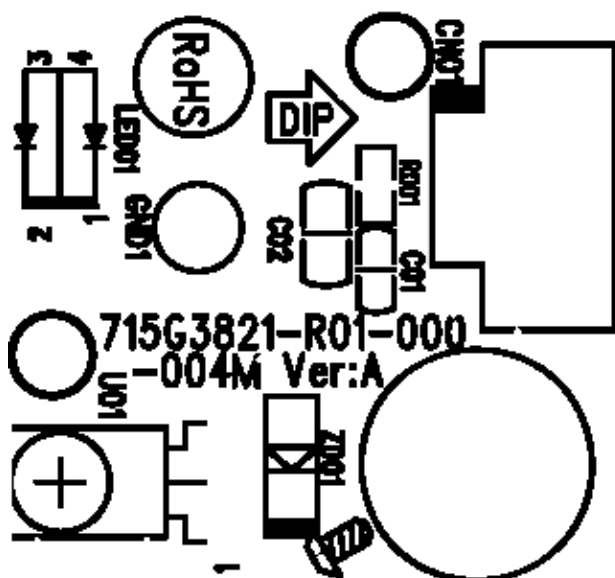

6.5 LVDS to FFC Board

LC32W053 715G4417T01000004S

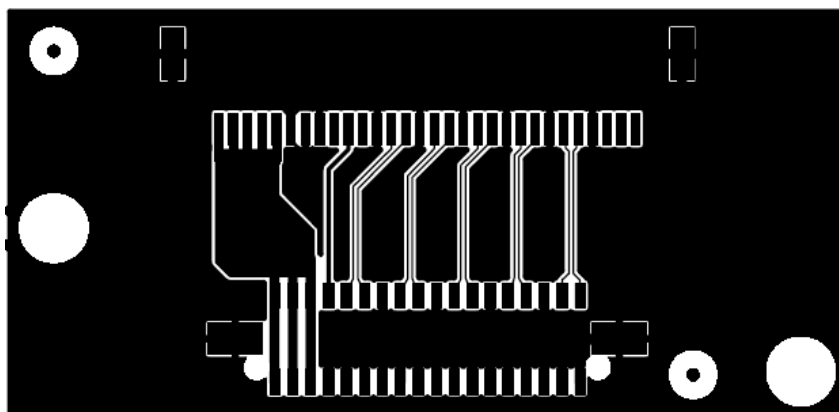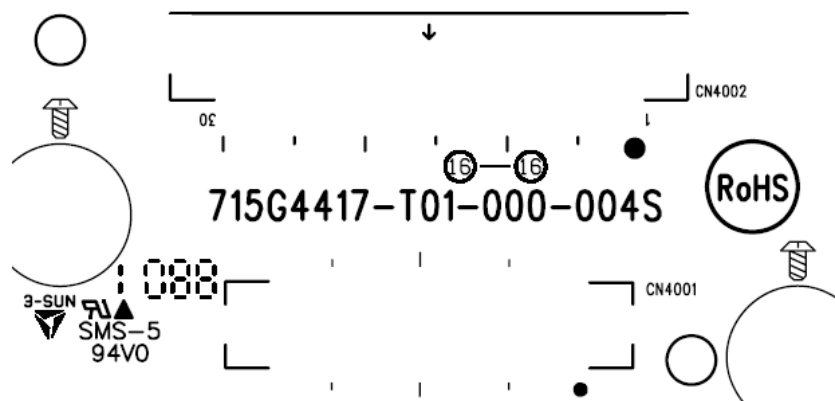

7. Adjustment

White Balance Adjustment

Approximately 60 minutes should be allowed for warm up before proceeding white balance adjustment.

Before started adjust white balance, please set the Ca210 Channel to 05 Channel and set it's mode to xyLv mode.


Color Temp.		Cold	Normal	Warm
AV/HDMI/VGA/Component Mode	x	272	285	313
	y	278	293	329
	Y	More than 350cd/cm ² (at full white)		

Note: The tolerance of the Cold/Normal/Warm color coordinates should be less than ± 20

How to setting the Ca210 channel, you can reference to Ca210 user guide or simple use the “Memory CH” up or down to set the channel to 05 channel, and use the “Mode” key to set the mode to xyLv.

Following is the procedure to do white-balance adjust

1. Press menu key and then press number key 1 → 9 → 9 → 9 → Enter, it will achieve the factory mode. Take other model's factory menu for example:

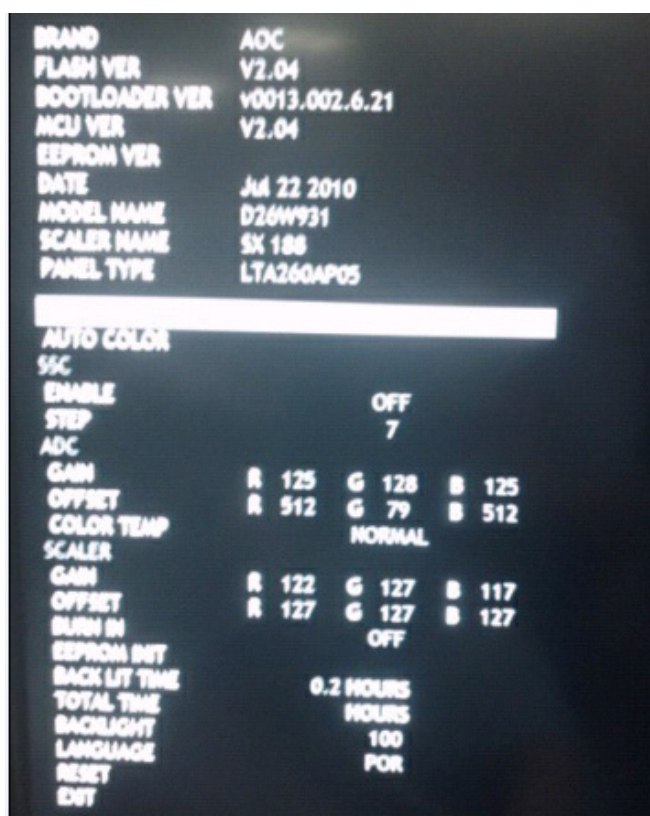

In the White Balance you can adjust 3 items.

SCALER GAIN R, G, B → R, G, B Gain adjust.

Adjust AV Source:

1. Set the pattern generator to timing 307 or PAL-M timing. And Select the item of Current Source and select composite Source
2. Switch the Ca210 to xyLv-mode (with press “MODE” button)
3. Switch the Ca210 channel to Channel 05 (with up or down “MEMORY CH” button)
4. The LCD-indicator on Ca210 will show x =285, y =293, Lv can adjust to More than 350cd/cm²(at full white).

5. Enter the item "Color Temp" to select Normal to adjust.
6. Use the item R Gain,G Gain or B Gain to adjust white balance: use 80 IRE (Pattern 141) signal, and adjust the white balance, until the Ca210 show x =285, y =293.

Adjust HDMI Source:

1. Set the pattern generator to timing 347 or HDMI-720P@60Hz timing. And Select the item of Current Source and select HDMI Source
2. Switch the Ca210 to xyLv-mode (with press "MODE" button)
3. Switch the Ca210 channel to Channel 05 (with up or down "MEMORY CH" button)
4. The LCD-indicator on Ca210 will show x =285, y =293, Lv can adjust to More than 350cd/cm²(at full white).
5. Enter the item "Color Temp" to select Normal to adjust.
6. Use the item R Gain,G Gain or B Gain to adjust white balance: use 80 IRE (Pattern 141) signal, and adjust the white balance, until the Ca210 show x =285, y =293.


Adjust VGA Source:


1. Set the pattern generator to timing 137 or 1024*768@60Hz timing. And Select the item of Current Source and select VGA Source
2. Switch the Ca210 to xyLv-mode (with press "MODE" button)
3. Switch the Ca210 channel to Channel 05 (with up or down "MEMORY CH" button)
4. The LCD-indicator on Ca210 will show x =285, y =293, Lv can adjust to More than 350cd/cm²(at full white).
5. Enter the item "Color Temp" to select Normal to adjust.
6. Use the item R Gain,G Gain or B Gain to adjust white balance: use 80 IRE (Pattern 141) signal, and adjust the white balance, until the Ca210 show x =285, y =293.

Adjust Component Source:

1. Set the pattern generator to timing 314 or HDTV-720p@60Hz timing. And Select the item of Current Source and select Component Source
2. Switch the Ca210 to xyLv-mode (with press "MODE" button)
3. Switch the Ca210 channel to Channel 05 (with up or down "MEMORY CH" button)
4. The LCD-indicator on Ca210 will show x =285, y =293, Lv can adjust to More than 350cd/cm²(at full white).
5. Enter the item "Color Temp" to select Normal to adjust.
6. Use the item R Gain,G Gain or B Gain to adjust white balance: use 80 IRE (Pattern 141) signal, and adjust the white balance, until the Ca210 show x =285, y =293.
7. Enter the item "Color Temp" to select Cool to adjust.
8. Use the item R Gain,G Gain or B Gain to adjust white balance: use 80 IRE (Pattern 141) signal, and adjust the white balance, until the Ca210 show x =272, y =278.
9. Enter the item "Color Temp" to select Warm to adjust.
10. Use the item R Gain,G Gain or B Gain to adjust white balance: use 80 IRE (Pattern 141) signal, and adjust the white balance, until the Ca210 show x =313, y =329.

8. Block Diagram

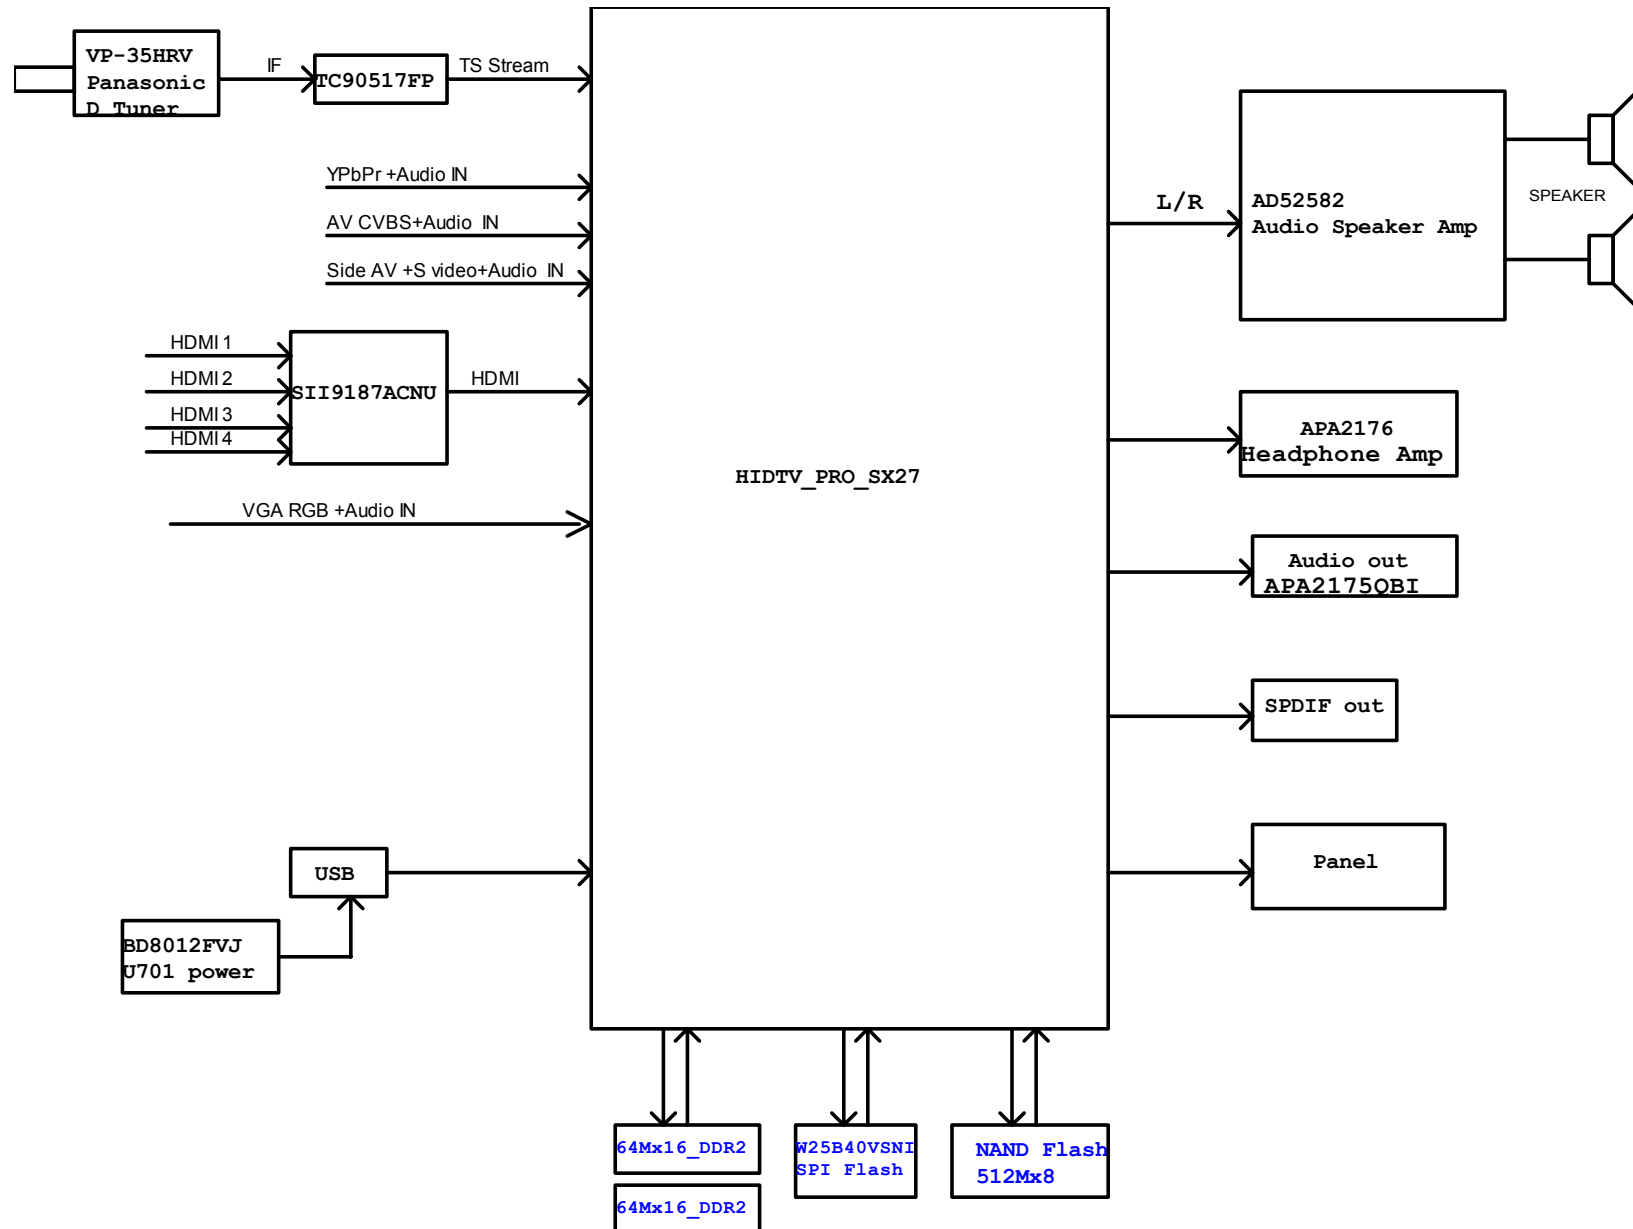


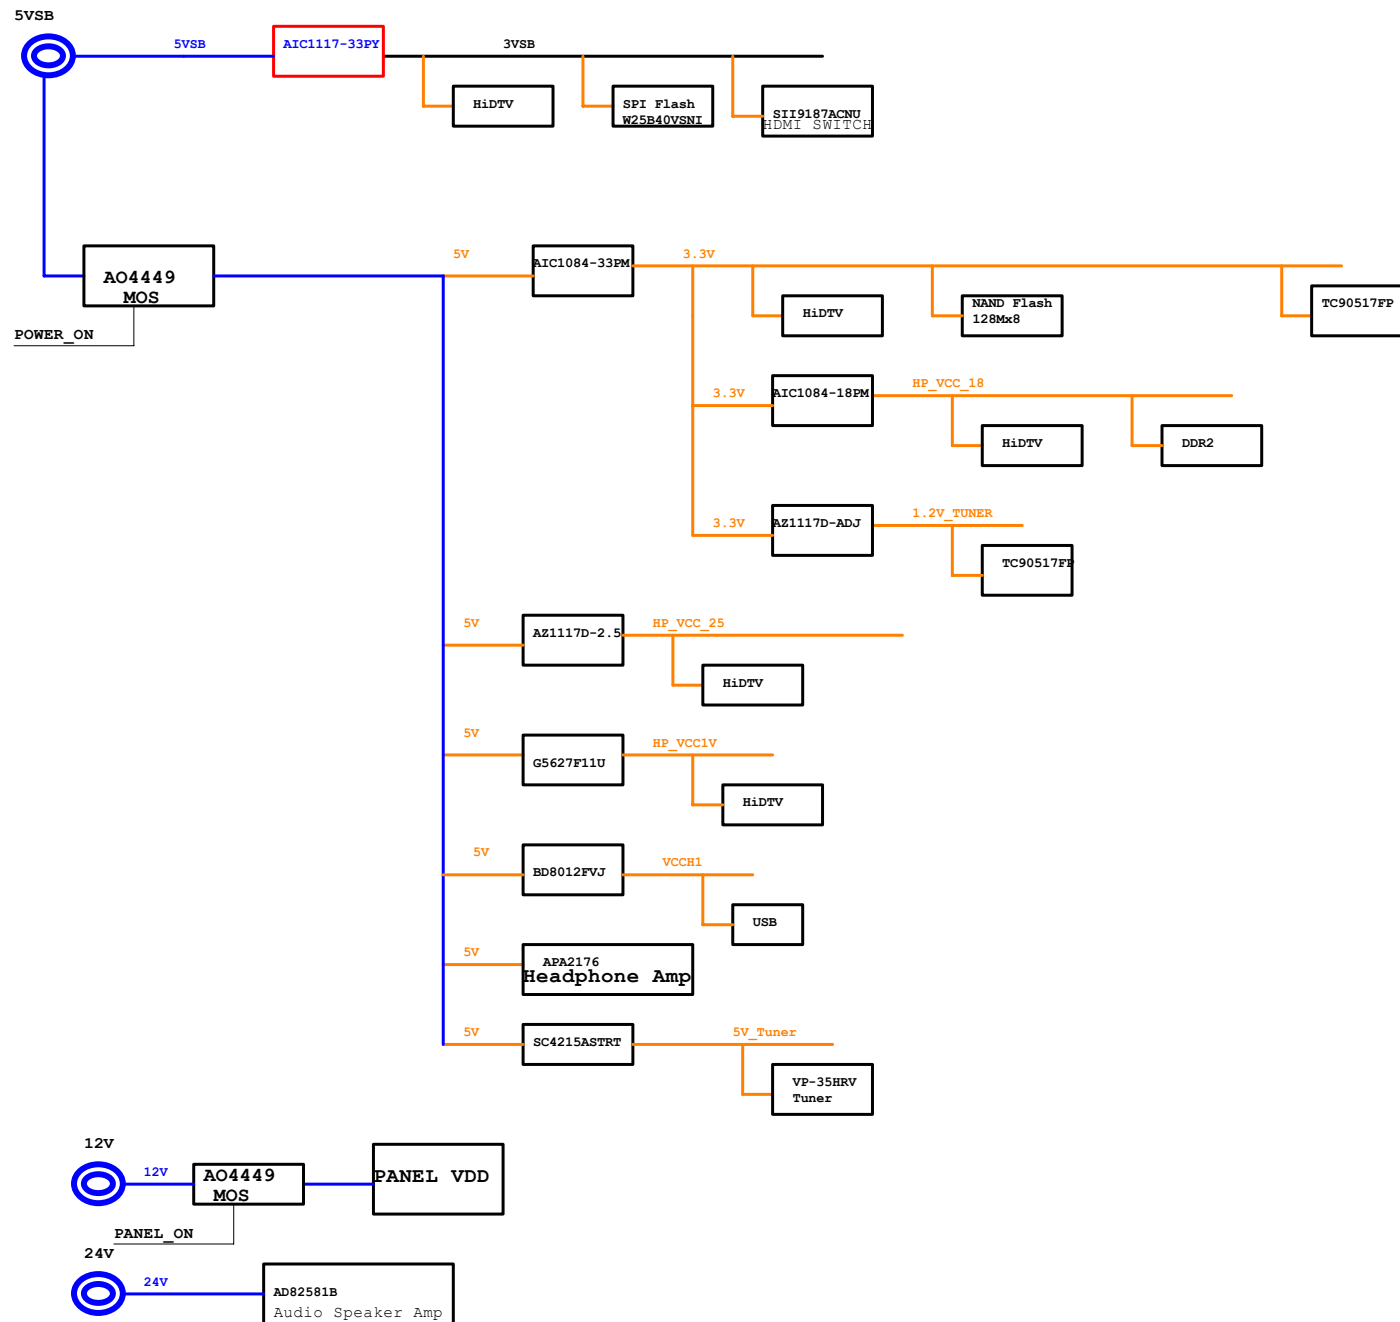




715G3787M0G000005K



T P V (Top Victory Electronics Co., Ltd.)		OEM MODEL		Size	Custom
話筒爪模數		TPV MODEL		Rev	01
Key Component	04:HIDPRO SX-1	PCB NAME	715G3787-M01-000-0050	修 多	<修多>
Date	Wednesday, May 05, 2010	Sheet	4 of 18		

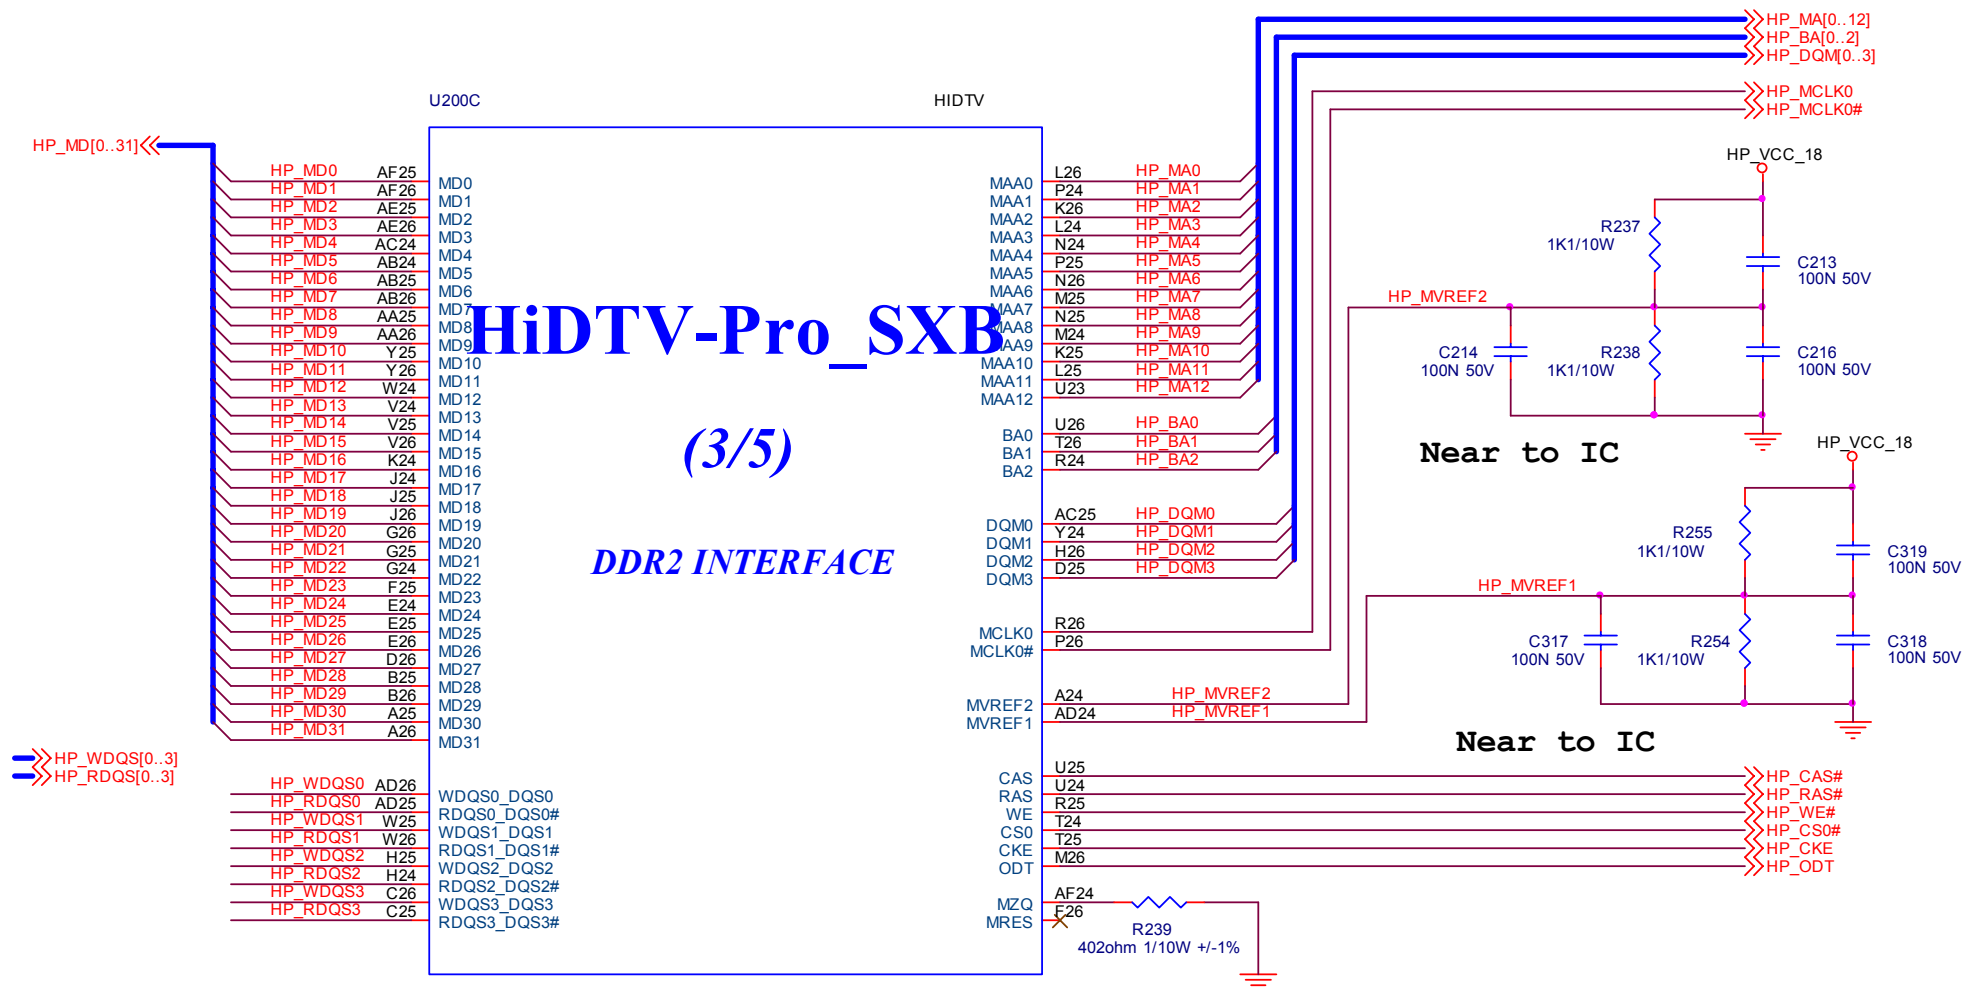


TPV (Top Victory Electronics Co., Ltd.)		OEM MODEL		Size	Custom
結構瓜網腹		TPV MODEL		Rev	01
Key Component	06:HiDPRO SX-3	PCB NAME	715G3787-M01-000-0050	称爹	<称爹>
Date	Wednesday, May 05, 2010	Sheet	6 of 18		

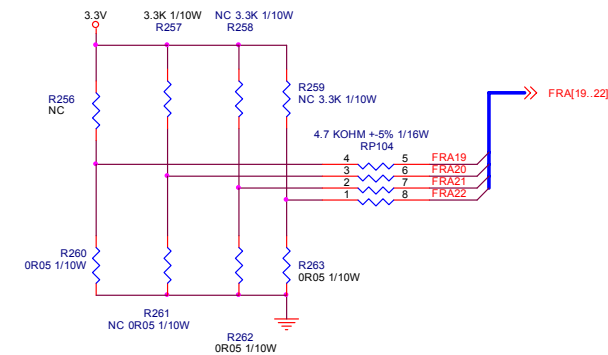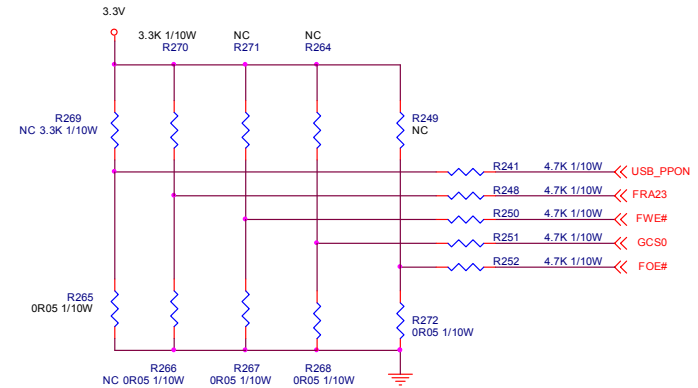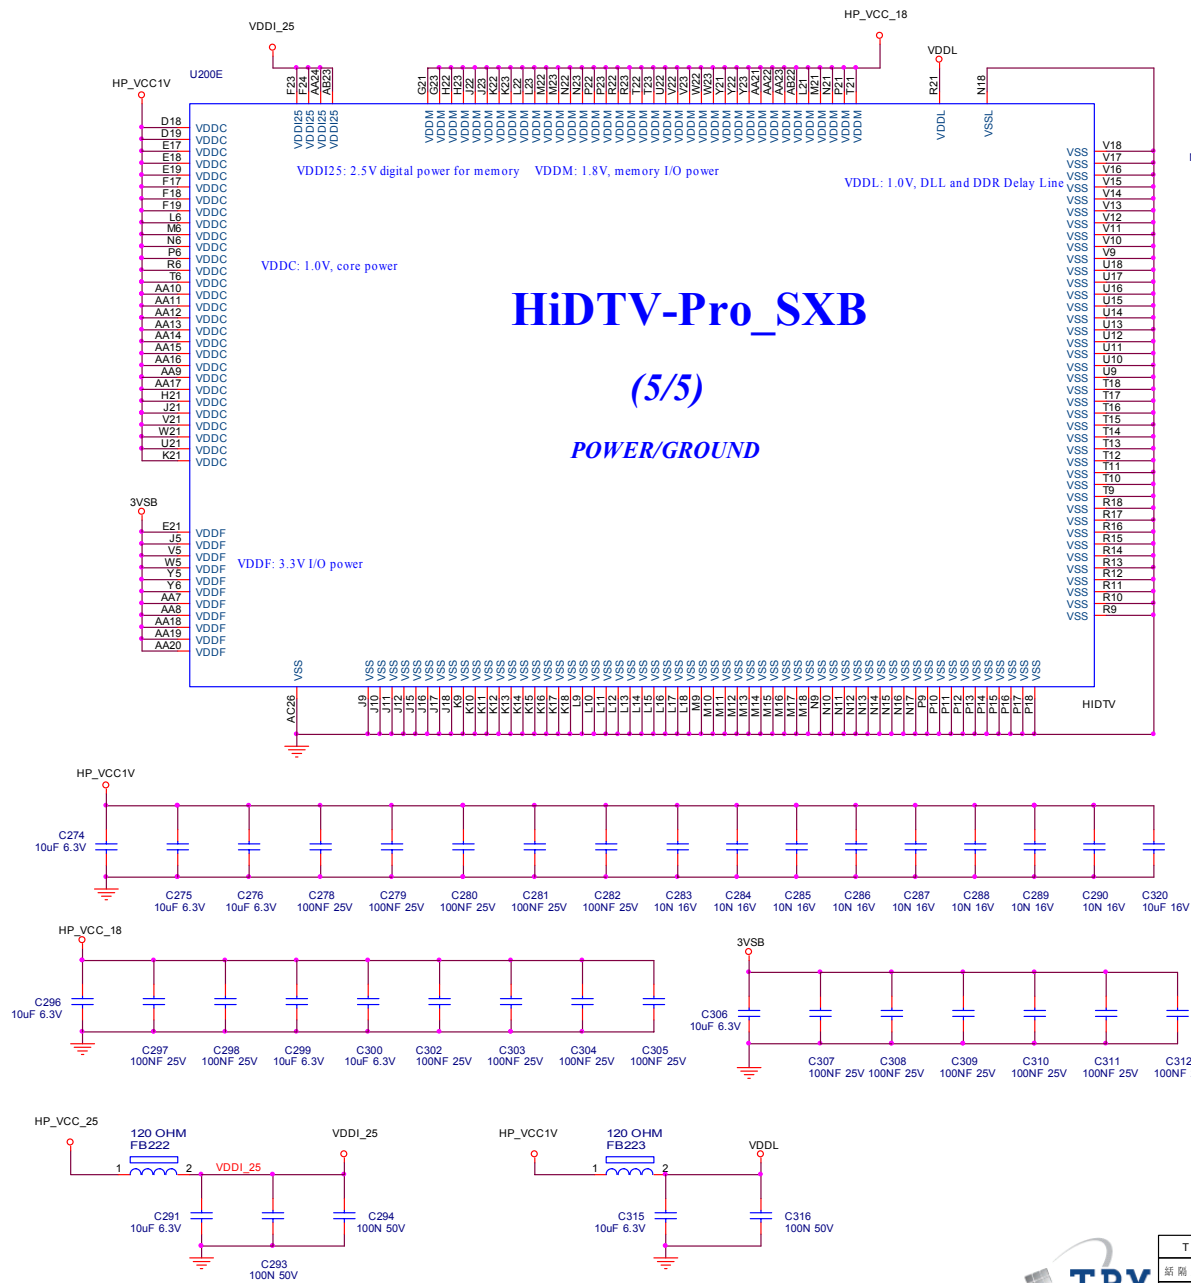


No	PIN	Configure Pin	Description & Setting(* as default setting)
1	USB_PPON	ROMSIZE	0 : 8bit(*) 1 : 16bit
2	FRA19/GCS0	VCO_PC_HW[1:0]	00 : auto (from process detector) 01 : ss corner(*) 10 : tt corner 11 : ft corner
3	FWE	EEPROM_BURN	0 : normal function 1 : burn code for eeprom(*)
4	FOE	EJTAG_SEL	0 : non-daisy chain mode(*) 1 : daisy chain mode
5	FRA20	CONM_SN	0 : Slave 8051 1 : Master 8051 (*)
6	FRA21	SYNC_MODE	0 : ASYNC mode(*) 1 : SYNC mode
7	FRA22	PARR_EN	0 : SPI Enabled 1 : Parallel FLASH Enabled(*)
8	FRA23	I2C_8051_SEL	0 : Disable Slave I2C/Enable 8051 1 : Enable Slave I2C/Disable 8051(*)






TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	Custom
話筒瓜爾	TPV MODEL		Rev	01
Key Component	08:HiDPRO SX-5	PCB NAME	715G3787-M01-000-0050	称
Date	Wednesday, May 05, 2010	Sheet	8 of 18	<称>

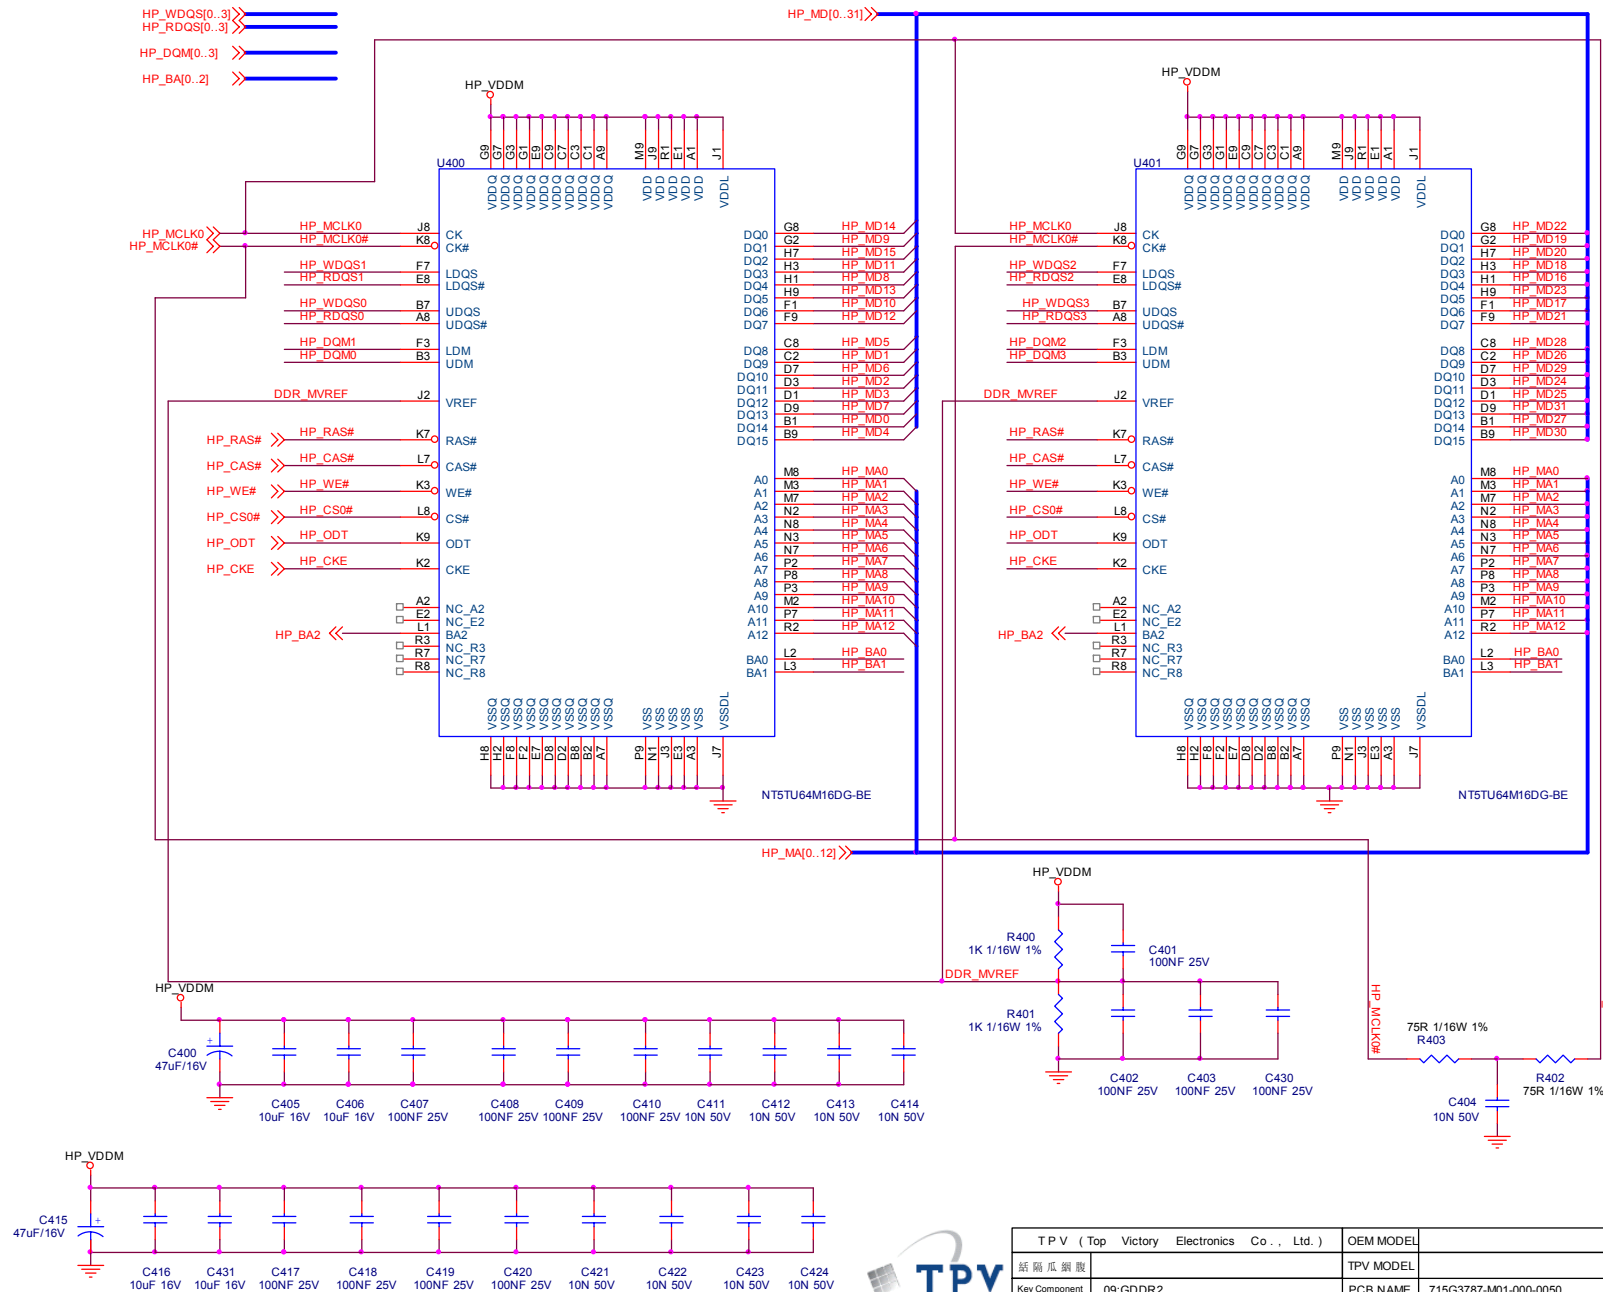


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	Custom
Key Component	09:GDDR2	TPV MODEL	Rev	01
Date	Wednesday, May 05, 2010	PCB NAME	715G3787-M01-000-0050	陈豪
		Sheet	9 of 18	<陈豪>

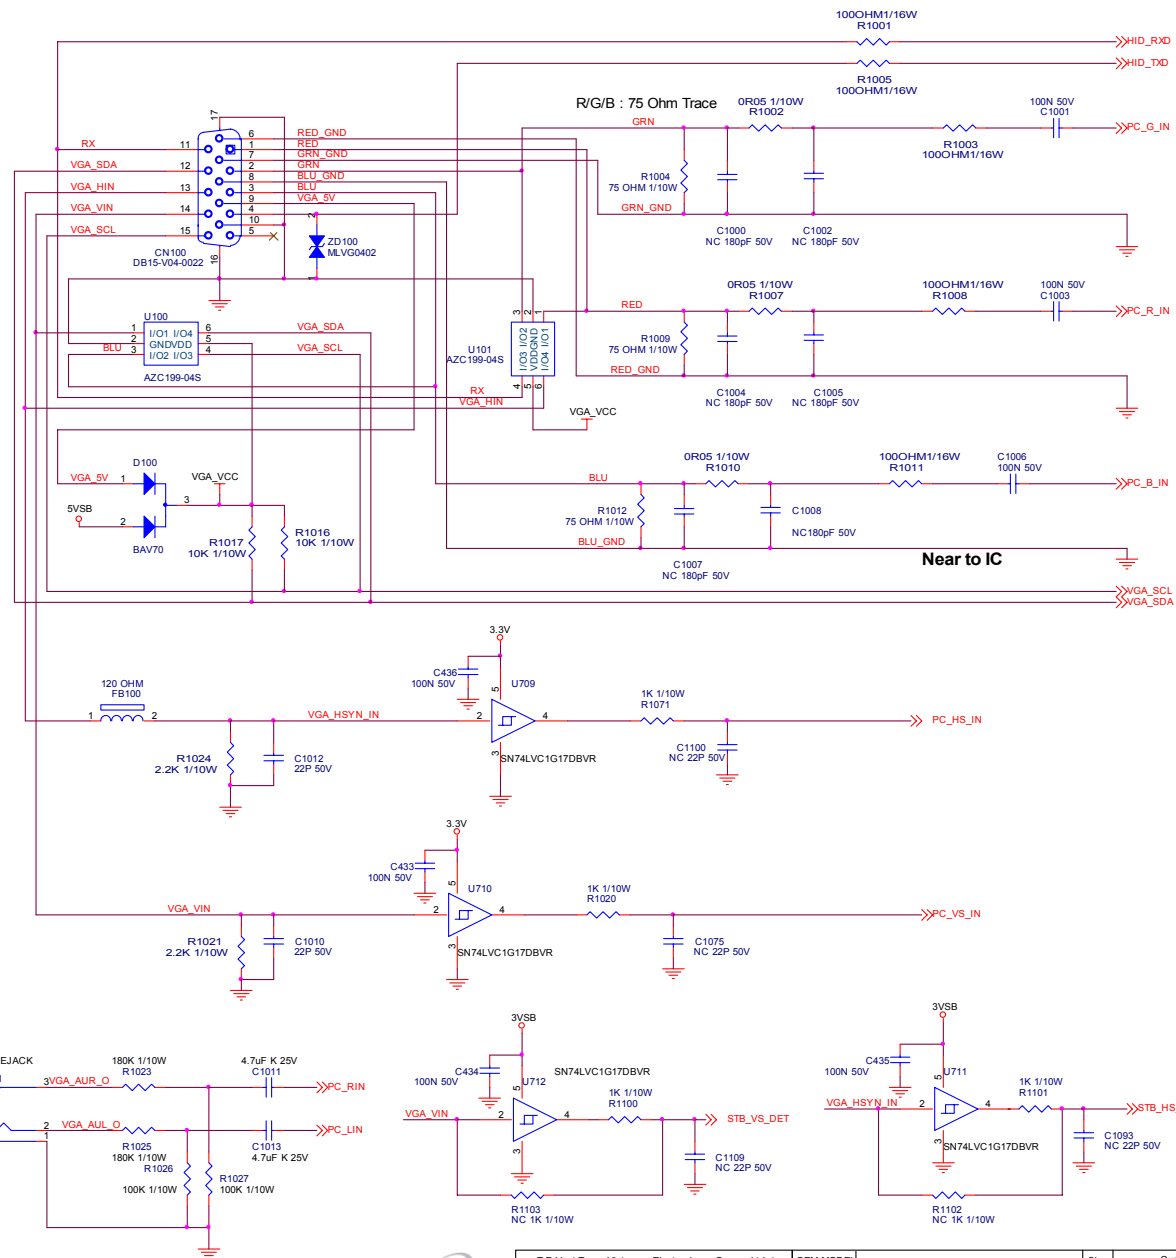

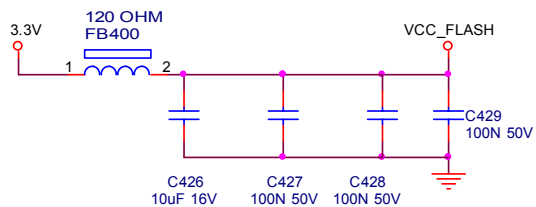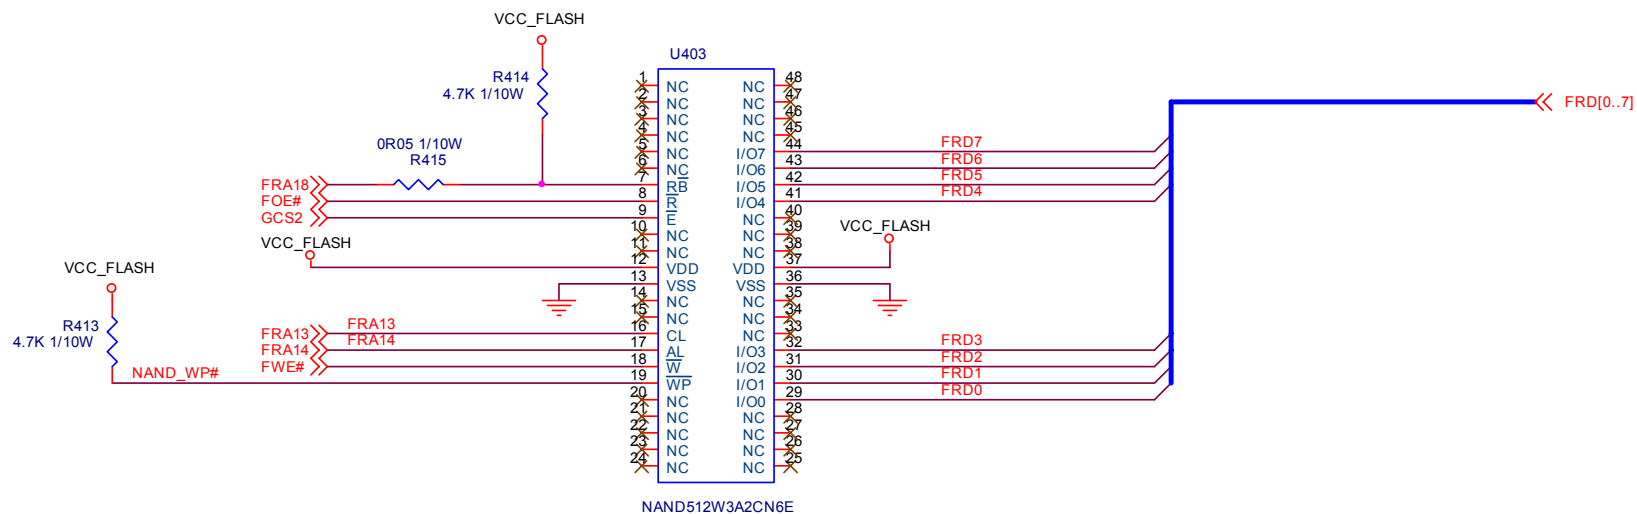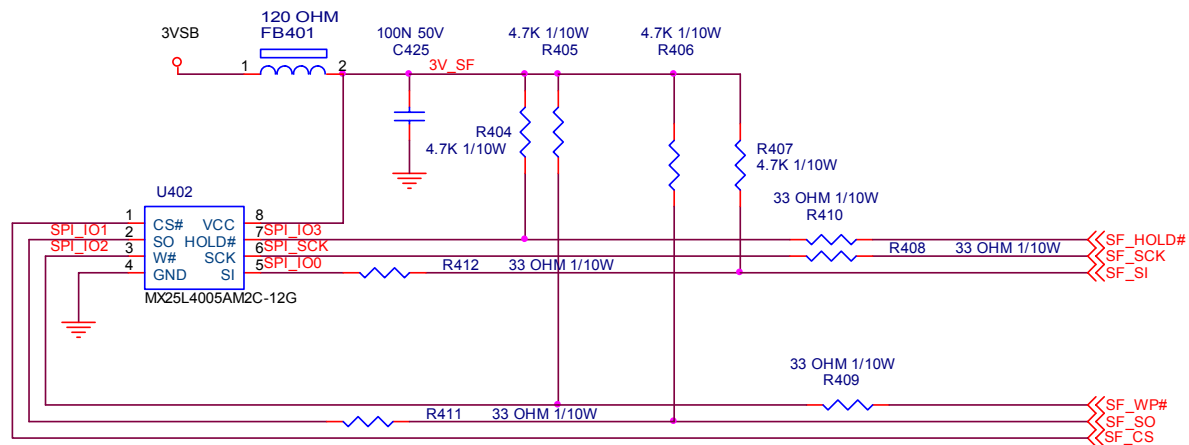


TPV (Top Victory Electronics Co., Ltd.)				OEM MODEL		Size	Custom
結構瓜網膜				TPV MODEL		Rev	01
Key Component	12:HP_SX_ROM/FLASH	PCB NAME	715G3787-M01-000-0050	称爹	<称爹>		
Date	Wednesday, May 05, 2010	Sheet	12 of 18				


57

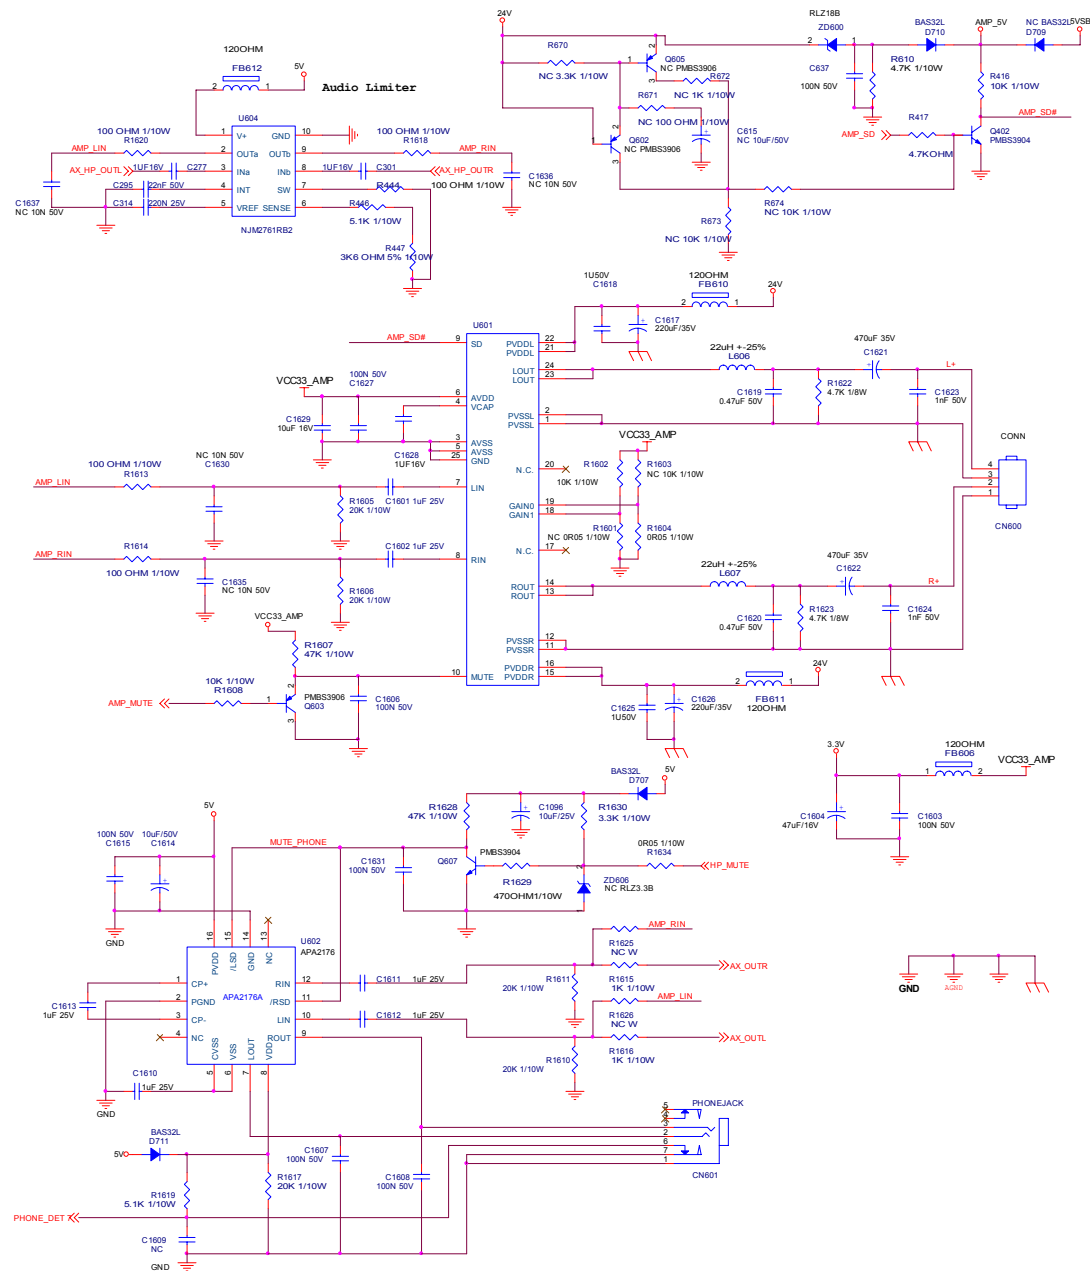






TPV (Top Victory Electronics Co., Ltd.)		OEM MODEL		Size	Custom
冠捷电子		TPV MODEL		Rev	01
Key Component		PCB NAME	715G3787-M01-000-0050	料号	
Date		Monday, June 28, 2015	Sheet 14 of 18		

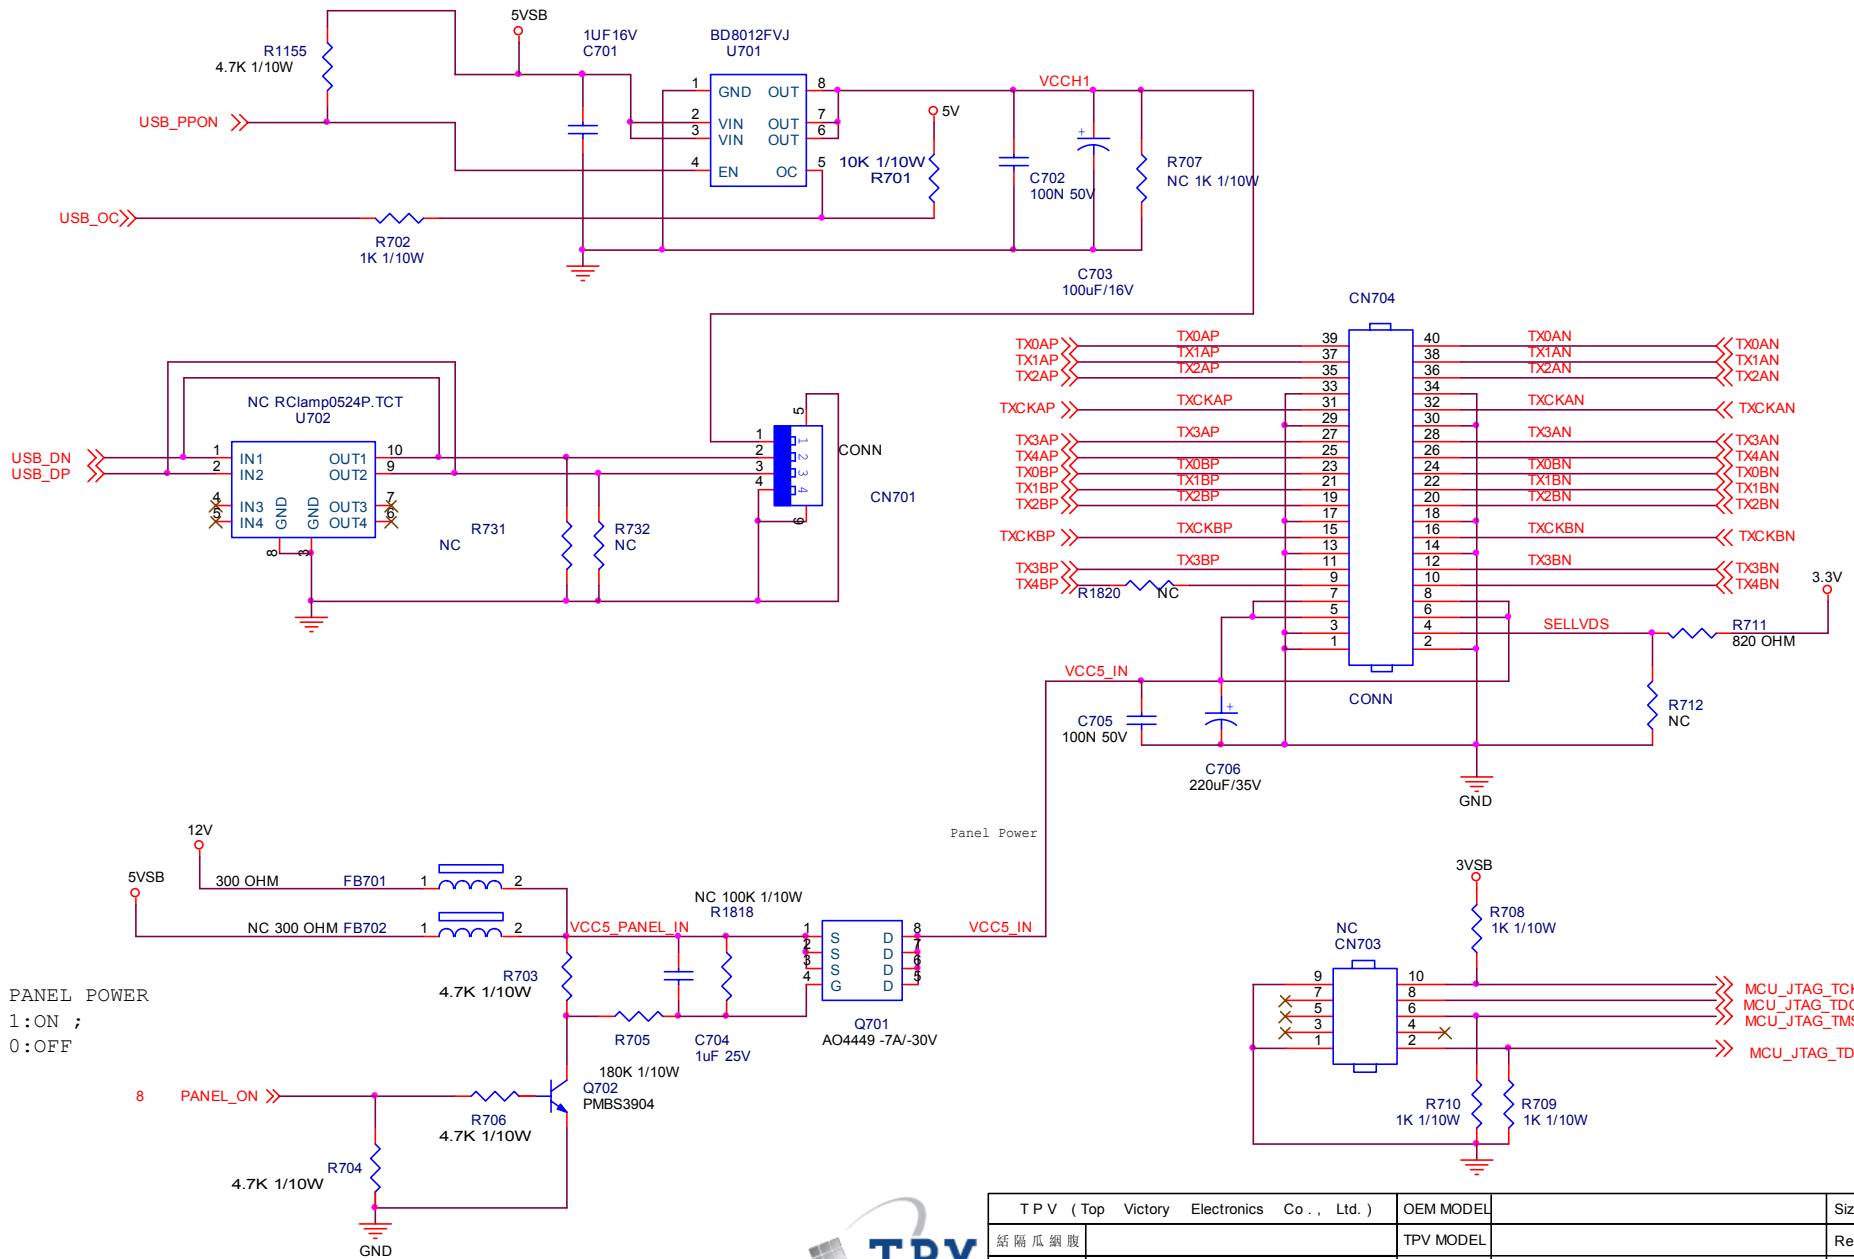

TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	Custom
結隔瓜網腹	TPV MODEL		Rev	01
Key Component	15:Peripheral1	PCB NAME	715G3787-M01-000-0050	称爹
Date	Wednesday, May 05, 2010	Sheet	15 of 18	<称爹>

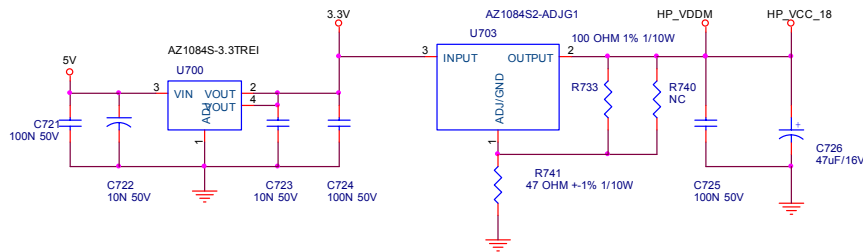


$$V_{out} = 1.25V \times (1 + R_{down} / R_{up}) = 1.25 \times (1 + 4.7k / 10k) = 1.837V$$

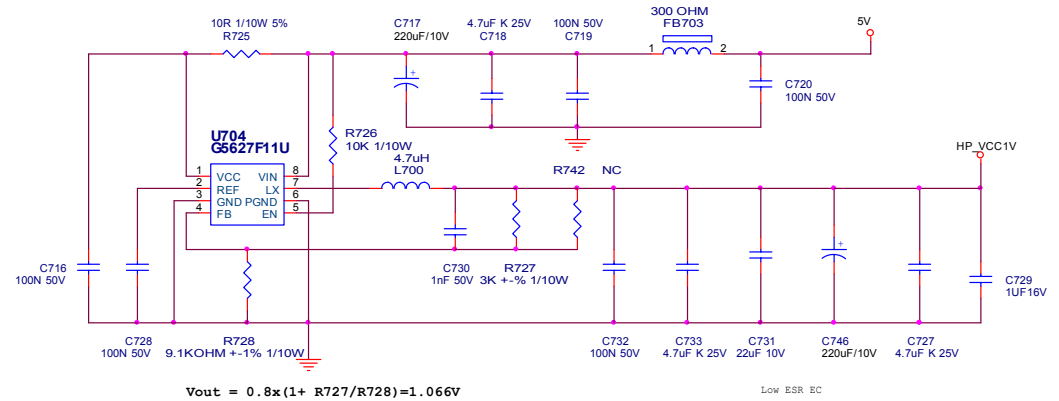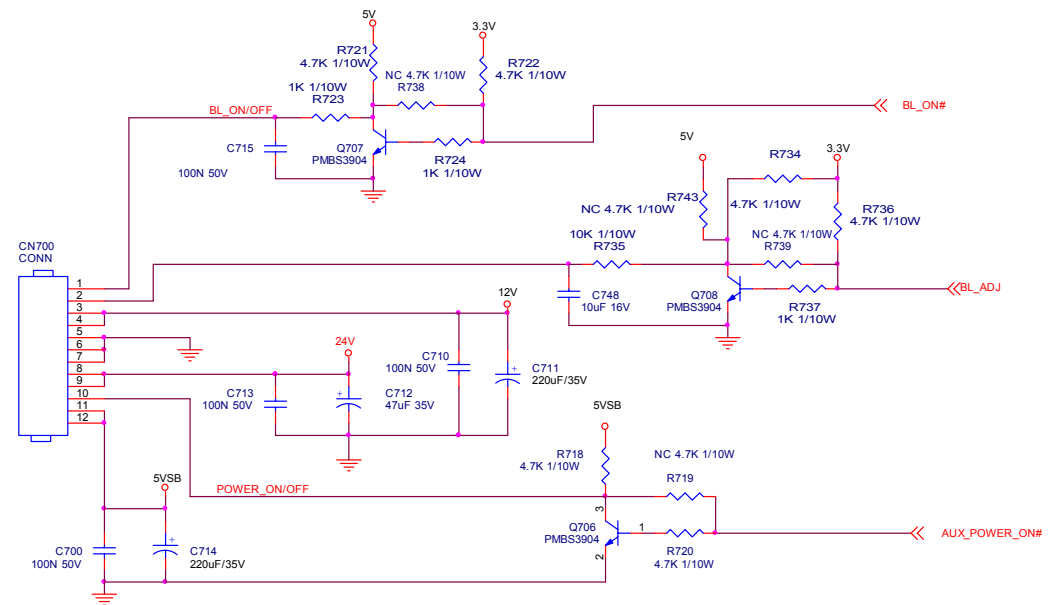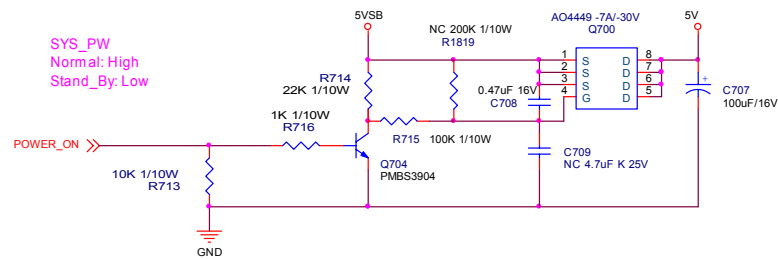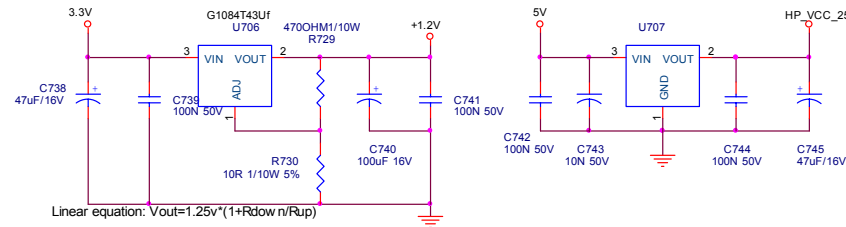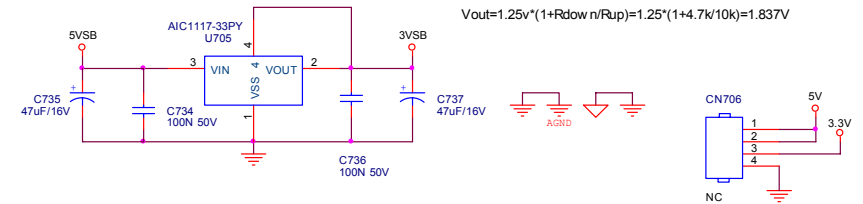


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	Custom
鋅錫板鍍銀	TPV MODEL		Rev	01
Key Component	16:Power	PCB NAME	715G3787-M01-000-0050	稱重
Date	Wednesday, May 12, 2010	Sheet	16 of 18	<稱重>



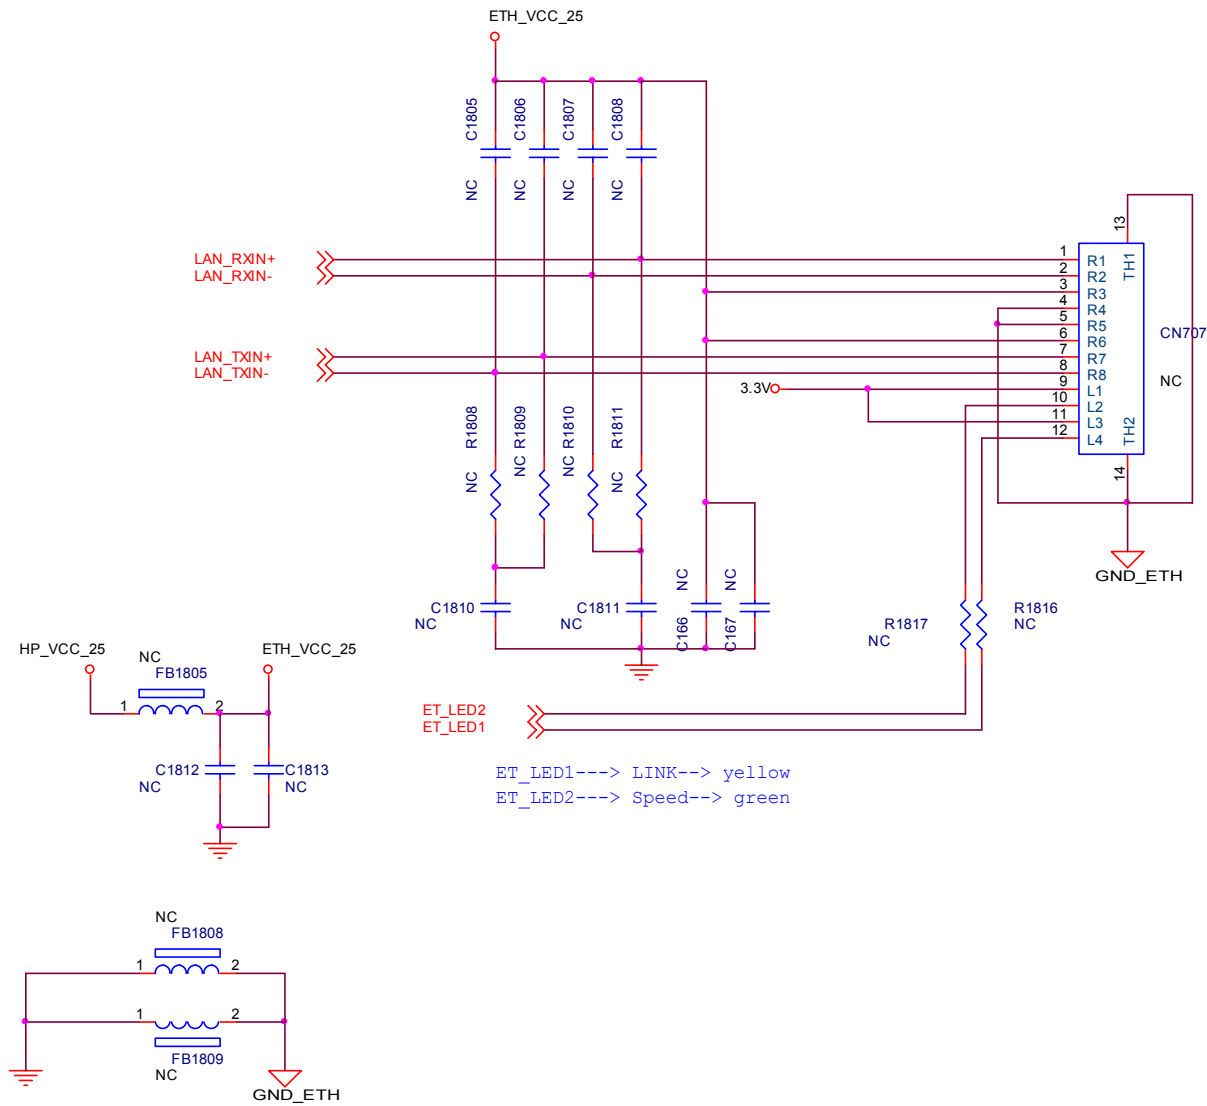


TPV (Top Victory Electronics Co., Ltd.)		OEM MODEL		Size	Custom
結構瓜網腹		TPV MODEL		Rev	01
Key Component	18:KEY AND IR INTERFACE	PCB NAME	715G3787-M01-000-0050	称爹	<称爹>
Date	Thursday, June 10, 2010	Sheet	19 of 19		

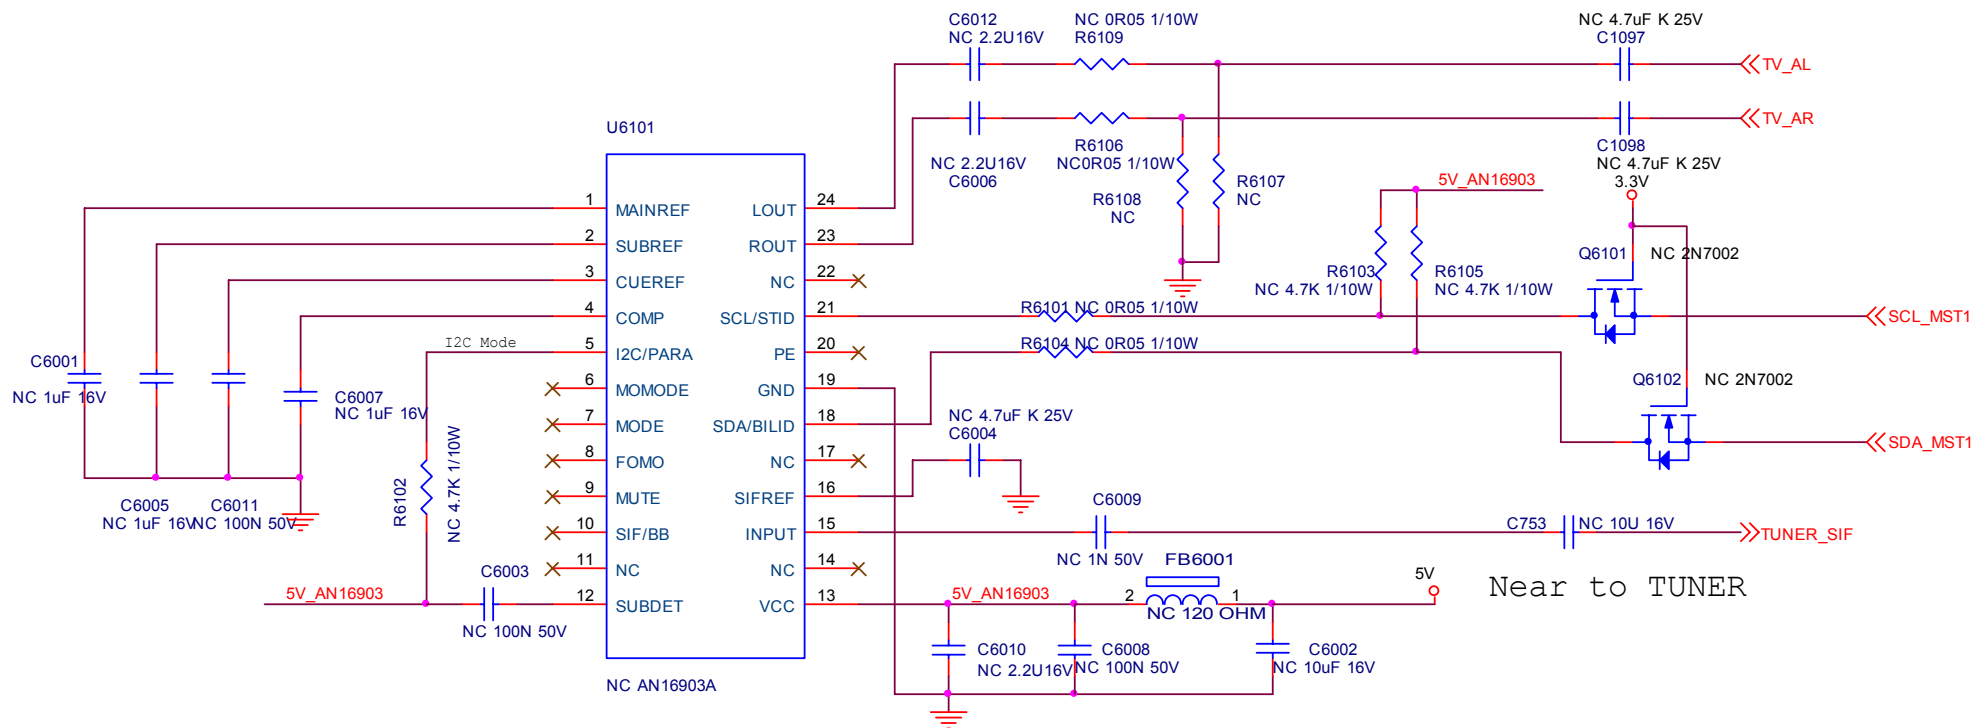


TPV (Top Victory Electronics Co., Ltd.)		OEM MODEL		Size	Custom
紙隔瓜網腹		TPV MODEL		Rev	01
Key Component	18:KEY AND IR INTERFACE	PCB NAME	715G3787-M01-000-0050	称爹	<称爹>
Date	Wednesday, May 05, 2010	Sheet	19 of 19		


9.2 Power Board
D26W931 715G2907 1 3

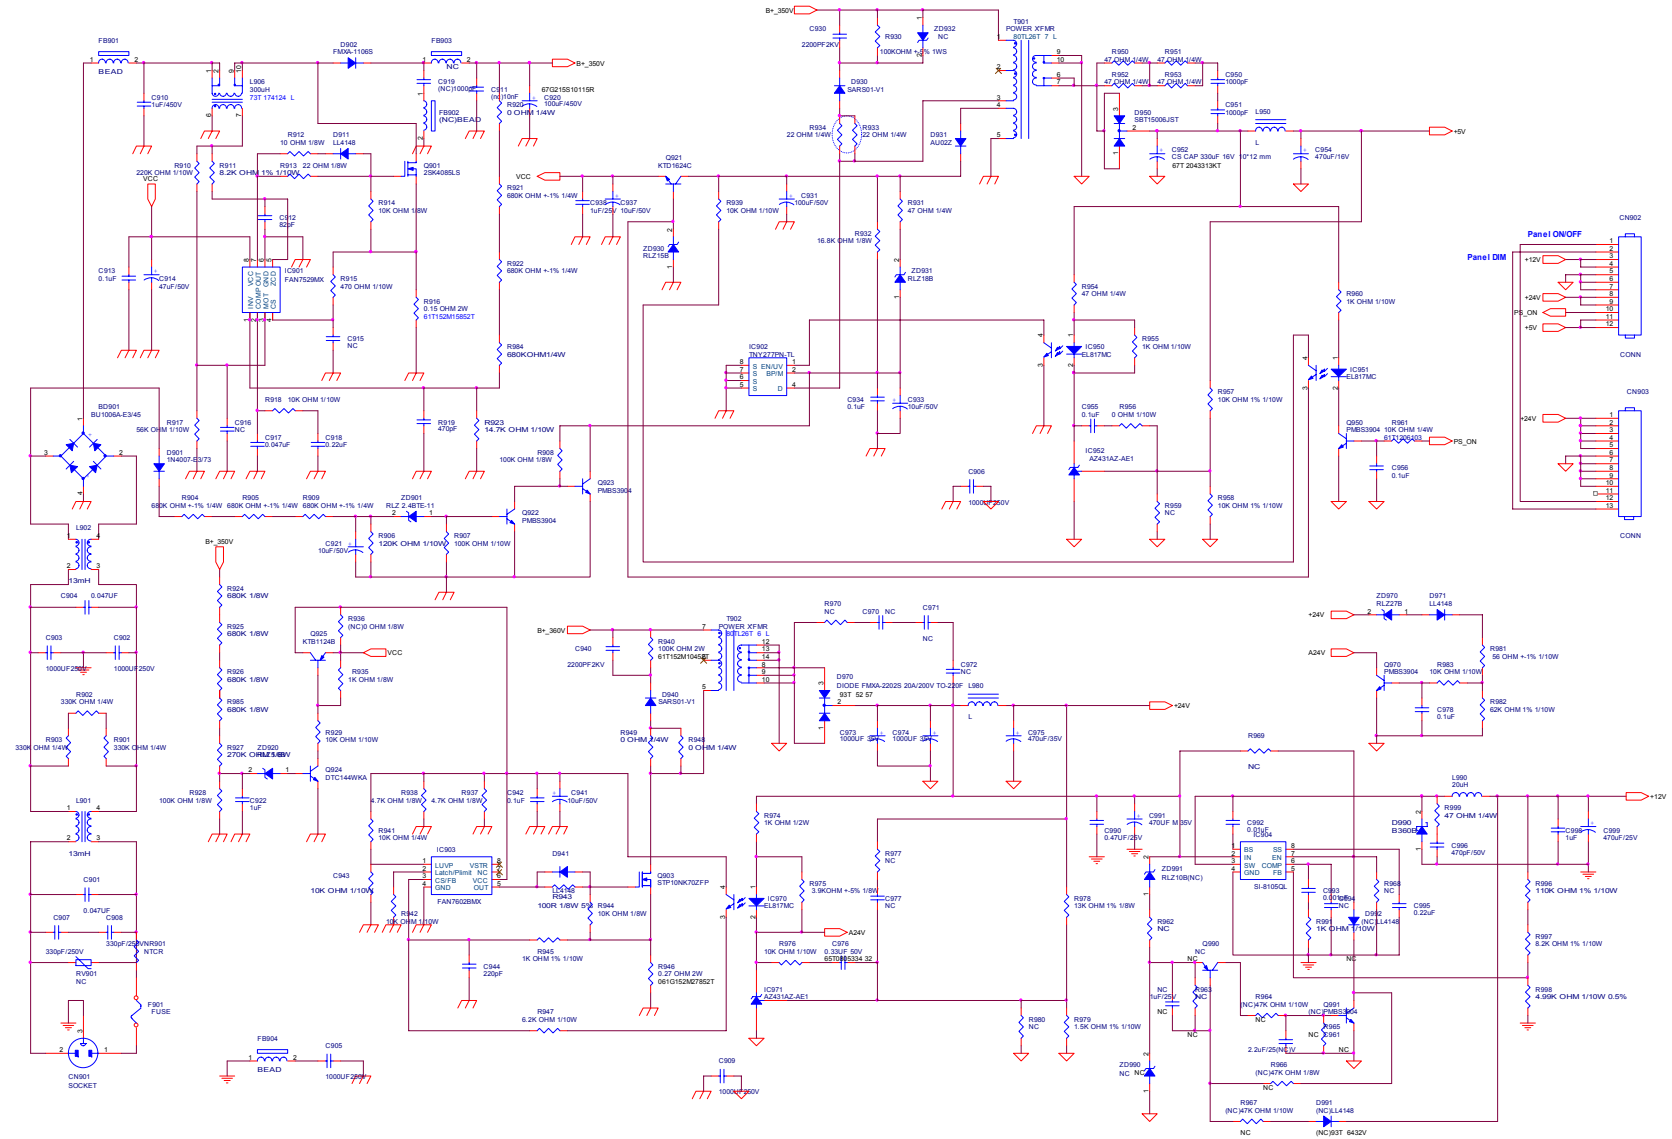


TPV (Top Victory Electronics Co., Ltd.)	DEM MODEL	Size	D
頂冠電子	TPV MODEL	Rev	A
Rev Component: 01 POWER	PCB NAME: 715G2907 1 3	Rev	<6.8>
Date: F2024 January 09, 2009	Sheet: 1 of 1		

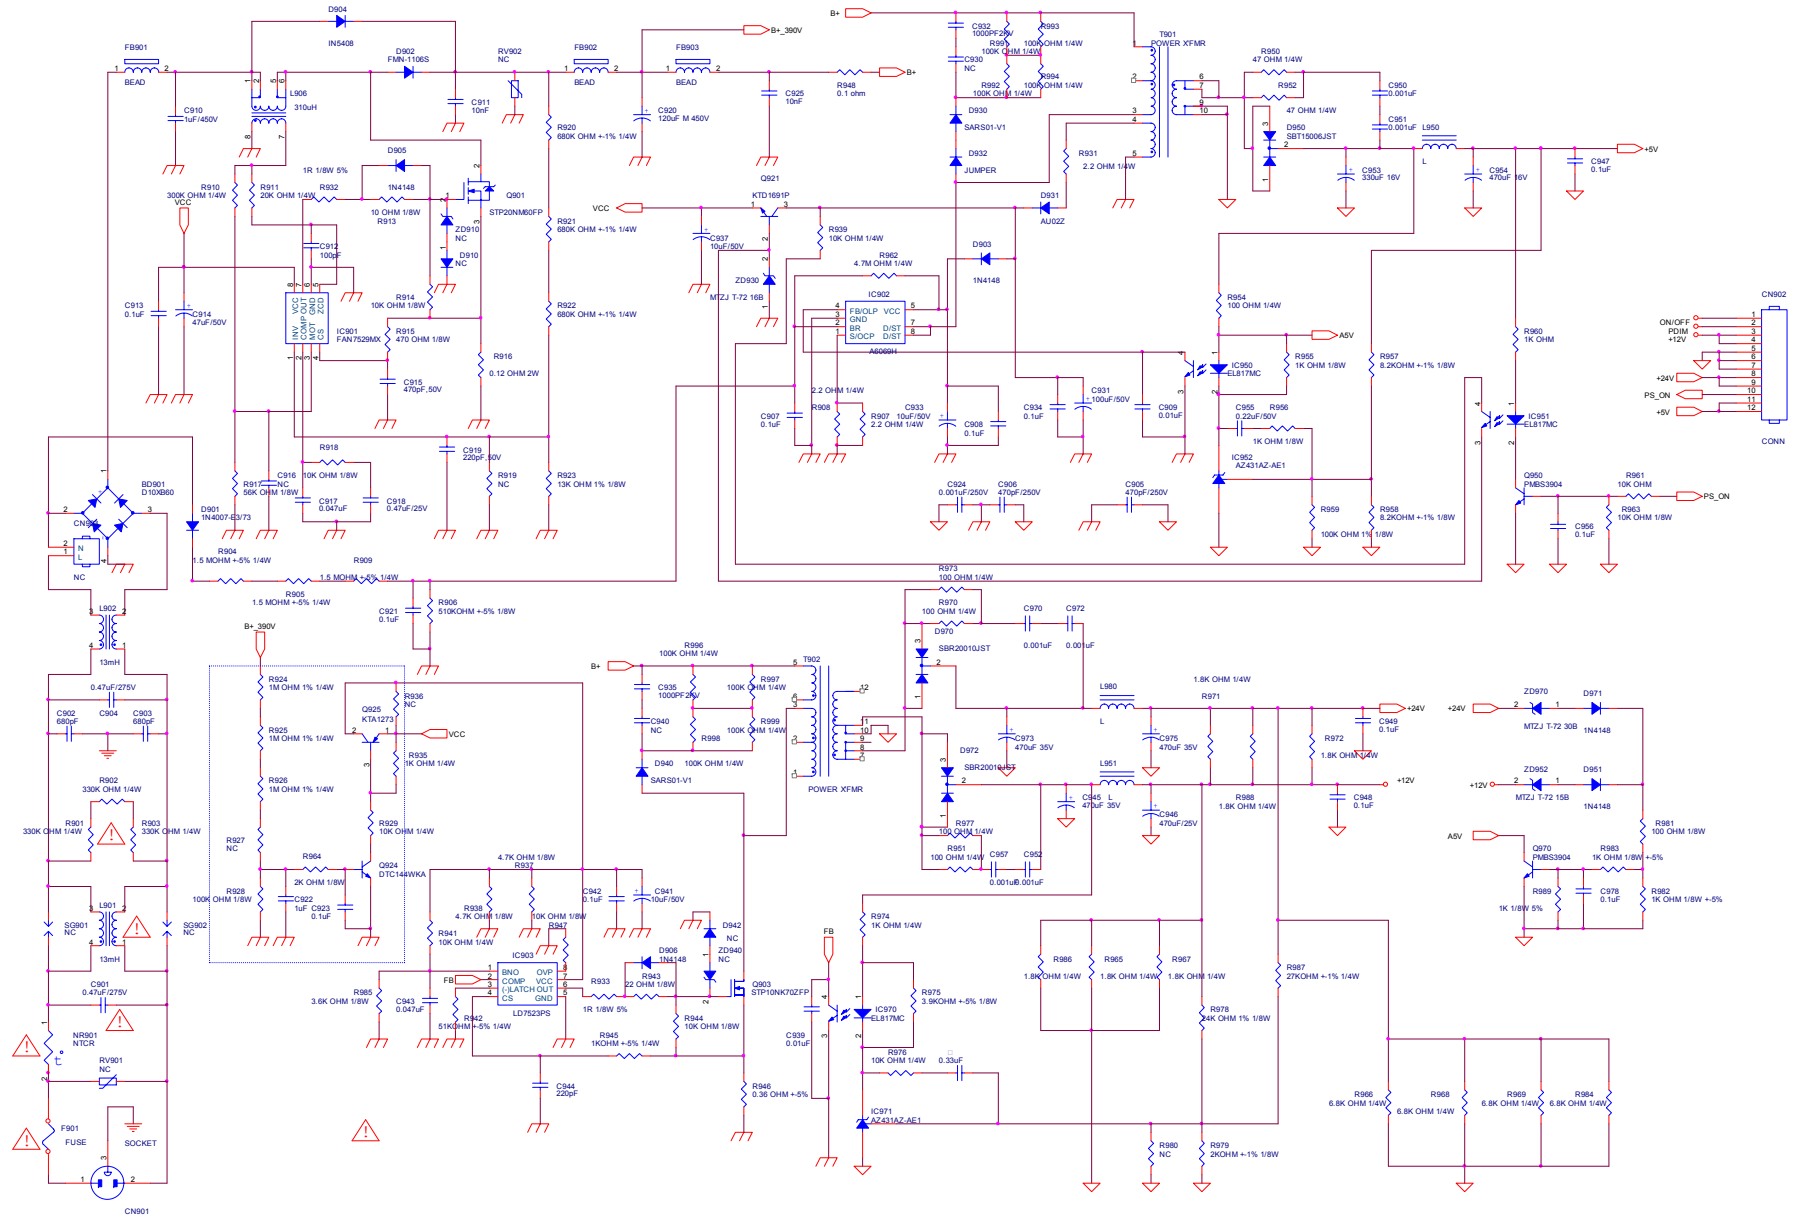



T.P.V (Top Victory Electronics Co., Ltd.)	OEM MODEL	Rev	Custom
规格书	TPV MODEL	Rev	A
Key Component POWER	PCB NAME	715G3332-1	
Date Wednesday, May 27, 2009	Sheet	of	88
			BBY MODEL

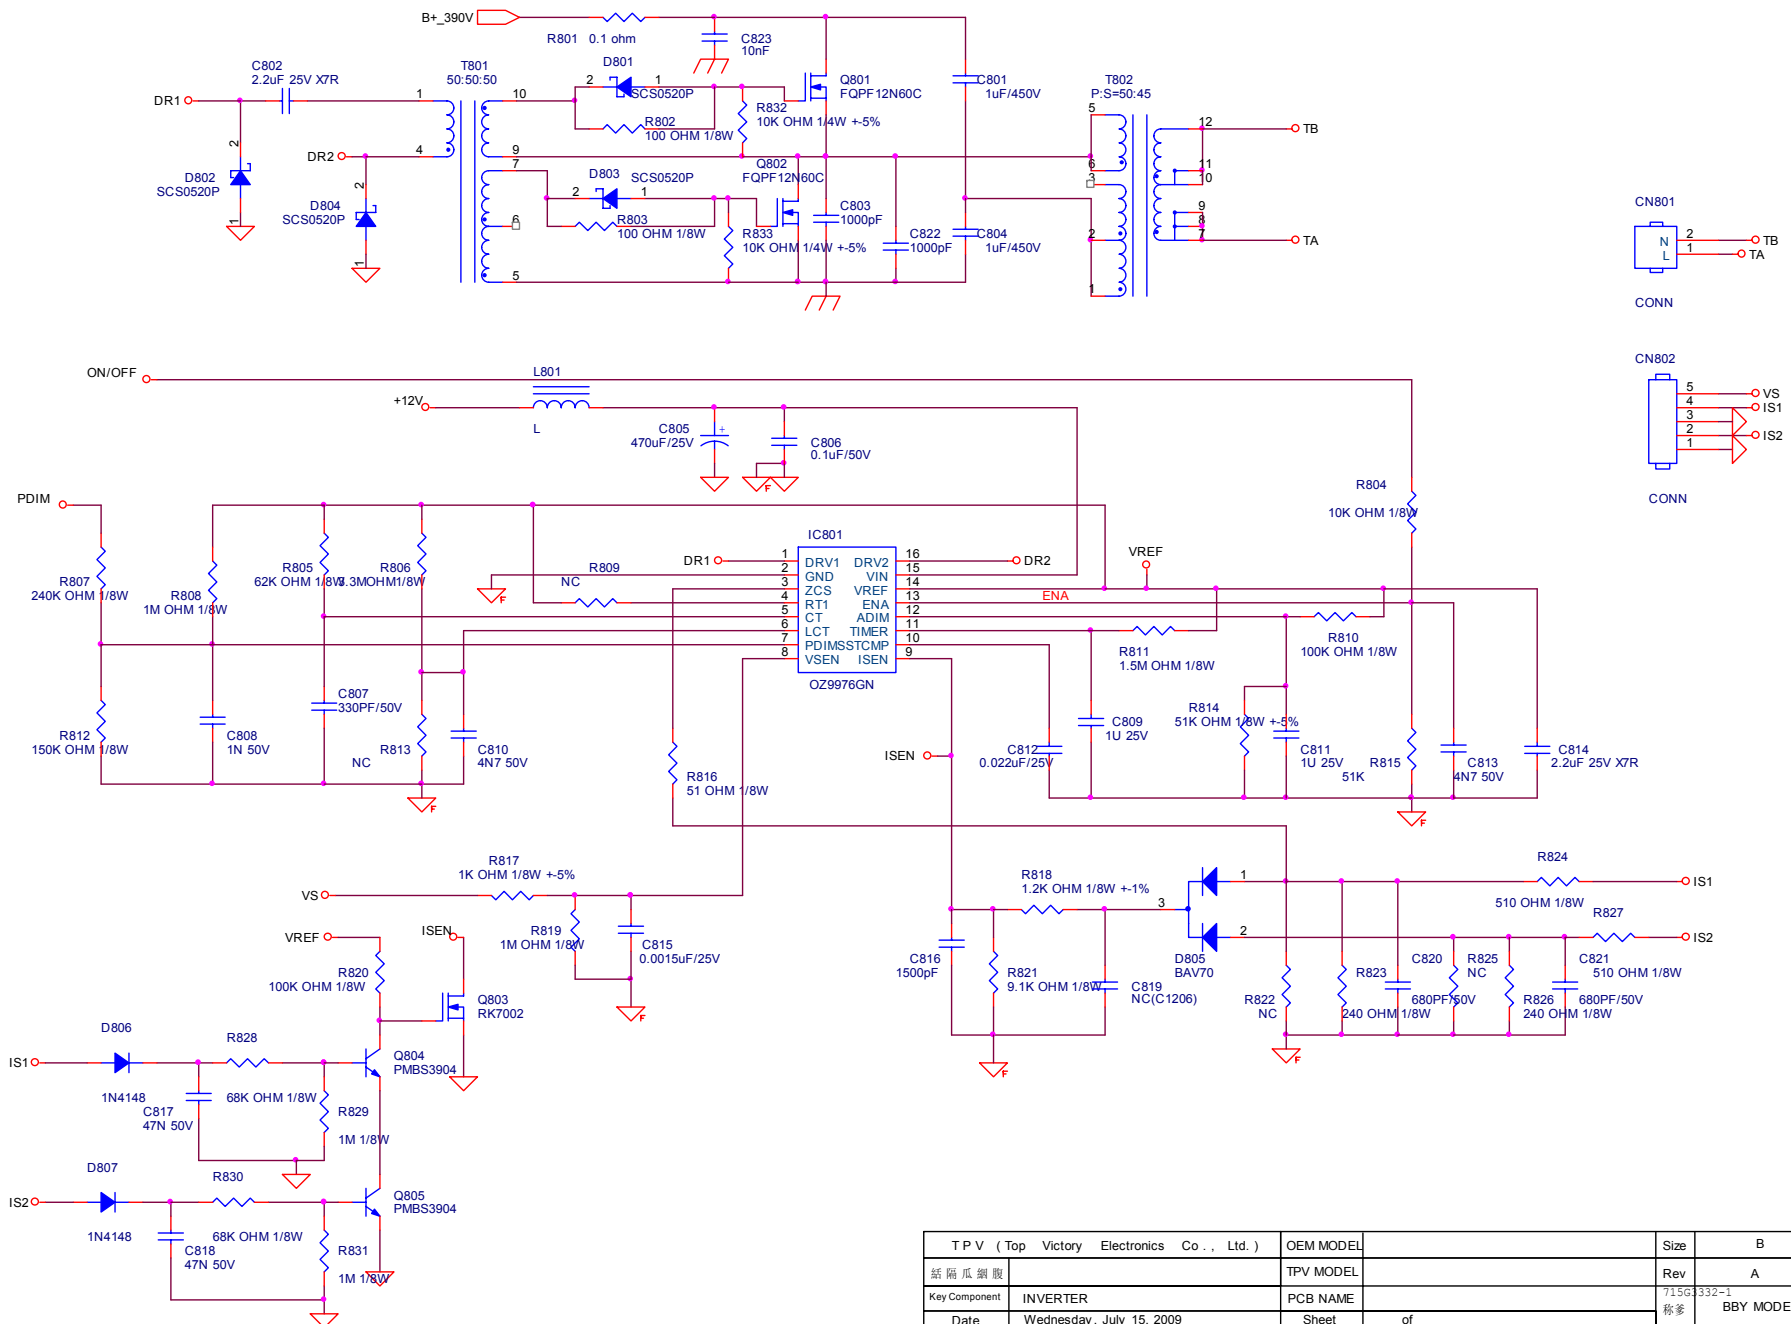


D32W931 715G3690P01000003M

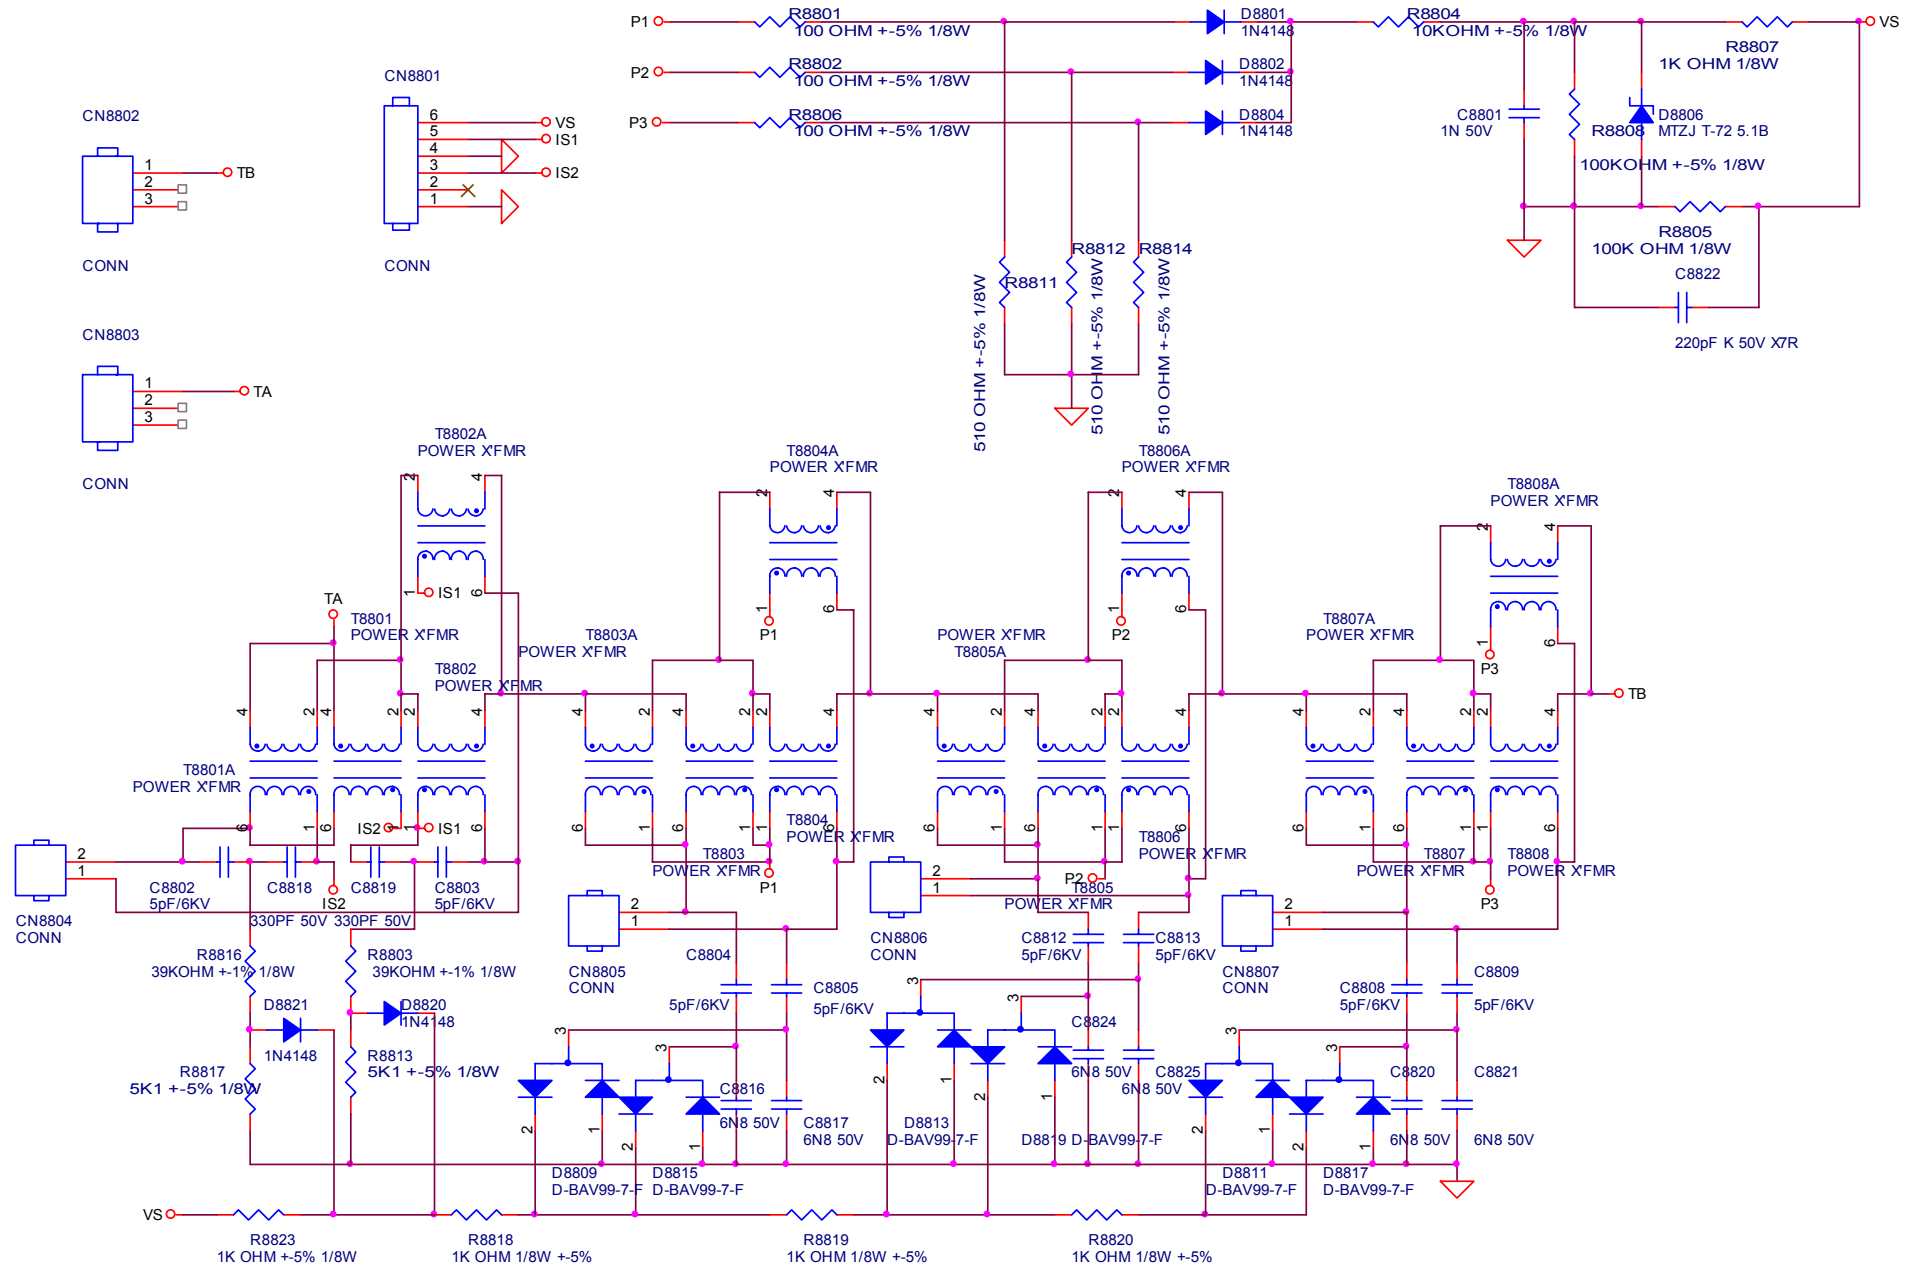


LC32W053 715G3811P01W30003S

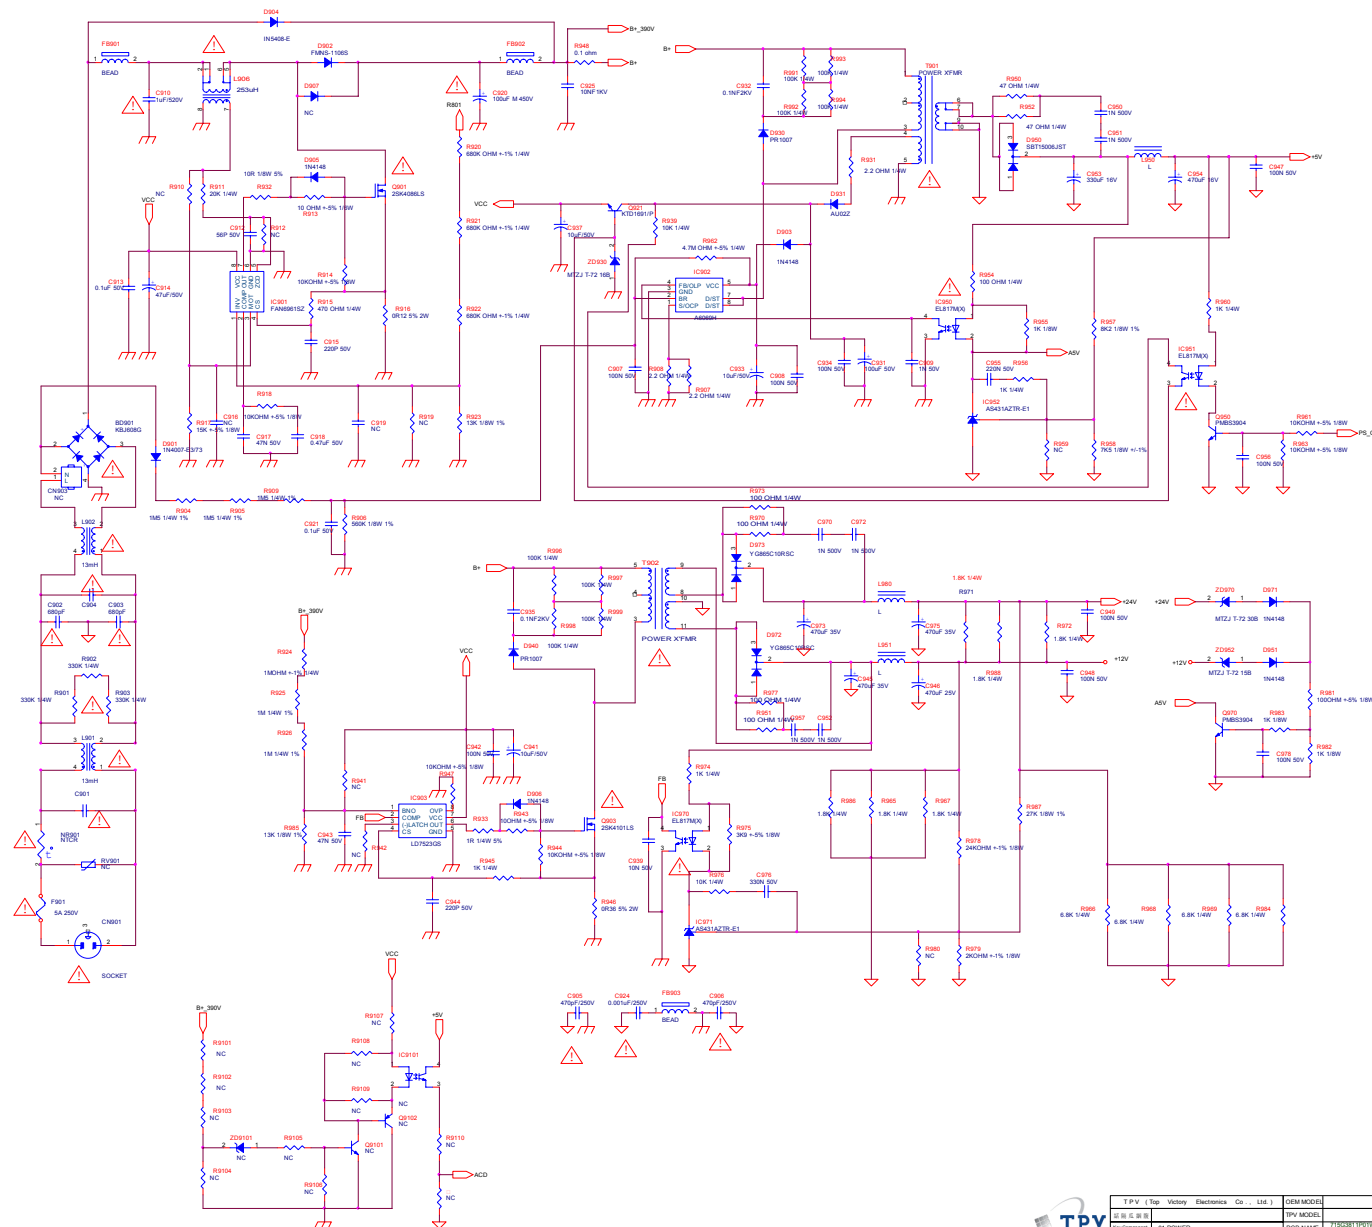

TPV (Top Victory Electronics Co., Ltd.)	DEM-MODEL	Rev	Custom
TPV MODEL	TPV MODEL	Rev	1.0
PCB NAME	715G3811P01W30003S	Rev	1.0
Date	Wednesday, March 24, 2010	Sheet	1 of 2

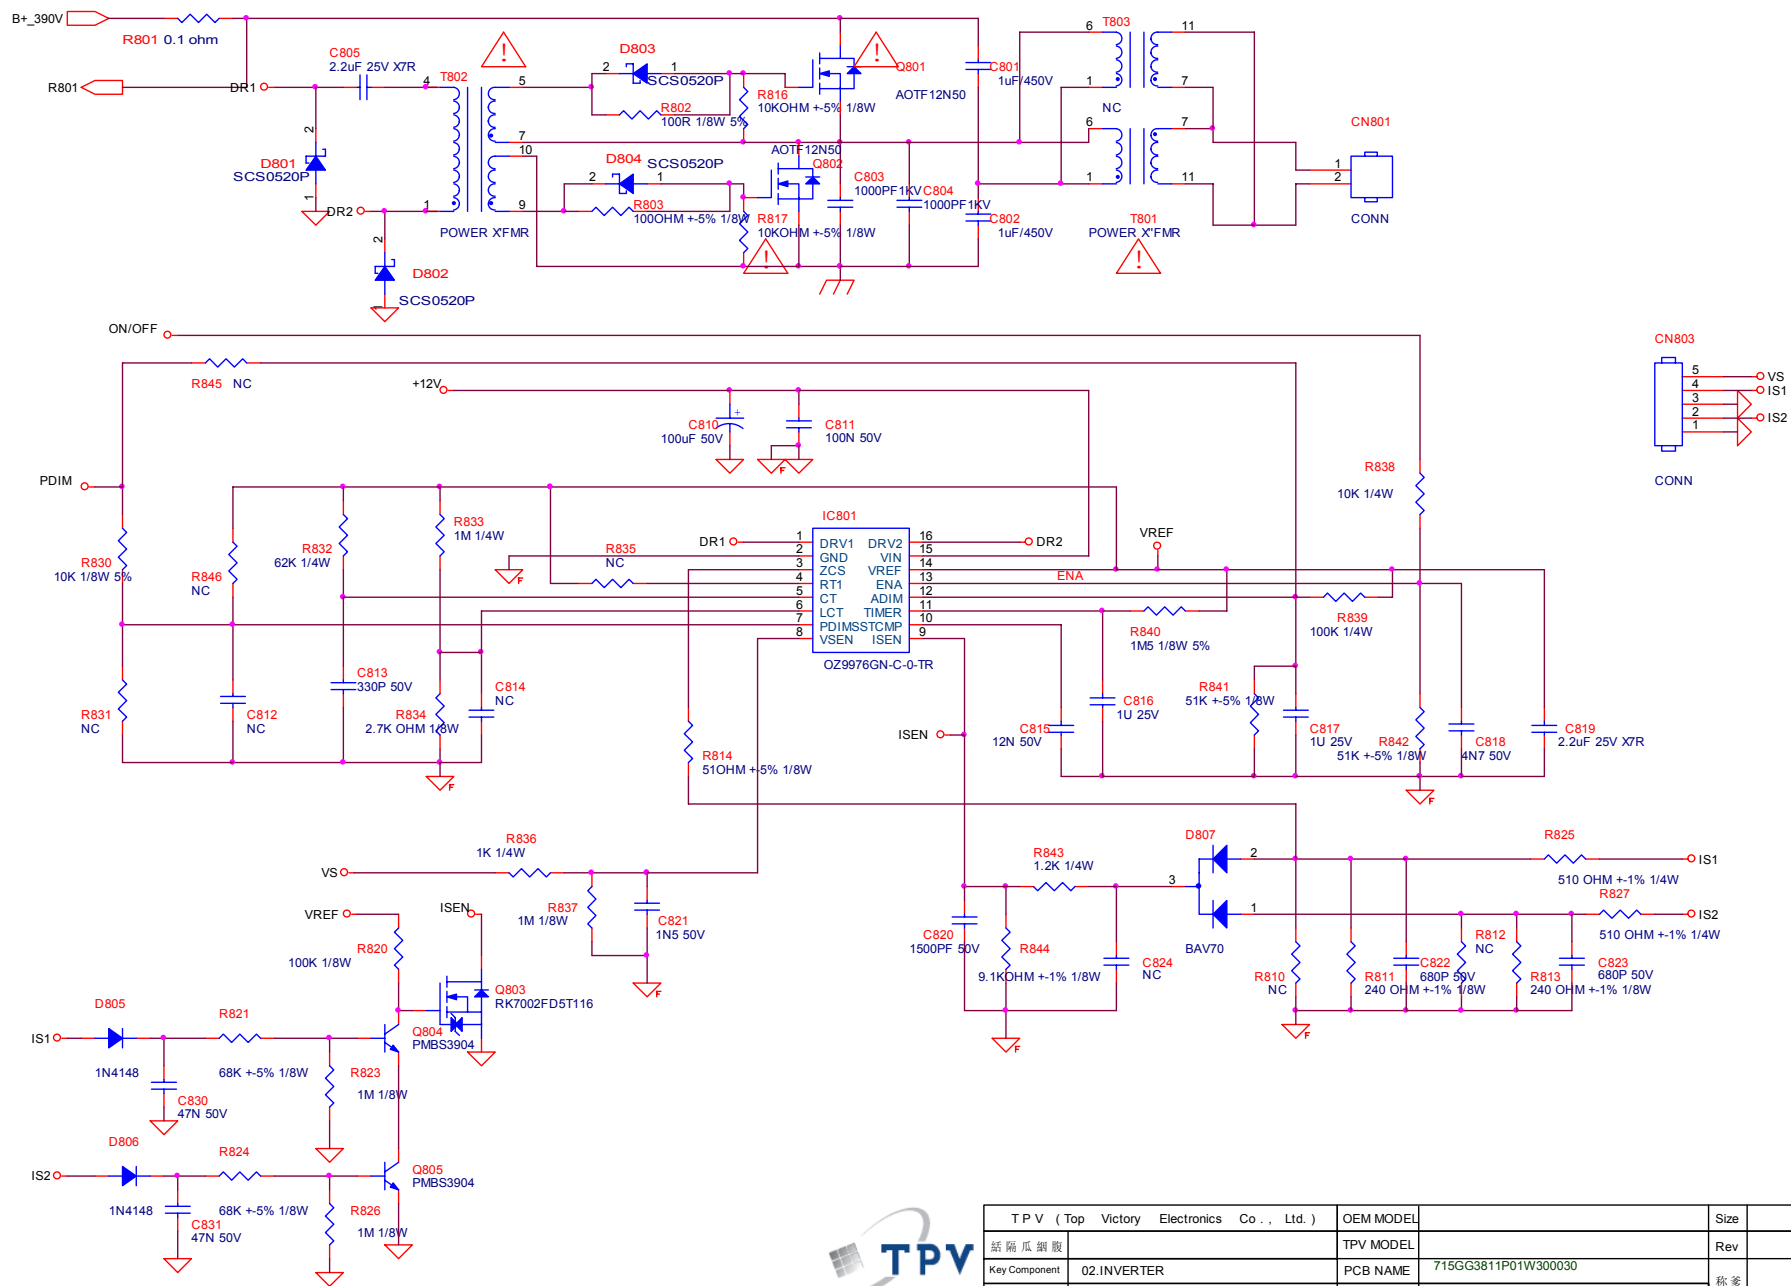


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	B
紙隔瓜銅版	TPV MODEL		Rev	1.0
Key Component	02.INVERTER	PCB NAME	715GG3811P01W300030	称爹
Date	Wednesday, March 24, 2010	Sheet	2 of 2	<称爹>

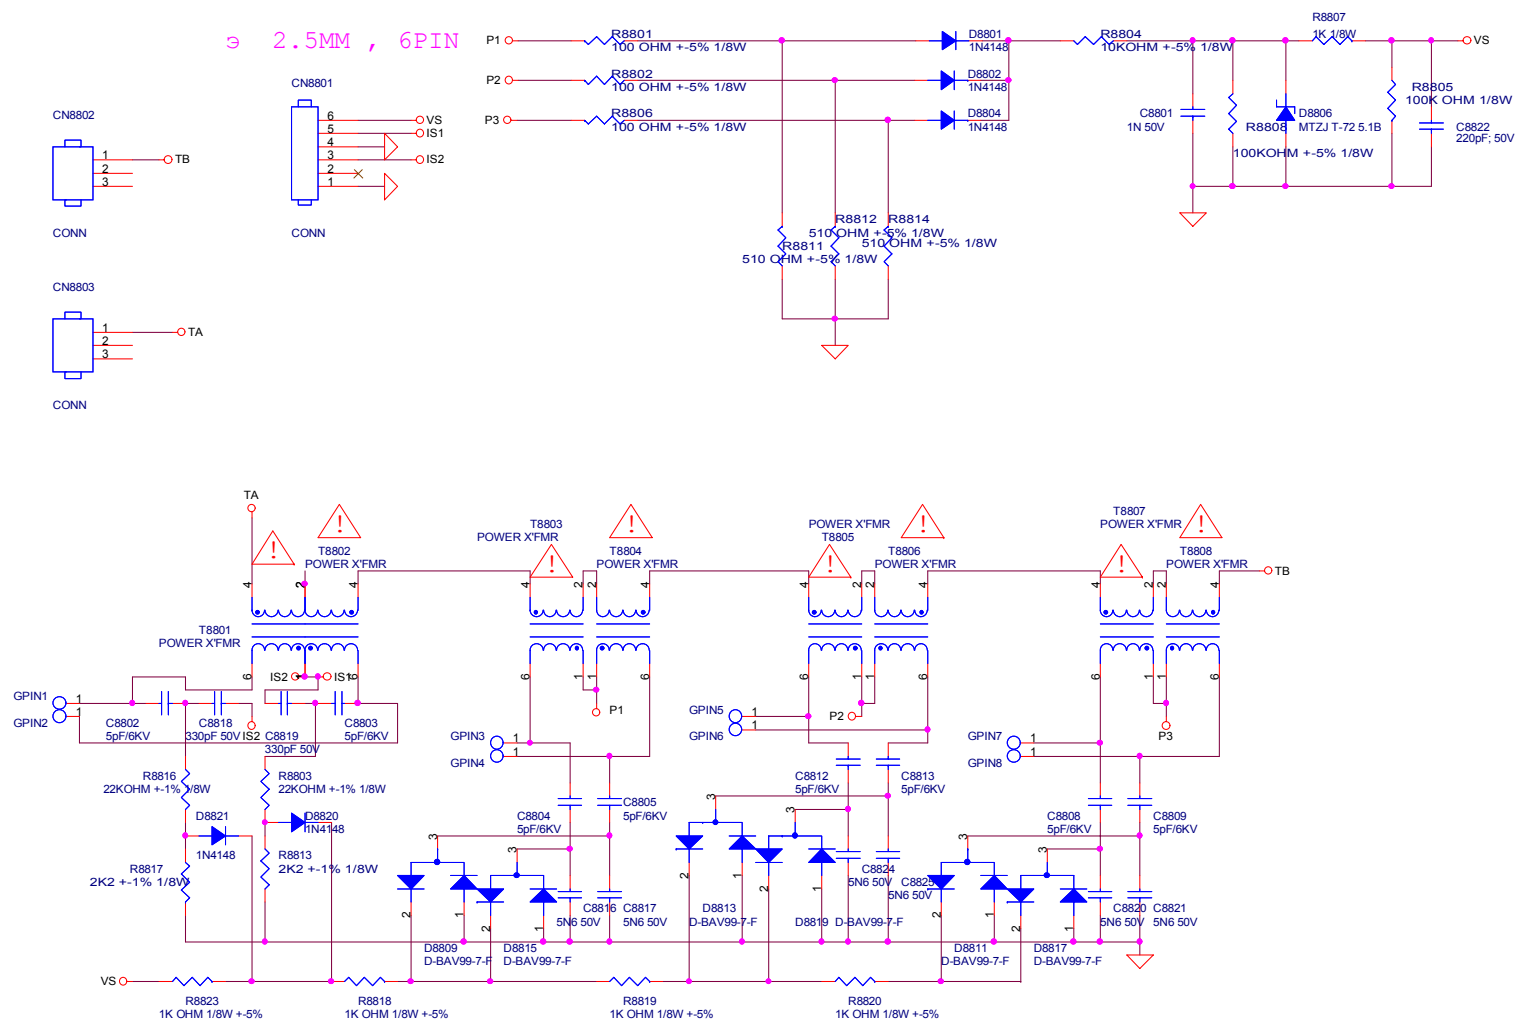


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	Custom
屏隔瓜網版	TPV MODEL		Rev	C
Key Component	01.INVERTER	PCB NAME	称爹	SKYWORTH MODEL
Date	Friday, March 26, 2010	Sheet	1 of 1	

LC42H053 715G3885P02W30003S

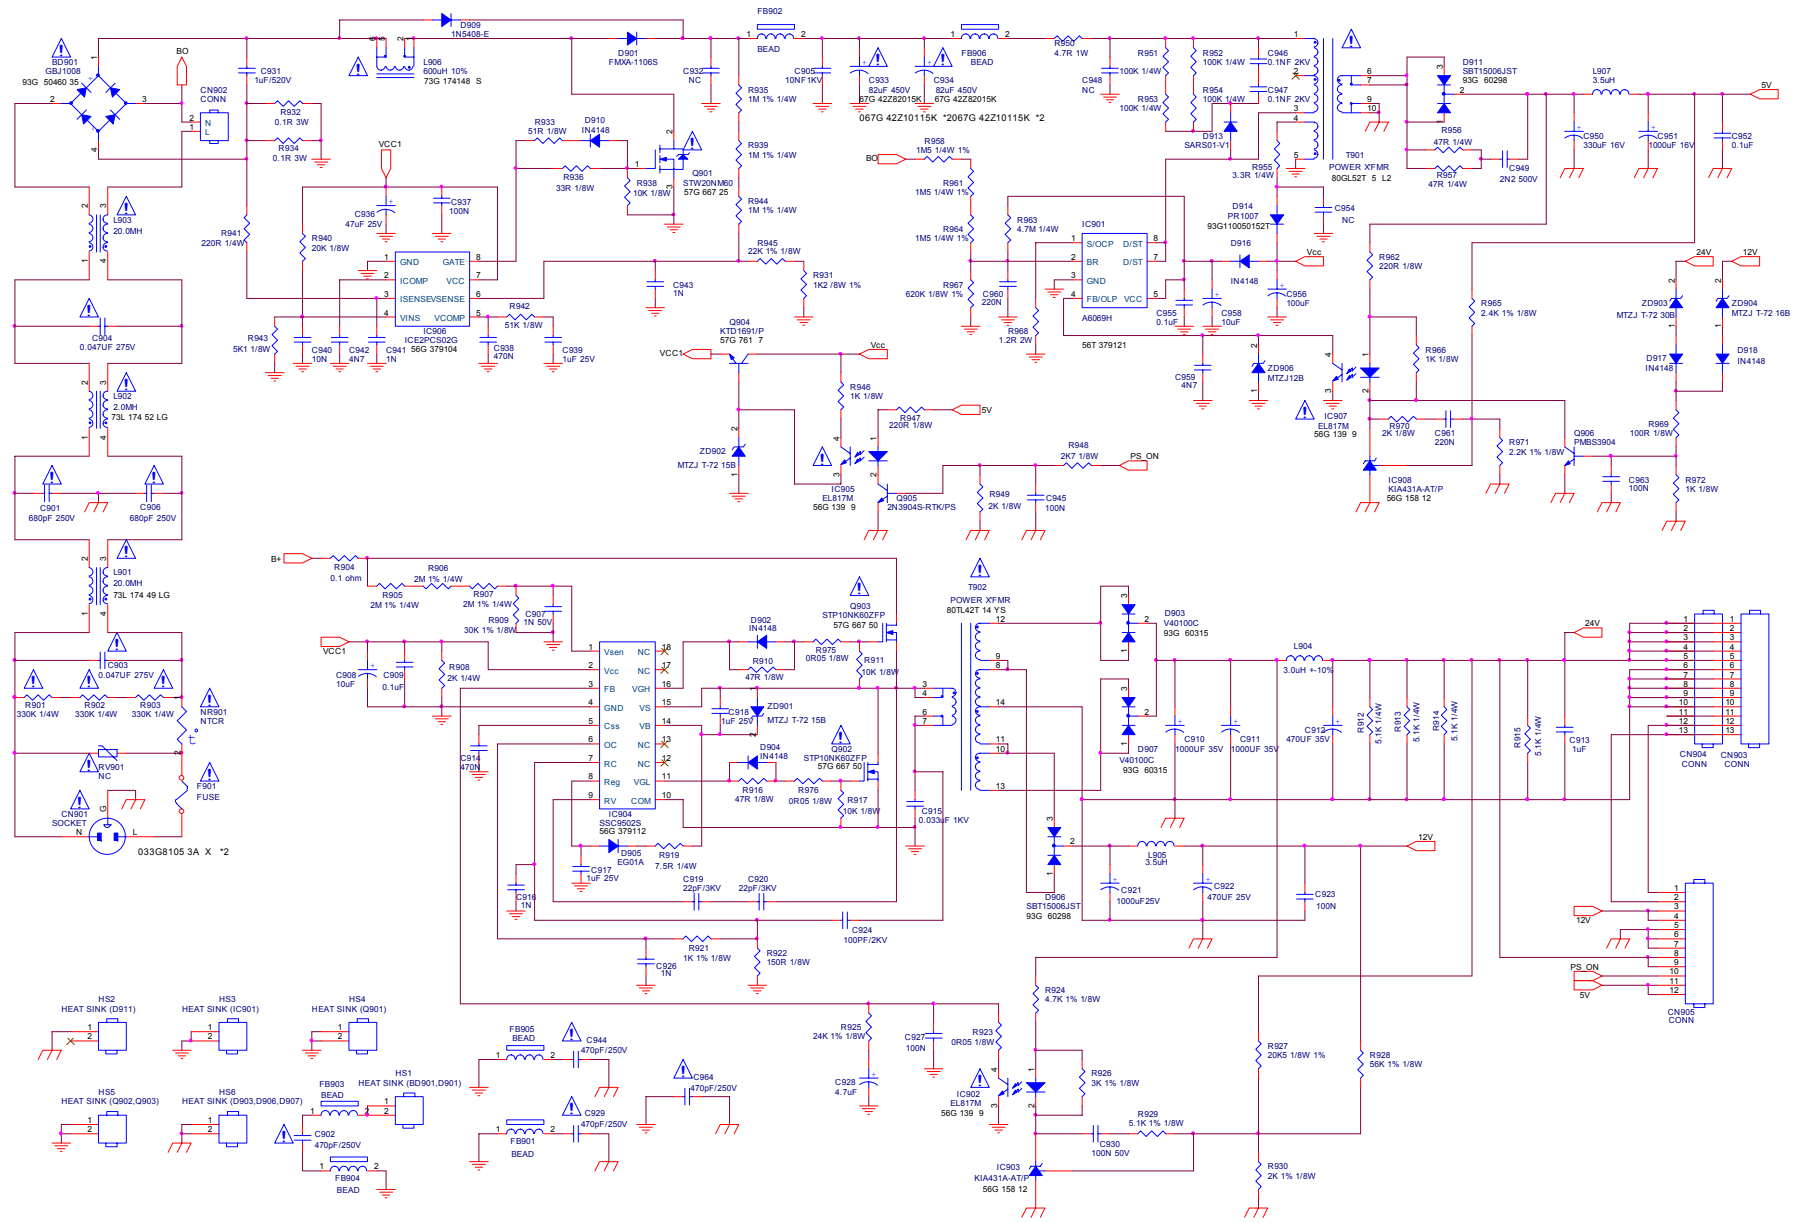


T P V (Top Victory Electronics Co., Ltd.)		OEM MODEL		Size	C
规格书附表		TPV MODEL		Rev	B
Key Component		Pcb NAME	715G3885-1	修 改 <修 改>	
Date	Tuesday, March 09, 2010	Sheet	1 of 1		

9.3 Key Board
D26W931/D32W931 715G4151K01000001S

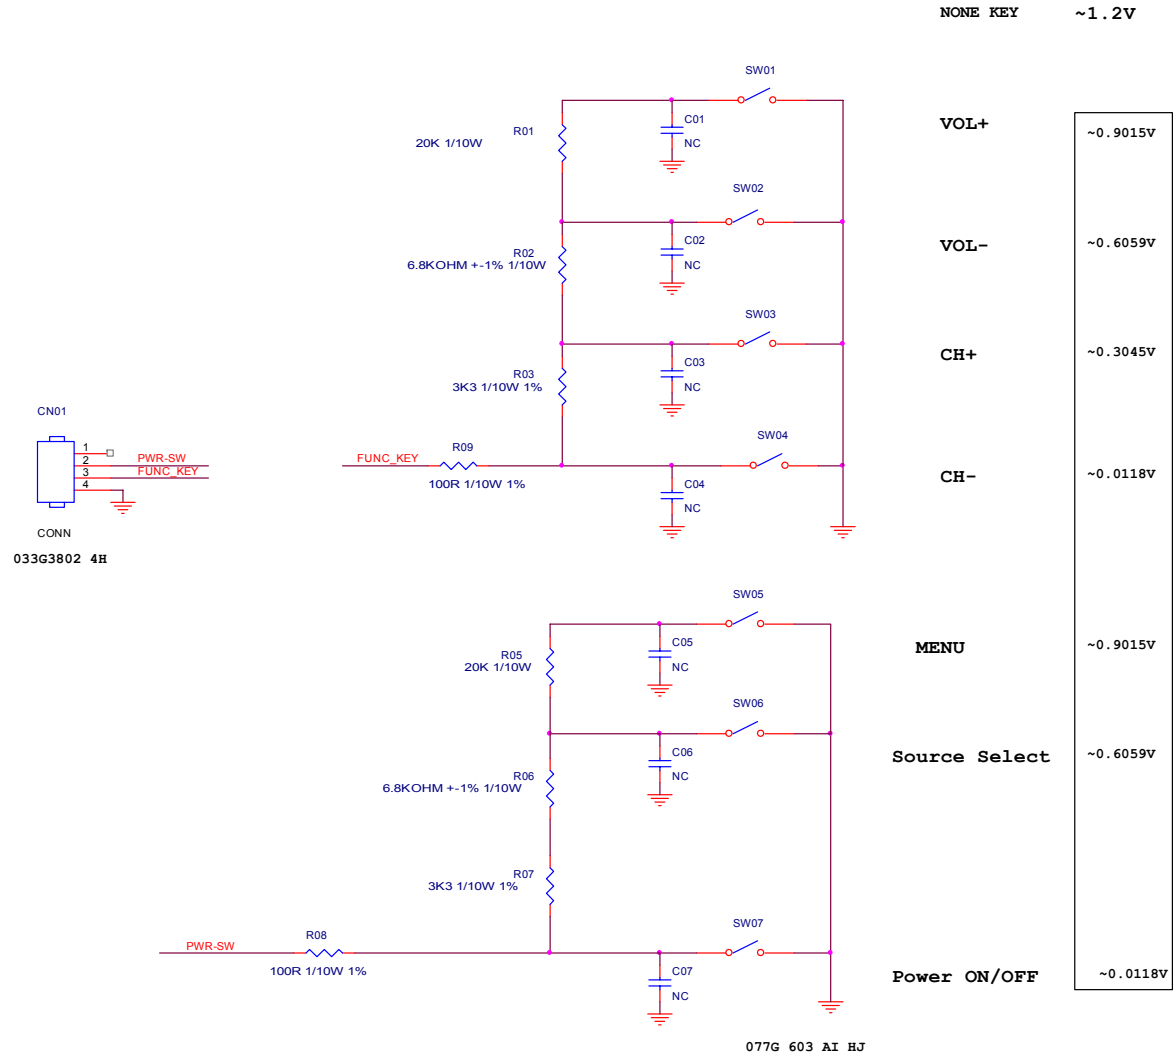


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	Custom
胜利电源	TPV MODEL		Rev	B
Key Component	01-Keypad	PCB NAME	715G4151	称 爹
Date	Tuesday, January 26, 2010	Sheet	1 of 1	<称爹>

NONE KEY ~1.2V

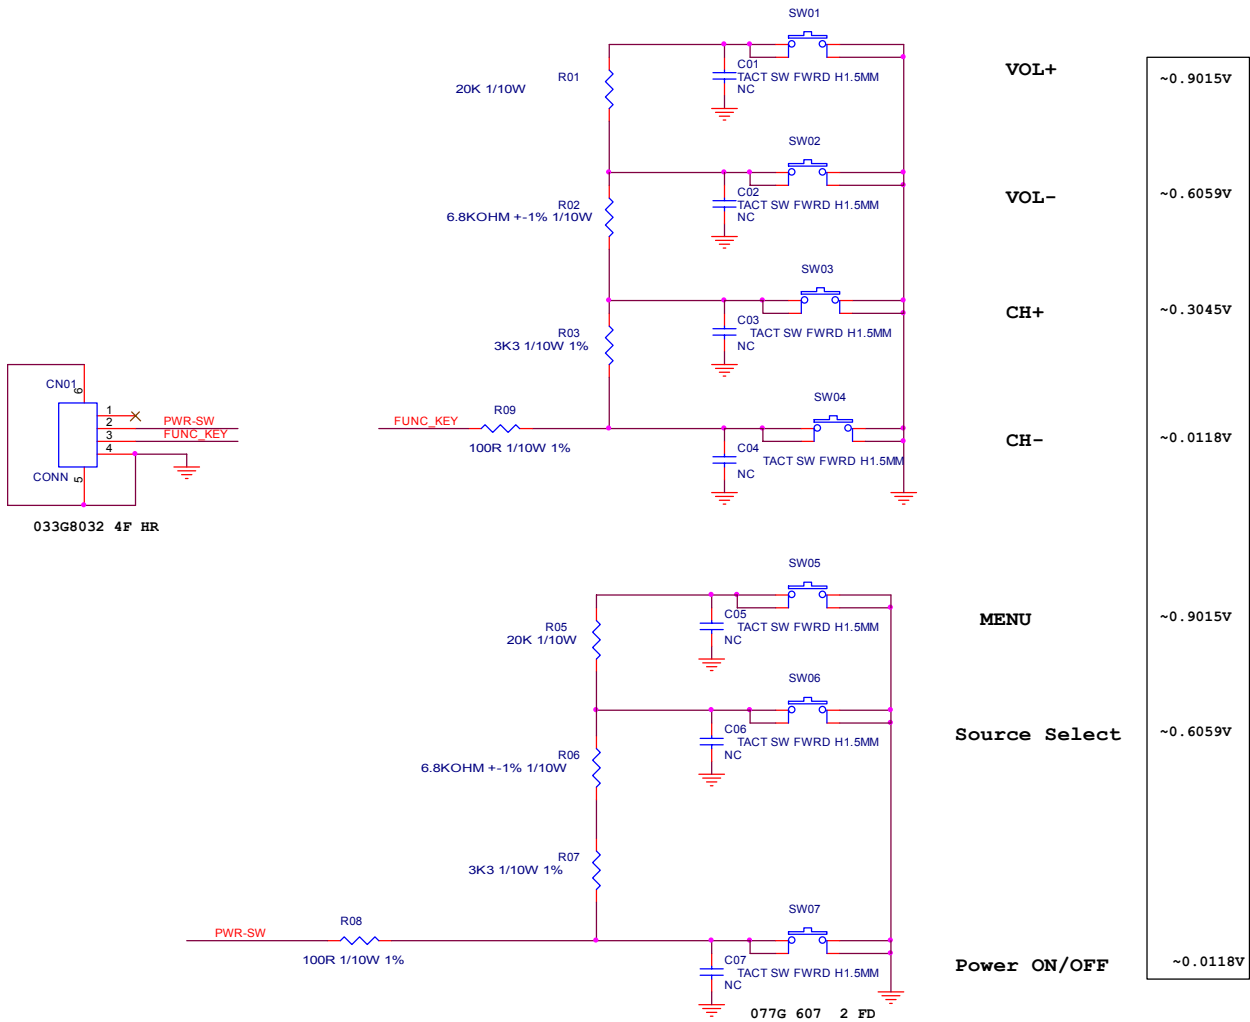


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL		Size	Custom
統隔瓜銅股	TPV MODEL		Rev	B
Key Component	01-Keypad	PCB NAME	715G3814	称爹
Date	Tuesday, May 11, 2010	Sheet	1 of 1	<陈爹>

9.4 IR Board
D26W931 715G3304 1

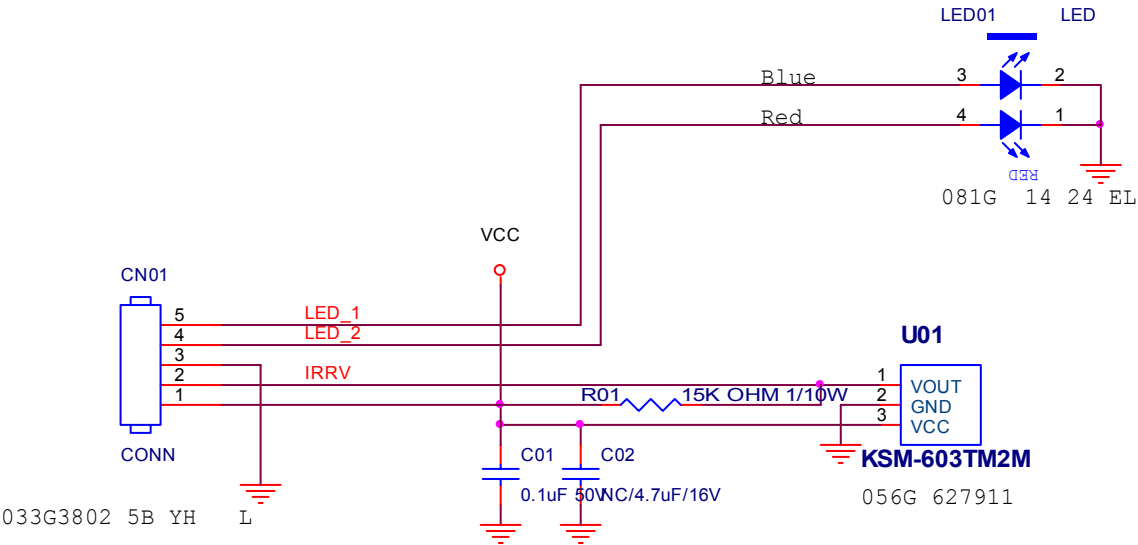


T P V (Top Victory Electronics Co . , Ltd.)		OEM MODEL		Size	A
結構瓜網腹		TPV MODEL		Rev	C
Key Component	01-IR&LED	PCB NAME	715T3304 1	称爹	<称爹>
Date	Monday , November 09, 2009	Sheet	1 of 1		

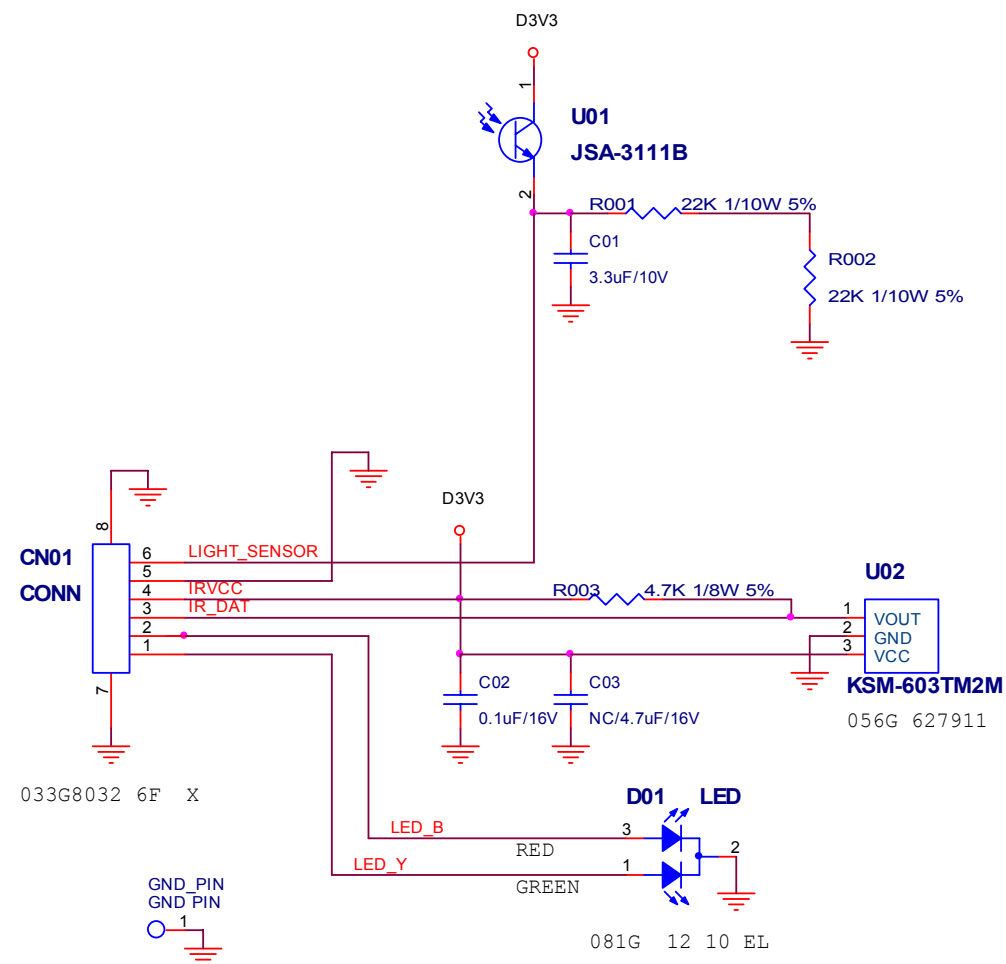


TPV (Top Victory Electronics Co., Ltd.)		OEM MODEL		Size	Custom
結構瓜網腹		TPV MODEL		Rev	B
Key Component	01-IR&LED	PCB NAME	715G3394	称爹	<称爹>
Date	Friday, January 15, 2010	Sheet	1 of 1		

LC32W053/LC42H053 715G3821R01000004M

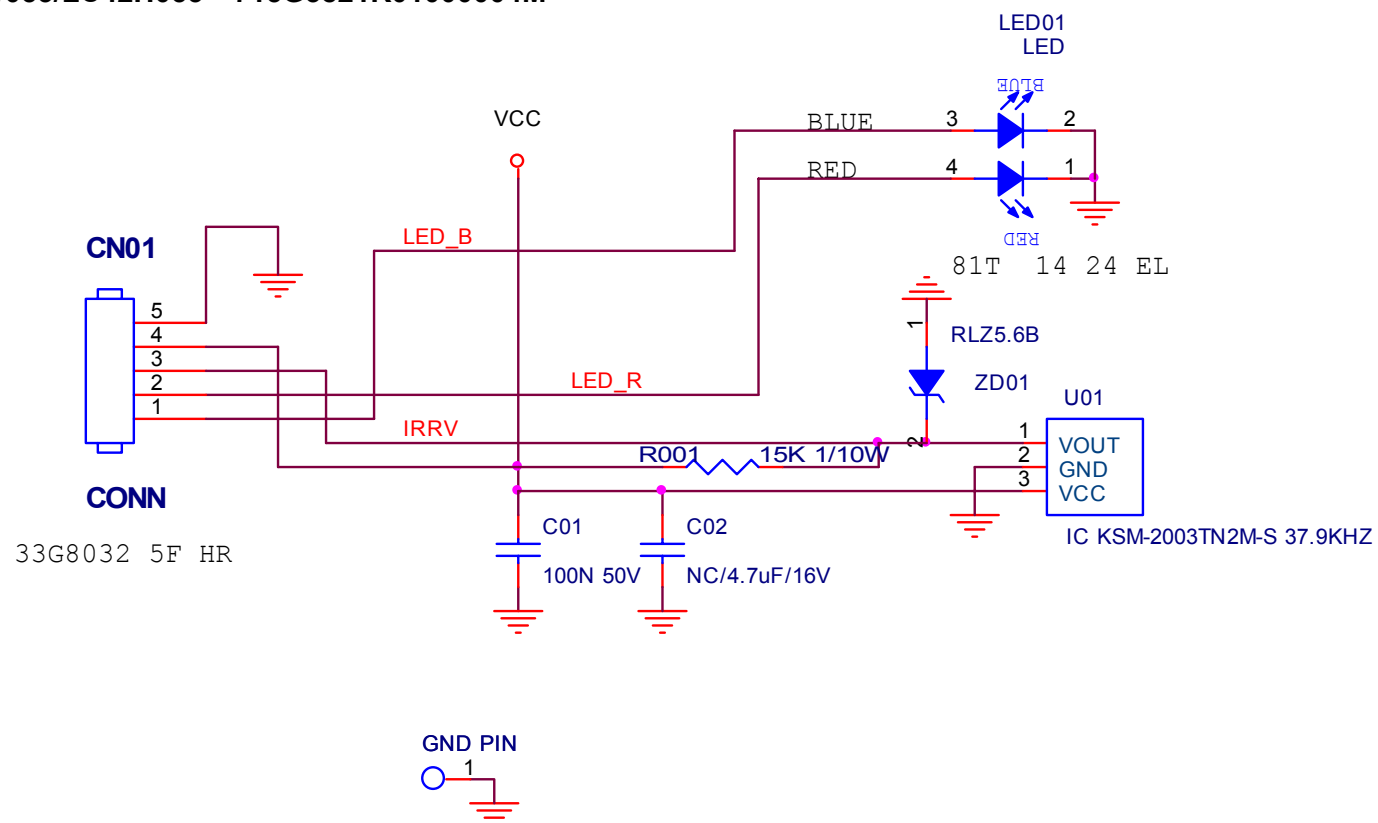



T P V (Top Victory Electronics Co . , Ltd.)		OEM MODEL		Size	Custom
結 隔 瓜 網 腹	T3821-D-X-X-1-091207	TPV MODEL		Rev	0.2
Key Component	IR&LED	PCB NAME	715G3821R01000004M	称 爹	
Date	Tuesday , December 08, 2009	Sheet	1 of 1		


9.5 LVDS to FFC Board
LC32W053 715G4417T01000004S

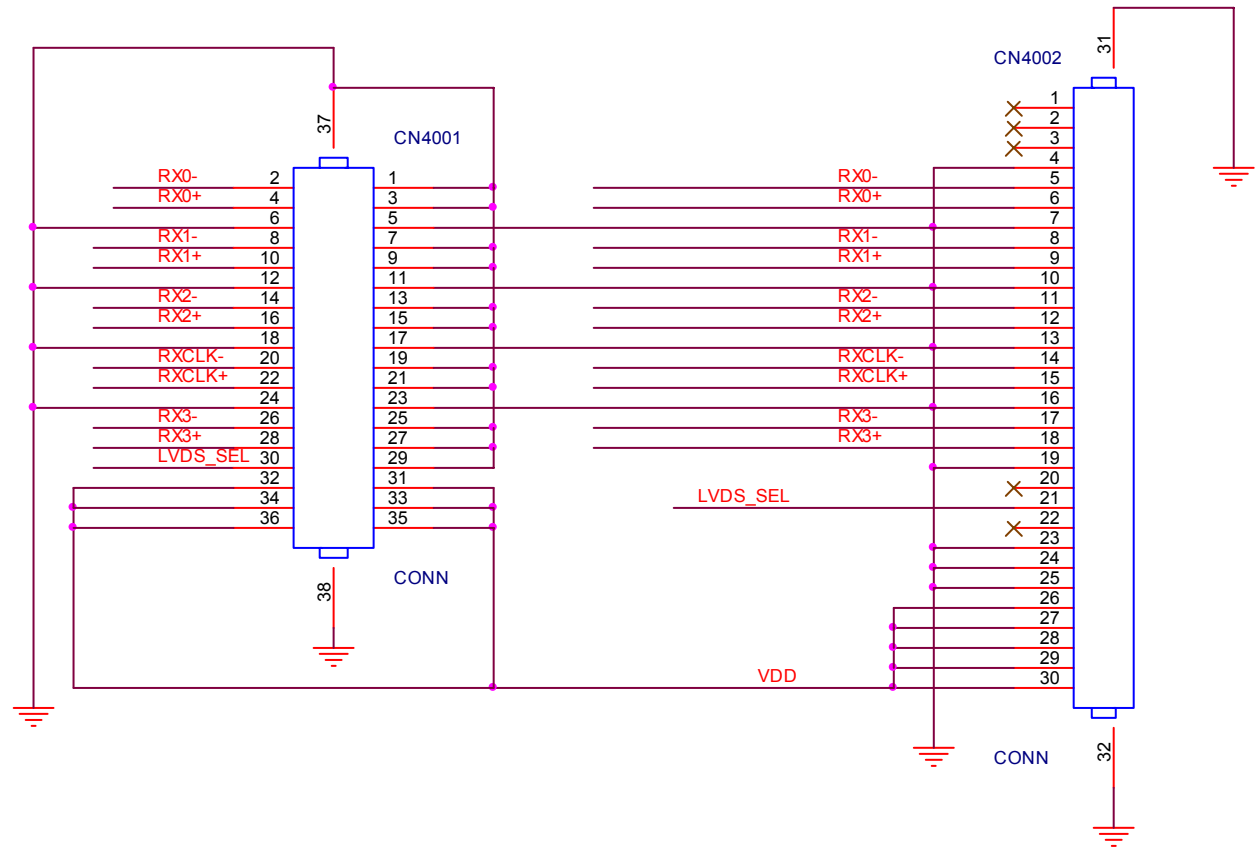


10. Exploded View D26W931

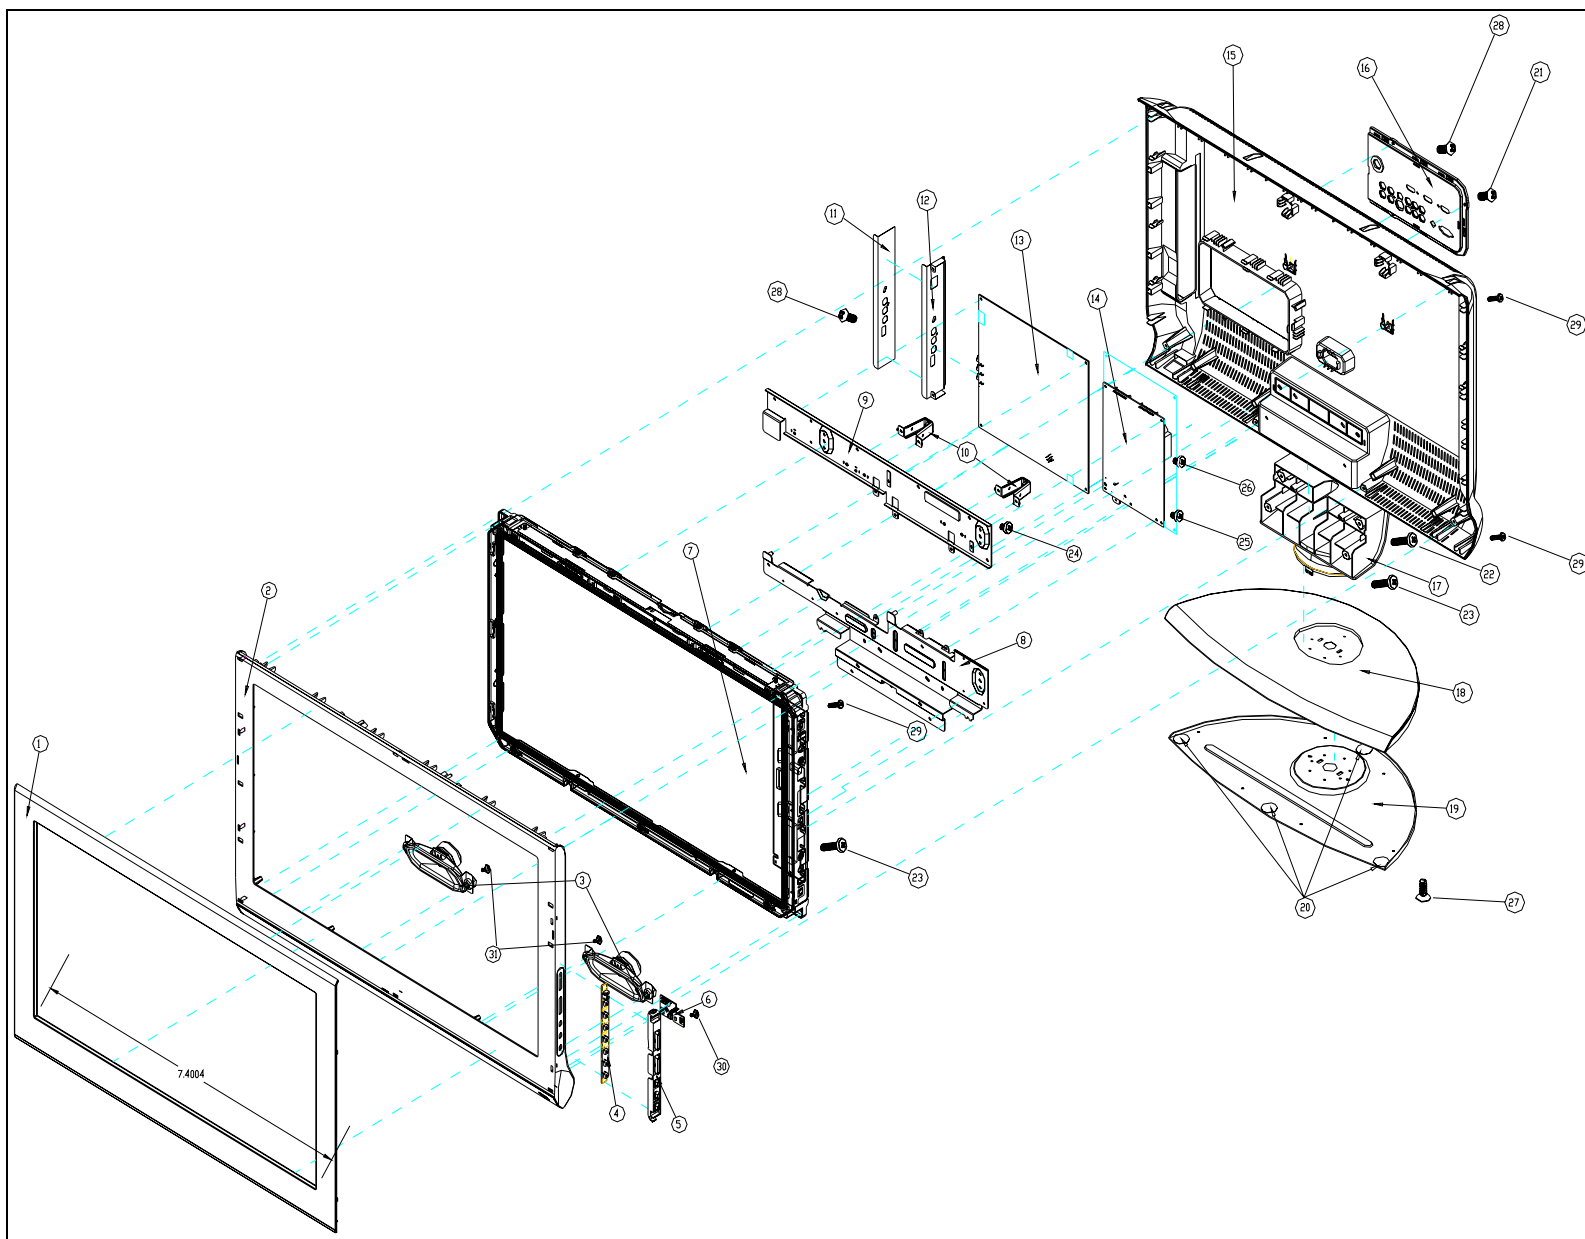

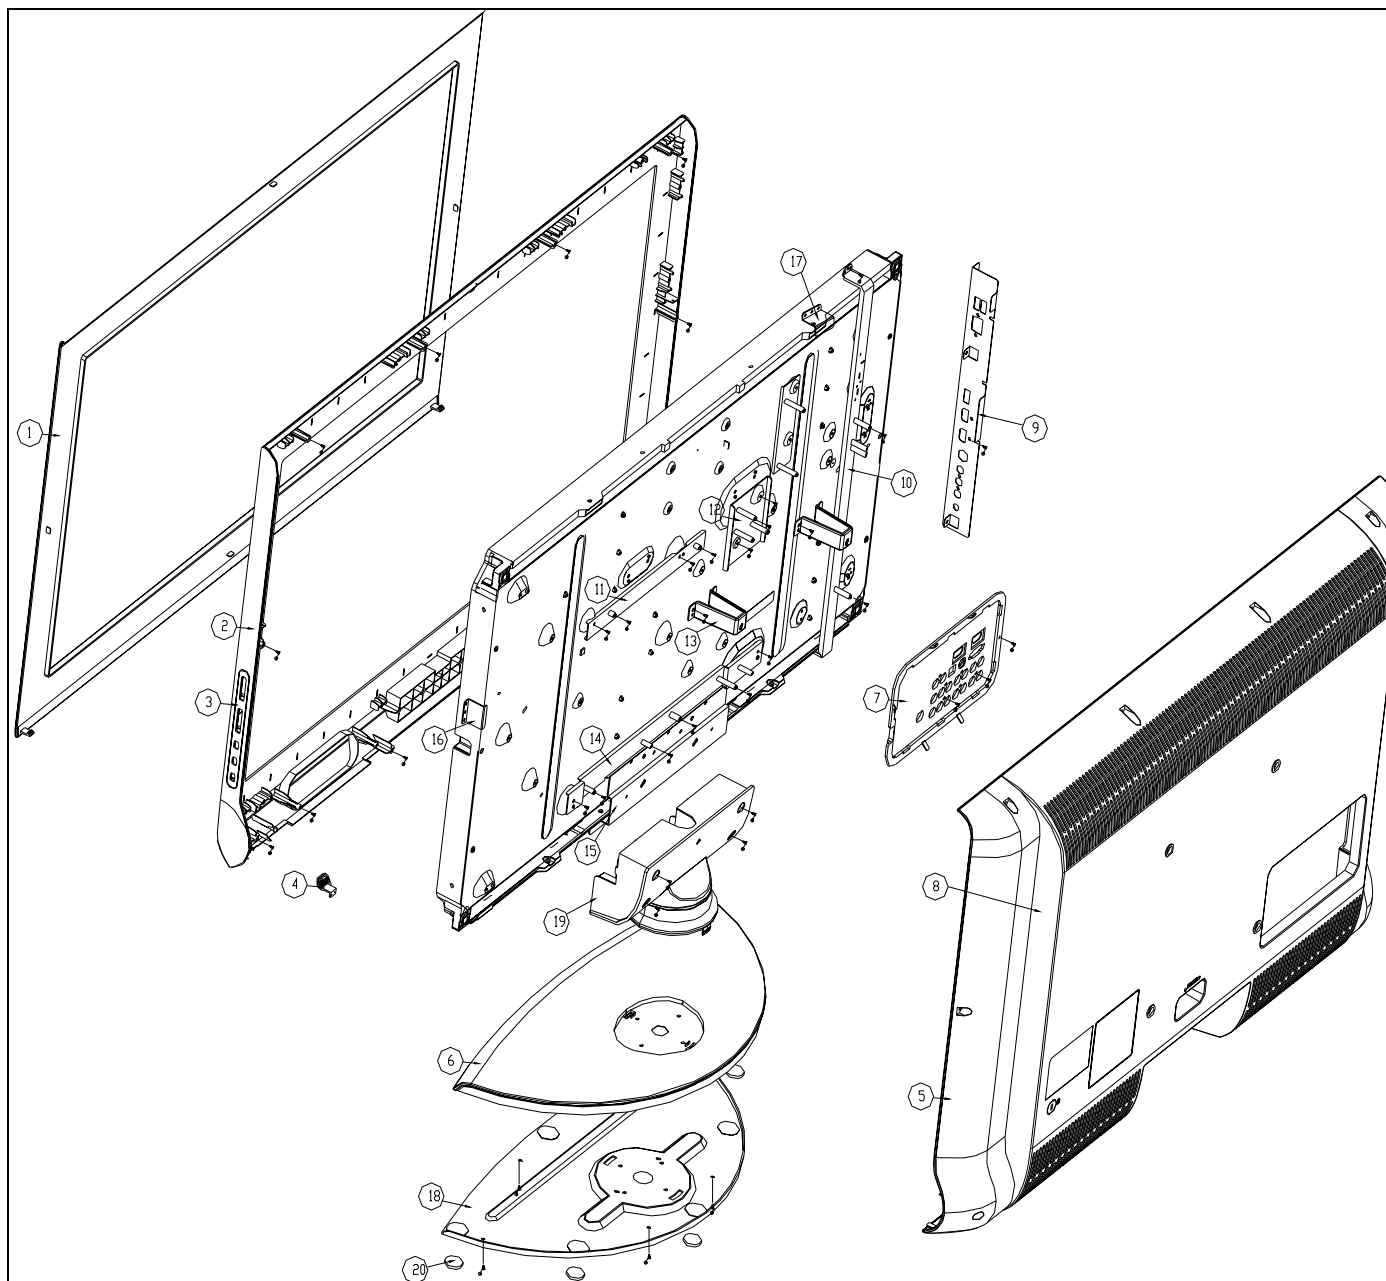

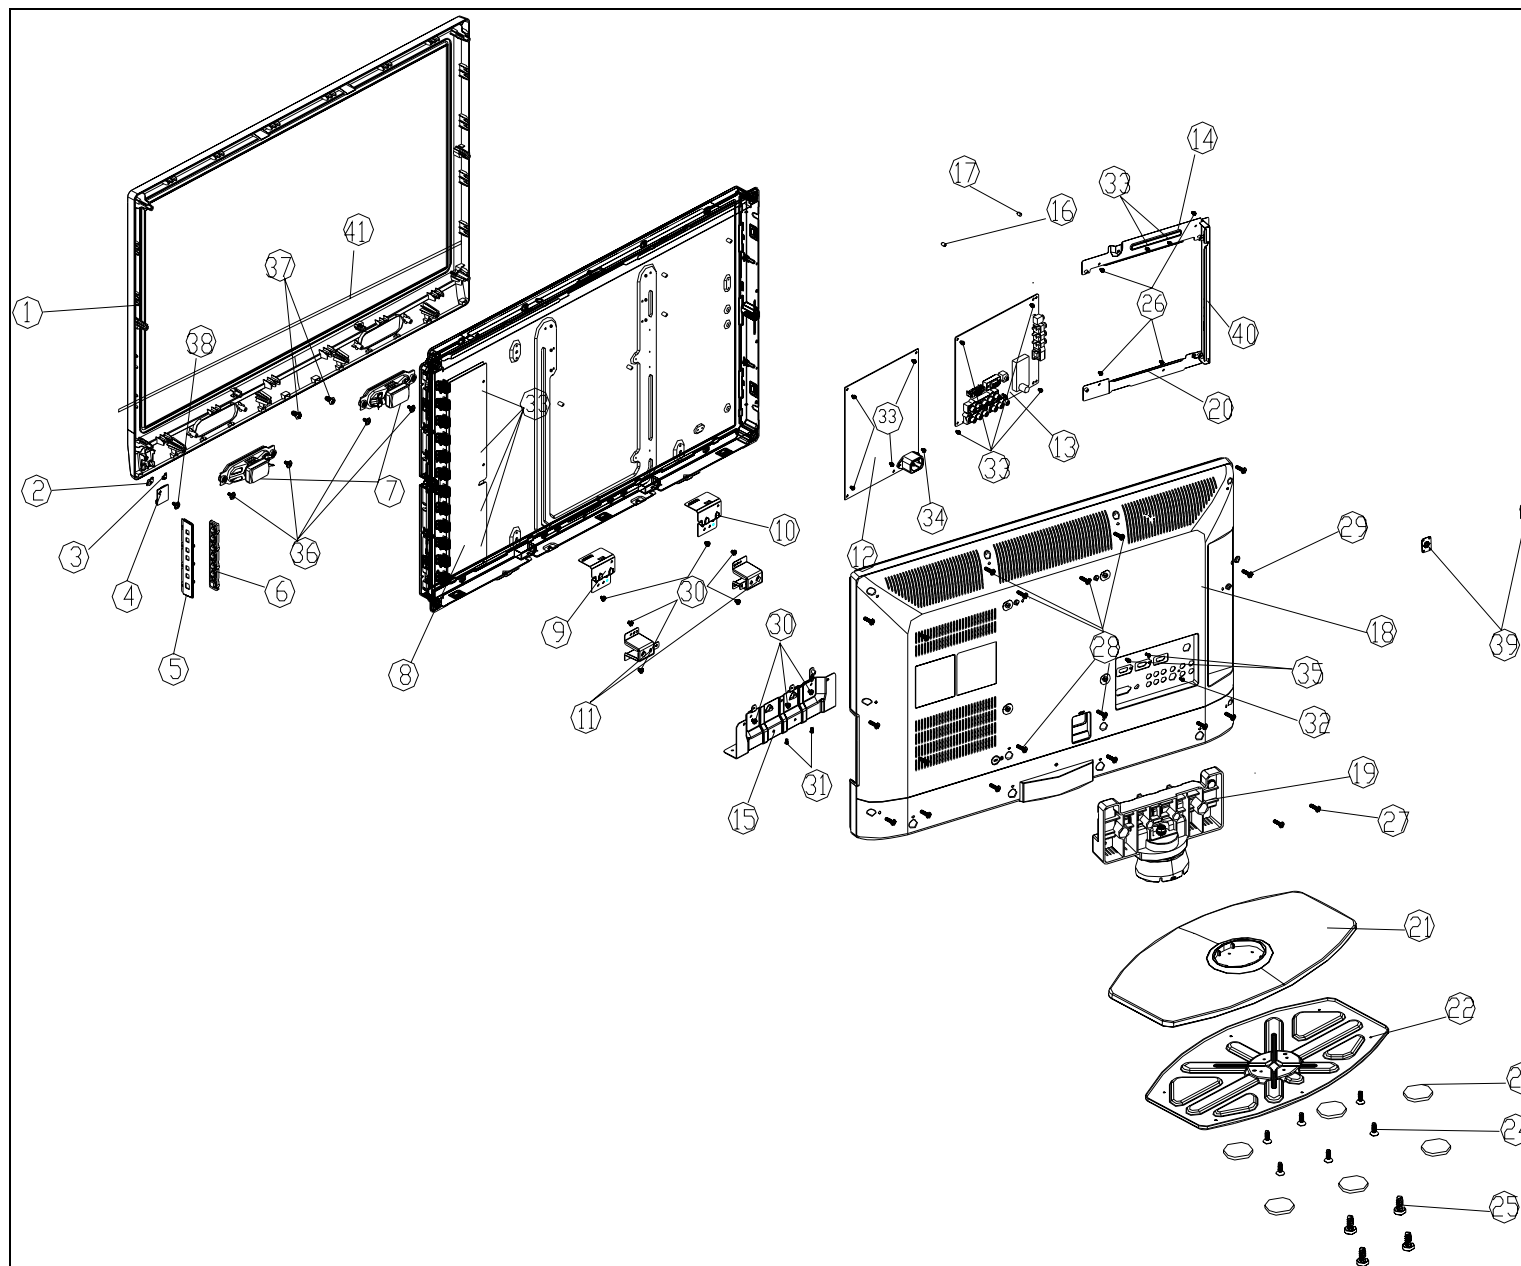

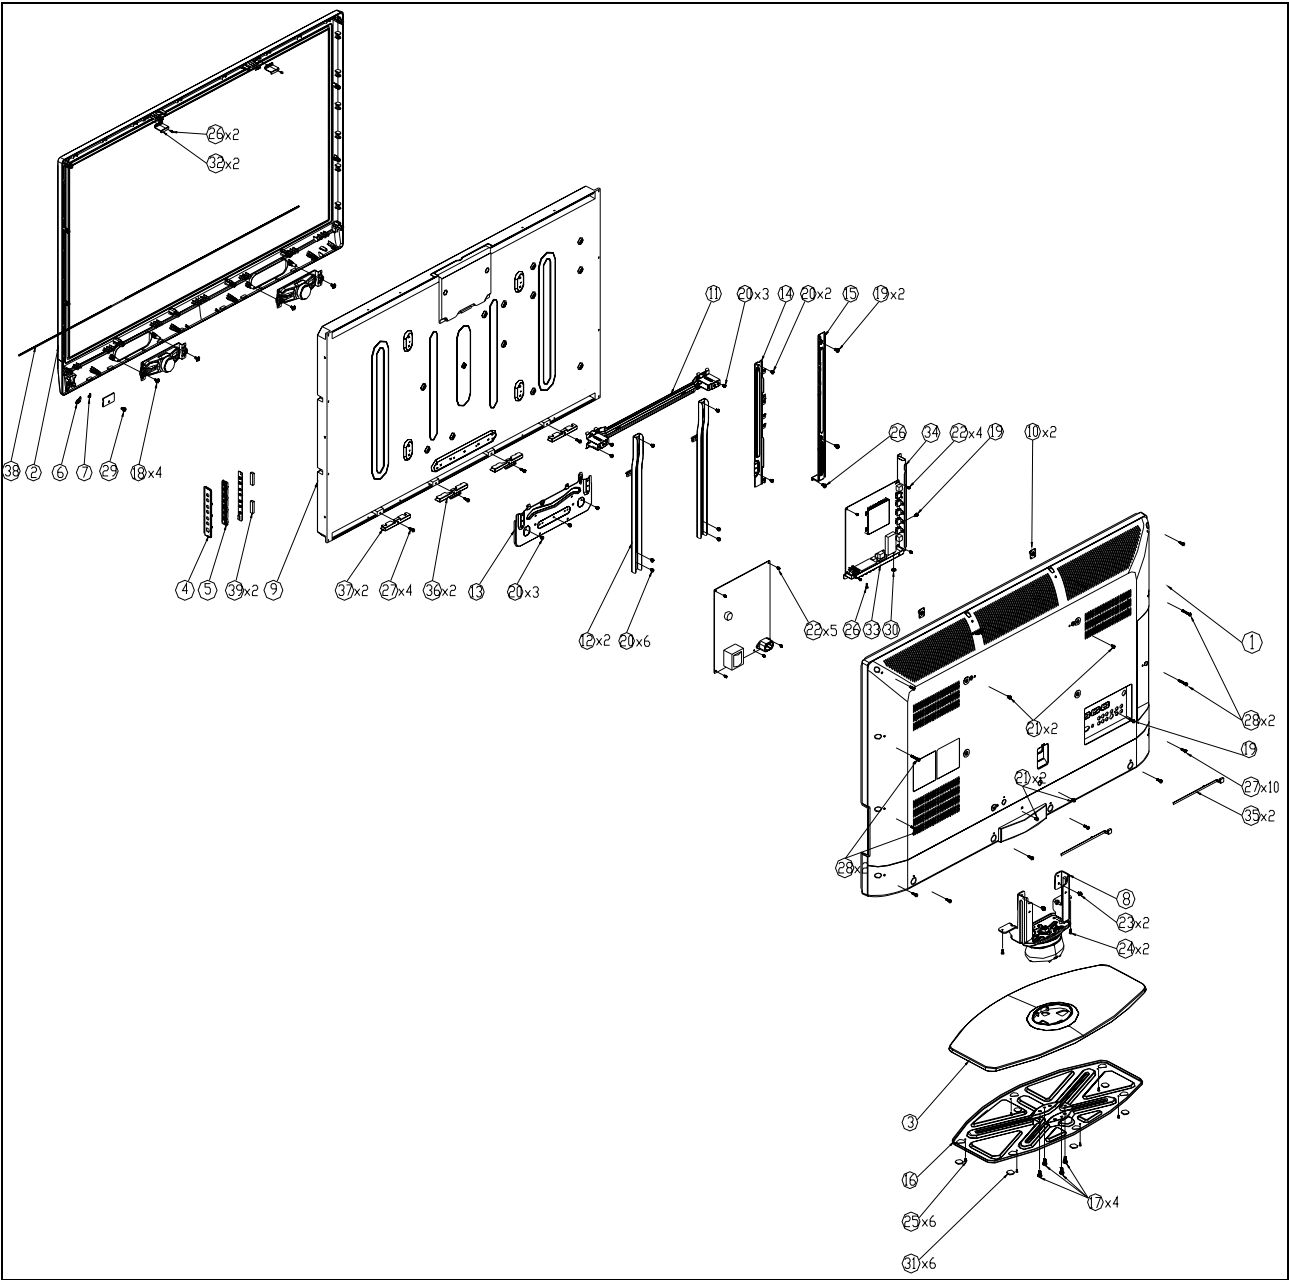

D26W931					
Item	Description				
1	DECO				
2	BEZEL				
3	SPK				
4	KEY BOARD				
5	KEY_FUNCTION				
6	IR BOARD				
7	PANEL				
8	BKT-BTM-TRIDENT				
9	BKT-TOP-TRIDENT	Item	Part No.	Description	Qty
10	BKT-VESA-TRIDENT	21	0M1G 930 6 47 CR3	SCREW(REAR IO)	2
11	SIDE LABLE	22	0M1G 940 16 47 CR3	SCREW(BASE SWIVEL/BASE BKT)	2
12	SIDE-IO-TRIDENT	24	0M1G1140 6120	SCREW(VESA/BOTTOM BKT/TOP BKT)	10
13	MAIN BOARD	25	0M1G1730 8120	SCREW(POWER BOARD/MAIN BOARD)	8
14	POWER BOARD	26	0M1G1730 10120	SCREW(POWER BOARD)	1
15	REAR COVER	27	0Q1G 130 8120	SCREW(BASE BKT/BASE COVER)	6
16	COVER-REAR-IO	28	0Q1G 930 8 47 CR3	SCREW(SIDE IO/REAR IO)	3
17	STAND ASS`Y	29	0Q1G 940 12 47 CR3	SCREW(BEZEL/REAR COVER/BEZEL/PANEL)	12
18	BASE	23	0Q1G 940 16 47 CR3	SCREW(PACKAGE/BASE SWIVEL/BKT/BEZEL)	8
19	BKT_BASE_PLATE	30	0Q1G1030 8120	SCREW(IR BOARD)	1
20	RUBBER	31	0Q1G1840 8120	SCREW(SPEAKER)	2

D32W931					
Item	Description				
1	DECO				
2	BEZEL				
3	KEY_FUNCTION				
4	LENS_IR				
5	REAR COVER				
6	BASE				
7	COVER_REAR_IO				
8	BRACKET_VESA				
9	BRACKET_SIDE_AV_BRZ				
10	BRACKET_POWER	Item	Part No.	Description	Qty
11	BRACKET_TOP	21	0M1G 340 4120	SCREW(PANEL/BKT)	8
12	BRACKET_LEFT_TOP	22	0M1G 930 6120	SCREW(PANEL/BKT)	1
13	BRACKET_VESA	23	0M1G 930 8 47 CR3	SCREW(PANEL/BKT)	5
14	BRACKET_PCB_SUPPORT	24	0M1G 940 16 47 CR3	SCREW(COMSUPTIVE ASS'Y)	2
15	BRACKET_BASE	25	0M1G1730 8120	SCREW(MAIN BOARD/POWER BOARD/INVERTER BOARD/BKT)	14
16	BRACKET_HOLD_TOP	26	0M1G1730 10120	SCREW(MAIN BOARD/BKT)	1
17	BKT-TOP	27	0Q1G 930 10 47 CR3	SCREW(BKT/PANEL/BEZEL/REAR COVER)	25
18	BKT_BASE_PLATE	28	0Q1G 940 16 47 CR3	SCREW(COMSUPTIVE ASS'Y/REAR COVER)	2
19	COMSUPTIVE ASS'Y	29	Q01G6080 1	SCREW(SPEAKER/BEZEL)	2
20	RUBBER	30	0Q1G 130 8120	SCREW(BASE/BKT)	6

LC32W053	
Item	Description
1	BEZEL
2	LENS_POWER
3	POWER LENS
4	IR BOARD
5	KEY COVER
6	KEY BUTTON
7	SPK
8	PANEL
9	PANEL_SUPPORT_BKT_TOP
10	PANEL_SUPPORT_BKT_TOP

Item	Part No.	Description	Qty
11	VESA_BKT		
12	POWER BOARD	24 0Q1G 130 6 47 CR3	6
13	MAIN BOARD	25 0Q1G 940 14 47 CR3	4
14	PCB_BKT_BTM	26 0M1G 130 6120	4
15	BASE_SUPPORT_BKT	27 0M1G 940 10 47 CR3	2
16	STRING	28 0M1G 940 10 47 CR3	6
17	PCB SUPPORT	29 0Q1G 940 16 47 CR3	10
18	REAR COVER	30 0M1G 940 6120	9
19	STAND HINGE	31 0M1G 940 6120	2
20	SIDE_BKT	32 0Q1G 930 8 47 CR3	2
21	BASE	33 0M1G1730 6120	14
22	BASE BKT	34 0M1G1730 8120	1
23	RUBBER FOOT	35 0M1G 930 8 47 CR3	2
39	BKT-VESA-BTM	36 001G6021 1	4
40	PCB_BKT_TOP	37 0Q1G 940 14 47 CR3	2
41	DECO_BEZEL	38 0Q1G1030 6120	1

LC42H053					
Item	Description				
1	REAR COVER				
2	BEZEL				
3	BASE				
4	KEY COVER				
5	KEY BUTTON				
6	IE LENS				
7	LED LENS				
8	HINGE-A'SSY				
9	PANEL				
10	BKT-VESA-BTM				
11	BRACKET	Item	Part No.	Description	Qty
12	BKT-PB	17	Q01G6145 1	SCREW(BKT-BASE/BASE)	4
13	BKT-STAND	18	001G6021 1	SCREW(SPEAKER/BEZEL)	4
14	BKT-MB-L	19	0M1G 930 6 47 CR3	SCREW(MAIN BOARD/BKT/PANEL/REAR COVER)	4
15	BKT-MB-R	20	0M1G 940 6120	SCREW(BKT/PANEL)	14
16	BKT-BASE	21	0M1G 940 8 47 CR3	SCREW(REAR COVER)	4
31	RUBBER FOOT	22	0M1G1730 8120	SCREW(MAIN BOARD/BKT/POWER BOARD)	9
32	BKT-FIX-PANEL	23	0M1G1740 8120	SCREW(BKT/HINGE-A'SSY)	2
34	PCB_BKT_TOP	24	0M1G1740 14120	SCREW(HINGE-A'SSY)	2
35	CABLE TIE	25	0Q1G 130 8 47 CR3	SCREW(BKT-BASE/BASE)	6
36	BKT-FIX	26	0Q1G 930 8 47 CR3	SCREW(BKT/PANEL)	4
37	BKT-FIX-S	27	0Q1G 940 16 47 CR3	SCREW(BKT-FIX-S/PANEL/REAR COVER/BEZEL)	14
38	DECO_BEZEL	28	0Q1G 940 30 47 CR3	SCREW(REAR COVER/BEZEL)	4
39	RUBBER	29	0Q1G1030 6120	SCREW(IR BOARD/BEZEL)	1

11. BOM List

Note: The parts information listed below are for reference only, and are subject to change without notice. Please go to <http://cs.tpv.com.cn/hello1.asp> for the latest information.

D26W931 E269STNS4WB36N

Location	Part No.	Description	Remark
	002F7015 1	NUT	
	004F081510T 00	WASHER	
	004F122515M 00	WASHER	
	004F1808104 00	WASHER	
	004F1808104 01	WASHER	
	004F180820M 00	WASHER	
	028F0840110	SHAFT	
	040G 581689 4A	BARCODE LABEL FOR 1	
	045G 77500	BARCODE RIBBON	
	045G 77501	BARCODE RIBBON	
	052G 1186	SMALL TAPE	
	052G 2191 A	PAPER TAPE	
SP01	078G120A501 V	SPK 8 OHM 12W 138X45 VECO	2nd source
SP01	078G120A501 Y	SPK 8 OHM 12W 138X45 SUNLINK	
	085T 583103	GASKET	
	089G 725CAA DB	D-SUB CABLE	
E08901	089G424A15N CX	AC POWER CORD 1500MM BRAZIL REG.	
E08901	089G424A15N IS	AC POWER CORD 1.5M FOR BRAZIL REG.	2nd source
ECN700	095G801312D664	HARNESS 12P-12P 120MM	
ECN600	095G8014 4L614	HARNESS 4P-B&R+B&W 500/380MM	
ECN600	095G8014 4W614	HARNESS 4P-B&R+B&W 500/380MM	2nd source
ECN903	095G801414DH82	HARNESS 14P(PH)-13P(A2008H) 230MM	
ECN903	095G801414XH82	HARNESS 14P(PH)-13P(A2008H) 230MM	2nd source
ECN704	095G8018 3DJ35	LVDS CABLE 30P-40P 320MM	2nd source
ECN704	095G8018 3XJ35	LVDS CABLE 30P-40P 320MM	
	0M1G 930 6 47 CR3	SCREW	
	0M1G 940 16 47 CR3	SCREW	
	0M1G1140 6120	SCREW	
	0M1G1730 8120	SCREW	
	0M1G1730 10120	SCREW 42A9930016	
	0Q1G 930 8 47 CR3	SCREW	
	0Q1G 940 12 47 CR3	SCREW	
	0Q1G 940 16 47 CR3	SCREW	
	0Q1G 940 16 47 CR3	SCREW	
	0Q1G1840 8120	SCREW	
	705TQ949001	COMSUPTIVE ASS'Y-A4	
	705TQA34E20	REAR COVER ASS'Y	
	P34T0291ADT 1A0100	REAR COVER TV26W-9C1-9C1	
	Q15T0257101CKD	26BKT-VESA-BTM	
	Q34T7112ADT 1A0100	COVER-REAR-IO	
	705TQA34E21	STAND ASS'Y	
	0Q1G 130 8120	SCREW 42A9930011	
	P15T0439202CKD	BKT_BASE_PLATE	
	P34T0305ADT 1L0100	BASE	
	Q12G6300 25 3	RUBBER	
	705TQA34E35	BEZEL ASS'Y	
	0Q1G1030 8120	SCREW	

	IRPFAQE9C	IR BOARD	
CN01	033G3802 5B YH L	CONNECTOR 5P 2.0	
U01	056G 627911	IR 38KHZ KSM-603TM2M	
U01	056T 627 33 1	IR 37.9KHZ KSM-603TM2E	
	709T3304 QM002	COMSUPTIVE ASS'Y	
R01	061G0603153	RST CHIPR 15KOHM +-5% 1/10W	
C01	065G060310432K F	CAP CHIP 0603 0.1UF K 50V X7R	
LED01	081G 14 24 EL	CHIP LED BLUE/DARK RED	
	709T3304 QS002	COMSUPTIVE ASS'Y	
	052G6026 2	MESH PRINTTING PAPER	
E715	715G3304 1	IR BOARD PCB	
	P33T0131AFT 1C0100	IR LENS	
	P33T0132ADT 1L0100	KEY_FUNCTION	
	P34T0289ADT 2L0100	BEZEL TV26W-9C1	
	P34T0290ADTA1L0100	DECO-26	
	Q52G 31 7	3M DOUBLE FABE TYPE	
E750	750TVS260AP512N000	PANEL LTA260AP05 002 SZ SEC	2nd source
	756TQ9CB TS208 00	MAIN BOARD-CBPFAT9SQ1C	
U402	056G1133923	IC MX25L4005AM2C-12G SOP-8	
U403	056T1133111	IC NAND512W3A2DN6E TSOP-48	
SMTF-U402	100TATMK001S11	MCU ASS'Y-056G1133923	
SMTF-U403	100TATSF002S11	MCU ASS'Y-056T1133111	
	Q11G5054 1	CABLE CLAMP	
	Q11T5002 1 GP	CABLE CLAMP	
	Q11T5043 3	SUPPORT CLIP	
	Q15T0804101CKD	SIDE-IO-TRIDENT	
	Q15T0831101CKD	BKT-VESA-TRIDENT	
	Q15T0832101CKD	BKT-BTM-TRIDENT	
	Q15T0833101CKD	BKT-TOP-TRIDENT	
	Q40G 26061539A	RATING LABEL	
	Q40G2010 26006	SIDE LABEL	
	Q44GE033102	EPS FOR 2K9 AOC 26"TV	
	Q44GE033202	EPS FOR 2K9 AOC 26"TV	
	Q44GE033302	EPS FOR 2K9 AOC 26"TV	
	Q44GE03361514A	26 TV AOC CARTON	
	Q45G 77 5	PE PACKING (Y1900241)	
	Q45G 99609 78 BC	PE BAG	
	Q45G 99626 36 BC	PE BAG	
	Q50G 4 10	TIE (Y1900221)	
	Q50T 500523	CABLE TIE	
	Q51G6001 3	DESICCANT	
	Q52G 1150523	TAPE_INSULATING	
	Q52G 1150523	TAPE_INSULATING	
	Q52G 1185 92	HCL TAPE	
	Q52G6025 15256	INSULATING SHEET	
	089G 17356C553	AUDIO CABLE 1800MM	
	0Q1G 940 16 47 CR3	SCREW	
	Q41T7800615A92	WARRANTY CARD	
	Q45G 76 28NV2 R	PE BAG FOR BASE SCREW SZ02742	
	Q45G2010M0101A	PE BAG FOR MANUAL	
	040G 45762412B	CBPC LABEL	
CN700	033G327812D	WAFER 12P PLUG	
CN600	033G3802 4B Y W	WAFER	
CN200	033G380210B Y W	WAFER	

C1622	067G 305471 6C	EC 470UF 35V KM 10X16MM	
C1621	067G 305471 6C	EC 470UF 35V KM 10X16MM	
C714	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C711	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C706	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C1626	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C1617	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
L607	073G 253158 H	CHOKE COIL 22UH+/-25%	
L606	073G 253158 H	CHOKE COIL 22UH+/-25%	
CN601	088G 30211K	PHONE JACK 5PIN	
CN701	088G 352 2 YG	USB CONNECTOR USB4-01	
CN701	088G 352 21CL	USB CONN TYPE A	
CN100	088G353A15FVCS	D-SUB 15PIN FEMALE VERTICAL SCREWED	
CN107	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN106	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN102	088T 78 1369C	RCA JACK 2*3 G/B/R+B/W/R	
CN104	088T 78 13932 C	RCA JACK + S JACK Y/B	
CN105	088T 7813C19C	RCA JACK 1*3 R/W/Y	
CN101	088T 30252C	PHONE JACK 3.5MM 3P V/A GREEN	
T100	094G PALISBM1M	TUNER PAL+ISDB ENG36F13KF	
	709T3787 QM002	COMSUPTIVE ASS'Y	
	055G 23524	WELDING FLUX WITHOUT PB	
	Q55G 100620500	TIN STICK(SN-0.5AG)	
C323	067G 305100 3T	10UF 16V	
C1614	067G 305100 7T	105℃ 10UF +-20% 50V	
C1099	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1096	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1046	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1042	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1039	067G 3051007PT	CAP 105℃ 10UF M 50V	
C740	067G 3051013CT	EC 100UF 16V KM 6.3X11MM	
C707	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C703	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C1021	067G 305221 3T	220UF/16V	
C751	067G 305470 3T	47UF +-20% 16V	
C750	067G 305470 3T	47UF +-20% 16V	
C745	067G 305470 3T	47UF +-20% 16V	
C738	067G 305470 3T	47UF +-20% 16V	
C737	067G 305470 3T	47UF +-20% 16V	
C735	067G 305470 3T	47UF +-20% 16V	
C726	067G 305470 3T	47UF +-20% 16V	
C415	067G 305470 3T	47UF +-20% 16V	
C400	067G 305470 3T	47UF +-20% 16V	
C1604	067G 305470 3T	47UF +-20% 16V	
C712	067G 3054706CT	EC CAP 47UF M 35V	
C746	067G215Y2212KT	LOW ESR EC 220UF 10V 6.3*11MM	
C717	067G215Y2212KT	LOW ESR EC 220UF 10V 6.3*11MM	
C752	067G215Y4704KT	EC CAP.105C	
CN704	033T8033 40 X	CON. V 2*20P M 1.25 SM S1312-40SVA-1R	
U704	056G 379 92	IC G5627F11U SOP-8(FD)	
U200	056G 562F03	IC HIDTV PRO-SX 27*27 BGA	
U700	056G 563 30	IC AZ1084S-3.3TREI 5A/3.3V TO-263-3	
U707	056G 563122	IC G1084-25TU3UF TO-263T	
U706	056G 563143	IC G1084T43UF TO-252	

U703	056G 563246	LDO AZ1084S2-ADJG1 TO-263-2 5A/ADJ	
U705	056G 563514	IC AZ1117H-3.3TRG1 1A/3.3V SOT223	
U105	056G 563964	IC SC4215HSTRT SO-8	
U106	056G 575515	IC TC90517FG LQFP-64	
U400	056G 615505	IC NT5TU64M16DG-BE(7-7-7) 1066 1G BGA-84	
U401	056G 615505	IC NT5TU64M16DG-BE(7-7-7) 1066 1G BGA-84	
U601	056G 616519	IC AD52582-QE24NAT E-TSSOP-24L 18W	
U107	056G 616520	IC DAC WM8524GEDT/R TSSOP-16 WOLFSON	
U505	056G 634 25	IC SII9187ACNU QFN-72	
U202	056G 643 27	IC G692L293TCUF 2.91V SOT-143	
U701	056G 659501	IC BD8012FVJ TSSOP-B8J	
U100	056G 662502	C ESD AZC199-04S SOT23-6L	
U101	056G 662502	C ESD AZC199-04S SOT23-6L	
U402	056G1133923	IC MX25L4005AM2C-12G SOP-8	
U709	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U710	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U711	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U712	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U715	056T 563146	IC G912T63U 1A/1.2V SOT-223	
U604	056T 593 17	NTM2761RB2	
U602	056T 616516	IC APA2176AQBTRL TQFN3X3-16	
U403	056T1133111	IC NAND512W3A2DN6E TSOP-48	
Q402	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q601	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q607	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q708	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q707	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q706	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q704	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q702	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q608	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q603	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q201	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q200	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q701	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
Q700	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
Q202	057G 765 1	2SC2412K	
RP102	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP101	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP100	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP104	061G 1254728JF	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W	
RP103	061G 1254728JF	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W	
R1070	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R1067	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R1064	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R401	061G04021001FY	RST CHIPR 1KOHM 1% 1/16W YAGEO	
R400	061G04021001FY	RST CHIPR 1KOHM 1% 1/16W YAGEO	
R1011	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1079	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1081	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1005	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1001	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1003	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1008	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	

R1086	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1083	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1152	061G0402102 JF	RST CHIPR 1KOHM +-5% 1/16W FENGHUA	
R1154	061G0402102 JF	RST CHIPR 1KOHM +-5% 1/16W FENGHUA	
R1153	061G0402220 JF	RST CHIPR 22 OHM +-5% 1/16W FENGHUA	
R403	061G04027509FT	RST CHIP 75R 1/16W 1%	
R402	061G04027509FT	RST CHIP 75R 1/16W 1%	
R260	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R262	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R263	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R265	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R267	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R268	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R272	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R273	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R274	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R548	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R549	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R415	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R543	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R546	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1094	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
L101	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R231	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R206	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1604	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1054	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R232	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1002	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1007	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1010	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1056	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1059	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1063	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1066	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1069	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1099	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1634	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R571	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R573	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R574	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R725	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R730	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R553	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R733	061G06031000FF	RST CHIPR 100 OHM +-1% 1/10W FENGHUA	
R255	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R254	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R238	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R237	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R1062	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R229	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R209	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R1614	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R557	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	

R558	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1104	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R280	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R444	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1620	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1618	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1109	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1105	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1106	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1107	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1108	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1613	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1050	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1048	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1030	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1029	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1632	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R213	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R216	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R702	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R708	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R709	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R710	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R716	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R723	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R724	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R737	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1100	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1101	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R246	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1616	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1615	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1071	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1033	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1028	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1020	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R416	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R225	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R217	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1633	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1608	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1078	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1077	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1060	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1058	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R701	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R713	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R726	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1602	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1609	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R244	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R245	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R247	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R275	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	

R1057	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1016	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1017	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1031	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1034	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1035	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1037	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1038	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1043	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1055	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R735	061G0603103 JY	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R1026	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1027	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1075	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1076	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1089	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1090	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1095	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1096	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R715	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R207	061G0603105 JF	RST CHIPR 1M OHM +-5% 1/10W FENGHUA	
R1049	061G0603105 JF	RST CHIPR 1M OHM +-5% 1/10W FENGHUA	
R1149	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R1148	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R218	061G0603124FY	RST CHIP 12K4 1/10W 1%	
R1150	061G0603181 JF	RST CHIPR 180 OHM +-5% 1/10W FENGHUA	
R243	061G0603182 JF	RST CHIPR 1.8K OHM +-5% 1/10W FENGHUA	
R242	061G0603182 JF	RST CHIPR 1.8K OHM +-5% 1/10W FENGHUA	
R705	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R1025	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R1023	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R1611	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1610	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1606	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1605	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1617	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1040	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1039	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1024	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R1021	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R234	061G0603223 JF	RST CHIPR 22KOHM 5% 1/10W FENGHUA	
R233	061G0603223 JF	RST CHIPR 22KOHM 5% 1/10W FENGHUA	
R714	061G0603223 JY	RST CHIPR 22K OHM 1/10W YAGEO	
R727	061G06033001FF	RST CHIPR 3KOHM +-1% 1/10W FENGHUA	
R208	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R408	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R409	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R410	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R411	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R412	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R1144	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R4H1	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R270	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R257	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	

R4H4	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H6	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R1630	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H2	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R447	061G0603362 JF	RST CHIPR 3.6K OHM +-5% 1/10W FENGHUA	
R447	061G0603362 JT	RST CHIP 3K6 1/10W 5% TZAI YUAN	
R239	061G06034020FT	RST CHIP R 402OHM 1/10W +/-1%	
R1051	061G0603470 JY	RST CHIPR 47 OHM 1/10W YAGEO	
R741	061G06034709FF	RST CHIPR 47 OHM +-1% 1/10W FENGHUA	
R1629	061G0603471 JF	RST CHIPR 470OHM +-5% 1/10W FENGHUA	
R729	061G0603471 JF	RST CHIPR 470OHM +-5% 1/10W FENGHUA	
R417	061G0603472 JF	RST CHIPR 4.7KOHM +-5% 1/10W FENGHUA	
R417	061G0603472 JT	RST CHIP 4K7 1/10W 5% TZAI YUAN	
R610	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R547	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R541	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R414	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R413	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R407	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R406	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R405	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R404	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R253	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R252	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R251	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R250	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R721	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R722	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R734	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R736	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R203	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R204	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R205	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R236	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R704	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R720	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R718	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R706	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R703	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1041	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1042	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1046	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1047	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1053	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1155	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R200	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R211	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R212	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R248	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R241	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R226	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R224	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R223	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R220	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	

R219	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R215	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1631	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R544	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R545	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R550	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R551	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R555	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R556	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R1607	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R1628	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R446	061G0603512 JF	RST CHIPR 5.1K OHM +-5% 1/10W FENGHUA	
R1619	061G0603512 JY	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R201	061G06036041FF	RST CHIPR 6.04KOHM +-1% 1/10W FENGHUA	
R1093	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
R230	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R1009	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1012	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1065	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1068	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1072	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1080	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1082	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1084	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1087	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1151	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1004	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1061	061G06038202FI	TEST ONLY RST 0603 82K 1% 1/10W TA-I	
R711	061G0603821 JF	RST CHIPR 820 OHM +- 5% 1/10W FENGHUA	
R1092	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1091	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1088	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1085	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1074	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1073	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R728	061G06039101FF	RST CHIPR 9.1KOHM +-1% 1/10W FENGHUA	
R1623	061G0805472 JY	RST CHIPR 4.7K OHM 5% 1/8W YAGEO	
R1622	061G0805472 JY	RST CHIPR 4.7K OHM 5% 1/8W YAGEO	
FB107	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
FB105	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
FB107	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
FB105	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
C290	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C289	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C288	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C287	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C286	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C285	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C284	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C283	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C413	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C412	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C421	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C414	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	

C424	065G040210332K	Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C423	065G040210332K	Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C422	065G040210332K	Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C404	065G040210332K	Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C411	065G040210332K	Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C305	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C307	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C308	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C309	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C310	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C311	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C312	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C401	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C402	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C403	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C407	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C408	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C409	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C410	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C417	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C418	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C419	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C420	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C430	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C278	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C279	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C280	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C281	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C282	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C297	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C298	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C302	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C303	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C304	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C1010	065G040222031J	Y	CAP CHIP 0402 22P 50V NPO +/-5%	
C1012	065G040222031J	Y	CAP CHIP 0402 22P 50V NPO +/-5%	
C1037	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C1623	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C730	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C1624	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C212	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C722	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C723	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C743	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C317	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C318	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C319	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C425	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C427	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C428	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C429	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C433	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C436	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C514	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	

C235	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C238	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C240	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C241	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C242	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C243	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1210	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1603	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1606	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1607	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1608	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1615	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1627	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1631	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C216	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C214	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C213	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C211	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C210	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C206	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C205	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1632	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C522	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C525	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C527	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C529	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C530	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C701	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C729	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1638	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1640	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1642	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C277	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C301	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1628	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1063	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1062	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C321	065G060310522K	T	CAP CHIP 0603 1UF K 25V X7R	
C324	065G060310522K	T	CAP CHIP 0603 1UF K 25V X7R	
C704	065G060310522K	T	CAP CHIP 0603 1UF K 25V X7R	
C1028	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1030	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1034	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1035	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1601	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1602	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1610	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1611	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1612	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1613	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C203	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C204	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1022	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1020	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	

C1014	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C270	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C263	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C259	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C257	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C253	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C252	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C249	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C248	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C246	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C315	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C306	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C300	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C299	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C296	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C291	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C276	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C275	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C274	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C245	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C218	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C221	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C224	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C225	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C228	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C230	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C236	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C237	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C239	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C1056	065G060315232K	3	CAP 0603 1.5NF 10% 50V X7R	
C1633	065G060315332K	F	CAP CHIP 0603 15NF K 50V X7R	
C1634	065G060315332K	F	CAP CHIP 0603 15NF K 50V X7R	
C1043	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1055	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1054	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1044	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C208	065G060320031J	Y	CAP CHIP 0603 20PF J 50V NPO	
C207	065G060320031J	Y	CAP CHIP 0603 20PF J 50V NPO	
C1083	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1084	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1086	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1090	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C295	065G060322332K	Y	TPV CHIP 0603 22N 50V X7R +/-10%	
C314	065G060322422K	T	CAP CHIP0603 220NF K 25V X7R	
C1641	065G060322517Z	Y	CAP CHIP 0603 2.2UF Z 16V Y5V	
C1057	065G060347031J	Y	CAP CHIP 0603 47P 50V NPO +/-5%	
C708	065G060347412K	Y	CAP CHIP 0603 0.47UF K 16V X7R	
C1625	065G080510537Z	T	CAP CHIP 0805 1UF Z 50V Y5V	
C1618	065G080510537Z	T	CAP CHIP 0805 1UF Z 50V Y5V	
C1066	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C1629	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C273	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C320	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C405	065G080510615K	T	CHIP 10UF 16V X5R 0805	

C406	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C416	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C426	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C431	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C523	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C1064	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C748	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C233	065G080522522K	T	CAP CHIP 0805 2.2UF K 25V X7R	
C222	065G080522522K	T	CAP CHIP 0805 2.2UF K 25V X7R	
C1619	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C1620	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C1011	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C1013	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C733	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C727	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C718	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C1092	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1091	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1089	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1087	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1080	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1079	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1814	065G120610612K	T	CAP CHIP 1206 10UF K 16V X7R	
C1639	065G120610612K	T	CAP CHIP 1206 10UF K 16V X7R	
C731	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
C269	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
C268	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
FB701	071G 56G301 EA		BEAD 300 OHM	
FB703	071G 56G301 EA		BEAD 300 OHM	
FB609	071G 56G301 EA		BEAD 300 OHM	
FB208	071G 56K121		CHIP BEAD	
FB209	071G 56K121		CHIP BEAD	
FB210	071G 56K121		CHIP BEAD	
FB211	071G 56K121		CHIP BEAD	
FB212	071G 56K121		CHIP BEAD	
FB213	071G 56K121		CHIP BEAD	
FB214	071G 56K121		CHIP BEAD	
FB215	071G 56K121		CHIP BEAD	
FB217	071G 56K121		CHIP BEAD	
FB216	071G 56K121		CHIP BEAD	
FB218	071G 56K121		CHIP BEAD	
FB224	071G 56K121		CHIP BEAD	
FB223	071G 56K121		CHIP BEAD	
FB222	071G 56K121		CHIP BEAD	
FB221	071G 56K121		CHIP BEAD	
FB220	071G 56K121		CHIP BEAD	
FB219	071G 56K121		CHIP BEAD	
FB207	071G 56K121		CHIP BEAD	
FB611	071G 56K121		CHIP BEAD	
FB610	071G 56K121		CHIP BEAD	
FB606	071G 56K121		CHIP BEAD	
FB401	071G 56K121		CHIP BEAD	
FB400	071G 56K121		CHIP BEAD	
FB225	071G 56K121		CHIP BEAD	

FB112	071G 56K121	CHIP BEAD	
FB200	071G 56K121	CHIP BEAD	
FB201	071G 56K121	CHIP BEAD	
FB202	071G 56K121	CHIP BEAD	
FB203	071G 56K121	CHIP BEAD	
FB204	071G 56K121	CHIP BEAD	
FB205	071G 56K121	CHIP BEAD	
FB206	071G 56K121	CHIP BEAD	
FB612	071G 56K121 M	CHIP BEAD	
FB613	071G 56K121 M	CHIP BEAD	
FB614	071G 56K121 M	CHIP BEAD	
FB111	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB110	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB109	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB108	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB106	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB104	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB103	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB102	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB101	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB508	071G 59C121 B	FCM1608C-121T03 SMD	
FB502	071G 59C121 B	FCM1608C-121T03 SMD	
FB100	071G 59C121 B	FCM1608C-121T03 SMD	
FB509	071G 59C121 B	FCM1608C-121T03 SMD	
FB511	071G 59C121 B	FCM1608C-121T03 SMD	
FB227	071G 59D121 TA	CHIP BEAD 120R/600MA FCM1608KF-121T06	
L700	073G253S 46 H	SMD CHOKE 4.7UH	
R240	073G253S 94 M1	SMD CHOKE 2.2UH 10% 600MA	
L105	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L104	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L103	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L102	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
CN503	088T 340 21 VA	HDMI HEADER 21P V/T	
CN501	088T 340 21 VA	HDMI HEADER 21P V/T	
CN500	088T 340 21 VA	HDMI HEADER 21P V/T	
D503	093G 64 42 PP	BAV70 SOT-23	
D502	093G 64 42 PP	BAV70 SOT-23	
D100	093G 64 42 PP	BAV70 SOT-23	
X200	093G 22S503 H	CRYSTAL HSX840GA 24MHZ HELE	
X100	093G 22S910 H	HSX840GA 20P 16.00MHZ	
ZD612	093G 39S 24 T	RLZ 5.6B LLDS	
ZD611	093G 39S 24 T	RLZ 5.6B LLDS	
ZD610	093G 39S 24 T	RLZ 5.6B LLDS	
ZD609	093G 39S 24 T	RLZ 5.6B LLDS	
ZD608	093G 39S 24 T	RLZ 5.6B LLDS	
ZD600	093G 39S 44 T	RLZ18B LLDS	
D711	093G 64S3PH	BAS32L	
D710	093G 64S3PH	BAS32L	
D708	093G 64S3PH	BAS32L	
D707	093G 64S3PH	BAS32L	
ZD111	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD110	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD109	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD108	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	

ZD107	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD106	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD105	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD104	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD102	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD101	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD100	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
	709T3787 QS002	COMSUPTIVE ASS'Y	
	052G 2191 A	PAPER TAPE	
	052G6026 2	MESH PRINTTING PAPER	
	055G 23520	IPA	
	055G 100610	TIN CREAM W/O PB	
	715G3787M0G000005K	MAIN BOARD PCB	
	Q90T0202 1	HEAT SINK FOR U200	
	KEPFASQ2C	KEY BOARD	
CN01	033G3802 4H	WAFER 4P RIGHT ANGLE	
	709T4151 QM002	COMSUPTIVE ASS'Y	
	Q55G 100620500	TIN STICK(SN-0.5AG)	
R09	061G06031000FF	RST CHIPR 100 OHM +-1% 1/10W FENGHUA	
R08	061G06031000FF	RST CHIPR 100 OHM +-1% 1/10W FENGHUA	
R09	061G06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R08	061G06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R05	061G06032002FF	RST CHIPR 20KOHM +-1% 1/10W FENGHUA	
R01	061G06032002FF	RST CHIPR 20KOHM +-1% 1/10W FENGHUA	
R05	061G06032002FY	RST CHIPR 20KOHM +-1% 1/10W YAGEO	
R01	061G06032002FY	RST CHIPR 20KOHM +-1% 1/10W YAGEO	
R07	061G06033301FF	RST CHIPR 3.3KOHM +-1% 1/10W FENGHUA	
R03	061G06033301FF	RST CHIPR 3.3KOHM +-1% 1/10W FENGHUA	
R07	061G06033301FY	RST CHIP 3K3 1/10W 1%	
R03	061G06033301FY	RST CHIP 3K3 1/10W 1%	
R06	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
R02	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
R06	061G06036801FY	RST CHIPR 6.8KOHM +-1% 1/10W YAGEO	
R02	061G06036801FY	RST CHIPR 6.8KOHM +-1% 1/10W YAGEO	
	709T4151 QS002	COMSUPTIVE ASS'Y	
SW07	077G 603 AI HJ	TACT SWITCH 2PIN	
SW06	077G 603 AI HJ	TACT SWITCH 2PIN	
SW05	077G 603 AI HJ	TACT SWITCH 2PIN	
SW04	077G 603 AI HJ	TACT SWITCH 2PIN	
SW03	077G 603 AI HJ	TACT SWITCH 2PIN	
SW02	077G 603 AI HJ	TACT SWITCH 2PIN	
SW01	077G 603 AI HJ	TACT SWITCH 2PIN	
E715	715G4151K01000001S	KEY BOARD PCB	
	ADTVA2412QDE	POWER BOARD	
	040G 45762412B	CBPC LABEL	
	009G6005 1 GP	GROUND TERMINAL	
CN902	033G380212B Y	WAFER	
CN903	033T380213B Y	CONNECTOR	
IC970	056G 139 7	IC EL817MC M-TYPE	
IC951	056G 139 7	IC EL817MC M-TYPE	
IC950	056G 139 7	IC EL817MC M-TYPE	
IC970	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC951	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC950	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	

IC970	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC950	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC951	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC902	056G 581 7	IC TNY277PN DIP-8C	
IC904	056T 563134	IC SI-8105QL DIP-8	
NR901	061G 58030 W	NTCR 3OHM 5A	
C904	063G107K474 US	0.47UF +-10%	
C901	063G107K474 US	0.47UF +-10%	
C910	063G213J105GFA	MPF CAP	
C911	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5U	
C909	065G306K3312BP	330PF K 250VAC	
C908	065G306K3312BP	330PF K 250VAC	
C907	065G306K3312BP	330PF K 250VAC	
C903	065G306K6812BP	Y1 680PF M 250VAC	
C902	065G306K6812BP	Y1 680PF M 250VAC	
C906	065G306M1022B2	1000PF 400VAC/250VAC Y1	
C905	065G306M1022B2	1000PF 400VAC/250VAC Y1	
C952	067G204V331 3K	CS CAP 330UF 16V 10*12 MM	
C974	067G215A1026KV	EC 1000UF 35V 12.5*25MM	
C973	067G215A1026KV	EC 1000UF 35V 12.5*25MM	
C999	067G215A4714KV	EC 470UF 25V 10*16MM	
C975	067G215A4716KV	EC 470UF 35V M 10*16MM	
C920	067G215S10115R	105C 100UF M 450V	
C991	067G215S4716KV	CAP 105C 470UF M 35V 10*20	
FB901	071G 55 21	FERRITE BEAD	
L980	073G 253 91 L	CHOKE BY LI TA	
L950	073G 253 91 L	CHOKE BY LI TA	
L902	073T 174106 H	LINE FILTER 13MH	
L901	073T 174106 H	LINE FILTER 13MH	
L906	073T 174124 L	PFC CHOKE 300UH PT-009584	
L990	073T 253194 H	CHOKE COIL 20UH	
T902	080TL26T 6 L	X'FMR 370UH PT-009411-1	
T901	080TL26T 7 L	X'FMR 260UH PT-009486	
CN901	087G 501 48 S	AC SOCKET 3PIN + 3 HOLE	
CN901	087G 501 48 DL	AC SOCKET 3PIN + 3 HOLE	
	0Q1G 340 8106 CR3	SCREW FOR CN901	
	705TQ793028	D970 ASS'Y	
D970	093G 52 57	DIODE FMXA-2202S 20A/200V TO-220F	
D970	093G 60265	FCH20A20 TO-220	
	0M1G1730 8120	SCREW	
	Q90T0095 2	HEAT SINK	
	705TQ793029	BD901 ASS'Y	
	090T 425502	HEAT SINK	
BD901	093G 50460 39	BRIDGE BU1006A-E3/45 10A/600V BU	
	0M1G1730 8120	SCREW	
	705TQ793030	D950 ASS'Y	
	090G6084 1	HEAT SINK	
D950	093G 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
	0M1G1730 8120	SCREW	
	705TQ793031	Q901&D902 ASS'Y	
Q901	057G 667 55	FET 2SK4087LS 14A/600V TO-220FI(LS)	
D902	093G 220 33	DIODE FMXA-1106S	
	0M1G1730 8120	SCREW	
	Q90T0095 2	HEAT SINK	

	705TQ951017	OIL FOR DISAPPEAR	
	705TQA57011	Q903 ASS'Y	
Q903	057G 667 21	STP10NK70ZFP	
Q903	057G 667 51	FET 2SK4101LS 7A/650V TO-220FI(LS)	
	090T 425502	HEAT SINK	
	0M1G1730 8120	SCREW	
	709T2907 QM001	COMSUPTIVE ASS'Y	
	055G 23520	IPA	
	Q55G 23525	WELDING FLUX WITHOUT PB	
	Q55G 100625	TIN STICK_LOW ARGENTUM	
IC901	056G 368 12	IC FAN7529MX SOP-8	
IC903	056G 379101	IC FAN7602BMX SOP-8	
Q970	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q950	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q923	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q922	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q924	057G 760 5	DTC144WKA BY ROHM SMT	
Q921	057G 761 11	TRA KTD1624C RTF/P 60V/3A SOT-89	
Q925	057G 761 12	TRA KTB1124B SOT-89 KEC	
Q921	057T 761505	TRA KTD1624-B	
Q925	057T 761506	TRA KTB1124-B	
R956	061G0603000	RST CHIP MAX 0R05 1/10W	
R945	061G0603100 1F	RST CHIPR 1 KOHM +-1% 1/10W	
R958	061G0603100 2F	RST CHIPR 10K OHM +-1% 1/10W	
R957	061G0603100 2F	RST CHIPR 10K OHM +-1% 1/10W	
R991	061G0603102	RST CHIPR 1K OHM +-5% 1/10W	
R960	061G0603102	RST CHIPR 1K OHM +-5% 1/10W	
R955	061G0603102	RST CHIPR 1K OHM +-5% 1/10W	
R971	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R942	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R918	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R929	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R939	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R983	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R976	061G0603103	RST CHIPR 10 KOHM +-5% 1/10W	
R907	061G0603104	RST CHIPR 100 KOHM +-5% 1/10W	
R996	061G0603110 3F	RST CHIPR 110KOHM +-1% 1/10W	
R906	061G0603124	RST CHIPR 120 KOHM +-5% 1/10W	
R923	061G06031302FT	ST CHIP 13K 1/10W 1%	
R923	061G06031302FY	RST CHIPR 13KOHM +-1% 1/10W YAGEO	
R979	061G0603150 1F	RST CHIPR 1.5 KOHM +-1% 1/10W	
R910	061G0603224	RST CHIPR 220 KOHM +-5% 1/10W	
R915	061G0603471	RST CHIPR 470 OHM +-5% 1/10W	
R998	061G0603499 1D	RST CHIPR 4.99K OHM +-0.5% 1/10W	
R981	061G0603560 9F	RST CHIPR 56 OHM +-1% 1/10W	
R917	061G0603563	RST CHIPR 56 KOHM +-5% 1/10W	
R982	061G0603620 2F	RST CHIPR 62 KOHM +-1% 1/10W	
R947	061G0603622	RST CHIPR 6.2 KOHM +-5% 1/10W	
R997	061G0603820 1F	RST CHIPR 8.2 KOHM +-1% 1/10W	
R911	061G0603820 1F	RST CHIPR 8.2 KOHM +-1% 1/10W	
R912	061G0805100	RST CHIPR 10 OHM +-5% 1/8W	
R943	061G0805101	1ST CHIPR 100 OHM +-5% 1/8W	
R935	061G0805102	RST CHIPR 1K OHM +-5% 1/8W	
R944	061G0805103	RST CHIPR 10K OHM +-5% 1/8W	

R914	061G0805103		RST CHIPR 10K OHM +-5% 1/8W	
R928	061G0805104		RST CHIPR 100K OHM +-5% 1/8W	
R908	061G0805104		RST CHIPR 100K OHM +-5% 1/8W	
R978	061G0805130 2F		RST CHIP 13K 1/8W 1%	
R913	061G0805220		RST CHIPR 22 OHM +-5% 1/8W	
R927	061G0805274		RST CHIPR 270 KOHM +-5% 1/8W	
R975	061G0805392		3.9 KOHM 1/10W	
R938	061G0805472		RST CHIPR 4.7 KOHM +-5% 1/8W	
R937	061G0805472		RST CHIPR 4.7 KOHM +-5% 1/8W	
R985	061G0805684		680K/0805	
R926	061G0805684		680K/0805	
R924	061G0805684		680K/0805	
R925	061G0805684		680K/0805	
R920	061G1206000		RST CHIP MAX 0R05 1/4W	
RJ901	061G1206000		RST CHIP MAX 0R05 1/4W	
RJ902	061G1206000		RST CHIP MAX 0R05 1/4W	
R961	061G1206103		RST CHIPR 10K OHM +-5% 1/4W	
R941	061G1206103		RST CHIPR 10K OHM +-5% 1/4W	
R934	061G1206220		RST CHIPR 22 OHM +-5% 1/4W	
R933	061G1206220		RST CHIPR 22 OHM +-5% 1/4W	
R903	061G1206334		RST CHIPR 330KOHM +-5% 1/4W	
R902	061G1206334		RST CHIPR 330KOHM +-5% 1/4W	
R901	061G1206334		RST CHIPR 330KOHM +-5% 1/4W	
R931	061G1206470		RST CHIPR 47 OHM +-5% 1/4W	
R950	061G1206470		RST CHIPR 47 OHM +-5% 1/4W	
R951	061G1206470		RST CHIPR 47 OHM +-5% 1/4W	
R952	061G1206470		RST CHIPR 47 OHM +-5% 1/4W	
R953	061G1206470		RST CHIPR 47 OHM +-5% 1/4W	
R954	061G1206470		RST CHIPR 47 OHM +-5% 1/4W	
R999	061G1206470		RST CHIPR 47 OHM +-5% 1/4W	
R984	061G1206680 3F		RST CHIPR 680KOHM +-1% 1/4W	
R922	061G1206680 3F		RST CHIPR 680KOHM +-1% 1/4W	
R921	061G1206680 3F		RST CHIPR 680KOHM +-1% 1/4W	
R909	061G1206680 3F		RST CHIPR 680KOHM +-1% 1/4W	
R905	061G1206680 3F		RST CHIPR 680KOHM +-1% 1/4W	
R904	061G1206680 3F		RST CHIPR 680KOHM +-1% 1/4W	
R932	061T0805168 2F		CHIP 16.8K OHM 1/8W 1%	
C993	065G060310231J Y		CAP CHIP 0603 1NF J 50V NPO	
C978	065G060310432K F		CAP CHIP 0603 0.1UF K 50V X7R	
C956	065G060310432K F		CAP CHIP 0603 0.1UF K 50V X7R	
C955	065G060310432K F		CAP CHIP 0603 0.1UF K 50V X7R	
C942	065G060310432K F		CAP CHIP 0603 0.1UF K 50V X7R	
C913	065G060310432K F		CAP CHIP 0603 0.1UF K 50V X7R	
C934	065G060310432K F		CAP CHIP 0603 0.1UF K 50V X7R	
C944	065G060322131J F		CAP CHIP 0603 220PF J 50V NPO	
C995	065G0603224 32		CHIP 0.22UF 50V X7R	
C918	065G0603224 32		CHIP 0.22UF 50V X7R	
R919	065G060347131J F		CAP CHIP 0603 470PF J 50V NPO	
C943	065G060347332K F		CAP CHIP 0603 47NF K 50V X7R	
C917	065G060347332K F		CAP CHIP 0603 47NF K 50V X7R	
C912	065G060382031J Y		CAP CHIP 0603 82PF J 50V NPO	
C951	065G080510231J F		CAP CHIP 0805 1NF J 50V NPO	
C950	065G080510231J F		CAP CHIP 0805 1NF J 50V NPO	
C992	065G080510332K A		CAP CHIP 0805 10NF K 50V X7R	

C922	065G080510537Z	3	CAP CHIP 0805 1U 50V Y5V -20%+80%	
C998	065G080510537Z	3	CAP CHIP 0805 1U 50V Y5V -20%+80%	
C976	065G0805334	32	CHIP 0.33UF 50V X7R	
C996	065G080547131J	Y	CAP CHIP 0805 470P 50V NPO +/-5%	
C990	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C938	065T0603105	25	CHIP 1UF 25V X5R	
C972	065T080533242Y		CAP CHIP 0805 3300PF K 100V X7R	
C971	065T080533242Y		CAP CHIP 0805 3300PF K 100V X7R	
C970	065T080533242Y		CAP CHIP 0805 3300PF K 100V X7R	
D941	093G	6432V	LL4148-GSO8	
D971	093G	6432V	LL4148-GSO8	
D911	093G	6432V	LL4148-GSO8	
ZD930	093G 39S	15 T	RLZ15B LLDS	
ZD920	093G 39S	24 T	RLZ 5.6B LLDS	
ZD970	093G 39S	42 T	RLZ27B LLDS	
ZD931	093G 39S	44 T	RLZ18B LLDS	
ZD901	093G 39S	103 T	DIODE RLZ 2.4BTE-11 500MW/2.4V LL-34	
D990	093G 60S	31 T	DIODE B360B 3A/60V SMB	
D971	093G 64S522SEM		LL4148	
D941	093G 64S522SEM		LL4148	
D911	093G 64S522SEM		LL4148	
	709T2907 QS001		COMSUPTIVE ASS'Y	
T902	006G	31 4	1.7MM RIVET	
CN901	006G	31500 GP	EYELET	
IC971	056G 158	10 T	IC AS431AZTR-E1 TO-92	
IC952	056G 158	10 T	IC AS431AZTR-E1 TO-92	
R940	061G152M10452T		RST MOFR 100KOHM +-5% 2WS	
R946	061G152M27852T		RST MOFR 0.27 OHM +-5% 2WS	
R970	061G152M33952T		RST MOFR 3.3 OHM +-5% 2WS	
R974	061G175L10252T		1KOHM +-5% 1/2W	
R930	061G208M10452T		RST MOF 100K 5% 1W	
R916	061T152M15852T		RST MOFR 0.15 OHM +-5% 2WS	
C940	065G	2K222 2T6921	CAP CER 2200PF K 2KV Y5P	
C930	065G	2K222 2T6921	CAP CER 2200PF K 2KV Y5P	
C941	067G215A1007KT		EC 10UF 50V M 5*11MM	
C937	067G215A1007KT		EC 10UF 50V M 5*11MM	
C921	067G215A1007KT		EC 10UF 50V M 5*11MM	
C931	067G215A1017KT		EC 100UF 50V 8*12MM	
C914	067G215A4707KT		EC 47UF 50V 6.3*11MM	
C954	067G215A4712KT		EC 470UF 10V 8*12.5MM	
FB904	071G	55 26 S	FERRITE CORE	
FB903	071G	55 26 S	FERRITE CORE	
FB904	071T	55 26 H	FERRITE BEAD 3.5*6.0*0.8	
FB903	071T	55 26 H	FERRITE BEAD 3.5*6.0*0.8	
F901	084G	55 7 B	FUSE 3.15A 250V BUSSMANN	
D901	093G	52 1552T	DIODE 1N4007-E3/73 1A/1000V DO-41	
D931	093G	5250S52T	DIODE AU02Z-V1 SANKEN	
D940	093T1080	252T	DIODE SARSO1-V1 SANKEN	
D930	093T1080	252T	DIODE SARSO1-V1 SANKEN	
J909	095G	90 23	JUMPER WIRE	
J910	095G	90 23	JUMPER WIRE	
J911	095G	90 23	JUMPER WIRE	
J912	095G	90 23	JUMPER WIRE	
J913	095G	90 23	JUMPER WIRE	

J915	095G 90 23	JUMPER WIRE	
J916	095G 90 23	JUMPER WIRE	
J917	095G 90 23	JUMPER WIRE	
J925	095G 90 23	JUMPER WIRE	
J923	095G 90 23	JUMPER WIRE	
J922	095G 90 23	JUMPER WIRE	
J921	095G 90 23	JUMPER WIRE	
J918	095G 90 23	JUMPER WIRE	
J919	095G 90 23	JUMPER WIRE	
J920	095G 90 23	JUMPER WIRE	
J908	095G 90 23	JUMPER WIRE	
J907	095G 90 23	JUMPER WIRE	
J906	095G 90 23	JUMPER WIRE	
J905	095G 90 23	JUMPER WIRE	
J904	095G 90 23	JUMPER WIRE	
J903	095G 90 23	JUMPER WIRE	
J902	095G 90 23	JUMPER WIRE	
J901	095G 90 23	JUMPER WIRE	
	709T2907 QA001	COMSUPTIVE ASS'Y	
	715G2907 1 3	POWER BOARD PCB	
	Q51G 6 4509	GLUE_RTV	
	Q45G 99606 24 ESD	INSULATING PE BAG	
ECN200	095G801410D650	HARNESS 10P-5P+4P(PH) 400/550	
ECN200	095G801410X650	HARNESS 10P-5P+4P(PH) 400/550	2nd source
	P34T0307ADT 1L0100	BASE COVER	
	P34T0364ADT 1L0100	BASE_SWIVEL	

D32W931 E329MTNS4WB36N

Location	Part No.	Description	Remark
	002F7015 1	NUT	
	004F081510T 00	WASHER	
	004F122515M 00	WASHER	
	004F1808104 00	WASHER	
	004F1808104 01	WASHER	
	004F180820M 00	WASHER	
	028F0840110	SHAFT	
	040G 58162435A	P/N LABEL FOR MANUAL PE BAG	
	040G 581689 4A	BARCODE LABEL FOR 1	
	045G 77500	BARCODE RIBBON	
	045G 77501	BARCODE RIBBON	
	052G 1186	SMALL TAPE	
	052G 1211 B	CONDUCTIVE TAPE 85MM *40MM *0.09MM	
	052G 2191 A	PAPER TAPE	
SP01	078G0150501 K	SPK 6 OHM 15W 160X42MM KUAIDA	
SP01	078G0150501 Y	SPK 6 OHM 15W 160X42MM SUNLINK	2nd source
	089G 725CAA DB	D-SUB CABLE	
	089G424A15N CX	AC POWER CORD 1500MM BRAZIL REG.	
	095G801312D 42	HARNESS 12P-12P 150MM	
ECN600	095G8014 4D609	HARNESS 4P(2008)-B&R +B&W 550/400	
ECN600	095G8014 4X609	HARNESS 4P(2008)-B&R +B&W 550/400	2nd source
ECN200	095G801410D646	HARNESS 10P-6P+4P 700/850	
ECN200	095G801410X646	HARNESS 10P-6P+4P 700/850	2nd source
E09505	095G8018 3DJ12	LVDS CABLE 30P-40P(1.25MM) 350MM	2nd source
E09505	095G8018 3XJ12	LVDS CABLE 30P-40P(1.25MM) 350MM	
E09504	095G8021 3D901	HARNESS 3P-3P+3P 250MM FQE092369HY	
E09504	095G8021 3X901	HARNESS 3P-3P+3P 250MM LCDXXTF0288	2nd source
	0M1G 340 4120	SCREW	
	0M1G 930 6120	SCREW	
	0M1G 930 8 47 CR3	SCREW	
	0M1G 940 16 47 CR3	SCREW	
	0M1G1730 8120	SCREW	
	0M1G1730 10120	SCREW 42A9930016	
	0Q1G 930 10 47 CR3	SCREW	
	0Q1G 940 16 47 CR3	SCREW	
	705TQ933J10	PLASTIC ASS'Y 32	
	P33T0132ADT 1L0100	KEY_FUNCTION	
	705TQ949001	COMSUPTIVE ASS'Y-A4	
	705TQA34J52	BASE ASS'Y 32"	
	0Q1G 130 8120	SCREW 42A9930011	
	P15T0439202CKD	BKT_BASE_PLATE	
	P34T0305ADT 1L0100	BASE	
	Q12G6300 25 3	RUBBER	
	705TQA34J53	BEZEL ASS'Y 32	
	036T 600 18115 GP	HIMERON	
	0Q1G 930 10 47 CR3	SCREW	
	P33T0135AFT 1C0100	LENS_IR	
	P34T0302ADT 1L0100	BEZEL TV32W-9C1-9C2	
	P34T0303ADTA1L0100	DECO	
	Q44T3231 21 27	EVA WASHER	
	Q44T3231 21 28	EVA WASHER	

	Q52G 3 81	3M DOUBLE FACE TAPE	
	705TQA34J54	REAR COVER ASS'Y 32"	
	0Q1G 930 10 47 CR3	SCREW	
	P15T0320101	BRACKET_VESA	
	P34T0304ADT 1L0100	REAR COVER 32	
	Q34T7113ADT 1L0100	COVER_REAR_IO	
E750	750TVM315BN511N000	PANEL V315B5-LN1 C1 TW CMO	2nd source
E750	750TVM315BN513N000	PANEL V315B5-LN1 C1 NH CMO	2nd source
	756TQ9CB TS207 00	MAIN BOARD-CBPF9T9SQ2C	
U402	056G1133923	IC MX25L4005AM2C-12G SOP-8	
U403	056T1133111	IC NAND512W3A2DN6E TSOP-48	
SMTF-U402	100TATMK001S11	MCU ASS'Y-056G1133923	
SMTF-U403	100TATMK002S11	MCU ASS'Y-056T1133111	
	040G 45762412B	CBPC LABEL	
CN700	033G327812D	WAFER 12P PLUG	
CN600	033G3802 4B Y W	WAFER	
CN200	033G380210B Y W	WAFER	
C1621	067G 305471 6C	EC 470UF 35V KM 10X16MM	
C1622	067G 305471 6C	EC 470UF 35V KM 10X16MM	
C714	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C711	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C706	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C1626	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C1617	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
L606	073G 253158 H	CHOKO COIL 22UH+/-25%	
L607	073G 253158 H	CHOKO COIL 22UH+/-25%	
CN601	088G 30211K	PHONE JACK 5PIN	
CN701	088G 352 2 YG	USB CONNECTOR USB4-01	
CN701	088G 352 21CL	USB CONN TYPE A	
CN100	088G353A15FVCS	D-SUB 15PIN FEMALE VERTICAL SCREWED	
CN106	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN107	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN102	088T 78 1369C	RCA JACK 2*3 G/B/R+B/W/R	
CN104	088T 78 13932 C	RCA JACK + S JACK Y/B	
CN105	088T 7813C19C	RCA JACK 1*3 R/W/Y	
CN101	088T 30252C	PHONE JACK 3.5MM 3P V/A GREEN	
T100	094G PALISBM1M	TUNER PAL+ISDB ENG36F13KF	
	709T3787 QM002	COMSUPTIVE ASS'Y	
	055G 23524	WELDING FLUX WITHOUT PB	
	Q55G 100620500	TIN STICK(SN-0.5AG)	
C323	067G 305100 3T	10UF 16V	
C1614	067G 305100 7T	105℃ 10UF +-20% 50V	
C1099	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1096	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1046	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1042	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1039	067G 3051007PT	CAP 105℃ 10UF M 50V	
C740	067G 3051013CT	EC 100UF 16V KM 6.3X11MM	
C703	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C707	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C1021	067G 305221 3T	220UF/16V	
C735	067G 305470 3T	47UF +-20% 16V	
C726	067G 305470 3T	47UF +-20% 16V	
C400	067G 305470 3T	47UF +-20% 16V	

C415	067G 305470 3T	47UF +-20% 16V	
C737	067G 305470 3T	47UF +-20% 16V	
C1604	067G 305470 3T	47UF +-20% 16V	
C738	067G 305470 3T	47UF +-20% 16V	
C745	067G 305470 3T	47UF +-20% 16V	
C750	067G 305470 3T	47UF +-20% 16V	
C751	067G 305470 3T	47UF +-20% 16V	
C712	067G 3054706CT	EC CAP 47UF M 35V	
C746	067G215Y2212KT	LOW ESR EC 220UF 10V 6.3*11MM	
C717	067G215Y2212KT	LOW ESR EC 220UF 10V 6.3*11MM	
C752	067G215Y4704KT	EC CAP.105C	
CN704	033T8033 40 X	CON. V 2*20P M 1.25 SM S1312-40SVA-1R	
U704	056G 379 92	IC G5627F11U SOP-8(FD)	
U200	056G 562F03	IC HIDTV PRO-SX 27*27 BGA	
U700	056G 563 30	IC AZ1084S-3.3TREI 5A/3.3V TO-263-3	
U707	056G 563122	IC G1084-25TU3UF TO-263T	
U706	056G 563143	IC G1084T43UF TO-252	
U703	056G 563246	LDO AZ1084S2-ADJG1 TO-263-2 5A/ADJ	
U705	056G 563514	IC AZ1117H-3.3TRG1 1A/3.3V SOT223	
U707	056G 563521	IC LDO AZ1084S2-2.5TRG1 TO-263-2 BCD	
U105	056G 563964	IC SC4215HSTRT SO-8	
U106	056G 575515	IC TC90517FG LQFP-64	
U400	056G 615505	IC NT5TU64M16DG-BE(7-7-7) 1066 1G BGA-84	
U401	056G 615505	IC NT5TU64M16DG-BE(7-7-7) 1066 1G BGA-84	
U601	056G 616519	IC AD52582-QE24NAT E-TSSOP-24L 18W	
U107	056G 616520	IC DAC WM8524GEDT/R TSSOP-16 WOLFSON	
U505	056G 634 25	IC SII9187ACNU QFN-72	
U202	056G 643 27	IC G692L293TCUF 2.91V SOT-143	
U701	056G 659501	IC BD8012FVJ TSSOP-B8J	
U100	056G 662502	C ESD AZC199-04S SOT23-6L	
U101	056G 662502	C ESD AZC199-04S SOT23-6L	
U402	056G1133923	IC MX25L4005AM2C-12G SOP-8	
U712	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U711	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U710	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U709	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U715	056T 563146	IC G912T63U 1A/1.2V SOT-223	
U604	056T 593 17	NTM2761RB2	
U602	056T 616516	IC APA2176AQBITRL TQFN3X3-16	
U403	056T1133111	IC NAND512W3A2DN6E TSOP-48	
Q402	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q601	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q607	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q608	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q702	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q704	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q706	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q707	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q708	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q603	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q201	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q200	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q700	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
Q701	057G 763 79	FET AO4449 -7A/-30V SOIC-8	

Q202	057G 765 1	2SC2412K	
RP100	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP101	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP102	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP104	061G 1254728JF	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W	
RP103	061G 1254728JF	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W	
R1064	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R1067	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R1070	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R400	061G04021001FY	RST CHIPR 1KOHM 1% 1/16W YAGEO	
R401	061G04021001FY	RST CHIPR 1KOHM 1% 1/16W YAGEO	
R1008	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1086	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1083	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1081	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1079	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1011	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1005	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1003	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1001	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1152	061G0402102 JF	RST CHIPR 1KOHM +-5% 1/16W FENGHUA	
R1154	061G0402102 JF	RST CHIPR 1KOHM +-5% 1/16W FENGHUA	
R1153	061G0402220 JF	RST CHIPR 22 OHM +-5% 1/16W FENGHUA	
R402	061G04027509FT	RST CHIP 75R 1/16W 1%	
R403	061G04027509FT	RST CHIP 75R 1/16W 1%	
R546	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R543	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R415	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R274	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R273	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R272	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R268	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R548	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R549	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R206	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R231	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
L101	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1094	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R232	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R267	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1002	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1007	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1010	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1056	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1059	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1063	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1066	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1069	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1099	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1604	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R260	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R262	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R263	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R265	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	

R1634	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R553	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R730	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R725	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R574	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R573	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R571	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R733	061G06031000FF	RST CHIPR 100 OHM +-1% 1/10W FENGHUA	
R237	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R238	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R254	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R255	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R1062	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R229	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R209	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R1029	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1030	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1048	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1050	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1054	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1613	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1614	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R557	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R558	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R280	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R444	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1620	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1618	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1109	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1108	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1107	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1106	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1105	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1104	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R708	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R709	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R710	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R716	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R723	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R724	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R737	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1100	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1101	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R246	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1020	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1028	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1033	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1071	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1615	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1616	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1632	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R213	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R216	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R702	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	

R713	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R701	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R416	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R225	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R217	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1633	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1608	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R726	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1602	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1609	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R244	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R245	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R247	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R275	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1016	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1017	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1031	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1034	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1035	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1037	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1038	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1043	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1055	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1057	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1058	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1060	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1077	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1078	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R735	061G0603103 JY	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R715	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1096	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1095	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1090	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1089	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1076	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1075	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1027	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1026	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R207	061G0603105 JF	RST CHIPR 1M OHM +-5% 1/10W FENGHUA	
R1049	061G0603105 JF	RST CHIPR 1M OHM +-5% 1/10W FENGHUA	
R1149	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R1148	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R218	061G06031242FY	RST CHIP 12K4 1/10W 1%	
R1150	061G0603181 JF	RST CHIPR 180 OHM +-5% 1/10W FENGHUA	
R242	061G0603182 JF	RST CHIPR 1.8K OHM +-5% 1/10W FENGHUA	
R243	061G0603182 JF	RST CHIPR 1.8K OHM +-5% 1/10W FENGHUA	
R1023	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R1025	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R705	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R1611	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1610	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1606	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1605	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1617	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	

R1040	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1039	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1021	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R1024	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R233	061G0603223 JF	RST CHIPR 22KOHM 5% 1/10W FENGHUA	
R234	061G0603223 JF	RST CHIPR 22KOHM 5% 1/10W FENGHUA	
R714	061G0603223 JY	RST CHIPR 22K OHM 1/10W YAGEO	
R1817	061G0603271 JF	RST CHIPR 270OHM 1/10W FENGHUA	
R1816	061G0603271 JF	RST CHIPR 270OHM 1/10W FENGHUA	
R727	061G06033001FF	RST CHIPR 3KOHM +-1% 1/10W FENGHUA	
R1144	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R208	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R408	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R409	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R410	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R411	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R412	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R257	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R270	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H1	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H4	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H6	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R1630	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H2	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R446	061G0603362 JF	RST CHIPR 3.6K OHM +-5% 1/10W FENGHUA	
R239	061G06034020FT	RST CHIP R 402OHM 1/10W +/-1%	
R1051	061G0603470 JY	RST CHIPR 47 OHM 1/10W YAGEO	
R741	061G06034709FF	RST CHIPR 47 OHM +-1% 1/10W FENGHUA	
R729	061G0603471 JF	RST CHIPR 470OHM +-5% 1/10W FENGHUA	
R1629	061G0603471 JF	RST CHIPR 470OHM +-5% 1/10W FENGHUA	
R226	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R224	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R223	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R220	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R219	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R215	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R212	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R211	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R200	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1155	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1053	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1047	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1046	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1042	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1041	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R417	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R610	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R703	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R706	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R718	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R720	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R721	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R722	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R734	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	

R736	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R203	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R204	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R205	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R236	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R704	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R541	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R413	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R414	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R241	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R248	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R250	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R251	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R252	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R253	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R404	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R405	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R406	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R407	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R547	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R550	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R551	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R555	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R556	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R545	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R544	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R1631	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R1628	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R1607	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R1808	061G06034999FY	RST CHIPR 49.9 OHM +-1% 1/10W YAGEO	
R1809	061G06034999FY	RST CHIPR 49.9 OHM +-1% 1/10W YAGEO	
R1810	061G06034999FY	RST CHIPR 49.9 OHM +-1% 1/10W YAGEO	
R1811	061G06034999FY	RST CHIPR 49.9 OHM +-1% 1/10W YAGEO	
R447	061G0603512 JT	RST CHIPR 5.1KOHM +-5% 1/10W TZAI YUAN	
R1619	061G0603512 JY	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R201	061G06036041FF	RST CHIPR 6.04KOHM +-1% 1/10W FENGHUA	
R1093	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
R230	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R1151	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1087	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1084	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1082	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1080	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1072	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1068	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1065	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1012	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1009	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1004	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1061	061G06038202FI	TEST ONLY RST 0603 82K 1% 1/10W TA-I	
R1073	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1074	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1085	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1088	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	

R1091	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1092	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R728	061G06039101FF	RST CHIPR 9.1KOHM +-1% 1/10W FENGHUA	
R1622	061G0805472 JY	RST CHIPR 4.7K OHM 5% 1/8W YAGEO	
R1623	061G0805472 JY	RST CHIPR 4.7K OHM 5% 1/8W YAGEO	
FB105	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
FB107	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
FB105	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
FB107	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
C283	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C284	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C285	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C286	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C287	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C288	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C289	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C290	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C424	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C423	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C422	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C421	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C414	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C413	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C412	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C411	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C404	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C309	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C308	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C307	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C305	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C304	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C303	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C302	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C298	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C297	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C282	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C281	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C280	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C279	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C278	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C310	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C430	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C420	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C419	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C418	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C417	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C410	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C409	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C408	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C407	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C403	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C402	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C401	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C312	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	

C311	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C1010	065G040222031J	Y	CAP CHIP 0402 22P 50V NPO +/-5%	
C1012	065G040222031J	Y	CAP CHIP 0402 22P 50V NPO +/-5%	
C1037	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C1623	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C1624	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C730	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C743	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C723	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C722	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C212	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C258	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C256	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C260	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C261	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C262	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C264	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C265	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C266	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C267	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C271	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C272	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C293	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C294	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C316	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C317	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C736	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C739	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C255	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C229	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C227	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C226	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C223	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C220	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C219	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C217	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C216	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C214	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C213	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C211	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C210	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C206	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C231	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C254	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C251	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C250	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C247	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C244	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C243	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C242	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C241	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C240	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C238	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C235	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	

C306	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C315	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C1056	065G060315232K	3	CAP 0603 1.5NF 10% 50V X7R	
C1633	065G060315332K	F	CAP CHIP 0603 15NF K 50V X7R	
C1634	065G060315332K	F	CAP CHIP 0603 15NF K 50V X7R	
C1055	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1054	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1044	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1043	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C207	065G060320031J	Y	CAP CHIP 0603 20PF J 50V NPO	
C208	065G060320031J	Y	CAP CHIP 0603 20PF J 50V NPO	
C1083	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1084	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1086	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1090	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C295	065G060322332K	Y	TPV CHIP 0603 22N 50V X7R +/-10%	
C314	065G060322422K	T	CAP CHIP0603 220NF K 25V X7R	
C1641	065G060322517Z	Y	CAP CHIP 0603 2.2UF Z 16V Y5V	
C1057	065G060347031J	Y	CAP CHIP 0603 47P 50V NPO +/-5%	
C708	065G060347412K	Y	CAP CHIP 0603 0.47UF K 16V X7R	
C1805	065G060356031J	Y	CAP CHIP 0603 56P 50V NPO +/-5%	
C1806	065G060356031J	Y	CAP CHIP 0603 56P 50V NPO +/-5%	
C1807	065G060356031J	Y	CAP CHIP 0603 56P 50V NPO +/-5%	
C1808	065G060356031J	Y	CAP CHIP 0603 56P 50V NPO +/-5%	
C1625	065G080510537Z	T	CAP CHIP 0805 1UF Z 50V Y5V	
C1618	065G080510537Z	T	CAP CHIP 0805 1UF Z 50V Y5V	
C523	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C431	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C426	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C416	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C406	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C405	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C320	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C273	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C1629	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C1066	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C1064	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C748	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C233	065G080522522K	T	CAP CHIP 0805 2.2UF K 25V X7R	
C222	065G080522522K	T	CAP CHIP 0805 2.2UF K 25V X7R	
C1620	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C1619	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C1011	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C1013	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C718	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C727	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C733	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C1092	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1091	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1089	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1087	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1080	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1079	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1814	065G120610612K	T	CAP CHIP 1206 10UF K 16V X7R	

C1639	065G120610612K	T	CAP CHIP 1206 10UF K 16V X7R	
C268	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
C269	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
C731	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
FB609	071G 56G301 EA		BEAD 300 OHM	
FB703	071G 56G301 EA		BEAD 300 OHM	
FB701	071G 56G301 EA		BEAD 300 OHM	
FB112	071G 56K121		CHIP BEAD	
FB200	071G 56K121		CHIP BEAD	
FB216	071G 56K121		CHIP BEAD	
FB217	071G 56K121		CHIP BEAD	
FB218	071G 56K121		CHIP BEAD	
FB219	071G 56K121		CHIP BEAD	
FB220	071G 56K121		CHIP BEAD	
FB221	071G 56K121		CHIP BEAD	
FB222	071G 56K121		CHIP BEAD	
FB223	071G 56K121		CHIP BEAD	
FB224	071G 56K121		CHIP BEAD	
FB225	071G 56K121		CHIP BEAD	
FB400	071G 56K121		CHIP BEAD	
FB401	071G 56K121		CHIP BEAD	
FB606	071G 56K121		CHIP BEAD	
FB610	071G 56K121		CHIP BEAD	
FB611	071G 56K121		CHIP BEAD	
FB201	071G 56K121		CHIP BEAD	
FB202	071G 56K121		CHIP BEAD	
FB203	071G 56K121		CHIP BEAD	
FB204	071G 56K121		CHIP BEAD	
FB205	071G 56K121		CHIP BEAD	
FB206	071G 56K121		CHIP BEAD	
FB207	071G 56K121		CHIP BEAD	
FB208	071G 56K121		CHIP BEAD	
FB209	071G 56K121		CHIP BEAD	
FB210	071G 56K121		CHIP BEAD	
FB211	071G 56K121		CHIP BEAD	
FB212	071G 56K121		CHIP BEAD	
FB213	071G 56K121		CHIP BEAD	
FB214	071G 56K121		CHIP BEAD	
FB215	071G 56K121		CHIP BEAD	
FB612	071G 56K121	M	CHIP BEAD	
FB613	071G 56K121	M	CHIP BEAD	
FB614	071G 56K121	M	CHIP BEAD	
FB111	071G 57G301 MB		BEAD 1206 300OHM 4A	
FB110	071G 57G301 MB		BEAD 1206 300OHM 4A	
FB109	071G 57G301 MB		BEAD 1206 300OHM 4A	
FB108	071G 57G301 MB		BEAD 1206 300OHM 4A	
FB106	071G 57G301 MB		BEAD 1206 300OHM 4A	
FB104	071G 57G301 MB		BEAD 1206 300OHM 4A	
FB103	071G 57G301 MB		BEAD 1206 300OHM 4A	
FB102	071G 57G301 MB		BEAD 1206 300OHM 4A	
FB101	071G 57G301 MB		BEAD 1206 300OHM 4A	
FB511	071G 59C121	B	FCM1608C-121T03 SMD	
FB509	071G 59C121	B	FCM1608C-121T03 SMD	
FB508	071G 59C121	B	FCM1608C-121T03 SMD	

FB502	071G 59C121 B	FCM1608C-121T03 SMD	
FB100	071G 59C121 B	FCM1608C-121T03 SMD	
FB1805	071G 59D121 TA	CHIP BEAD 120R/600MA FCM1608KF-121T06	
FB1808	071G 59D121 TA	CHIP BEAD 120R/600MA FCM1608KF-121T06	
FB1809	071G 59D121 TA	CHIP BEAD 120R/600MA FCM1608KF-121T06	
FB227	071G 59D121 TA	CHIP BEAD 120R/600MA FCM1608KF-121T06	
L700	073G253S 46 H	SMD CHOKE 4.7UH	
R240	073G253S 94 M1	SMD CHOKE 2.2UH 10% 600MA	
L102	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L103	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L104	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L105	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
CN500	088T 340 21 VA	HDMI HEADER 21P V/T	
CN501	088T 340 21 VA	HDMI HEADER 21P V/T	
CN503	088T 340 21 VA	HDMI HEADER 21P V/T	
D100	093G 64 42 PP	BAV70 SOT-23	
D502	093G 64 42 PP	BAV70 SOT-23	
D503	093G 64 42 PP	BAV70 SOT-23	
X200	093G 22S503 H	CRYSTAL HSX840GA 24MHZ HELE	
X100	093G 22S910 H	HSX840GA 20P 16.00MHZ	
ZD612	093G 39S 24 T	RLZ 5.6B LLDS	
ZD611	093G 39S 24 T	RLZ 5.6B LLDS	
ZD610	093G 39S 24 T	RLZ 5.6B LLDS	
ZD609	093G 39S 24 T	RLZ 5.6B LLDS	
ZD608	093G 39S 24 T	RLZ 5.6B LLDS	
ZD600	093G 39S 44 T	RLZ18B LLDS	
D711	093G 64S3PH	BAS32L	
D710	093G 64S3PH	BAS32L	
D708	093G 64S3PH	BAS32L	
D707	093G 64S3PH	BAS32L	
ZD111	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD110	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD109	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD108	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD107	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD106	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD105	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD104	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD102	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD101	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD100	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
	709T3787 QS002	COMSUPTIVE ASS'Y	
	052G 2191 A	PAPER TAPE	
	052G6026 2	MESH PRINTTING PAPER	
	055G 23520	IPA	
	055G 100610	TIN CREAM W/O PB	
	715G3787M0G000005K	MAIN BOARD PCB	
	Q90T0202 1	HEAT SINK FOR U200	
	INTVAL88MQD8	INVERTER BOARD	
	040G 45762412B	CBPC LABEL	
CN8803	033G3802 3B Y L	CONN 2.0 3P	
CN8802	033G3802 3B Y L	CONN 2.0 3P	
CN8803	033G3802 3B Y W	CONN 2.0 3P	
CN8802	033G3802 3B Y W	CONN 2.0 3P	

CN8807	033G8021 2A F	INVTER CONN. 13MM 2P	
CN8805	033G8021 2A F	INVTER CONN. 13MM 2P	
CN8806	033G8021 2A F	INVTER CONN. 13MM 2P	
CN8804	033G8021 2A F	INVTER CONN. 13MM 2P	
CN8806	033T8021 2A U	CONN 13.0MM 2P R/A	
CN8807	033T8021 2A U	CONN 13.0MM 2P R/A	
CN8804	033T8021 2A U	CONN 13.0MM 2P R/A	
CN8805	033T8021 2A U	CONN 13.0MM 2P R/A	
C8809	065G 6J5096ET	CAP CER 5PF J 6KV	
C8812	065G 6J5096ET	CAP CER 5PF J 6KV	
C8813	065G 6J5096ET	CAP CER 5PF J 6KV	
C8802	065G 6J5096ET	CAP CER 5PF J 6KV	
C8803	065G 6J5096ET	CAP CER 5PF J 6KV	
C8804	065G 6J5096ET	CAP CER 5PF J 6KV	
C8805	065G 6J5096ET	CAP CER 5PF J 6KV	
C8808	065G 6J5096ET	CAP CER 5PF J 6KV	
T8803	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8802	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8804	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8805	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8806	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8801	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8808	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8807	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
CN8801	095G 825 6D901	HARNESS 6P(SCN)-5P 300MM FQE092368HY	
R8805	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R8808	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R8805	061G08051003FY	RST CHIPR 100KOHM +-1% 1/8W YAGEO	
R8808	061G08051003FY	RST CHIPR 100KOHM +-1% 1/8W YAGEO	
R8801	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R8802	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R8806	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R8801	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8802	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8806	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8807	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8818	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8819	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8820	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8823	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8823	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8820	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8819	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8818	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8807	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8804	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R8804	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R8805	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R8808	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R8803	061G08052202FT	RST CHIP 22K 1/8W 1%	
R8816	061G08052202FT	RST CHIP 22K 1/8W 1%	
R8803	061G08052202FY	RST CHIPR 22KOHM +-1% 1/8W YAGEO	
R8816	061G08052202FY	RST CHIPR 22KOHM +-1% 1/8W YAGEO	
R8813	061G08053601FF	RST CHIPR 3.6KOHM +-1% 1/8W FENGHUA	

R8817	061G08053601FF	RST CHIPR 3.6KOHM +-1% 1/8W FENGHUA	
R8813	061G08053601FT	RST CHIP 3K6 1/8W 1%	
R8817	061G08053601FT	RST CHIP 3K6 1/8W 1%	
R8814	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W FENGHUA	
R8812	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W FENGHUA	
R8811	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W FENGHUA	
R8811	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W YAGEO	
R8812	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W YAGEO	
R8814	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W YAGEO	
RJ8801	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
RJ8802	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
RJ8802	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
RJ8801	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
C8801	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C8822	065G080522132K Y	CAP CHIP 0805 220P 50V X7R +/-10%	
C8819	065G080533131J Y	CAP CHIP 0805 330PF J 50V NPO	
C8818	065G080533131J Y	CAP CHIP 0805 330PF J 50V NPO	
C8816	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
C8817	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
C8820	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
C8821	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
C8824	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
C8825	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
D8819	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8809	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8811	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8813	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8815	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8817	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8809	093G 6433S	DIODE BAV99 SEMTECH	
D8811	093G 6433S	DIODE BAV99 SEMTECH	
D8813	093G 6433S	DIODE BAV99 SEMTECH	
D8815	093G 6433S	DIODE BAV99 SEMTECH	
D8817	093G 6433S	DIODE BAV99 SEMTECH	
D8819	093G 6433S	DIODE BAV99 SEMTECH	
D8806	093G 3919552T	DIODE MTZJ T-72 5.1B 500MW/5.1V DO-34	
D8821	093G 64 1152T	1N4148	
D8820	093G 64 1152T	1N4148	
D8804	093G 64 1152T	1N4148	
D8802	093G 64 1152T	1N4148	
D8801	093G 64 1152T	1N4148	
D8801	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D8802	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D8804	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D8820	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D8821	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
J8806	095G 90 23	JUMPER WIRE	
J8805	095G 90 23	JUMPER WIRE	
J8803	095G 90 23	JUMPER WIRE	
J8804	095G 90 23	JUMPER WIRE	
J8801	095G 90 23	JUMPER WIRE	
J8802	095G 90 23	JUMPER WIRE	
J8808	095G 90 23	JUMPER WIRE	
J8809	095G 90 23	JUMPER WIRE	

J8810	095G 90 23	JUMPER WIRE	
J8811	095G 90 23	JUMPER WIRE	
E715	715G3690P01000003M	INVERTER BOARD PCB	
E715	715G3690P01000003S	INVERTER BOARD PCB	2nd source
	KEPFASQ2C	KEY BOARD	
CN01	033G3802 4H	WAFER 4P RIGHT ANGLE	
	709T4151 QM002	COMSUPTIVE ASS'Y	
	Q55G 100620500	TIN STICK(SN-0.5AG)	
R09	061G06031000FF	RST CHIPR 100 OHM +-1% 1/10W FENGHUA	
R08	061G06031000FF	RST CHIPR 100 OHM +-1% 1/10W FENGHUA	
R09	061G06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R08	061G06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R05	061G06032002FF	RST CHIPR 20KOHM +-1% 1/10W FENGHUA	
R01	061G06032002FF	RST CHIPR 20KOHM +-1% 1/10W FENGHUA	
R05	061G06032002FY	RST CHIPR 20KOHM +-1% 1/10W YAGEO	
R01	061G06032002FY	RST CHIPR 20KOHM +-1% 1/10W YAGEO	
R03	061G06033301FF	RST CHIPR 3.3KOHM +-1% 1/10W FENGHUA	
R07	061G06033301FF	RST CHIPR 3.3KOHM +-1% 1/10W FENGHUA	
R07	061G06033301FY	RST CHIP 3K3 1/10W 1%	
R03	061G06033301FY	RST CHIP 3K3 1/10W 1%	
R06	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
R02	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
R02	061G06036801FY	RST CHIPR 6.8KOHM +-1% 1/10W YAGEO	
R06	061G06036801FY	RST CHIPR 6.8KOHM +-1% 1/10W YAGEO	
	709T4151 QS002	COMSUPTIVE ASS'Y	
SW07	077G 603 AI HJ	TACT SWITCH 2PIN	
SW03	077G 603 AI HJ	TACT SWITCH 2PIN	
SW01	077G 603 AI HJ	TACT SWITCH 2PIN	
SW02	077G 603 AI HJ	TACT SWITCH 2PIN	
SW05	077G 603 AI HJ	TACT SWITCH 2PIN	
SW04	077G 603 AI HJ	TACT SWITCH 2PIN	
SW06	077G 603 AI HJ	TACT SWITCH 2PIN	
E715	715G4151K01000001S	KEY BOARD PCB	2nd source
	P15T0460501CKD	BRACKET_SIDE_AV_BRZ	
	P15T0501201CKD	BRACKET_POWER	
	P15T0536101CKD	BRACKET_TOP	
	P15T0537101CKD	BRACKET_LEFT_TOP	
	P15T0538101CKD	BRACKET_VESA	
	P15T0539101CKD	BRACKET_PCB_SUPPORT	
	P15T0540101CKD	BRACKET_BASE	
	P15T0541101CKD	BRACKET_HOLD_TOP	
	P34T0307ADT 1L0100	BASE COVER	
	P34T0364ADT 1L0100	BASE_SWIVEL	
	PWTVL88MQE3	POWER BOARD	
	040G 45762412B	CBPC LABEL	
CN802	033G3802 5B Y W	WEAFER	
CN801	033G8029 3A	3PIN (2PIN NC)	
CN902	033T327812D	WAFER 12P PLUG	
CN802	033T3802 5B Y	CONNECTOR	
	051T 6 4503	GLUE_RTV	
IC950	056G 139 7	IC EL817MC M-TYPE	
IC951	056G 139 7	IC EL817MC M-TYPE	
IC970	056G 139 7	IC EL817MC M-TYPE	
IC902	056T 379121	IC STR- A6069H DIP-8	

Q921	057G 761 7	KTD1691P	
C901	063G107K474 US	0.47UF +-10%	
C904	063G107K474 US	0.47UF +-10%	
C801	063G213J105GFA	MPF CAP	
C804	063G213J105GFA	MPF CAP	
C910	063G213J105GFA	MPF CAP	
C925	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5U	
C911	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5U	
C823	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5U	
C906	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C905	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C924	065G306M1022B2	1000PF 400VAC/250VAC Y1	
C903	065G306M6812B3	Y1 CAP 680PF +-20% 250VAC CD SERIES	
C902	065G306M6812B3	Y1 CAP 680PF +-20% 250VAC CD SERIES	
C920	067G 42Z12115K	EC 120UF M 450V 18*45MM	
C953	067G204V331 3K	CS CAP 330UF 16V 10*12 MM	
C954	067G215A4713KV	EC 470UF 16V M 10*12MM	
C975	067G215A4716KV	EC 470UF 35V M 10*16MM	
C973	067G215A4716KV	EC 470UF 35V M 10*16MM	
C945	067G215A4716KV	EC 470UF 35V M 10*16MM	
C805	067G215P4714KV	LOW ESR EC 470UF M 25V 10*16MM	
C946	067G215P4714KV	LOW ESR EC 470UF M 25V 10*16MM	
L902	073G 174106 DN	LINE FILTER 13MH LK.TF032.A20	
L901	073G 174106 DN	LINE FILTER 13MH LK.TF032.A20	
L906	073G 174143 N	PFC CHOKE 310UH YUVA-1123	
L801	073G 253 91 L	CHOKE BY LI TA	
L950	073G 253 91 L	CHOKE BY LI TA	
L951	073G 253 91 L	CHOKE BY LI TA	
L980	073G 253 91 L	CHOKE BY LI TA	
T801	080GL26T 15 N	X'FMR 840UH MIN YUVA-1094	
T802	080GL32P 4 L	X'FMR 4.4MH 25% CC-011225-10	
T902	080GL37T 19 N	X'FMR 550UH 5% YUVA-1089	
T901	080GL52T 5 N2	X'FMR 1.0MH 10%	
F901	084G 41 11 L	FUSE 5A 250V	
CN901	087G 501 48 S	AC SOCKET 3PIN + 3 HOLE	
CN901	087G 501 48 DL	AC SOCKET 3PIN + 3 HOLE	
D904	093G 52 70 1	1N5408-E(SHORT PIN) 3A/1000V DO-201AD	
D904	093G 5255L52T	DIDOE 1N5408-E3/73 3A/1000V DO-201AD	
	0Q1G 340 8106 CR3	SCREW	
	705TQ857022	Q901 ASS'Y	
Q901	057G 667 24	STP20NM60FP TO-220FP ST	
Q901	057G 667939	MOSFET STF20NM60D TO220-FP	
	0M1G1730 8120	SCREW	
HS2	Q90T0095 2	HEAT SINK	
	705TQ857023	Q903 ASS'Y	
Q903	057G 667 21	STP10NK70ZFP	
	0M1G1730 8120	SCREW	
HS3	Q90T6084 6	HEAT SINK	
	705TQ861011	NR901 ASS'Y	
NR901	061T 58030 WL	RST NTCR 3 OHM +-20% 5A THINKING	
	Q09T 203 8	PIN FOR NR901	
	705TQ893054	BD901 ASS'Y	
BD901	093G 50460 18	D10XB60	
BD901	093G 50460 49	BRIDGE KBJ1008G 10A/800V KBJ	

	0M1G1730 10120	SCREW 42A9930016	
HS1	P90T0027301	HEAT SINK	
	705TQ893055	D950 ASS'Y	
HS5	090G6084 1	HEAT SINK	
D950	093G 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
D950	093G1506 2	FMW-2156	
	0M1G1730 8120	SCREW	
	705TQ893056	D902 ASS'Y	
D902	093G 52 56	DIODE FMN-1106S 10A/600V TO-220	
	0M1G1730 8120	SCREW	
HS6	Q90G6084 3	HEAT SINK	
	705TQ893057	D972 ASS'Y	
HS7	090G6064 1	HEAT SINK	
D970	093G 60282	DIODE SP20100R TO-220FP	
D972	093G 60282	DIODE SP20100R TO-220FP	
D972	093G 60300	DIODE SBR20010JST 20A/100V TO-220ML(LS)	
D970	093G 60300	DIODE SBR20010JST 20A/100V TO-220ML(LS)	
	0M1G1730 8120	SCREW	
	705TQ957037	Q801/Q802 ASS'Y	
Q801	057G 611903	MOSFET AOTF12N50 TO-220F	
Q802	057G 611903	MOSFET AOTF12N50 TO-220F	
	0M1G1730 10120	SCREW 42A9930016	
HS8	Q90T0087 2	HEAT SINK	
	709T3332 QM001	COMSUPTIVE ASS'Y	
	055G 23524	WELDING FLUX WITHOUT PB	
	Q51G 6 4509	GLUE_RTV	
	Q55G 100625	TIN STICK_LOW ARGENTUM	
IC901	056G 368 12	IC FAN7529MX SOP-8	
IC801	056T 379122	IC OZ9976GN-C-0-TR SOP-16	
IC903	056T 379133	IC LD7523A GS SOP-8	
Q804	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q805	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q950	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q970	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q803	057G 759 2	RK7002FD5T116 SOT-23 BY ROHM	
Q924	057G 760 5	DTC144WKA BY ROHM SMT	
R913	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/10W FENGHUA	
R913	061G0805100 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R818	061G08051001FT	RST CHIP 1K 1/8W 1%	
R818	061G08051001FY	RST CHIPR 1KOHM +-1% 1/8W YAGEO	
R928	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R820	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R810	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R959	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R959	061G08051003FT	RST CHIP 100K 1/8W 1%	
R810	061G08051003FY	RST CHIPR 100KOHM +-1% 1/8W YAGEO	
R820	061G08051003FY	RST CHIPR 100KOHM +-1% 1/8W YAGEO	
R928	061G08051003FY	RST CHIPR 100KOHM +-1% 1/8W YAGEO	
R829	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R831	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R808	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R819	061G08051004FF	RST CHIPR 1 MOHM +-1% 1/8W FENGHUA	
R819	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R808	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	

R831	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R829	061G08051004FT	RST CHIP R 1 MOHM +-1% 1/8W	
R802	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R803	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R981	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R802	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R803	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R981	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R955	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R956	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R982	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R983	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R989	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R989	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R983	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R982	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R956	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R955	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R804	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R914	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R918	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R944	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R947	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R963	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R963	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R947	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R944	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R918	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R914	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R804	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R810	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R820	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R928	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R808	061G0805105 JW	RST CHIPR 1MOHM +-5% 1/8W WAL SIN	
R819	061G0805105 JW	RST CHIPR 1MOHM +-5% 1/8W WAL SIN	
R933	061G0805109 JF	RST CHIPR 1 OHM +- 5% 1/8W FENGHUA	
R932	061G0805109 JF	RST CHIPR 1 OHM +- 5% 1/8W FENGHUA	
R932	061G0805109 JW	RST CHIPR 1OHM +-5% 1/8W WAL SIN	
R933	061G0805109 JW	RST CHIPR 1OHM +-5% 1/8W WAL SIN	
R923	061G08051302FF	RST CHIPR 13KOHM +-1% 1/8W FENGHUA	
R923	061G08051302FT	RST CHIP 13K 1/8W 1%	
R811	061G08051504FF	RST CHIPR 1M5 +-1% 1/8W FENGHUA	
R811	061G08051504FT	RST CHIPR 1M5 +-1% 1/8W TZAI YUAN	
R812	061G0805154 JF	RST CHIPR 150KOHM +-5% 1/8W FENGHUA	
R812	061G0805154 JW	RST CHIPR 150K +-5% 1/8W WAL SIN	
R811	061G0805155 JW	RST CHIPR 1M5 +-5% 1/8W WAL SIN	
R979	061G08052001FF	RST CHIPR 2KOHM +-1% 1/8W FENGHUA	
R979	061G08052001FT	RST CHIP 2K 1/8W 1%	
R964	061G0805202 JF	RST CHIPR 2KOHM +-5% 1/8W FENGHUA	
R964	061G0805202 JW	RST CHIPR 2K +-5% 1/8W WAL SIN	
R943	061G0805220 JF	RST CHIPR 22 OHM +-5% 1/8W FENGHUA	
R943	061G0805220 JT	RST CHIPR 22OHM +-5% 1/8W TZAI YUAN	
R817	061G0805222 JF	BST CHIPR 2.2KOHM +-5% 1/8W FENGHUA	
R817	061G0805222 JW	RST CHIPR 2K2 +-5% 1/8W WAL SIN	

R978	061G08052402FF	RST CHIPR 24KOHM +-1% 1/8W FENGHUA	
R978	061G08052402FT	RST CHIP 24K 1/8W 1%	
R807	061G0805244 JF	RST CHIPR 240KOHM +-5% 1/8W FENGHUA	
R807	061G0805244 JW	RST CHIPR 240K +-5% 1/8W WALSIN	
R987	061G08052702FF	RST CHIPR 27KOHM +-1% 1/8W FENGHUA	
R987	061G08052702FT	RST CHIP 27K 1/8W 1%	
R823	061G08053300FF	RST CHIPR 330 OHM +-1% 1/8W FENGHUA	
R826	061G08053300FF	RST CHIPR 330 OHM +-1% 1/8W FENGHUA	
R822	061G08053300FF	RST CHIPR 330 OHM +-1% 1/8W FENGHUA	
R825	061G08053300FF	RST CHIPR 330 OHM +-1% 1/8W FENGHUA	
R825	061G08053300FW	RST CHIPR 330OHM +-1% 1/8W WALSIN	
R822	061G08053300FW	RST CHIPR 330OHM +-1% 1/8W WALSIN	
R826	061G08053300FW	RST CHIPR 330OHM +-1% 1/8W WALSIN	
R823	061G08053300FW	RST CHIPR 330OHM +-1% 1/8W WALSIN	
R822	061G08053300FY	RST CHIPR 330 OHM +-1% 1/8W YAGEO	
R823	061G08053300FY	RST CHIPR 330 OHM +-1% 1/8W YAGEO	
R806	061G0805335 JF	RST CHIPR 3.3 MOHM +-5% 1/8W	
R806	061G0805335 JT	RST CHIPR 3M3 +-5% 1/8W TZAI YUAN	
R985	061G0805362 JF	RST CHIPR 3K6 +-5% 1/8W FENGHUA	
R985	061G0805362 JW	RST CHIPR 3K6 +-5% 1/8W WALSIN	
R975	061G0805392 JF	RST CHIPR 3.9KOHM +-5% 1/8W FENGHUA	
R975	061G0805392 JY	RST CHIPR 3K9 +-5% 1/8W YAGEO	
R915	061G08054700FF	RST CHIPR 470 OHM +-1% 1/8W FENGHUA	
R915	061G08054700FT	RST CHIP 470R 1/8W 1%	
R937	061G0805472 JF	RST CHIPR 4.7KOHM +-5% 1/8W FENGHUA	
R938	061G0805472 JF	RST CHIPR 4.7KOHM +-5% 1/8W FENGHUA	
R937	061G0805472 JY	RST CHIPR 4.7K OHM 5% 1/8W YAGEO	
R938	061G0805472 JY	RST CHIPR 4.7K OHM 5% 1/8W YAGEO	
R816	061G0805510 JF	RST CHIPR 51OHM +-5% 1/8W FENGHUA	
R816	061G0805510 JW	RST CHIPR 51OHM +-5% 1/8W WALSIN	
R824	061G08055100FF	RST CHIPR 510 OHM +-1% 1/8W FENGHUA	
R827	061G08055100FF	RST CHIPR 510 OHM +-1% 1/8W FENGHUA	
R824	061G08055100FT	RST CHIP R 510 OHM +-1% 1/8W	
R827	061G08055100FT	RST CHIP R 510 OHM +-1% 1/8W	
R814	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R815	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R814	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R815	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R917	061G0805563 JF	RST CHIPR 56KOHM +-5% 1/8W FENGHUA	
R917	061G0805563 JY	RST CHIPR 56K +-5% 1/8W YAGEO	
R906	061G0805564 JF	RST CHIPR 560KOHM +-5% 1/8W FENGHUA	
R906	061G0805564 JT	RST CHIPR 560K +-5% 1/8W TZAI YUAN	
R805	061G08056202FF	RST CHIPR 62KOHM +-1% 1/8W FENGHUA	
R805	061G08056202FT	RST CHIP 62K 1/8W 1%	
R828	061G0805683 JF	RST CHIPR 68KOHM +-5% 1/8W FENGHUA	
R830	061G0805683 JF	RST CHIPR 68KOHM +-5% 1/8W FENGHUA	
R830	061G0805683 JT	RST CHIPR 68K +-5% 1/8W TZAI YUAN	
R828	061G0805683 JT	RST CHIPR 68K +-5% 1/8W TZAI YUAN	
R957	061G08058201FF	RST CHIPR 8.2KOHM +-1% 1/8W FENGHUA	
R958	061G08058201FF	RST CHIPR 8.2KOHM +-1% 1/8W FENGHUA	
R957	061G08058201FT	RST CHIP 8K2 1/8W 1%	
R958	061G08058201FT	RST CHIP 8K2 1/8W 1%	
R821	061G08059101FF	RST CHIPR 9.1KOHM +-1% 1/8W FENGHUA	
R821	061G08059101FT	RST CHIP 9K1 1/8W 1%	

R821	061G08059101FY	RST CHIPR 9.1KOHM +-1% 1/8W YAGEO	
JR906	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR905	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR904	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR903	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR902	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR901	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JP907	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR801	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR802	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR803	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR804	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR805	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR906	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR905	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR904	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR903	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR902	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR901	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR805	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR804	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR803	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR802	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR801	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JP907	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
R924	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R925	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R926	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R924	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R925	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R926	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R951	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R970	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R973	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R977	061G1206101 JF	RST CHIPR 100 OHM +-5% 1/4W FENGHUA	
R951	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R970	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R973	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R977	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R945	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R935	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R945	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R935	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R976	061G1206103 JF	RST CHIPR 10KOHM +-5% 1/4W FENGHUA	
R941	061G1206103 JF	RST CHIPR 10KOHM +-5% 1/4W FENGHUA	
R939	061G1206103 JF	RST CHIPR 10KOHM +-5% 1/4W FENGHUA	
R929	061G1206103 JF	RST CHIPR 10KOHM +-5% 1/4W FENGHUA	
R833	061G1206103 JF	RST CHIPR 10KOHM +-5% 1/4W FENGHUA	
R832	061G1206103 JF	RST CHIPR 10KOHM +-5% 1/4W FENGHUA	
R976	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R941	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R939	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R929	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R833	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	

R832	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R999	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R998	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R997	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R996	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R994	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R993	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R992	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R991	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R994	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R996	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R999	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R998	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R997	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R991	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R992	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R993	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R904	061G1206155 JF	RST CHIPR 1.5MOHM +-5% 1/4W FENGHUA	
R905	061G1206155 JF	RST CHIPR 1.5MOHM +-5% 1/4W FENGHUA	
R909	061G1206155 JF	RST CHIPR 1.5MOHM +-5% 1/4W FENGHUA	
R904	061G1206155 JT	RST CHIPR 1.5MOHM +-5% 1/4W TZAI YUAN	
R905	061G1206155 JT	RST CHIPR 1.5MOHM +-5% 1/4W TZAI YUAN	
R909	061G1206155 JT	RST CHIPR 1.5MOHM +-5% 1/4W TZAI YUAN	
R988	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R986	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R972	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R971	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R967	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R965	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R986	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WALSIN	
R988	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WALSIN	
R965	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WALSIN	
R967	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WALSIN	
R971	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WALSIN	
R972	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WALSIN	
R911	061G1206203 JT	RST CHIPR 20KOHM +-5% 1/4W TZAI YUAN	
R911	061G1206203 JW	RST CHIPR 20KOHM +-5% 1/4W WALSIN	
R907	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA	
R908	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA	
R931	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA	
R931	061G1206229 JY	RST CHIPR 2.2R 5% 1/4W YAGEO	
R908	061G1206229 JY	RST CHIPR 2.2R 5% 1/4W YAGEO	
R907	061G1206229 JY	RST CHIPR 2.2R 5% 1/4W YAGEO	
R910	061G1206304 JF	RST CHIPR 300KOHM +-5% 1/4W FENGHUA	
R910	061G1206304 JT	RST CHIPR 300 KOHM 1/4W TZAI YUAN	
R901	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R902	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R903	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R901	061G1206334 JT	RST CHIPR 330 KOHM 1/4W TZAI YUAN	
R902	061G1206334 JT	RST CHIPR 330 KOHM 1/4W TZAI YUAN	
R903	061G1206334 JT	RST CHIPR 330 KOHM 1/4W TZAI YUAN	
R952	061G1206470 JF	RST CHIPR 47 OHM +-5% 1/4W FENGHUA	
R950	061G1206470 JF	RST CHIPR 47 OHM +-5% 1/4W FENGHUA	
R952	061G1206470 JT	RST CHIPR 47 OHM +-5% 1/4W TZAI YUAN	

R950	061G1206470 JT	RST CHIPR 47 OHM +-5% 1/4W TZAI YUAN	
R962	061G1206475 JF	RST CHIPR 4.7 MOHM +-5% 1/4W FENGHUA	
R962	061G1206475 JT	RST CHIPR 4.7 MOHM +-5% 1/4W TZAI YUAN	
R942	061G1206513 JT	RST CHIP R 51 KOHM +-5% 1/4W	
R942	061G1206513 JW	RST CHIPR 51 KOHM +-5% 1/4W WAL SIN	
R920	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R921	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R922	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R922	061G12066803FT	RST CHIP 680K 1/4W 1%	
R921	061G12066803FT	RST CHIP 680K 1/4W 1%	
R920	061G12066803FT	RST CHIP 680K 1/4W 1%	
R966	061G1206682 JF	RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R968	061G1206682 JF	RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R969	061G1206682 JF	RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R984	061G1206682 JF	RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R984	061G1206682 JT	RST CHIPR 6.8 KOHM 1/4W TZAI YUAN	
R969	061G1206682 JT	RST CHIPR 6.8 KOHM 1/4W TZAI YUAN	
R968	061G1206682 JT	RST CHIPR 6.8 KOHM 1/4W TZAI YUAN	
R966	061G1206682 JT	RST CHIPR 6.8 KOHM 1/4W TZAI YUAN	
C912	065G080510132K Y	CAP CHIP 0805 100PF K 50V X7R	
C808	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C909	065G080510332K Y	CAP CHIP 0805 10N 50V X7R +/-10%	
C939	065G080510332K Y	CAP CHIP 0805 10N 50V X7R +/-10%	
C949	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C948	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C947	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C942	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C934	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C923	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C921	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C913	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C908	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C907	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C806	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C956	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C978	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C809	065G080510522K Y	CAP CHIP 0805 1UF K 25V X7R	
C811	065G080510522K Y	CAP CHIP 0805 1UF K 25V X7R	
C922	065G080510537Z 3	CAP CHIP 0805 1U 50V Y5V -20%+80%	
C816	065G080515231J Y	CAP CHIP 0805 1N5 50V NPO +/-5%	
C919	065G080522131G F	CAP 0805 220PF 2% 50V NPO	
C944	065G080522132K Y	CAP CHIP 0805 220P 50V X7R +/-10%	
C815	065G080522132K Y	CAP CHIP 0805 220P 50V X7R +/-10%	
C812	065G080522322K Y	CAP CHIP 0805 22NF K 25V X7R	
C955	065G080522432K F	CAP CHIP 0805 0.22UF K 50V X7R	
C814	065G080522522K Y	CAP CHIP 0805 2.2UF K 25V X7R	
C802	065G080522522K Y	CAP CHIP 0805 2.2UF K 25V X7R	
C807	065G080533131G A	CAP CHIP 0805 330PF J 50V NPO	
C976	065G080533432K F	CAP CHIP 0805 0.33UF K 50V X7R	
C915	065G080547132K F	CAP CHIP 0805 470PF K 50V X7R	
C810	065G080547232K Y	CAP CHIP 0805 4700PF K 50V X7R	
C813	065G080547232K Y	CAP CHIP 0805 4700PF K 50V X7R	
C917	065G080547332K F	CAP CHIP 0805 47NF K 50V X7R	
C943	065G080547332K F	CAP CHIP 0805 47NF K 50V X7R	

C818	065G080547332K	F	CAP CHIP 0805 47NF K 50V X7R	
C817	065G080547332K	F	CAP CHIP 0805 47NF K 50V X7R	
C918	065G080547422K	T	CAP CHIP 0805 0.47UF K 25V X7R	
C820	065G080568131J	F	CAP CHIP 0805 680PF J 50V NPO	
C821	065G080568131J	F	CAP CHIP 0805 680PF J 50V NPO	
C957	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
C970	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
C952	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
C951	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
C950	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
C972	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
D805	093G 64 42 PP		BAV70 SOT-23	
D801	093T 60S 5 T		SCS0520P SOD-123	
D802	093T 60S 5 T		SCS0520P SOD-123	
D803	093T 60S 5 T		SCS0520P SOD-123	
D804	093T 60S 5 T		SCS0520P SOD-123	
	709T3332 QS001		COMSUPTIVE ASS'Y	
CN901	006G 31501		EYELET	
T802	006G 31502		1.5MM RIVET	
IC952	056G 158 10 T		IC AS431AZTR-E1 TO-92	
R974	061G 20010252T		RST MFR 1K OHM +-1% 1/4W	
R801	061G 30310852T	GP	FUSE RESISTOR	
R948	061G 30310852T	GP	FUSE RESISTOR	
R960	061G 60210252T		CFR 1K OHM +-5% 1/6W	
R961	061G 60210352T		CFR 10KOHM +-5% 1/6W	
R916	061G152M12852T		RST MOFR 0.12 OHM +-5% 2WS	
R946	061G152M36852T		RST MOF 0R36 5% 2W	
R954	061T 20010152T		100 OHM 1% 1/4W	
C822	065G 1K102 2T6213		CAP CER 1000PF K 1KV Y5P	
C803	065G 1K102 2T6213		CAP CER 1000PF K 1KV Y5P	
C932	065G 2K102 2T6921		CAP CER 1000PF 2KV K Y5P	
C935	065G 2K102 2T6921		CAP CER 1000PF 2KV K Y5P	
C933	067G215Y1007KT		KY50VB10M-TP5 5*11.5	
C937	067G215Y1007KT		KY50VB10M-TP5 5*11.5	
C941	067G215Y1007KT		KY50VB10M-TP5 5*11.5	
C931	067G215Y1017NT		EC 100UF 50V 8*11.5MM	
C914	067G215Y4707KT		47UF 50V	
FB901	071T 55 26 H		FERRITE BEAD 3.5*6.0*0.8	
ZD952	093G 3916652T		MTZJ15B (13.89-14.62)	
ZD930	093G 3916752T		MTZJ T-72 16B	
ZD970	093G 3917152T		TZJ T-72 30B	
D901	093G 52 1552T		DIODE 1N4007-E3/73 1A/1000V DO-41	
D931	093G 5250S52T		DIODE AU02Z-V1 SANKEN	
D903	093G 64 1152T		1N4148	
D905	093G 64 1152T		1N4148	
D906	093G 64 1152T		1N4148	
D971	093G 64 1152T		1N4148	
D807	093G 64 1152T		1N4148	
D806	093G 64 1152T		1N4148	
D951	093G 64 1152T		1N4148	
ZD970	093G 39G 9		DIODE MTZJ30B DO-34	
D930	093T1080 252T		DIODE SARSO1-V1 SANKEN	
D940	093T1080 252T		DIODE SARSO1-V1 SANKEN	
J911	095G 90 23		JUMPER WIRE	

J912	095G 90 23	JUMPER WIRE	
J913	095G 90 23	JUMPER WIRE	
J916	095G 90 23	JUMPER WIRE	
J917	095G 90 23	JUMPER WIRE	
J918	095G 90 23	JUMPER WIRE	
J919	095G 90 23	JUMPER WIRE	
J920	095G 90 23	JUMPER WIRE	
D932	095G 90 23	JUMPER WIRE	
J801	095G 90 23	JUMPER WIRE	
J802	095G 90 23	JUMPER WIRE	
J901	095G 90 23	JUMPER WIRE	
J808	095G 90 23	JUMPER WIRE	
J806	095G 90 23	JUMPER WIRE	
J803	095G 90 23	JUMPER WIRE	
J910	095G 90 23	JUMPER WIRE	
J914	095G 90 23	JUMPER WIRE	
J804	095G 90 23	JUMPER WIRE	
J805	095G 90 23	JUMPER WIRE	
J807	095G 90 23	JUMPER WIRE	
J809	095G 90 23	JUMPER WIRE	
J902	095G 90 23	JUMPER WIRE	
J903	095G 90 23	JUMPER WIRE	
J904	095G 90 23	JUMPER WIRE	
J905	095G 90 23	JUMPER WIRE	
J906	095G 90 23	JUMPER WIRE	
J907	095G 90 23	JUMPER WIRE	
J908	095G 90 23	JUMPER WIRE	
J921	095G 90 23	JUMPER WIRE	
J922	095G 90 23	JUMPER WIRE	
J923	095G 90 23	JUMPER WIRE	
J925	095G 90 23	JUMPER WIRE	
J926	095G 90 23	JUMPER WIRE	
J927	095G 90 23	JUMPER WIRE	
	715G3332 1	POWER BOARD PCB	
D807	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D806	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D903	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D905	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D906	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D951	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D971	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
IC971	056G 158 10 T	IC AS431AZTR-E1 TO-92	
FB902	071G 55 23	BEAD	
Q925	057G 420 3 T	TRA KTA1273-Y- AT/ P_TO-92L KEC	
J810	095G 90 23	JUMPER WIRE	
FB903	071G 55 23	BEAD	
FB901	071G 55 26 S	FERRITE CORE	
	709T3332 QA001	COMSUPTIVE ASS'Y	
	Q01G6080 1	SCREW	
	Q11G5052 1	STRING	
	Q11T5043 5	PCB SUPPORT	
	Q12G6300 26 7	WASHER	
	Q12G7045 1	RUBBER	
	Q15T0760201CKD	BKT-TOP-2K10	

	Q36T 600 30 18	NONWOVEN FABRIC	
	Q36T 600 30 18	NONWOVEN FABRIC	
	Q40G 32061588A	RATING LABEL	
	Q40G2010 32004	SIDE LABEL	
	Q44GJ03761523A	32" AOC LCD TV CARTON	
	Q44GJ067101EPE	EPE FOR AOC	
	Q44GJ067201EPE	EPE FOR AOC	
	Q45G 77 5	PE PACKING (Y1900241)	
	Q45G 99609102 BC	PE BAG	
	Q45G 99626 36 BC	PE BAG	
	Q50G 4 10	TIE (Y1900221)	
	Q50T 500523	CABLE TIE	
	Q51G6001 3	DESICCANT	
	Q52G 1150523	TAPE_INSULATING	
	Q52G 1185 92	HCL TAPE	
	Q52G6025 15263	MYLAR	
	089G 17356C553	AUDIO CABLE 1800MM	
	0Q1G 940 16 47 CR3	SCREW	
	Q41T7800615A92	WARRANTY CARD	
	Q45G 76 28NV2 R	PE BAG FOR BASE SCREW SZ02742	
	Q45G2010M0201A	PE BAG	
	IRPFASQ2C	IR BOARD	
U02	056G 627911	IR 38KHZ KSM-603TM2M	
U02	056T 627 33 1	IR 37.9KHZ KSM-603TM2E	
U01	056T 627 41	LS JSA-3111B	
D01	081G 12 10 EL	LED BLUE/RED 209-3SURUBW/C470/S530-A3	
	709T3394 QM002	COMSUPTIVE ASS'Y	
	P11G0021101	IR-HOLDER	
	P11G0022101	IR-HOLDER	
	P11G0027101	HOLDER	
CN01	033G8032 6F X	WAFER 6P 1.25MM	
CN01	033G8032 6F HR	CONNECTOR	
R002	061G0603223	RST CHIPR 22 KOHM +-5% 1/10W	
R001	061G0603223	RST CHIPR 22 KOHM +-5% 1/10W	
R003	061G0805472	RST CHIPR 4.7 KOHM +-5% 1/8W	
C02	065G0603104 12	CER2 0603 X7R 16V 100N P	
C01	065G0805335A5K T	CAP CHIP 0805 3.3UF K 10V X5R	
	709T3394 QS002	COMSUPTIVE ASS'Y	
	052G6026 2	MESH PRINTTING PAPER	
	715G3394 2	IR BOARD PCB	
	Q45G 99606 25 ESD	INSULATING PE BAG	
	Q45G 99606 25 ESD	INSULATING PE BAG	

LC32W053 E32AATNSW3B26N

Location	Part No.	Description	Remark
	001G6021 1	SCREW	
	040G 581689 4A	BARCODE LABEL FOR 1	
	045G 77500	BARCODE RIBBON	
	045G 77501	BARCODE RIBBON	
	052G 1186	SMALL TAPE	
	052G 2191 A	PAPER TAPE	
SP01	078G0150 9A KA	SPK 6OHM 15W 125X32MM KUAIDA	2nd source
SP01	078G0150 9A YA	SPK 6OHM 15W 125X32MM SUNLINK	
	089G 17356C553	AUDIO CABLE 1800MM	
	089G 725CAA DB	D-SUB CABLE	
	089G424A15N CX	AC POWER CORD 1500MM BRAZIL REG.	
ECN4002	095G176W30N514	FFC CABLE 30PIN 435MM P1.0MM	
ECN700	095G801313D674	HARNESS 13P(2506)-12P(2506) 200MM	
ECN700	095G801313X674	HARNESS 13P(2506)-12P(2506) 200MM	2nd source
ECN600	095G8014 4W613	HARNESS 4P-B&R+B&W 500/380MM	
ECN600	095G8014 4X613	HARNESS 4P-B&R+B&W 550/290MM	2nd source
ECN200	095G801410D659	HARNESS 10P-5P+4P 750/850	2nd source
ECN200	095G801410X659	HARNESS 10P-5P+4P 750/850	
ECN704	095G801840D521	LVDS CABLE 40P-36P(1.25MM) 180MM	2nd source
ECN704	095G801840L521	LVDS CABLE 40P-36P(1.25MM) 180MM	
	095G8021 3D904	HARNESS 3P-3P+2P 290MM FQE92155I	
	0M1G 130 6120	SCREW M3X6	
	0M1G 930 8 47 CR3	SCREW	
	0M1G 940 6120	SCREW (M4X6)	
	0M1G 940 10 47 CR3	SCREW	
	0M1G1730 6120	SCREW,42-D020523	
	0M1G1730 8120	SCREW	
	0M1G1740 14 47 CR3	SCREW	
	0Q1G 130 6 47 CR3	SCREW	
	0Q1G 930 8 47 CR3	SCREW	
	0Q1G 940 14 47 CR3	SCREW	
	0Q1G 940 16 47 CR3	SCREW	
	0Q1G1030 6120	SCREW	
E750	750TVU31534L02N000	PANEL T315XW03 V4L0 SZ AUO	2nd source
	756TQACB TS016 00	MAIN BOARD-CBPFAT9SQ2C	
U402	056G1133923	IC MX25L4005AM2C-12G SOP-8	
U403	056T1133111	IC NAND512W3A2DN6E TSOP-48	
SMTF-U403	100TATAK002ST1	MCU ASS'Y-056T1133111	
SMTF-U402	100TATMK001S11	MCU ASS'Y-056G1133923	
	A15T0282201CKD	BKT-VESA-BTM	
	A33T0788ADTB1L0100	KEY COVER	
	A33T0789AFL 1L0100	KEY BUTTON	
	A34T1580ADT AA0130	REAR COVER	
	A34T1581ADT 1L0100	STAND HINGE -A2_32	
	A34T1582AFL 1L0100	STAND-A1_32	
	Q11G5052 1	STRING	
	Q11G5061 1	PCB SUPPORT	
	Q12G6082 1	FOOT PAD	
	Q12G6300 25 1	RUBBER FOOT	
	Q15T0704101CKD	BASE BKT	
	Q15T0715301CKD	PANEL_SUPPORT_BKT_TOP	

	Q15T0716301CKD	PANEL_SUPPORT_BKT_TOP	
	Q15T0717201CKD	BASE_SUPPORT_BKT	
	Q15T0720101CKD	VESA_BKT	
	Q15T0925101CKD	PCB_BKT_TOP	
	Q15T0926101CKD	PCB_BKT_BTM	
	Q15T0927101CKD	SIDE_BKT	
	Q33T0379 ED 1C0100	LENS_POWER_A2	
	Q33T0380 1 1C0100	POWER LENS	
	Q34T7081AFLF2L0100	BEZEL_TV32W-10A-CITA	
	Q34T7082AFL 1L0100	BASE	
	Q35T0071BBV 1L0100	DECO_BEZEL_TV 32"	
	Q36T 600 35 2 GP	NONWOVEN FABRIC	
	Q36T 600 37 18 GP	NONWOVEN FABRIC	
	Q37T0177012ADT CKD	HINGE 32	
	Q40G 32061590A	RATING LABEL	
	Q40G2010 32019	LABEL SIDE IO	
	Q40G2010 32115	BACK IO LABEL	
	Q41T7800615A92	WARRANTY CARD	
	Q44GJ061615 2A	CARTON	
	Q44GJ069101EPE	EPE	
	Q44GJ069201EPE	EPE	
	Q44T3231 21 27	EVA WASHER	
	Q44T3231 21 28	EVA WASHER	
	Q45G 76 28NV2 R	PE BAG FOR BASE SCREW SZ02742	
	Q45G 77 5	PE PACKING (Y1900241)	
	Q45G 99609102 BC	PE BAG	
	Q45G 99626 36 BC	PE BAG	
	Q45G2010M0201A	PE BAG	
	Q50G 4 10	TIE (Y1900221)	
	Q50G 500523	CABLE TIE	
	Q52G 1150523	TAPE_INSULATING	
	Q52G 1185 92	HCL TAPE	
CN700	033G327812D	WAFER 12P PLUG	
CN600	033G3802 4B Y W	WAFER	
CN200	033G380210B Y W	WAFER	
C1622	067G 305471 6C	EC 470UF 35V KM 10X16MM	
C1621	067G 305471 6C	EC 470UF 35V KM 10X16MM	
C714	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C711	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C706	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C1626	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C1617	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
L607	073G 253158 H	CHOKE COIL 22UH+/-25%	
L606	073G 253158 H	CHOKE COIL 22UH+/-25%	
CN601	088G 30211K	PHONE JACK 5PIN	
CN701	088G 352 2 YG	USB CONNECTOR USB4-01	
CN701	088G 352 21CL	USB CONN TYPE A	
CN100	088G353A15FVCS	D-SUB 15PIN FEMALE VERTICAL SCREWED	
CN107	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN106	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN102	088T 78 1369C	RCA JACK 2*3 G/B/R+B/W/R	
CN104	088T 78 13932 C	RCA JACK + S JACK Y/B	
CN105	088T 7813C19C	RCA JACK 1*3 R/W/Y	
CN101	088T 30252C	PHONE JACK 3.5MM 3P V/A GREEN	

T100	094G PALISBM1M	TUNER PAL+ISDB ENG36F13KF	
	709T3787 QM003	COMSUPTIVE ASS'Y	
	055G 23524	WELDING FLUX WITHOUT PB	
	Q55G 100620500	TIN STICK(SN-0.5AG)	
C323	067G 305100 3T	10UF 16V	
C1614	067G 305100 7T	105°C 10UF +-20% 50V	
C1099	067G 3051007PT	CAP 105°C 10UF M 50V	
C1096	067G 3051007PT	CAP 105°C 10UF M 50V	
C1046	067G 3051007PT	CAP 105°C 10UF M 50V	
C1042	067G 3051007PT	CAP 105°C 10UF M 50V	
C1039	067G 3051007PT	CAP 105°C 10UF M 50V	
C740	067G 3051013CT	EC 100UF 16V KM 6.3X11MM	
C707	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C703	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C1021	067G 305221 3T	220UF/16V	
C1604	067G 305470 3T	47UF +-20% 16V	
C400	067G 305470 3T	47UF +-20% 16V	
C415	067G 305470 3T	47UF +-20% 16V	
C726	067G 305470 3T	47UF +-20% 16V	
C735	067G 305470 3T	47UF +-20% 16V	
C737	067G 305470 3T	47UF +-20% 16V	
C738	067G 305470 3T	47UF +-20% 16V	
C745	067G 305470 3T	47UF +-20% 16V	
C750	067G 305470 3T	47UF +-20% 16V	
C751	067G 305470 3T	47UF +-20% 16V	
C712	067G 3054706CT	EC CAP 47UF M 35V	
C717	067G215Y2212KT	LOW ESR EC 220UF 10V 6.3*11MM	
C746	067G215Y2212KT	LOW ESR EC 220UF 10V 6.3*11MM	
C752	067G215Y4704KT	EC CAP.105C	
CN704	033T8033 40 X	CON. V 2*20P M 1.25 SM S1312-40SVA-1R	
U704	056G 379 92	IC G5627F11U SOP-8(FD)	
U200	056G 562F03	IC HIDTV PRO-SX 27*27 BGA	
U700	056G 563 30	IC AZ1084S-3.3TREI 5A/3.3V TO-263-3	
U707	056G 563122	IC G1084-25TU3UF TO-263T	
U706	056G 563143	IC G1084T43UF TO-252	
U703	056G 563246	LDO AZ1084S2-ADJG1 TO-263-2 5A/ADJ	
U705	056G 563514	IC AZ1117H-3.3TRG1 1A/3.3V SOT223	
U105	056G 563964	IC SC4215HSTRT SO-8	
U106	056G 575515	IC TC90517FG LQFP-64	
U400	056G 615505	IC NT5TU64M16DG-BE(7-7-7) 1066 1G BGA-84	
U401	056G 615505	IC NT5TU64M16DG-BE(7-7-7) 1066 1G BGA-84	
U601	056G 616519	IC AD52582-QE24NAT E-TSSOP-24L 18W	
U107	056G 616520	IC DAC WM8524GEDT/R TSSOP-16 WOLFSON	
U505	056G 634 25	IC SII9187ACNU QFN-72	
U202	056G 643 27	IC G692L293TCUF 2.91V SOT-143	
U701	056G 659501	IC BD8012FVJ TSSOP-B8J	
U100	056G 662502	C ESD AZC199-04S SOT23-6L	
U101	056G 662502	C ESD AZC199-04S SOT23-6L	
U402	056G1133923	IC MX25L4005AM2C-12G SOP-8	
U709	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U710	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U711	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U712	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U715	056T 563146	IC G912T63U 1A/1.2V SOT-223	

U604	056T 593 17	NTM2761RB2	
U602	056T 616516	IC APA2176AQBTRL TQFN3X3-16	
U403	056T1133111	IC NAND512W3A2DN6E TSOP-48	
Q402	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q601	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q607	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q608	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q702	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q704	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q706	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q707	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q603	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q201	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q200	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q701	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
Q700	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
Q202	057G 765 1	2SC2412K	
RP102	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP101	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP100	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP104	061G 1254728JF	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W	
RP103	061G 1254728JF	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W	
R1070	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R1067	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R1064	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R400	061G04021001FY	RST CHIPR 1KOHM 1% 1/16W YAGEO	
R401	061G04021001FY	RST CHIPR 1KOHM 1% 1/16W YAGEO	
R1005	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1008	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1001	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1003	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1086	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1083	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1081	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1079	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1011	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1154	061G0402102 JF	RST CHIPR 1KOHM +-5% 1/16W FENGHUA	
R1152	061G0402102 JF	RST CHIPR 1KOHM +-5% 1/16W FENGHUA	
R1153	061G0402220 JF	RST CHIPR 22 OHM +-5% 1/16W FENGHUA	
R403	061G04027509FT	RST CHIP 75R 1/16W 1%	
R402	061G04027509FT	RST CHIP 75R 1/16W 1%	
R1094	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1099	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1604	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R206	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R231	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R232	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R260	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R262	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R263	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R272	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R273	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R268	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R265	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	

R267	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R548	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R546	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R543	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R415	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R274	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R735	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1054	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R549	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
L101	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1002	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1007	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1010	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1056	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1059	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1063	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1066	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1069	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1634	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R553	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R571	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R573	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R574	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R725	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R730	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R733	061G06031000FF	RST CHIPR 100 OHM +-1% 1/10W FENGHUA	
R255	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R254	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R238	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R237	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R229	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R209	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R1062	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R1104	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1105	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1106	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1107	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R557	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R444	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R280	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1620	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R558	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1108	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1109	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1613	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1614	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1618	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1050	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1048	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1030	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1029	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1101	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1615	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1616	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	

R207	061G0603105 JF	RST CHIPR 1M OHM +-5% 1/10W FENGHUA	
R1049	061G0603105 JF	RST CHIPR 1M OHM +-5% 1/10W FENGHUA	
R1149	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R1148	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R218	061G06031242FY	RST CHIP 12K4 1/10W 1%	
R1150	061G0603181 JF	RST CHIPR 180 OHM +-5% 1/10W FENGHUA	
R243	061G0603182 JF	RST CHIPR 1.8K OHM +-5% 1/10W FENGHUA	
R242	061G0603182 JF	RST CHIPR 1.8K OHM +-5% 1/10W FENGHUA	
R705	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R1025	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R1023	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R1605	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1617	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1611	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1610	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1040	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1039	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1606	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1024	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R1021	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R234	061G0603223 JF	RST CHIPR 22KOHM 5% 1/10W FENGHUA	
R233	061G0603223 JF	RST CHIPR 22KOHM 5% 1/10W FENGHUA	
R714	061G0603223 JY	RST CHIPR 22K OHM 1/10W YAGEO	
R727	061G06033001FF	RST CHIPR 3KOHM +-1% 1/10W FENGHUA	
R1144	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R208	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R412	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R411	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R410	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R409	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R408	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R4H6	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H4	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H2	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H1	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R270	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R257	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R1630	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R239	061G06034020FT	RST CHIP R 402OHM 1/10W +/-1%	
R1051	061G0603470 JY	RST CHIPR 47 OHM 1/10W YAGEO	
R741	061G06034709FF	RST CHIPR 47 OHM +-1% 1/10W FENGHUA	
R729	061G0603471 JF	RST CHIPR 470OHM +-5% 1/10W FENGHUA	
R1629	061G0603471 JF	RST CHIPR 470OHM +-5% 1/10W FENGHUA	
R413	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R407	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R406	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R405	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R404	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R253	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R252	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R251	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R250	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R248	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R241	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	

R236	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R226	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R547	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R610	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R703	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R704	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R706	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R718	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R720	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R721	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R722	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R736	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R541	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R417	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R414	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R224	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1041	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1042	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1046	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1047	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1053	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1155	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R200	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R203	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R223	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R220	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R219	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R215	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R212	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R211	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R205	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R204	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1631	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R544	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R545	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R550	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R551	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R555	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R556	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R1628	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R1607	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R446	061G0603512 JF	RST CHIPR 5.1K OHM +-5% 1/10W FENGHUA	
R447	061G0603512 JF	RST CHIPR 5.1K OHM +-5% 1/10W FENGHUA	
R447	061G0603512 JT	RST CHIPR 5.1KOHM +-5% 1/10W TZAI YUAN	
R1619	061G0603512 JY	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R201	061G06036041FF	RST CHIPR 6.04KOHM +-1% 1/10W FENGHUA	
R1093	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
R230	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R1009	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1012	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1065	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1068	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1072	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1080	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	

R1082	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1084	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1087	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1151	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1004	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1061	061G06038202FI	TEST ONLY RST 0603 82K 1% 1/10W TA-I	
R1092	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1091	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1088	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1085	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1074	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1073	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R728	061G06039101FF	RST CHIPR 9.1KOHM +-1% 1/10W FENGHUA	
R1623	061G0805472 JY	RST CHIPR 4.7K OHM 5% 1/8W YAGEO	
R1622	061G0805472 JY	RST CHIPR 4.7K OHM 5% 1/8W YAGEO	
FB107	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
FB105	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
FB107	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
FB105	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
C289	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C288	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C287	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C286	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C290	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C285	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C284	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C283	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C421	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C414	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C422	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C423	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C424	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C404	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C411	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C412	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C413	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C305	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C307	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C308	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C309	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C310	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C311	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C312	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C401	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C402	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C403	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C407	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C408	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C409	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C410	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C417	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C418	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C419	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	
C420	065G040210425K T	CAP CHIP 0402 0.1UF 25V X5R	

C430	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C304	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C278	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C279	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C280	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C281	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C282	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C297	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C298	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C302	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C303	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C1010	065G040222031J	Y	CAP CHIP 0402 22P 50V NPO +/-5%	
C1012	065G040222031J	Y	CAP CHIP 0402 22P 50V NPO +/-5%	
C1037	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C1623	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C730	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C1624	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C212	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C722	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C723	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C743	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C258	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C260	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C261	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C262	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C264	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C265	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C266	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C267	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C271	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C272	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C293	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C294	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C316	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C317	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C318	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C319	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C322	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C425	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C256	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C226	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C227	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C229	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C231	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C232	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C234	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C235	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C238	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C240	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C241	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C242	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C243	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C244	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C247	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	

C1640	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1642	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C277	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C301	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C522	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C525	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C527	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C529	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C530	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C701	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C729	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1628	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1063	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1062	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C321	065G060310522K	T	CAP CHIP 0603 1UF K 25V X7R	
C324	065G060310522K	T	CAP CHIP 0603 1UF K 25V X7R	
C704	065G060310522K	T	CAP CHIP 0603 1UF K 25V X7R	
C1028	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1030	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1034	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1035	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1601	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1602	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1610	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1611	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1612	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1613	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C203	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C204	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1022	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1020	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1014	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C245	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C246	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C248	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C249	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C252	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C253	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C257	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C259	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C263	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C315	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C306	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C300	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C299	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C296	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C291	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C276	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C275	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C274	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C270	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C218	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C221	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C224	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	

C225	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C228	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C230	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C236	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C237	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C239	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C1056	065G060315232K	3	CAP 0603 1.5NF 10% 50V X7R	
C1633	065G060315332K	F	CAP CHIP 0603 15NF K 50V X7R	
C1634	065G060315332K	F	CAP CHIP 0603 15NF K 50V X7R	
C1043	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1055	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1054	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1044	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C208	065G060320031J	Y	CAP CHIP 0603 20PF J 50V NPO	
C207	065G060320031J	Y	CAP CHIP 0603 20PF J 50V NPO	
C1083	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1084	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1086	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1090	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C295	065G060322332K	Y	TPV CHIP 0603 22N 50V X7R +/-10%	
C314	065G060322422K	T	CAP CHIP0603 220NF K 25V X7R	
C1641	065G060322517Z	Y	CAP CHIP 0603 2.2UF Z 16V Y5V	
C1057	065G060347031J	Y	CAP CHIP 0603 47P 50V NPO +/-5%	
C708	065G060347412K	Y	CAP CHIP 0603 0.47UF K 16V X7R	
C1625	065G080510537Z	T	CAP CHIP 0805 1UF Z 50V Y5V	
C1618	065G080510537Z	T	CAP CHIP 0805 1UF Z 50V Y5V	
C1066	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C1629	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C273	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C320	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C405	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C406	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C416	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C426	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C431	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C523	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C1064	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C233	065G080522522K	T	CAP CHIP 0805 2.2UF K 25V X7R	
C222	065G080522522K	T	CAP CHIP 0805 2.2UF K 25V X7R	
C1619	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C1620	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C1011	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C733	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C727	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C718	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C1013	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C1092	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1091	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1089	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1087	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1080	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1079	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1814	065G120610612K	T	CAP CHIP 1206 10UF K 16V X7R	
C1639	065G120610612K	T	CAP CHIP 1206 10UF K 16V X7R	

C731	065G1206226A5K T	CAP CHIP1206 22UF K 10V X5R	
C269	065G1206226A5K T	CAP CHIP1206 22UF K 10V X5R	
C268	065G1206226A5K T	CAP CHIP1206 22UF K 10V X5R	
FB703	071G 56G301 EA	BEAD 300 OHM	
FB701	071G 56G301 EA	BEAD 300 OHM	
FB609	071G 56G301 EA	BEAD 300 OHM	
FB207	071G 56K121	CHIP BEAD	
FB208	071G 56K121	CHIP BEAD	
FB209	071G 56K121	CHIP BEAD	
FB210	071G 56K121	CHIP BEAD	
FB211	071G 56K121	CHIP BEAD	
FB212	071G 56K121	CHIP BEAD	
FB213	071G 56K121	CHIP BEAD	
FB219	071G 56K121	CHIP BEAD	
FB218	071G 56K121	CHIP BEAD	
FB217	071G 56K121	CHIP BEAD	
FB223	071G 56K121	CHIP BEAD	
FB222	071G 56K121	CHIP BEAD	
FB221	071G 56K121	CHIP BEAD	
FB220	071G 56K121	CHIP BEAD	
FB214	071G 56K121	CHIP BEAD	
FB215	071G 56K121	CHIP BEAD	
FB216	071G 56K121	CHIP BEAD	
FB206	071G 56K121	CHIP BEAD	
FB611	071G 56K121	CHIP BEAD	
FB610	071G 56K121	CHIP BEAD	
FB606	071G 56K121	CHIP BEAD	
FB401	071G 56K121	CHIP BEAD	
FB400	071G 56K121	CHIP BEAD	
FB225	071G 56K121	CHIP BEAD	
FB224	071G 56K121	CHIP BEAD	
FB112	071G 56K121	CHIP BEAD	
FB200	071G 56K121	CHIP BEAD	
FB201	071G 56K121	CHIP BEAD	
FB202	071G 56K121	CHIP BEAD	
FB203	071G 56K121	CHIP BEAD	
FB204	071G 56K121	CHIP BEAD	
FB205	071G 56K121	CHIP BEAD	
FB612	071G 56K121 M	CHIP BEAD	
FB613	071G 56K121 M	CHIP BEAD	
FB614	071G 56K121 M	CHIP BEAD	
FB111	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB110	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB109	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB108	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB106	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB104	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB103	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB102	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB101	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB508	071G 59C121 B	FCM1608C-121T03 SMD	
FB509	071G 59C121 B	FCM1608C-121T03 SMD	
FB511	071G 59C121 B	FCM1608C-121T03 SMD	
FB502	071G 59C121 B	FCM1608C-121T03 SMD	

FB100	071G 59C121 B	FCM1608C-121T03 SMD	
FB227	071G 59D121 TA	CHIP BEAD 120R/600MA FCM1608KF-121T06	
L700	073G253S 46 H	SMD CHOKE 4.7UH	
R240	073G253S 94 M1	SMD CHOKE 2.2UH 10% 600MA	
L103	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L104	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L105	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L102	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
CN503	088T 340 21 VA	HDMI HEADER 21P V/T	
CN501	088T 340 21 VA	HDMI HEADER 21P V/T	
CN500	088T 340 21 VA	HDMI HEADER 21P V/T	
D100	093G 64 42 PP	BAV70 SOT-23	
D502	093G 64 42 PP	BAV70 SOT-23	
D503	093G 64 42 PP	BAV70 SOT-23	
X200	093G 22S503 H	CRYSTAL HSX840GA 24MHZ HELE	
X100	093G 22S910 H	HSX840GA 20P 16.00MHZ	
ZD608	093G 39S 24 T	RLZ 5.6B LLDS	
ZD609	093G 39S 24 T	RLZ 5.6B LLDS	
ZD610	093G 39S 24 T	RLZ 5.6B LLDS	
ZD611	093G 39S 24 T	RLZ 5.6B LLDS	
ZD612	093G 39S 24 T	RLZ 5.6B LLDS	
ZD600	093G 39S 44 T	RLZ18B LLDS	
D711	093G 64S3PH	BAS32L	
D710	093G 64S3PH	BAS32L	
D708	093G 64S3PH	BAS32L	
D707	093G 64S3PH	BAS32L	
ZD111	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD110	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD109	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD108	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD107	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD106	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD105	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD104	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD102	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD101	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD100	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
	709T3787 QS003	COMSUPTIVE ASS'Y	
	052G 2191 A	PAPER TAPE	
	052G6026 2	MESH PRINTTING PAPER	
	055G 23520	IPA	
	055G 100610	TIN CREAM W/O PB	
E715	715G3787M0G000005K	MAIN BOARD PCB	
	Q90T0202 1	HEAT SINK FOR U200	
	KEPFAQE7C	KEY BOARD	
CN01	033G8032 4F HR	CONNECTOR	
R09	061G06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R08	061G06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R05	061G06032002FF	RST CHIPR 20KOHM +-1% 1/10W FENGHUA	
R01	061G06032002FF	RST CHIPR 20KOHM +-1% 1/10W FENGHUA	
R07	061G06033301FY	RST CHIP 3K3 1/10W 1%	
R03	061G06033301FY	RST CHIP 3K3 1/10W 1%	
R06	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
R02	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	

SW07	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW06	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW05	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW04	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW03	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW02	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW01	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
	709T3814 QS001	COMSUPTIVE ASS'Y	
	052G6026 2	MESH PRINTTING PAPER	
E715	715G3814K01003004S	KEY BOARD PCB	
	IRPFAQG1C	IR BOARD	
U01	056G 627 14 1M	IC KSM-2003TN2M-S 37.9KHZ	
	709T3821 QM001	COMSUPTIVE ASS'Y	
CN01	033G8032 5F HR	CONNECTOR	
R001	061G0603153 JY	RST CHIPR MAX 15KOHM 1/10W YAGEO	
C01	065G060310432K Y	CAP CHIP 0603 0.1UF K 50V X7R	
LED01	081G 14 24 EL	CHIP LED BLUE/DARK RED	
ZD01	093G 39S 24 T	RLZ 5.6B LLDS	
	709T3821 QS001	COMSUPTIVE ASS'Y	
	052G6026 2	MESH PRINTTING PAPER	
	715G3821R01000004M	IR BOARD PCB	
	PTPFAYA3C	LVDS TO FFC BOARD	
CN4002	311GF100B30ADJ	FFC CONN. 1.0MM 30P 1.0S-19X-30PWB	
CN4001	311GW125A36ACH	WAFER 1.25MM 36P	
	709T4417 QM001	COMSUPTIVE ASS'Y	
	052G6026 2	MESH PRINTTING PAPER	
	715G4417T01000004S	LVDS TO FFC BOARD	
	PWTVALC1AQE4	POWER BOARD	
	040G 45762412B	CBPC LABEL	
GND	009G6005 1	GROUND TERMINAL	
CN902	033G327813D	CONNECTOR	
CN803	033G3802 5B Y L	CONN 2.0 5P	
CN801	033G8029 3A	3PIN (2PIN NC)	
	051G 6 4503	GLUE_RTV	
IC950	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC951	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC970	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC970	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC950	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC951	056G 139 10	IC TLP781F PHOTOCOUPLER DIP-4	
IC902	056T 379121	IC STR- A6069H DIP-8	
Q921	057G 761 7	KTD1691P	
Q921	057G 761909 T	TRANSISTOR KSD1691YSTU TO-126	
RV901	061G 46 17	VARISTOR 560V TNR14V561K	
RV901	061G 46906 W	VARISTOR 560V TVR14561KFC4FY	
C901	063G 10747410V	0.47UF 275VAC ARCO	
C904	063G 10747410V	0.47UF 275VAC ARCO	
C910	063G210K105BCN	MPP CAP 1UF 520V P=15MM	
C802	063G213J105GFA	MPF CAP	
C801	063G213J105GFA	MPF CAP	
C804	065G 1K1021AT	CK45-R3AD102K-NR 1000PF / 1KV R-TYPE P	
C803	065G 1K1021AT	CK45-R3AD102K-NR 1000PF / 1KV R-TYPE P	
C925	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5U	
C906	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	

C905	065G306K4712BM	Y1 CAP 470PF +-10% 250V AC KX	
C924	065G306M1022BM	Y1.CAP.001UF 250VAC MURATA	
C903	065G306M6812B3	Y1 CAP 680PF +-20% 250VAC CD SERIES	
C902	065G306M6812B3	Y1 CAP 680PF +-20% 250VAC CD SERIES	
C920	067G 42Z10115K	EC 100UF M 450V 18*40MM	
C953	067G204V331 3K	CS CAP 330UF 16V 10*12 MM	
C954	067G215A4713KV	EC 470UF 16V M 10*12MM	
C946	067G215A4714KV	EC 470UF 25V 10*16MM	
C975	067G215A4716KV	EC 470UF 35V M 10*16MM	
C973	067G215A4716KV	EC 470UF 35V M 10*16MM	
C945	067G215A4716KV	EC 470UF 35V M 10*16MM	
L901	073G 174106 DN	LINE FILTER 13MH LK.TF032.A20	
L902	073G 174106 DN	LINE FILTER 13MH LK.TF032.A20	
L906	073G 174160 N	PFC CHOKE 253UH 5% YUVA-1253	
L980	073G 253 91 L	CHOKE BY LI TA	
L951	073G 253 91 L	CHOKE BY LI TA	
L950	073G 253 91 L	CHOKE BY LI TA	
T802	080GL26T 15 N	X'FMR 840UH MIN YUVA-1094	
T801	080GL32P 4 L	X'FMR 4.4MH 25% CC-011225-10	
T902	080GL37T 19 N	X'FMR 550UH 5% YUVA-1089	
T901	080GL52T 5 N2	X'FMR 1.0MH 10%	
F901	084G 41 11 B	FUSE 5A 250V LEAD TYPE	
F901	084G 41 11 C	FUSE 5A 250V UDA-A 005(PF)	
F901	084G 41 11 L	FUSE 5A 250V	
CN901	087G 501 48 S	AC SOCKET 3PIN + 3 HOLE	
CN901	087G 501 48 DL	AC SOCKET 3PIN + 3 HOLE	
D904	093G 52 70 1	1N5408-E(SHORT PIN) 3A/1000V DO-201AD	
	0Q1G 340 8106 CR3	SCREW	
	705TQ861001	NR901 ASS'Y	
NR901	061T 58030 WL	RST NTCR 3 OHM +-20% 5A THINKING	
	Q09T 203 8	PIN FOR NR901	
	705TQ957038	Q801/Q802 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
Q802	057G 611903	MOSFET AOTF12N50 TO-220F	
Q801	057G 611903	MOSFET AOTF12N50 TO-220F	
Q801	057T 611901	MOSFET 12A/500V FMA12N50E TO-220F	
Q802	057T 611901	MOSFET 12A/500V FMA12N50E TO-220F	
	0M1G1730 8120	SCREW	
HS1	P90T0027201	HEAT SINK	
	705TQ957040	Q903 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
Q903	057G 667 51	FET 2SK4101LS 7A/650V TO-220FI(LS)	
Q903	057G 667931	TEST ONLY	
HS9	090G6084 1	HEAT SINK	
	0M1G1730 8120	SCREW	
	705TQ957086	Q901 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
Q901	057G 611904	MOSFET AOTF12N60 TO-220F	
Q901	057G 667 49	FET 2SK4086LS 11.5A/600V TO-220FI(LS)	
	0M1G1730 8120	SCREW	
HS8	Q90T0206 1	HEAT SINK	
	705TQ993051	D902 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
HS7	090G6084 1	HEAT SINK	

D902	093G 52905	DIODE FMNS-1106S TO-220	
	0M1G1730 8120	SCREW	
	705TQ993053	D950 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
HS10	090G6084 1	HEAT SINK	
D950	093G 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
D950	093G1506 2	FMW-2156	
	0M1G1730 8120	SCREW	
	705TQ993054	D972/D973 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
HS6	090G6064 1	HEAT SINK	
D973	093G 60329	DIODE FMEN-220A 20A/100V TO-220	
D972	093G 60329	DIODE FMEN-220A 20A/100V TO-220	
D973	093G 60331	DIODE YG865C10RSC 20A/100V TO-220F	
D972	093G 60331	DIODE YG865C10RSC 20A/100V TO-220F	
	0M1G1730 8120	SCREW	
	705TQ993110	BD901 ASS'Y	
	051G 200 1	OIL FOR DISAPPEAR	
BD901	093G 50460 34	BRIDGE KBJ608G 6A/800V KBJ	
BD901	093G 50460925	BRIDGE DIODE TS6B06G-01 KBJ	
	0M1G1730 10120	SCREW 42A9930016	
HS5	P90T0027301	HEAT SINK	
IC901	056G 379164	IC FAN6961SZ SOP-8	
IC903	056G 379175	IC LD7523GS SOP-8	
IC801	056T 379122	IC OZ9976GN-C-0-TR SOP-16	
Q950	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q970	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q803	057G 759 2	RK7002FD5T116 SOT-23 BY ROHM	
Q804	057G 759 2	RK7002FD5T116 SOT-23 BY ROHM	
Q805	057G 759 2	RK7002FD5T116 SOT-23 BY ROHM	
Q803	057G 763904	TRA FET 2N7002 SOT-23 PHILIPS	
Q804	057G 763904	TRA FET 2N7002 SOT-23 PHILIPS	
Q805	057G 763904	TRA FET 2N7002 SOT-23 PHILIPS	
R932	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/10W FENGHUA	
R943	061G0805100 JF	RST CHIPR 10 OHM +-5% 1/10W FENGHUA	
R943	061G0805100 JT	RST CHIP 10R 1/8W 5% TZAI YUAN	
R932	061G0805100 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R943	061G0805100 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R820	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R837	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R820	061G08051003FY	RST CHIPR 100KOHM +-1% 1/8W YAGEO	
R837	061G08051003FY	RST CHIPR 100KOHM +-1% 1/8W YAGEO	
R803	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R981	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R802	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R802	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R803	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R981	061G0805101 JT	RST CHIP 100R 1/8W 5% TZAI YUAN	
R981	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R803	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R802	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R955	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R982	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R983	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	

R983	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R982	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R955	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R982	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R983	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R955	061G0805102 JY	RST CHIPR 1K OHM 5% 1/8W YAGEO	
R963	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R961	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R947	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R944	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R918	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R914	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R830	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R817	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R816	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R963	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R961	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R947	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R944	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R918	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R914	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R830	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R817	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R816	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R963	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R961	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R947	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R944	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R918	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R914	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R817	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R816	061G0805103 JY	RST CHIPR 10KOHM +-5% 1/8W YAGEO	
R820	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R820	061G0805104 JY	RST CHIPR 100KOHM 1/8W YAGEO	
R985	061G08051302FF	RST CHIPR 13KOHM +-1% 1/8W FENGHUA	
R923	061G08051302FF	RST CHIPR 13KOHM +-1% 1/8W FENGHUA	
R923	061G08051302FT	RST CHIP 13K 1/8W 1%	
R985	061G08051302FT	RST CHIP 13K 1/8W 1%	
R923	061G08051302FY	RST CHIPR 13KOHM +-1% 1/8W YAGEO	
R985	061G08051302FY	RST CHIPR 13KOHM +-1% 1/8W YAGEO	
R840	061G08051504FF	RST CHIPR 1M5 +-1% 1/8W FENGHUA	
R840	061G08051504FT	RST CHIPR 1M5 +-1% 1/8W TZAI YUAN	
R917	061G0805153 JF	RST CHIPR 15K +-5% 1/8W FENGHUA	
R917	061G0805153 JT	RST CHIP 15K 1/8W 5% TZAI YUAN	
R840	061G0805155 JW	RST CHIPR 1M5 +-5% 1/8W WAL SIN	
R979	061G08052001FF	RST CHIPR 2KOHM +-1% 1/8W FENGHUA	
R979	061G08052001FT	RST CHIP 2K 1/8W 1%	
R811	061G08052400FF	RST CHIPR 240 OHM +-1% 1/8W FENGHUA	
R813	061G08052400FF	RST CHIPR 240 OHM +-1% 1/8W FENGHUA	
R811	061G08052400FT	RST CHIP R 240 OHM +-1% 1/8W	
R813	061G08052400FT	RST CHIP R 240 OHM +-1% 1/8W	
R844	061G08052401FF	RST CHIPR 2.4KOHM +-1% 1/8W FENGHUA	
R844	061G08052401FT	RST CHIP R 2K4 +/-1% 1/8W	
R978	061G08052402FF	RST CHIPR 24KOHM +-1% 1/8W FENGHUA	

R978	061G08052402FT	RST CHIP 24K 1/8W 1%	
R987	061G08052702FT	RST CHIP 27K 1/8W 1%	
R987	061G08052702FY	RST CHIPR 27KOHM +-1% 1/8W YAGEO	
R834	061G0805272 JF	RST CHIPR 2.7KOHM +-5% 1/8W FENGHUA	
R834	061G0805272 JT	RST CHIPR 2K7 +-5% 1/8W TZAI YUAN	
R975	061G0805392 JF	RST CHIPR 3.9KOHM +-5% 1/8W FENGHUA	
R975	061G0805392 JY	RST CHIPR 3K9 +-5% 1/8W YAGEO	
R826	061G0805474 JT	RST CHIPR 470K +-5% 1/8W TZAI YUAN	
R823	061G0805474 JT	RST CHIPR 470K +-5% 1/8W TZAI YUAN	
R824	061G0805474 JT	RST CHIPR 470K +-5% 1/8W TZAI YUAN	
R821	061G0805474 JT	RST CHIPR 470K +-5% 1/8W TZAI YUAN	
R826	061G0805474 JY	RST CHIPR 470K +-5% 1/8W YAGEO	
R823	061G0805474 JY	RST CHIPR 470K +-5% 1/8W YAGEO	
R824	061G0805474 JY	RST CHIPR 470K +-5% 1/8W YAGEO	
R821	061G0805474 JY	RST CHIPR 470K +-5% 1/8W YAGEO	
R814	061G0805510 JF	RST CHIPR 51OHM +-5% 1/8W FENGHUA	
R814	061G0805510 JW	RST CHIPR 51OHM +-5% 1/8W WAL SIN	
R841	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R842	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R842	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R841	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R906	061G08055603FT	RST CHIP 560K 1/8W 1%	
R906	061G08055603FY	RST CHIPR 560KOHM +-1% 1/8W YAGEO	
R958	061G08057501FF	RST CHIPR 7.5KOHM +-1% 1/8W FENGHUA	
R958	061G08057501FT	RST CHIP R 7K5 1/8W +/-1%	
R957	061G08058201FF	RST CHIPR 8.2KOHM +-1% 1/8W FENGHUA	
R957	061G08058201FY	RST CHIPR 8.2KOHM +-1% 1/8W YAGEO	
JR905	061G1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
JR904	061G1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
JR903	061G1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
JR902	061G1206000 F	RST CHIPR 0 OHM +-5% 1/4W FENGHUA	
JR902	061G1206000 Y	RST CHIP MAX 0R05 1/4W YAGEO	
JR903	061G1206000 Y	RST CHIP MAX 0R05 1/4W YAGEO	
JR904	061G1206000 Y	RST CHIP MAX 0R05 1/4W YAGEO	
JR905	061G1206000 Y	RST CHIP MAX 0R05 1/4W YAGEO	
R925	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R926	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R924	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R924	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R925	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R926	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R951	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R954	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R970	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R973	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R977	061G1206101 JT	RST CHIPR 100 OHM +-5% 1/4W TZAI YUAN	
R977	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R973	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R970	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R954	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R951	061G1206101 JY	RST CHIPR 100R +-5% 1/4W YAGEO	
R974	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R960	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R956	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	

R945	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R836	061G1206102 JF	RST CHIPR 1KOHM +-5% 1/4W FENGHUA	
R836	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R945	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R956	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R960	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R974	061G1206102 JT	RST CHIPR 1KOHM +-5% 1/4W TZAI YUAN	
R833	061G1206103 JF	RST CHIPR 10KOHM +-5% 1/4W FENGHUA	
R976	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R939	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R838	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R833	061G1206103 JT	RST CHIPR 10KOHM +-5% 1/4W TZAI YUAN	
R838	061G1206103 JY	RST CHIPR 10K +-5% 1/4W YAGEO	
R939	061G1206103 JY	RST CHIPR 10K +-5% 1/4W YAGEO	
R976	061G1206103 JY	RST CHIPR 10K +-5% 1/4W YAGEO	
R999	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R998	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R997	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R996	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R994	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R993	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R992	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R991	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R839	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R994	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R996	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R997	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R998	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R999	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R993	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R992	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R991	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R839	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R933	061G1206109 JT	RST CHIPR 1 OHM +-5% 1/4W TZAI YUAN	
R933	061G1206109 JW	RST CHIPR 1 OHM +-5% 1/4W WAL SIN	
R843	061G1206122 JT	RST CHIPR 1.2KOHM +-5% 1/4W TZAI YUAN	
R843	061G1206122 JW	RST CHIPR 1.2KOHM +-5% 1/4W WAL SIN	
R827	061G12061500FI	RST 1206 150R 1% 1/4W	
R825	061G12061500FI	RST 1206 150R 1% 1/4W	
R825	061G12061500FT	RST 1206 150R 1% 1/4W	
R827	061G12061500FT	RST 1206 150R 1% 1/4W	
R904	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R905	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R909	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R904	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R905	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R909	061G12061504FY	RST CHIP 1M5 1/4W 1%	
R988	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R986	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R972	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R971	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R967	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R965	061G1206182 JT	RST CHIPR 1.8KOHM +-5% 1/4W TZAI YUAN	
R965	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WAL SIN	

R967	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WAL SIN	
R971	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WAL SIN	
R972	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WAL SIN	
R986	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WAL SIN	
R988	061G1206182 JW	RST CHIPR 1.8KOHM +-5% 1/4W WAL SIN	
R911	061G1206203 JT	RST CHIPR 20KOHM +-5% 1/4W TZAI YUAN	
R911	061G1206203 JW	RST CHIPR 20KOHM +-5% 1/4W WAL SIN	
R931	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA	
R908	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA	
R907	061G1206229 JF	RST CHIPR 2.2 OHM +-5% 1/4W FENGHUA	
R931	061G1206229 JY	RST CHIPR 2.2R 5% 1/4W YAGEO	
R908	061G1206229 JY	RST CHIPR 2.2R 5% 1/4W YAGEO	
R907	061G1206229 JY	RST CHIPR 2.2R 5% 1/4W YAGEO	
R901	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R902	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R903	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R903	061G1206334 JT	RST CHIPR 330 KOHM 1/4W TZAI YUAN	
R901	061G1206334 JT	RST CHIPR 330 KOHM 1/4W TZAI YUAN	
R902	061G1206334 JT	RST CHIPR 330 KOHM 1/4W TZAI YUAN	
R950	061G1206470 JT	RST CHIPR 47 OHM +-5% 1/4W TZAI YUAN	
R952	061G1206470 JT	RST CHIPR 47 OHM +-5% 1/4W TZAI YUAN	
R950	061G1206470 JY	RST CHIPR 47R +-5% 1/4W YAGEO	
R952	061G1206470 JY	RST CHIPR 47R +-5% 1/4W YAGEO	
R915	061G1206471 JT	RST CHIPR 470 OHM 1/4W TZAI YUAN	
R915	061G1206471 JY	RST CHIPR 470R 1/4W +-5% YAGEO	
R962	061G1206475 JF	RST CHIPR 4.7 MOHM +-5% 1/4W FENGHUA	
R962	061G1206475 JT	RST CHIPR 4.7 MOHM +-5% 1/4W TZAI YUAN	
R922	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R921	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R920	061G12066803FF	RST CHIPR 680KOHM +-1% 1/4W FENGHUA	
R922	061G12066803FT	RST CHIP 680K 1/4W 1%	
R921	061G12066803FT	RST CHIP 680K 1/4W 1%	
R920	061G12066803FT	RST CHIP 680K 1/4W 1%	
R832	061G12066812FF	RST 1206 68.1K 1/4W 1%	
R832	061G12066812FT	RST 1206 68.1K 1/4W 1%	
R984	061G1206682 JF	RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R966	061G1206682 JF	RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R968	061G1206682 JF	RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R969	061G1206682 JF	RST CHIPR 6.8KOHM +-5% 1/4W FENGHUA	
R966	061G1206682 JT	RST CHIPR 6.8 KOHM 1/4W TZAI YUAN	
R968	061G1206682 JT	RST CHIPR 6.8 KOHM 1/4W TZAI YUAN	
R969	061G1206682 JT	RST CHIPR 6.8 KOHM 1/4W TZAI YUAN	
R984	061G1206682 JT	RST CHIPR 6.8 KOHM 1/4W TZAI YUAN	
C909	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C939	065G080510332K Y	CAP CHIP 0805 10N 50V X7R +/-10%	
C921	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C913	065G080510432K F	CAP CHIP 0805 0.1UF K 50V X7R	
C978	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C956	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C949	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C948	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C947	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C942	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C934	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	

C908	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C907	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C811	065G080510432K	Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C817	065G080510522K	3	CAP CHIP 0805 1U 25V X7R +/-10%	
C816	065G080510522K	3	CAP CHIP 0805 1U 25V X7R +/-10%	
C815	065G080512332K	Y	CAP CHIP 0805 12N 50V X7R +/-10%	
C821	065G080515232K	Y	CAP CHIP 0805 1N5 50V X7R +/-10%	
C820	065G080515232K	Y	CAP CHIP 0805 1N5 50V X7R +/-10%	
C915	065G080522132K	Y	CAP CHIP 0805 220P 50V X7R +/-10%	
C944	065G080522132K	Y	CAP CHIP 0805 220P 50V X7R +/-10%	
C955	065G080522432K	Y	CAP CHIP 0805 0.22UF K 50V X7R	
C819	065G080522522K	Y	CAP CHIP 0805 2.2UF K 25V X7R	
C805	065G080522522K	Y	CAP CHIP 0805 2.2UF K 25V X7R	
C813	065G080533131J	Y	CAP CHIP 0805 330PF J 50V NPO	
C976	065G080533432K	F	CAP CHIP 0805 0.33UF K 50V X7R	
C818	065G080547232K	Y	CAP CHIP 0805 4700PF K 50V X7R	
C943	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C917	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C831	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C830	065G080547332K	Y	CAP CHIP 0805 47N 50V X7R +/-10%	
C918	065G080547432K	Y	CAP CHIP 0805 470N 50V X7R +/-10%	
C912	065G080556031J	F	CAP CHIP 0805 56PF J 50V NPO	
C822	065G080568131J	F	CAP CHIP 0805 680PF J 50V NPO	
C823	065G080568131J	F	CAP CHIP 0805 680PF J 50V NPO	
C972	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
C970	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
C957	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
C952	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
C951	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
C950	065G120610272K	Y	CAP CHIP 1206 1NF K 500V X7R	
D807	093G 64 42 PP		BAV70 SOT-23	
D801	093G 60S 5 T		SCS0520P SOD-123	
D802	093G 60S 5 T		SCS0520P SOD-123	
D803	093G 60S 5 T		SCS0520P SOD-123	
D804	093G 60S 5 T		SCS0520P SOD-123	
CN901	006G 31500 GP		EYELET	
IC971	056G 158 10 T		IC AS431AZTR-E1 TO-92	
IC952	056G 158 10 T		IC AS431AZTR-E1 TO-92	
IC971	056G 158 12		KIA431A-AT/P TO-92	
IC952	056G 158 12		KIA431A-AT/P TO-92	
R948	061G 30310852T GP		FUSE RESISTOR	
R801	061G 30310852T GP		FUSE RESISTOR	
R913	061G 60210052T TZ		RST CFR 10R 1/6W 5%	
R916	061G152M12852T		RST MOFR 0.12 OHM +-5% 2WS	
R946	061G152M36852T		RST MOF 0R36 5% 2W	
C932	065G 2K102 2T6921		CAP CER 1000PF 2KV K Y5P	
C935	065G 2K102 2T6921		CAP CER 1000PF 2KV K Y5P	
C810	067G215A1017KT		EC 100UF 50V 8*12MM	
C931	067G215A1017KT		EC 100UF 50V 8*12MM	
C941	067G215Y1007KT		KY50VB10M-TP5 5*11.5	
C933	067G215Y1007KT		KY50VB10M-TP5 5*11.5	
C937	067G215Y1007KT		KY50VB10M-TP5 5*11.5	
C914	067G215Y4707KT		47UF 50V	
FB902	071G 55 23 S		BEAD	

FB903	071G	55 26	S	FERRITE CORE	
FB901	071G	55 26	S	FERRITE CORE	
FB903	071T	55 26	H	FERRITE BEAD 3.5*6.0*0.8	
FB901	071T	55 26	H	FERRITE BEAD 3.5*6.0*0.8	
ZD952	093G	3916652T		MTZJ15B (13.89-14.62)	
ZD930	093G	3916752T		MTZJ T-72 16B	
ZD970	093G	3917152T		TZJ T-72 30B	
D901	093G	52 1552T		DIODE 1N4007-E3/73 1A/1000V DO-41	
D901	093G	5212T52T		DIODE 1N4007 DO-41	
D931	093G	5250S52T		DIODE AU02Z-V1 SANKEN	
D905	093G	64 1152T		1N4148	
D906	093G	64 1152T		1N4148	
D951	093G	64 1152T		1N4148	
D971	093G	64 1152T		1N4148	
D903	093G	64 1152T		1N4148	
D806	093G	64 1152T		1N4148	
D805	093G	64 1152T		1N4148	
D971	093G	64 1152T	PH	SWITCH DIODE 1N4148 BY PHILIPS	
D951	093G	64 1152T	PH	SWITCH DIODE 1N4148 BY PHILIPS	
D906	093G	64 1152T	PH	SWITCH DIODE 1N4148 BY PHILIPS	
D805	093G	64 1152T	PH	SWITCH DIODE 1N4148 BY PHILIPS	
D806	093G	64 1152T	PH	SWITCH DIODE 1N4148 BY PHILIPS	
D903	093G	64 1152T	PH	SWITCH DIODE 1N4148 BY PHILIPS	
D905	093G	64 1152T	PH	SWITCH DIODE 1N4148 BY PHILIPS	
ZD952	093G	39G	5	DIODE MTZJ15B DO-34	
ZD970	093G	39G	9	DIODE MTZJ30B DO-34	
D930	093G	110050152T		DIODE PR1007 1A/1000V 500NS DO-41	
D940	093G	110050152T		DIODE PR1007 1A/1000V 500NS DO-41	
J906	095G	90 23		JUMPER WIRE	
J907	095G	90 23		JUMPER WIRE	
J908	095G	90 23		JUMPER WIRE	
J909	095G	90 23		JUMPER WIRE	
J910	095G	90 23		JUMPER WIRE	
J911	095G	90 23		JUMPER WIRE	
J912	095G	90 23		JUMPER WIRE	
J913	095G	90 23		JUMPER WIRE	
J914	095G	90 23		JUMPER WIRE	
J915	095G	90 23		JUMPER WIRE	
J916	095G	90 23		JUMPER WIRE	
J917	095G	90 23		JUMPER WIRE	
J923	095G	90 23		JUMPER WIRE	
J922	095G	90 23		JUMPER WIRE	
J921	095G	90 23		JUMPER WIRE	
J920	095G	90 23		JUMPER WIRE	
J919	095G	90 23		JUMPER WIRE	
J905	095G	90 23		JUMPER WIRE	
J801	095G	90 23		JUMPER WIRE	
J802	095G	90 23		JUMPER WIRE	
J803	095G	90 23		JUMPER WIRE	
J804	095G	90 23		JUMPER WIRE	
J805	095G	90 23		JUMPER WIRE	
J806	095G	90 23		JUMPER WIRE	
J904	095G	90 23		JUMPER WIRE	
J903	095G	90 23		JUMPER WIRE	

J902	095G 90 23	JUMPER WIRE	
J901	095G 90 23	JUMPER WIRE	
J808	095G 90 23	JUMPER WIRE	
J807	095G 90 23	JUMPER WIRE	
	715G3811P01W30003S	POWER BOARD PCB	
	Q45G 99606 25 ESD	INSULATING PE BAG	
	INTVAL88AQD1	INVERTER BOARD	
	040G 45762412B	CBPC LABEL	
CN8803	033G3802 2B Y	CONNECTOR	
CN8803	033G3802 2B Y W	CONNECTOR	
CN8802	033G3802 3B Y L	CONN 2.0 3P	
CN8802	033G3802 3B Y W	CONN 2.0 3P	
C8813	065G 6J5096ET	CAP CER 5PF J 6KV	
C8812	065G 6J5096ET	CAP CER 5PF J 6KV	
C8809	065G 6J5096ET	CAP CER 5PF J 6KV	
C8808	065G 6J5096ET	CAP CER 5PF J 6KV	
C8805	065G 6J5096ET	CAP CER 5PF J 6KV	
C8804	065G 6J5096ET	CAP CER 5PF J 6KV	
C8803	065G 6J5096ET	CAP CER 5PF J 6KV	
C8802	065G 6J5096ET	CAP CER 5PF J 6KV	
T8808	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8807	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8806	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8805	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8804	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8803	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8802	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
T8801	080GL32T 24 DN	INVERTER X'FMR 155UH TK.6512J.101	
CN8801	095G 825 6D901	HARNESS 6P(SCN)-5P 300MM FQE092368HY	
R8805	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R8808	061G08051003FF	RST CHIPR 100KOHM +-1% 1/8W FENGHUA	
R8808	061G08051003FY	RST CHIPR 100KOHM +-1% 1/8W YAGEO	
R8805	061G08051003FY	RST CHIPR 100KOHM +-1% 1/8W YAGEO	
R8806	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R8802	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R8801	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R8806	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8802	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8801	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R8807	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8818	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8819	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8820	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8823	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R8823	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8820	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8819	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8818	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8807	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R8804	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R8804	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R8808	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R8805	061G0805104 JT	RST CHIPR 100KOHM +- 5% 1/8W TZAI YUAN	
R8813	061G08052201FF	RST CHIPR 2.2KOHM +-1% 1/8W FENGHUA	

R8817	061G08052201FF	RST CHIPR 2.2KOHM +-1% 1/8W FENGHUA	
R8817	061G08052201FY	RST CHIPR 2.2KOHM +-1% 1/8W YAGEO	
R8813	061G08052201FY	RST CHIPR 2.2KOHM +-1% 1/8W YAGEO	
R8816	061G08052202FT	RST CHIP 22K 1/8W 1%	
R8803	061G08052202FT	RST CHIP 22K 1/8W 1%	
R8803	061G08052202FY	RST CHIPR 22KOHM +-1% 1/8W YAGEO	
R8816	061G08052202FY	RST CHIPR 22KOHM +-1% 1/8W YAGEO	
R8811	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W FENGHUA	
R8812	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W FENGHUA	
R8814	061G0805511 JF	RST CHIPR 510OHM +-5% 1/8W FENGHUA	
R8811	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W YAGEO	
R8812	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W YAGEO	
R8814	061G0805511 JY	RST CHIPR 510OHM +-5% 1/8W YAGEO	
RJ8801	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
RJ8802	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
RJ8802	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
RJ8801	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
C8801	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C8822	065G080522132K Y	CAP CHIP 0805 220P 50V X7R +/-10%	
C8818	065G080533131J Y	CAP CHIP 0805 330PF J 50V NPO	
C8819	065G080533131J Y	CAP CHIP 0805 330PF J 50V NPO	
C8816	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
C8817	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
C8820	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
C8821	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
C8824	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
C8825	065G080556231J Y	CAP CHIP 0805 5600PF J 50V NPO	
D8819	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8817	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8815	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8813	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8811	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8809	093G 64 33	DIO SIG SM BAV99 (PHSE)R	
D8809	093G 6433S	DIODE BAV99 SEMTECH	
D8811	093G 6433S	DIODE BAV99 SEMTECH	
D8813	093G 6433S	DIODE BAV99 SEMTECH	
D8815	093G 6433S	DIODE BAV99 SEMTECH	
D8817	093G 6433S	DIODE BAV99 SEMTECH	
D8819	093G 6433S	DIODE BAV99 SEMTECH	
D8806	093G 3919552T	DIODE MTZJ T-72 5.1B 500MW/5.1V DO-34	
D8801	093G 64 1152T	1N4148	
D8802	093G 64 1152T	1N4148	
D8804	093G 64 1152T	1N4148	
D8820	093G 64 1152T	1N4148	
D8821	093G 64 1152T	1N4148	
D8821	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D8820	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D8804	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D8802	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
D8801	093G 64 1152T PH	SWITCH DIODE 1N4148 BY PHILIPS	
J8811	095G 90 23	JUMPER WIRE	
J8810	095G 90 23	JUMPER WIRE	
J8809	095G 90 23	JUMPER WIRE	
J8808	095G 90 23	JUMPER WIRE	

J8806	095G 90 23	JUMPER WIRE	
J8805	095G 90 23	JUMPER WIRE	
J8804	095G 90 23	JUMPER WIRE	
J8803	095G 90 23	JUMPER WIRE	
J8802	095G 90 23	JUMPER WIRE	
J8801	095G 90 23	JUMPER WIRE	
	715G4132P01000003H	INVERTER BOARD PCB	
	Q45G 99606 25 ESD	INSULATING PE BAG	

LC42H053 E42AATNSW3B26N

Location	Part No.	Description	Remark
	001G6021 1	SCREW	
	036T 600 18117	HEMIRON	
	040G 581689 4A	BARCODE LABEL FOR 1	
	045G 77500	BARCODE RIBBON	
	045G 77501	BARCODE RIBBON	
	052G 1186	SMALL TAPE	
	052G 2191 A	PAPER TAPE	
SP01	078T 522 2 Y	SPEAKER 6 OHM 15W 160X40MM	
	089G 17356C553	AUDIO CABLE 1800MM	
	089G 725CAA DB	D-SUB CABLE	
E08901	089G424A15N CX	AC POWER CORD 1500MM BRAZIL REG.	
E08901	089G424A15N IS	AC POWER CORD 1.5M FOR BRAZIL REG.	2nd source
ECN701	095G801312D902	HARNESS 12P-12P 260MM FQE91345I	
ECN701	095G801312X902	HARNESS 12P-12P 260MM LCDXXTF0383	2nd source
ECN903	095G801314D901	HARNESS 13P-14P 380MM FQE91566I	
ECN903	095G801314X901	HARNESS 13P-14P 380MM LCDXXTF0381	2nd source
ECN600	095G8014 4D588	HARNESS 4P(PLUG)-B&R(800MM)+B&W(380MM)	
ECN600	095G8014 4W588	HARNESS 4P(PLUG)-B&R(800MM)+B&W(380MM)	2nd source
ECN200	095G801410D657	HARNESS 10P-5P+4P 950MM	
ECN200	095G801410W657	HARNESS 10P-5P+4P 950MM	2nd source
ECN704	095G801851D560	LVDS CABLE 51P-40P(1.25MM) 500MM	2nd source
ECN704	095G801851L560	LVDS CABLE 51P-40P(1.25MM) 500MM	
	0M1G 930 6 47 CR3	SCREW	
	0M1G 930 6 47 CR3	SCREW	
	0M1G 940 6120	SCREW (M4X6)	
	0M1G 940 6120	SCREW (M4X6)	
	0M1G 940 6120	SCREW (M4X6)	
	0M1G 940 6120	SCREW (M4X6)	
	0M1G 940 8 47 CR3	SCREW	
	0M1G 940 8 47 CR3	SCREW	
	0M1G1730 8120	SCREW	
	0M1G1730 8120	SCREW	
	0M1G1740 8120	SCREW FOR STD/MF 42-D020715/42-D000649()	
	0M1G1740 14120	SCREW	
	0Q1G 130 8 47 CR3	SCREW	
	0Q1G 930 8 47 CR3	SCREW	
	0Q1G 930 8 47 CR3	SCREW	
	0Q1G 930 8 47 CR3	SCREW	
	0Q1G 940 16 47 CR3	SCREW	
	0Q1G 940 16 47 CR3	SCREW	
	0Q1G 940 30 47 CR3	SCREW	
	0Q1G1030 6120	SCREW	
E750	750TVU420H6213N000	PANEL T420HW06 V210 XM AUO	2nd source
	756TQACB TS017 00	MAIN BOARD-CBPFAT1SQ3C	
U402	056G1133923	IC MX25L4005AM2C-12G SOP-8	
U403	056T1133111	IC NAND512W3A2DN6E TSOP-48	
SMTF-U403	100TATAM004S11	MCU ASS'Y-056T1133111	
SMTF-U402	100TATMK001S11	MCU ASS'Y-056G1133923	
	A15T0282201CKD	BKT-VESA-BTM	
	A15T0943101CKD	BRACKET	
	A15T0945101CKD	42-BKT-PB	

	A15T0946101CKD	42-BKT-STAND	
	A15T1022101CKD	BKT-BASE-A2	
	A33T0788ADTB1L0100	KEY COVER	
	A33T0789AFL 1L0100	KEY BUTTON	
	A33T0806 ED 1C0100	IE LENS_A2	
	A33T0807 1 1C0100	LED LENS_A2	
	A34T1574ADT 3A0100	REAR COVER 42"	
	A34T1575 GM 1A0100	HINGE COVER-A2_42	
	A34T1576AFL 1L0100	STAND-A1_42	
	A34T1614AFLC2L0100	BEZEL 42	
	A34T1615AFL 1L0100	BASE-A2_42	
	A37T0142011CKD	42-HINGE-A'SSY	
	Q01G6145 1	SCREW	
	Q11G5055 1	STAND	
	Q11T5027 1	LEAD-CLAMPER	
	Q12G6300 25 1	RUBBER FOOT	
	Q12G7057 1	RUBBER	
	Q15T0419101CKD	BKT-FIX-PANEL	
	Q15T0802101CKD	BKT-FIX	
	Q15T0803101CKD	BKT-FIX-S	
	Q15T0925101CKD	PCB_BKT_TOP	
	Q15T0929101CKD	BKT-MB-L	
	Q15T0930101CKD	BKT-MB-R	
	Q16G0001 10 4	EVA WASHER	
	Q16G0001 10 7	EVA	
	Q35T0072BBV 1L0100	DECO_BEZEL_TV 42"	
	Q36T 600 35 3 GP	NONWOVEN FABRIC	
	Q36T 600 37 24 GP	NONWOVEN FABRIC	
	Q40G 42061552A	RATING LABEL	
	Q40G2010 32019	LABEL SIDE IO	
	Q40G2010 42107	LABEL IO BACK	
	Q41T7800615A92	WARRANTY CARD	
	Q44GN041102	EPS FOR OTS 42 CCFL TV	
	Q44GN041202	EPS FOR OTS 42 CCFL TV	
	Q44GN041302	EPS FOR OTS 42 CCFL TV	
	Q44GN041402	EPS FOR OTS 42 CCFL TV	
	Q44GN041502	EPS FOR OTS 42 CCFL TV	
	Q44GN041602	EPS FOR OTS 42 CCFL TV	
	Q44GN041615 1A	CARTON	
	Q44T3231 21 11	EVA WASHER	
	Q45G 76 28NV2 R	PE BAG FOR BASE SCREW SZ02742	
	Q45G 77 5	PE PACKING (Y1900241)	
	Q45G 99609103 BC	PE BAG	
	Q45G 99626 36 BC	PE BAG	
	Q45G2010M0201A	PE BAG	
	Q50G 4 10	TIE (Y1900221)	
	Q50T 500523	CABLE TIE	
	Q52G 1150523	TAPE_INSULATING	
	Q52G 1185 92	HCL TAPE	
CN700	033G327812D	WAFER 12P PLUG	
CN600	033G3802 4B Y W	WAFER	
CN200	033G380210B Y W	WAFER	
C1621	067G 305471 6C	EC 470UF 35V KM 10X16MM	
C1622	067G 305471 6C	EC 470UF 35V KM 10X16MM	

C714	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C711	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C706	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C1617	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
C1626	067G215Y221 6N	EC 220UF 35V KY35VB220M-L 10*12.5MM	
L606	073G 253158 H	CHOKE COIL 22UH+/-25%	
L607	073G 253158 H	CHOKE COIL 22UH+/-25%	
CN601	088G 30211K	PHONE JACK 5PIN	
CN701	088G 352 2 YG	USB CONNECTOR USB4-01	
CN701	088G 352 21CL	USB CONN TYPE A	
CN100	088G353A15FVCS	D-SUB 15PIN FEMALE VERTICAL SCREWED	
CN107	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN106	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN102	088T 78 1369C	RCA JACK 2*3 G/B/R+B/W/R	
CN104	088T 78 13932 C	RCA JACK + S JACK Y/B	
CN105	088T 7813C19C	RCA JACK 1*3 R/W/Y	
CN101	088T 30252C	PHONE JACK 3.5MM 3P V/A GREEN	
T100	094G PALISBM1M	TUNER PAL+ISDB ENG36F13KF	
	709T3787 QM003	COMSUPTIVE ASS'Y	
	055G 23524	WELDING FLUX WITHOUT PB	
	Q55G 100620500	TIN STICK(SN-0.5AG)	
C323	067G 305100 3T	10UF 16V	
C1614	067G 305100 7T	105℃ 10UF +-20% 50V	
C1099	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1096	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1046	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1039	067G 3051007PT	CAP 105℃ 10UF M 50V	
C1042	067G 3051007PT	CAP 105℃ 10UF M 50V	
C740	067G 3051013CT	EC 100UF 16V KM 6.3X11MM	
C707	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C703	067G 3051014CT	EC 100UF 25V KM 6.3X11MM	
C1021	067G 305221 3T	220UF/16V	
C751	067G 305470 3T	47UF +-20% 16V	
C750	067G 305470 3T	47UF +-20% 16V	
C745	067G 305470 3T	47UF +-20% 16V	
C738	067G 305470 3T	47UF +-20% 16V	
C737	067G 305470 3T	47UF +-20% 16V	
C735	067G 305470 3T	47UF +-20% 16V	
C726	067G 305470 3T	47UF +-20% 16V	
C415	067G 305470 3T	47UF +-20% 16V	
C400	067G 305470 3T	47UF +-20% 16V	
C1604	067G 305470 3T	47UF +-20% 16V	
C712	067G 3054706CT	EC CAP 47UF M 35V	
C717	067G215Y2212KT	LOW ESR EC 220UF 10V 6.3*11MM	
C746	067G215Y2212KT	LOW ESR EC 220UF 10V 6.3*11MM	
C752	067G215Y4704KT	EC CAP.105C	
CN704	033T8033 40 X	CON. V 2*20P M 1.25 SM S1312-40SVA-1R	
U704	056G 379 92	IC G5627F11U SOP-8(FD)	
U200	056G 562F03	IC HIDTV PRO-SX 27*27 BGA	
U700	056G 563 30	IC AZ1084S-3.3TREI 5A/3.3V TO-263-3	
U707	056G 563122	IC G1084-25TU3UF TO-263T	
U706	056G 563143	IC G1084T43UF TO-252	
U703	056G 563246	LDO AZ1084S2-ADJG1 TO-263-2 5A/ADJ	
U705	056G 563514	IC AZ1117H-3.3TRG1 1A/3.3V SOT223	

U105	056G 563964	IC SC4215HSTRT SO-8	
U106	056G 575515	IC TC90517FG LQFP-64	
U400	056G 615505	IC NT5TU64M16DG-BE(7-7-7) 1066 1G BGA-84	
U401	056G 615505	IC NT5TU64M16DG-BE(7-7-7) 1066 1G BGA-84	
U601	056G 616519	IC AD52582-QE24NAT E-TSSOP-24L 18W	
U107	056G 616520	IC DAC WM8524GEDT/R TSSOP-16 WOLFSON	
U505	056G 634 25	IC SII9187ACNU QFN-72	
U202	056G 643 27	IC G692L293TCUF 2.91V SOT-143	
U701	056G 659501	IC BD8012FVJ TSSOP-B8J	
U101	056G 662502	C ESD AZC199-04S SOT23-6L	
U100	056G 662502	C ESD AZC199-04S SOT23-6L	
U402	056G1133923	IC MX25L4005AM2C-12G SOP-8	
U709	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U710	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U711	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U712	056G4LVCG17 TI	IC SN74LVC1G17DBVR STO-23	
U715	056T 563146	IC G912T63U 1A/1.2V SOT-223	
U604	056T 593 17	NTM2761RB2	
U602	056T 616516	IC APA2176AQBITRL TQFN3X3-16	
U403	056T1133111	IC NAND512W3A2DN6E TSOP-48	
Q704	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q702	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q608	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q607	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q601	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q402	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q708	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q706	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q707	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q603	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q201	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q200	057G 417 6	PMBS3906/PHILIPS-SMT(06)	
Q701	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
Q700	057G 763 79	FET AO4449 -7A/-30V SOIC-8	
Q202	057G 765 1	2SC2412K	
RP102	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP101	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP100	061G 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP104	061G 1254728JF	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W	
RP103	061G 1254728JF	RST CHIP AR 8P4R 4.7 KOHM +-5% 1/16W	
R1070	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R1067	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R1064	061G0402000 JY	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R401	061G04021001FY	RST CHIPR 1KOHM 1% 1/16W YAGEO	
R400	061G04021001FY	RST CHIPR 1KOHM 1% 1/16W YAGEO	
R1005	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1086	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1083	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1008	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1011	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1079	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1081	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1003	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	
R1001	061G0402101 JF	RST CHIPR 100 OHM +-5% 1/16W FENGHUA	

R1154	061G0402102 JF	RST CHIPR 1KOHM +-5% 1/16W FENGHUA	
R1152	061G0402102 JF	RST CHIPR 1KOHM +-5% 1/16W FENGHUA	
R1153	061G0402220 JF	RST CHIPR 22 OHM +-5% 1/16W FENGHUA	
R403	061G04027509FT	RST CHIP 75R 1/16W 1%	
R402	061G04027509FT	RST CHIP 75R 1/16W 1%	
R231	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R232	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R260	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R262	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R263	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R265	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R267	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R268	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R272	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R273	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R274	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R415	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R543	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R546	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R548	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R549	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1054	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R712	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R206	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
L101	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1002	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1007	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1010	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1056	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1059	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1063	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1066	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1069	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1094	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1099	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1604	061G0603000 JF	RST CHIPR MAX 0R05 1/10W FENGHUA	
R1634	061G0603100 JF	RST CHIPR 10 OHM 5% 1/10W FENGHUA	
R730	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R725	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R574	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R573	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R571	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R553	061G0603100 JT	RST CHIP 10R 1/10W 5% TZAI YUAN	
R733	061G06031000FF	RST CHIPR 100 OHM +-1% 1/10W FENGHUA	
R255	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R254	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R238	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R237	061G06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R229	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R209	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R1062	061G06031002FY	RST CHIPR 10KOHM +-1% 1/10W YAGEO	
R1106	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1107	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1108	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	

R1109	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1613	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1614	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1618	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1620	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R280	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R558	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R557	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R444	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1029	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1030	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1048	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1050	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1104	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1105	061G0603101 JF	RST CHIPR 100 OHM +-5% 1/10W FENGHUA	
R1616	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1632	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R213	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R216	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R246	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R702	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R708	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R709	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R710	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R716	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R723	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R724	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R737	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1615	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1101	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1100	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1071	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1033	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1028	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R1020	061G0603102 JY	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R225	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R217	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1633	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1609	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1608	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1602	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1078	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1077	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R244	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R245	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R247	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R275	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R416	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R701	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R713	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R726	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R735	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1060	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1016	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	

R1017	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1031	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1034	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1035	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1037	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1038	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1043	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1055	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1057	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1058	061G0603103 JF	RST CHIPR 10K OHM +-5% 1/10W FENGHUA	
R1075	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1076	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1089	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1090	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1095	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1096	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R715	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1027	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R1026	061G0603104 JF	RST CHIPR 100KOHM 5% 1/10W FENGHUA	
R207	061G0603105 JF	RST CHIPR 1M OHM +-5% 1/10W FENGHUA	
R1049	061G0603105 JF	RST CHIPR 1M OHM +-5% 1/10W FENGHUA	
R1149	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R1148	061G0603122 JF	RST CHIPR 1.2KOHM 5% 1/10W FENGHUA	
R218	061G06031242FY	RST CHIP 12K4 1/10W 1%	
R1150	061G0603181 JF	RST CHIPR 180 OHM +-5% 1/10W FENGHUA	
R242	061G0603182 JF	RST CHIPR 1.8K OHM +-5% 1/10W FENGHUA	
R243	061G0603182 JF	RST CHIPR 1.8K OHM +-5% 1/10W FENGHUA	
R1023	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R1025	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R705	061G0603184 JF	RST CHIPR 180KOHM 5% 1/10W FENGHUA	
R1617	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1611	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1610	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1606	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1605	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1040	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1039	061G0603203 JF	RST CHIPR 20K OHM +-5% 1/10W FENGHUA	
R1024	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R1021	061G0603222 JF	RST CHIPR 2.2K OHM +-5% 1/10W FENGHUA	
R234	061G0603223 JF	RST CHIPR 22KOHM 5% 1/10W FENGHUA	
R233	061G0603223 JF	RST CHIPR 22KOHM 5% 1/10W FENGHUA	
R714	061G0603223 JY	RST CHIPR 22K OHM 1/10W YAGEO	
R727	061G06033001FF	RST CHIPR 3KOHM +-1% 1/10W FENGHUA	
R208	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R408	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R409	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R410	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R411	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R412	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R1144	061G0603330 JY	RST CHIPR 33 OHM 1/10W YAGEO	
R4H6	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H4	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H2	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R4H1	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	

R270	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R257	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R1630	061G0603332 JF	RST CHIPR 3.3KOHM 5% 1/10W FENGHUA	
R447	061G0603362 JF	RST CHIPR 3.6K OHM +-5% 1/10W FENGHUA	
R239	061G06034020FT	RST CHIP R 402OHM 1/10W +/-1%	
R1051	061G0603470 JY	RST CHIPR 47 OHM 1/10W YAGEO	
R741	061G06034709FF	RST CHIPR 47 OHM +-1% 1/10W FENGHUA	
R1629	061G0603471 JF	RST CHIPR 470OHM +-5% 1/10W FENGHUA	
R729	061G0603471 JF	RST CHIPR 470OHM +-5% 1/10W FENGHUA	
R414	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R413	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R407	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R406	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R405	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R404	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R253	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R252	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R251	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R250	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R248	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R241	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R417	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R718	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R720	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R721	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R722	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R734	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R736	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R706	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R704	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R703	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R610	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R547	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R541	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1041	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1042	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1046	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1047	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1053	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R1155	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R200	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R203	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R204	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R205	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R236	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R226	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R224	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R223	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R220	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R219	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R215	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R212	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R211	061G0603472 JY	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R544	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	

R1631	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R1628	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R1607	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R551	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R555	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R556	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R545	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R550	061G0603473 JY	RST CHIPR 47KOHM 1/10W YAGEO	
R446	061G0603512 JF	RST CHIPR 5.1K OHM +-5% 1/10W FENGHUA	
R1619	061G0603512 JY	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R201	061G06036041FF	RST CHIPR 6.04KOHM +-1% 1/10W FENGHUA	
R1093	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
R230	061G0603750 JF	RST CHIPR 75OHM +- 5% 1/10W FENGHUA	
R1151	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1087	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1084	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1082	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1080	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1072	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1068	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1065	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1012	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1009	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1004	061G0603750 JY	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R1061	061G06038202FI	TEST ONLY RST 0603 82K 1% 1/10W TA-I	
R1073	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1074	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1085	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1088	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1091	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R1092	061G0603823 JF	RST CHIPR 82KOHM 5% 1/10W FENGHUA	
R728	061G06039101FF	RST CHIPR 9.1KOHM +-1% 1/10W FENGHUA	
R1623	061G0805472 JY	RST CHIPR 4.7K OHM 5% 1/8W YAGEO	
R1622	061G0805472 JY	RST CHIPR 4.7K OHM 5% 1/8W YAGEO	
FB107	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
FB105	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
FB105	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
FB107	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
C290	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C289	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C288	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C287	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C286	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C285	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C284	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C283	065G040210312K Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C413	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C414	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C421	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C422	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C423	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C424	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C412	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C411	065G040210332K Y	CAP CHIP 0402 10N 50V X7R +/-10%	

C404	065G040210332K	Y	CAP CHIP 0402 10N 50V X7R +/-10%	
C305	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C307	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C308	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C309	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C310	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C311	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C312	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C401	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C402	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C403	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C407	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C408	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C409	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C410	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C417	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C304	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C430	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C420	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C419	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C418	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C278	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C279	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C280	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C281	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C282	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C297	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C298	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C302	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C303	065G040210425K	T	CAP CHIP 0402 0.1UF 25V X5R	
C1010	065G040222031J	Y	CAP CHIP 0402 22P 50V NPO +/-5%	
C1012	065G040222031J	Y	CAP CHIP 0402 22P 50V NPO +/-5%	
C730	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C1624	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C1037	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C1623	065G060310232K	A	CAP CHIP 0603 1000PF K 50V X7R	
C743	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C723	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C722	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C212	065G060310332K	Y	CAP CHIP 0603 10N 50V X7R +/-10%	
C260	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C261	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C262	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C264	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C265	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C266	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C267	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C271	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C272	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C293	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C294	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C316	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C427	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C425	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	

C227	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1631	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1072	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1076	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1081	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1082	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1085	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1088	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1095	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1108	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1627	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1615	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1608	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1607	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1606	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1603	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1210	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1209	065G060310432K	Y	CAP CHIP 0603 0.1UF K 50V X7R	
C1642	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C277	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C301	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C522	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C525	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C527	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C529	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C530	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C701	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C729	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1640	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1638	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1628	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1063	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C1062	065G060310512K	T	CAP CHIP 0603 1UF K 16V X7R	
C321	065G060310522K	T	CAP CHIP 0603 1UF K 25V X7R	
C324	065G060310522K	T	CAP CHIP 0603 1UF K 25V X7R	
C704	065G060310522K	T	CAP CHIP 0603 1UF K 25V X7R	
C1034	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1035	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1601	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1602	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1610	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1611	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1612	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1613	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C203	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C204	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1030	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1028	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1022	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1020	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C1014	065G060310522K	Y	CAP CHIP 0603 1UF K 25V X7R	
C270	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C263	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C259	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	

C257	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C253	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C252	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C249	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C248	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C274	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C275	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C276	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C315	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C306	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C300	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C299	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C296	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C291	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C218	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C221	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C224	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C225	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C228	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C230	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C236	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C237	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C239	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C245	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C246	065G060310605M	Y	CAP CHIP 0603 10UF 6.3V X5R +/-20%	
C1056	065G060315232K	3	CAP 0603 1.5NF 10% 50V X7R	
C1634	065G060315332K	F	CAP CHIP 0603 15NF K 50V X7R	
C1633	065G060315332K	F	CAP CHIP 0603 15NF K 50V X7R	
C1043	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1044	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1054	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C1055	065G060318031J	Y	CAP CHIP 0603 18P 50V NPO +/-5%	
C208	065G060320031J	Y	CAP CHIP 0603 20PF J 50V NPO	
C207	065G060320031J	Y	CAP CHIP 0603 20PF J 50V NPO	
C1083	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1084	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1086	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C1090	065G060322131J	A	CAP 0603 220PF J 50V NPO	
C295	065G060322332K	Y	TPV CHIP 0603 22N 50V X7R +/-10%	
C314	065G060322422K	T	CAP CHIP0603 220NF K 25V X7R	
C1641	065G060322517Z	Y	CAP CHIP 0603 2.2UF Z 16V Y5V	
C1057	065G060347031J	Y	CAP CHIP 0603 47P 50V NPO +/-5%	
C708	065G060347412K	Y	CAP CHIP 0603 0.47UF K 16V X7R	
C1625	065G080510537Z	T	CAP CHIP 0805 1UF Z 50V Y5V	
C1618	065G080510537Z	T	CAP CHIP 0805 1UF Z 50V Y5V	
C1629	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C273	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C320	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C426	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C523	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C431	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C405	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C406	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C416	065G080510615K	T	CHIP 10UF 16V X5R 0805	

C1066	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C1064	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C748	065G080510615K	T	CHIP 10UF 16V X5R 0805	
C233	065G080522522K	T	CAP CHIP 0805 2.2UF K 25V X7R	
C222	065G080522522K	T	CAP CHIP 0805 2.2UF K 25V X7R	
C1620	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C1619	065G080547432K	T	CAP CHIP 0805 0.47UF K 50V X7R	
C1011	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C1013	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C718	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C727	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C733	065G080547525K	T	CAP MLCC 0805 4.7UF K 25V X5R	
C1092	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1091	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1089	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1087	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1079	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1080	065G0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C1639	065G120610612K	T	CAP CHIP 1206 10UF K 16V X7R	
C1814	065G120610612K	T	CAP CHIP 1206 10UF K 16V X7R	
C731	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
C269	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
C268	065G1206226A5K	T	CAP CHIP1206 22UF K 10V X5R	
FB703	071G 56G301 EA		BEAD 300 OHM	
FB701	071G 56G301 EA		BEAD 300 OHM	
FB609	071G 56G301 EA		BEAD 300 OHM	
FB212	071G 56K121		CHIP BEAD	
FB213	071G 56K121		CHIP BEAD	
FB214	071G 56K121		CHIP BEAD	
FB215	071G 56K121		CHIP BEAD	
FB216	071G 56K121		CHIP BEAD	
FB217	071G 56K121		CHIP BEAD	
FB218	071G 56K121		CHIP BEAD	
FB219	071G 56K121		CHIP BEAD	
FB220	071G 56K121		CHIP BEAD	
FB221	071G 56K121		CHIP BEAD	
FB222	071G 56K121		CHIP BEAD	
FB223	071G 56K121		CHIP BEAD	
FB224	071G 56K121		CHIP BEAD	
FB611	071G 56K121		CHIP BEAD	
FB610	071G 56K121		CHIP BEAD	
FB606	071G 56K121		CHIP BEAD	
FB401	071G 56K121		CHIP BEAD	
FB400	071G 56K121		CHIP BEAD	
FB225	071G 56K121		CHIP BEAD	
FB112	071G 56K121		CHIP BEAD	
FB200	071G 56K121		CHIP BEAD	
FB201	071G 56K121		CHIP BEAD	
FB202	071G 56K121		CHIP BEAD	
FB203	071G 56K121		CHIP BEAD	
FB204	071G 56K121		CHIP BEAD	
FB205	071G 56K121		CHIP BEAD	
FB206	071G 56K121		CHIP BEAD	
FB207	071G 56K121		CHIP BEAD	

FB208	071G 56K121	CHIP BEAD	
FB209	071G 56K121	CHIP BEAD	
FB210	071G 56K121	CHIP BEAD	
FB211	071G 56K121	CHIP BEAD	
FB614	071G 56K121 M	CHIP BEAD	
FB613	071G 56K121 M	CHIP BEAD	
FB612	071G 56K121 M	CHIP BEAD	
FB103	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB111	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB110	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB109	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB108	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB106	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB104	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB102	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB101	071G 57G301 MB	BEAD 1206 300OHM 4A	
FB511	071G 59C121 B	FCM1608C-121T03 SMD	
FB509	071G 59C121 B	FCM1608C-121T03 SMD	
FB508	071G 59C121 B	FCM1608C-121T03 SMD	
FB502	071G 59C121 B	FCM1608C-121T03 SMD	
FB100	071G 59C121 B	FCM1608C-121T03 SMD	
FB227	071G 59D121 TA	CHIP BEAD 120R/600MA FCM1608KF-121T06	
L700	073G253S 46 H	SMD CHOKE 4.7UH	
R240	073G253S 94 M1	SMD CHOKE 2.2UH 10% 600MA	
L105	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L104	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L103	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
L102	073T 6322910M	CHIP IND 0603 2.2UH+-10% MICROGATE	
CN500	088T 340 21 VA	HDMI HEADER 21P V/T	
CN503	088T 340 21 VA	HDMI HEADER 21P V/T	
CN501	088T 340 21 VA	HDMI HEADER 21P V/T	
D503	093G 64 42 PP	BAV70 SOT-23	
D502	093G 64 42 PP	BAV70 SOT-23	
D100	093G 64 42 PP	BAV70 SOT-23	
X200	093G 22S503 H	CRYSTAL HSX840GA 24MHZ HELE	
X100	093G 22S910 H	HSX840GA 20P 16.00MHZ	
ZD611	093G 39S 24 T	RLZ 5.6B LLDS	
ZD610	093G 39S 24 T	RLZ 5.6B LLDS	
ZD609	093G 39S 24 T	RLZ 5.6B LLDS	
ZD608	093G 39S 24 T	RLZ 5.6B LLDS	
ZD612	093G 39S 24 T	RLZ 5.6B LLDS	
ZD600	093G 39S 44 T	RLZ18B LLDS	
D707	093G 64S3PH	BAS32L	
D708	093G 64S3PH	BAS32L	
D710	093G 64S3PH	BAS32L	
D711	093G 64S3PH	BAS32L	
ZD111	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD110	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD109	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD108	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD107	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD106	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD105	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD104	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	

ZD102	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD101	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
ZD100	093G 64S500 SU	ESD MLVG04025R0QV05BP INPAQ	
	709T3787 QS003	COMSUPTIVE ASS'Y	
	052G 2191 A	PAPER TAPE	
	052G6026 2	MESH PRINTTING PAPER	
	055G 23520	IPA	
	055G 100610	TIN CREAM W/O PB	
E715	715G3787M0G000005K	MAIN BOARD PCB	
	Q90T0202 1	HEAT SINK FOR U200	
	KEPFAQE7C	KEY BOARD	
CN01	033G8032 4F HR	CONNECTOR	
R08	061G06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R09	061G06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R05	061G06032002FF	RST CHIPR 20KOHM +-1% 1/10W FENGHUA	
R01	061G06032002FF	RST CHIPR 20KOHM +-1% 1/10W FENGHUA	
R07	061G06033301FY	RST CHIP 3K3 1/10W 1%	
R03	061G06033301FY	RST CHIP 3K3 1/10W 1%	
R02	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
R06	061G06036801FF	RST CHIPR 6.8KOHM +-1% 1/10W FENGHUA	
SW07	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW06	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW05	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW04	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW03	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW02	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
SW01	077G 607 2 FD	CHIP TACT SW BY FORWARD SFKQGMA2125T-PL	
	709T3814 QS001	COMSUPTIVE ASS'Y	
	052G6026 2	MESH PRINTTING PAPER	
E715	715G3814K01003004S	KEY BOARD PCB	
	IRPFAQG1C	IR BOARD	
U01	056G 627 14 1M	IC KSM-2003TN2M-S 37.9KHZ	
	709T3821 QM001	COMSUPTIVE ASS'Y	
CN01	033G8032 5F HR	CONNECTOR	
R001	061G0603153 JY	RST CHIPR MAX 15KOHM 1/10W YAGEO	
C01	065G060310432K Y	CAP CHIP 0603 0.1UF K 50V X7R	
LED01	081G 14 24 EL	CHIP LED BLUE/DARK RED	
ZD01	093G 39S 24 T	RLZ 5.6B LLDS	
	709T3821 QS001	COMSUPTIVE ASS'Y	
	052G6026 2	MESH PRINTTING PAPER	
	715G3821R01000004M	IR BOARD PCB	
	ADTV92420ABL	POWER BOARD	
	040G 45762412B	CBPC LABEL	
	009G6005 1 GP	GROUND TERMINAL	
CN903	033G327813D	CONNECTOR	
CN905	033T327812D	WAFER 12P PLUG	
IC902	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC905	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC907	056G 139 9	IC EL817M(X) PHOTOCOUPLER DIP-4	
IC907	056G 139 3B	IC PC123Y82FZ0F	
IC905	056G 139 3B	IC PC123Y82FZ0F	
IC902	056G 139 3B	IC PC123Y82FZ0F	
IC901	056T 379121	IC STR- A6069H DIP-8	
Q904	057G 761 7	KTD1691P	

Q904	057G 761909 T	TRANSISTOR KSD1691YSTU TO-126	
R932	061G153M108 59	0.1 OHM +-5% 3W	
R934	061G153M108 59	0.1 OHM +-5% 3W	
C903	063G107K474 US	0.47UF +-10%	
C904	063G107K474 US	0.47UF +-10%	
C931	063G210K105BCN	MPP CAP 1UF 520V P=15MM	
C915	063G211J333 5C C	0.033UF 5% 1000V P=15MM	
C905	065G 1K103 2E6921	CAP CER 10NF K 1KV Y5U	
C919	065G 3J2206ET	22PF 5% SL 3KV TDK	
C920	065G 3J2206ET	22PF 5% SL 3KV TDK	
C944	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C929	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C902	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C964	065G306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C901	065G306K6812BM	Y1 CAP 680PF 10% 250VAC KX	
C906	065G306K6812BM	Y1 CAP 680PF 10% 250VAC KX	
C933	067G 42Z82015K	EC 82UF M 450V 18*36MM	
C934	067G 42Z82015K	EC 82UF M 450V 18*36MM	
C950	067G204V331 3K	CS CAP 330UF 16V 10*12 MM	
C951	067G215A1023KV	EC 1000UF 16V M 10*20MM	
C922	067G215D4714KV	E.C 105°C CAP 470UF M 25V ED SERIES	
C921	067G215S1024KV	EC 105°C CAP 1000UF M 25V	
C910	067G215S1026KV	EC CAP 1000UF 35V 12.5*25MM	
C911	067G215S1026KV	EC CAP 1000UF 35V 12.5*25MM	
C912	067G215S4716KV	CAP 105C 470UF M 35V 10*20	
L906	073G 174148 S	PFC CHOKE 600UH 10%	
L907	073G 253 91 H	CHOKE COIL	
L905	073G 253 91 H	CHOKE COIL	
L904	073G 253150 L	CHOCK	
L901	073L 174 49 LG	LINE FILTER	
L903	073L 174 49 LG	LINE FILTER	
L902	073L 174 52 LG	CHOKE COIL	
T901	080GL52T 5 L2	X'FMR 1.0MH 10%	
T902	080TL42T 14 YS	X'FMR 600UH YS04160152	
F901	084G 41 11 L	FUSE 5A 250V	
CN901	087G 501 48 S	AC SOCKET 3PIN + 3 HOLE	
CN901	087G 501 48 DL	AC SOCKET 3PIN + 3 HOLE	
D909	093G 52 70	DIODE 1N5408-P 3A/1000V DO-201AD	
D909	093G 52 70 1	1N5408-E(SHORT PIN) 3A/1000V DO-201AD	
D909	093G 5255L52T	DIDOE 1N5408-E3/73 3A/1000V DO-201AD	
	0Q1G 340 8106 CR3	SCREW	
	705TQ861008	NR901 ASS'Y	
NR901	061T 58030 WL	RST NTCR 3 OHM +-20% 5A THINKING	
	Q09T 203 8	PIN FOR NR901	
	705TQ893028	D906/D903/D907 ASS'Y	
D906	093G 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
D903	093G 60324	DIODE FMWN-2308 30A/80V TO-220	
D907	093G 60324	DIODE FMWN-2308 30A/80V TO-220	
	0M1G1730 8120	SCREW	
	Q90T0096A01	HEAT SINK	
	705TQ957049	Q902/Q903 ASS'Y	
Q902	057G 667 50	TRA STP10NK60ZFP 10A/600V TO-220FP	
Q903	057G 667 50	TRA STP10NK60ZFP 10A/600V TO-220FP	
	0M1G1730 8120	SCREW	

HS5	Q90G0099 2	HEAT SINK	
	705TQ957066	Q901 ASS'Y	
	012T 372 2	SILICON	
Q901	057G 667 25	STW20NM60	
	0M1G1730 10120	SCREW 42A9930016	
	Q90T0096A01	HEAT SINK	
	705TQ993073	D911 ASS'Y	
	090G6084 1	HEAT SINK	
D911	093G 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
	0M1G1730 8120	SCREW	
	705TQ993074	D901 ASS'Y	
D901	093G 220 33	DIODE FMXA-1106S	
	0M1G1730 8120	SCREW	
	Q90T0176 1	HEAT SINK	
	705TQ993075	BD901 ASS'Y	
BD901	093G 50460 35	BRIDGE GBJ1008 10A/800V GBJ	
	0M1G1730 10120	SCREW 42A9930016	
	Q90T0087 2	HEAT SINK	
IC906	056G 379104	IC ICE2PCS02H PG-DSO-8	
IC904	056G 379112	IC SSC9502S -TL SOP-18	
IC904	056G 379176	IC SSC9512S-TL SOP-18	
Q906	057G 417 4	PMBS3904/PHILIPS-SMT(04)	
Q905	057G 417 12 T	KEC 2N3904S-RTK/PS	
R923	061G0805000 JF	RST CHIPR 0 OHM +-5% 1/8W FENGHUA	
R975	061G0805000 JF	RST CHIPR 0 OHM +-5% 1/8W FENGHUA	
R976	061G0805000 JF	RST CHIPR 0 OHM +-5% 1/8W FENGHUA	
R923	061G0805000 JT	RST CHIPR 0 OHM +- 5% 1/8W TZAI YUAN	
R975	061G0805000 JT	RST CHIPR 0 OHM +- 5% 1/8W TZAI YUAN	
R976	061G0805000 JT	RST CHIPR 0 OHM +- 5% 1/8W TZAI YUAN	
R921	061G08051001FF	RST CHIPR 1KOHM +-1% 1/8W FENGHUA	
R921	061G08051001FT	RST CHIP 1K 1/8W 1%	
R969	061G0805101 JF	RST CHIPR 100 OHM +-5% 1/8W FENGHUA	
R969	061G0805101 JY	RST CHIPR 100OHM +- 5% 1/8W YEGAO	
R946	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R966	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R972	061G0805102 JF	RST CHIPR 1K OHM +-5% 1/8W FENGHUA	
R946	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R966	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R972	061G0805102 JT	RST CHIPR 1K OHM +- 5% 1/8W TZAI YUAN	
R911	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R917	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R938	061G0805103 JF	RST CHIPR 10K OHM +-5% 1/8W FENGHUA	
R911	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R917	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R938	061G0805103 JT	RST CHIPR 10K OHM +- 5% 1/8W TZAI YUAN	
R931	061G08051201FF	RST CHIPR 1.2KOHM +-1% 1/8W FENGHUA	
R931	061G08051201FT	RST CHIP R 1K2 1/8W +/-1%	
R922	061G08051500FF	RST CHIPR 150OHM +-1% 1/8W FENGHUA	
R922	061G08051500FT	RST CHIPR 150 OHM +-5% 1/8W	
R922	061G0805151 JT	RST CHIPR 150OHM +-5% 1/8W TZAI YUAN	
R930	061G08052001FF	RST CHIPR 2KOHM +-1% 1/8W FENGHUA	
R930	061G08052001FT	RST CHIP 2K 1/8W 1%	
R949	061G0805202 JF	RST CHIPR 2KOHM +-5% 1/8W FENGHUA	
R970	061G0805202 JF	RST CHIPR 2KOHM +-5% 1/8W FENGHUA	

R949	061G0805202 JT	RST CHIP 2K 1/8W 5% TZAI YUAN	
R970	061G0805202 JT	RST CHIP 2K 1/8W 5% TZAI YUAN	
R940	061G0805203 JF	RST CHIPR 20KOHM +-5% 1/8W FENGHUA	
R940	061G0805203 JT	RST CHIPR 20K +-5% 1/8W TZAI YUAN	
R927	061G08052052FF	RST CHIPR 20.5KOHM +-1% 1/8W FENGHUA	
R927	061G08052052FT	RST CHIP 20K5 1/8W 1%	
R971	061G08052201FF	RST CHIPR 2.2KOHM +-1% 1/8W FENGHUA	
R945	061G08052202FT	RST CHIP 22K 1/8W 1%	
R945	061G08052202FY	RST CHIPR 22KOHM +-1% 1/8W YAGEO	
R962	061G0805221 JF	RST CHIPR 220 OHM +-5% 1/8W FENGHUA	
R947	061G0805221 JF	RST CHIPR 220 OHM +-5% 1/8W FENGHUA	
R962	061G0805221 JT	RST CHIP 220R 1/8W 5% TZAI YUAN	
R947	061G0805221 JT	RST CHIP 220R 1/8W 5% TZAI YUAN	
R965	061G08052401FF	RST CHIPR 2.4KOHM +-1% 1/8W FENGHUA	
R925	061G08052402FF	RST CHIPR 24KOHM +-1% 1/8W FENGHUA	
R925	061G08052402FT	RST CHIP 24K 1/8W 1%	
R948	061G0805272 JF	RST CHIPR 2.7KOHM +-5% 1/8W FENGHUA	
R948	061G0805272 JT	RST CHIPR 2K7 +-5% 1/8W TZAI YUAN	
R926	061G08053001FF	RST CHIPR 3KOHM +-1% 1/8W FENGHUA	
R926	061G08053001FT	RST CHIP R 3K 1/8W +/-1%	
R909	061G08053002FF	RST CHIPR 30KOHM +-1% 1/8W FENGHUA	
R909	061G08053002FT	RST CHIP 30K 1/8W 1%	
R936	061G0805330 JF	RST CHIPR 33 OHM +-5% 1/8W FENGHUA	
R936	061G0805330 JY	RST CHIPR 33OHM +-5% 1/8W YAGEO	
R916	061G0805470 JF	RST CHIPR 47OHM +-5% 1/8W FENGHUA	
R910	061G0805470 JF	RST CHIPR 47OHM +-5% 1/8W FENGHUA	
R916	061G0805470 JT	RST CHIPR 47OHM +-5% 1/8W TZAI YUAN	
R910	061G0805470 JT	RST CHIPR 47OHM +-5% 1/8W TZAI YUAN	
R924	061G08054701FF	RST CHIPR 4.7KOHM +-1% 1/8W FENGHUA	
R924	061G08054701FT	RST CHIP 4K7 1/8W 1%	
R933	061G0805510 JF	RST CHIPR 51OHM +-5% 1/8W FENGHUA	
R933	061G0805510 JT	RST CHIPR 51OHM +-5% 1/8W TZAI YUAN	
R929	061G08055101FF	RST CHIPR 5.1KOHM +-1% 1/8W FENGHUA	
R929	061G08055101FT	RST CHIP 5K1 1/8W 1%	
R943	061G0805512 JF	RST CHIPR 5.1KOHM +-5% 1/8W FENGHUA	
R943	061G0805512 JT	RST CHIPR 5K1 +-5% 1/8W TZAI YUAN	
R942	061G0805513 JF	RST CHIPR 51KOHM +-5% 1/8W FENGHUA	
R942	061G0805513 JY	RST CHIPR 51K +-5% 1/8W YAGEO	
R928	061G08055602FF	RST CHIPR 56KOHM +-1% 1/8W FENGHUA	
R928	061G08055602FT	RST CHIP R 56K 1/8W +/-1%	
R967	061G08056203FF	RST CHIPR 620KOHM +-1% 1/8W FENGHUA	
R967	061G08056203FT	RST CHIP 620K 1/8W 1%	
JR910	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR909	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR908	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR907	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR905	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR904	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR903	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR902	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR901	061G1206000 JF	RST CHIPR MAX0R05 1/4W FENGHUA	
JR910	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR909	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR908	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	

JR907	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR905	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR904	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR903	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR902	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
JR901	061G1206000 JT	RST CHIPR MAX0R05 1/4W TZAI YUAN	
R935	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R939	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R944	061G12061004FF	RST CHIPR 1 MOHM +-1% 1/4W FENGHUA	
R944	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R939	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R935	061G12061004FT	RST CHIP R 1 MOHM +-1% 1/4W	
R951	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R952	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R953	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R954	061G1206104 JF	RST CHIPR 100KOHM +-5% 1/4W FENGHUA	
R951	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R952	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R953	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R954	061G1206104 JT	RST CHIPR 100KOHM +-5% 1/4W TZAI YUAN	
R964	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R961	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R958	061G12061504FT	RST CHIP 1M5 1/4W 1%	
R905	061G12062004FF	RST CHIPR 2MOHM 1% 1/4W FENGHUA	
R906	061G12062004FF	RST CHIPR 2MOHM 1% 1/4W FENGHUA	
R907	061G12062004FF	RST CHIPR 2MOHM 1% 1/4W FENGHUA	
R907	061G12062004FT	RST CHIP R 2MOHM 1/4W +/-1%	
R906	061G12062004FT	RST CHIP R 2MOHM 1/4W +/-1%	
R905	061G12062004FT	RST CHIP R 2MOHM 1/4W +/-1%	
R908	061G1206202 JF	RST CHIPR 2KOHM +-5% 1/4W FENGHUA	
R908	061G1206202 JT	RST CHIP R 2KOHM 1/4W +/-5%	
R941	061G1206221 JF	RST CHIPR 220 OHM +-5% 1/4W FENGHUA	
R941	061G1206221 JT	RST CHIPR 220 OHM +-5% 1/4W TZAI YUAN	
R903	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R902	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R901	061G1206334 JF	RST CHIPR 330KOHM +-5% 1/4W FENGHUA	
R901	061G1206334 JT	RST CHIPR 330 KOHM 1/4W TZAI YUAN	
R902	061G1206334 JT	RST CHIPR 330 KOHM 1/4W TZAI YUAN	
R903	061G1206334 JT	RST CHIPR 330 KOHM 1/4W TZAI YUAN	
R955	061G1206339 JF	RST CHIPR 3.3 OHM +-5% 1/4W FENGHUA	
R955	061G1206339 JT	RST CHIPR 3.3 OHM +-5% 1/4W TZAI YUAN	
R957	061G1206470 JF	RST CHIPR 47 OHM +-5% 1/4W FENGHUA	
R956	061G1206470 JF	RST CHIPR 47 OHM +-5% 1/4W FENGHUA	
R957	061G1206470 JT	RST CHIPR 47 OHM +-5% 1/4W TZAI YUAN	
R956	061G1206470 JT	RST CHIPR 47 OHM +-5% 1/4W TZAI YUAN	
R963	061G1206475 JF	RST CHIPR 4.7 MOHM +-5% 1/4W FENGHUA	
R963	061G1206475 JT	RST CHIPR 4.7 MOHM +-5% 1/4W TZAI YUAN	
R915	061G1206512 JT	RST CHIPR 5.1 KOHM 1/4W TZAI YUAN	
R914	061G1206512 JT	RST CHIPR 5.1 KOHM 1/4W TZAI YUAN	
R913	061G1206512 JT	RST CHIPR 5.1 KOHM 1/4W TZAI YUAN	
R912	061G1206512 JT	RST CHIPR 5.1 KOHM 1/4W TZAI YUAN	
R912	061G1206512 JY	RST CHIPR 5.1 KOHM 1/4W YAGEO	
R913	061G1206512 JY	RST CHIPR 5.1 KOHM 1/4W YAGEO	
R914	061G1206512 JY	RST CHIPR 5.1 KOHM 1/4W YAGEO	

R915	061G1206512 JY	RST CHIPR 5.1 KOHM 1/4W YAGEO	
R919	061G1206759 JF	RST CHIPR 7.5 OHM +-5% 1/4W FENGHUA	
R919	061G1206759 JT	RST CHIPR 7.5 OHM 1/4W TZAI YUAN	
R964	061T12061504FY	RST CHIP 1M5 1/4W 1%	
R958	061T12061504FY	RST CHIP 1M5 1/4W 1%	
R961	061T12061504FY	RST CHIP 1M5 1/4W 1%	
C926	065G080510231J 3	CAP CHIP 0805 1N 50V NPO +/-5%	
C943	065G080510231J 3	CAP CHIP 0805 1N 50V NPO +/-5%	
C941	065G080510231J Y	CAP CHIP 0805 1N 50V NPO +/-5%	
C916	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C907	065G080510232K Y	CAP CHIP 0805 1N 50V X7R +/-10%	
C940	065G080510332K Y	CAP CHIP 0805 10N 50V X7R +/-10%	
C963	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C955	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C952	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C945	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C937	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C930	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C927	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C923	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C909	065G080510432K Y	CAP CHIP 0805 100N 50V X7R +/-10%	
C917	065G080510522K T	CAP CHIP 0805 1UF K 25V X7R	
C918	065G080510522K T	CAP CHIP 0805 1UF K 25V X7R	
C939	065G080510522K T	CAP CHIP 0805 1UF K 25V X7R	
C913	065G080510537Z 3	CAP CHIP 0805 1U 50V Y5V -20%+80%	
C960	065G080522432K Y	CAP CHIP 0805 0.22UF K 50V X7R	
C961	065G080522432K Y	CAP CHIP 0805 0.22UF K 50V X7R	
C959	065G080547232K Y	CAP CHIP 0805 4700PF K 50V X7R	
C942	065G080547232K Y	CAP CHIP 0805 4700PF K 50V X7R	
C914	065G080547432K Y	CAP CHIP 0805 470N 50V X7R +/-10%	
C938	065G080547432K Y	CAP CHIP 0805 470N 50V X7R +/-10%	
C949	065G120622272K 3	CER 1206 2N2 500V X7R 10%	
L906	006G 31 4	1.7MM RIVET	
CN901	006G 31500 GP	EYELET	
T902	006G 31502	1.5MM RIVET	
IC908	056G 158 12	KIA431A-AT/P TO-92	
IC903	056G 158 12	KIA431A-AT/P TO-92	
R904	061G 30310852T GP	FUSE RESISTOR	
R950	061G 30347852T GP	RST FUSER 0.47OHM +-5% 1W	
R968	061T152M12952T	RST MOFR 1.2OHM +-5% 2WS	
C924	065G 2K1019FT6213	100PF K 2KV SL	
C947	065G 2K102 2T6921	CAP CER 1000PF 2KV K Y5P	
C946	065G 2K102 2T6921	CAP CER 1000PF 2KV K Y5P	
C928	067G 3154797KT	EC 4.7UF 50V M 5*11MM	
C936	067G215A4704KT	EC 47UF 25V 5*11MM	
C956	067G215D1017KT	EC CAP 100UF 50V 8*12MM	
C908	067G215Y1007KT	KY50VB10M-TP5 5*11.5	
C958	067G215Y1007KT	KY50VB10M-TP5 5*11.5	
FB902	071G 55 9 T	FERRITE BEAD	
FB906	071G 55 9 T	FERRITE BEAD	
FB905	071G 55 29	FERRITE BEAD	
FB904	071G 55 29	FERRITE BEAD	
FB903	071G 55 29	FERRITE BEAD	
FB901	071G 55 29	FERRITE BEAD	

ZD906	093G 39 5452T	HZ12B2-E	
ZD901	093G 3916652T	MTZJ15B (13.89-14.62)	
ZD902	093G 3916652T	MTZJ15B (13.89-14.62)	
ZD904	093G 3916752T	MTZJ T-72 16B	
ZD903	093G 3917152T	TZJ T-72 30B	
D905	093G 52 6452T	DIODE EG01A 0.5A/600V AXIAL-LEAD	
D918	093G 64 1152T	1N4148	
D917	093G 64 1152T	1N4148	
D916	093G 64 1152T	1N4148	
D910	093G 64 1152T	1N4148	
D904	093G 64 1152T	1N4148	
D902	093G 64 1152T	1N4148	
ZD906	093G 39G 2	DIODE MTZJ T-72 12B DO-34	
D914	093G110050152T	DIODE PR1007 1A/1000V 500NS DO-41	
D913	093T1080 252T	DIODE SARSO1-V1 SANKEN	
J919	095G 90 23	JUMPER WIRE	
J918	095G 90 23	JUMPER WIRE	
J917	095G 90 23	JUMPER WIRE	
J920	095G 90 23	JUMPER WIRE	
J921	095G 90 23	JUMPER WIRE	
J922	095G 90 23	JUMPER WIRE	
J923	095G 90 23	JUMPER WIRE	
J924	095G 90 23	JUMPER WIRE	
J925	095G 90 23	JUMPER WIRE	
J926	095G 90 23	JUMPER WIRE	
J927	095G 90 23	JUMPER WIRE	
J928	095G 90 23	JUMPER WIRE	
J929	095G 90 23	JUMPER WIRE	
J930	095G 90 23	JUMPER WIRE	
J931	095G 90 23	JUMPER WIRE	
J932	095G 90 23	JUMPER WIRE	
J933	095G 90 23	JUMPER WIRE	
J916	095G 90 23	JUMPER WIRE	
J901	095G 90 23	JUMPER WIRE	
J902	095G 90 23	JUMPER WIRE	
J903	095G 90 23	JUMPER WIRE	
J904	095G 90 23	JUMPER WIRE	
J905	095G 90 23	JUMPER WIRE	
J906	095G 90 23	JUMPER WIRE	
J907	095G 90 23	JUMPER WIRE	
J915	095G 90 23	JUMPER WIRE	
J914	095G 90 23	JUMPER WIRE	
J913	095G 90 23	JUMPER WIRE	
J912	095G 90 23	JUMPER WIRE	
J911	095G 90 23	JUMPER WIRE	
J910	095G 90 23	JUMPER WIRE	
J908	095G 90 23	JUMPER WIRE	
E715	715G3885P02W30003M	POWER BOARD PCB	2nd source
E715	715G3885P02W30003S	POWER BOARD PCB	
	Q51G 6 4509	GLUE_RTV	
	Q45G 99606 25 ESD	INSULATING PE BAG	