


Service
Service
Service

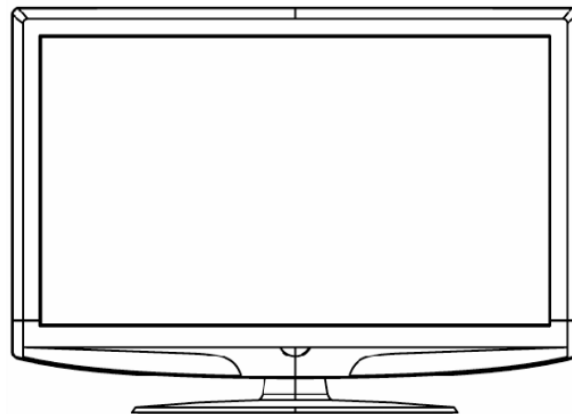

Service Manual

TABLE OF CONTENTS

Description	Page	Description	Page
Table Of Contents.....	1	6.1.Main Board.....	27
Important Safety Notice.....	2	6.2.Power Board.....	30
Revision List.....	3	6.3.Key Board.....	36
1. General Specification.....	4	6.4.IR Board.....	36
2. Operating Instructions.....	5	7. Adjustment.....	37
2.1. The Use Of Remote Control.....	5	8. Block Diagram.....	39
2.2. To Use The Menu.....	7	9. Schematic.....	40
2.3. How To Connect.....	13	9.1 Main Board.....	40
2.4. Front Panel Control Knobs.....	17	9.2.Power Board.....	58
3. Input/Output Specification.....	18	9.3.Key Board.....	60
4. Mechanical Instructions.....	20	10. Exploded View.....	60
5. Repair Flow Chart	23	11.BOM List.....	63
6. PCB Layout	27	12.Different Parts List.....	139

SAFETY NOTICE

ANY PERSON ATTEMPTING TO SERVICE THIS CHASSIS MUST FAMILIARIZE HIMSELF WITH THE CHASSIS AND BE AWARE OF THE NECESSARY SAFETY PRECAUTIONS TO BE USED WHEN SERVICING ELECTRONIC EQUIPMENT CONTAINING HIGH VOLTAGES.

CAUTION: USE A SEPARATE ISOLATION TRANSFORMER FOR THIS UNIT WHEN SERVICING

Important Safety Notice

Proper service and repair is important to the safe, reliable operation of all AOC Company Equipment. The service procedures recommended by AOC and described in this service manual are effective methods of performing service operations. Some of these service operations require the use of tools specially designed for the purpose. The special tools should be used when and as recommended.

It is important to note that this manual contains various CAUTIONS and NOTICES which should be carefully read in order to minimize the risk of personal injury to service personnel. The possibility exists that improper service methods may damage the equipment. It is also important to understand that these CAUTIONS and NOTICES ARE NOT EXHAUSTIVE. AOC could not possibly know, evaluate and advise the service trade of all conceivable ways in which service might be done or of the possible hazardous consequences of each way. Consequently, AOC has not undertaken any such broad evaluation. Accordingly, a servicer who uses a service procedure or tool which is not recommended by AOC must first satisfy himself thoroughly that neither his safety nor the safe operation of the equipment will be jeopardized by the service method selected.

Hereafter throughout this manual, AOC Company will be referred to as AOC.

WARNING

Use of substitute replacement parts, which do not have the same, specified safety characteristics might create shock, fire, or other hazards.

Under no circumstances should the original design be modified or altered without written permission from AOC. AOC assumes no liability, express or implied, arising out of any unauthorized modification of design.

Servicer assumes all liability.

FOR PRODUCTS CONTAINING LASER:

DANGER-Invisible laser radiations when open AVOID DIRECT EXPOSURE TO BEAM.

CAUTION-Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.

CAUTION -The use of optical instruments with this product will increase eye hazard.

TO ENSURE THE CONTINUED RELIABILITY OF THIS PRODUCT, USE ONLY ORIGINAL MANUFACTURER'S REPLACEMENT PARTS, WHICH ARE LISTED WITH THEIR PART NUMBERS IN THE PARTS LIST SECTION OF THIS SERVICE MANUAL.

Take care during handling the LCD module with backlight unit

- Must mount the module using mounting holes arranged in four corners.
- Do not press on the panel, edge of the frame strongly or electric shock as this will result in damage to the screen.
- Do not scratch or press on the panel with any sharp objects, such as pencil or pen as this may result in damage to the panel.
- Protect the module from the ESD as it may damage the electronic circuit (C-MOS).
- Make certain that treatment person's body is grounded through wristband.
- Do not leave the module in high temperature and in areas of high humidity for a long time.
- Avoid contact with water as it may a short circuit within the module.
- If the surface of panel becomes dirty, please wipe it off with a soft material. (Cleaning with a dirty or rough cloth may damage the panel.)

Revision List


[illegible]

1. General Specification

Model No.	L32W981	L37W981	L42W98H
DISPLAY			
Aspect Ratio	16:9	16:9	16:9
Resolution	1366 x 768	1366 x 768	1920 x 1080
OSD Language	English, German, French, Italian, Spanish, Portuguese, Dutch, Danish, Finnish, Swedish, Norwegian, Polish, Russian, Greek		
ENHANCEMENT			
Sound Output (RMS Watts)	2x5 W	2x10 W	2x10 W
Sound Mode	Rock, Pop, Live, Dance, Techno, Classic, Soft		
Picture Formats	Automatic, Panorama, 4:3, Movie expand 14:9, Movie expand 16:9, 16:9 subtitle, Wide screen		
Picture Mode	User, Cinema, Sport, Vivid, Hi-Bright		
CONNECTIONS			
Rear Connectors	Tuner input (75Ω) SCART 1 / SCART 2 PC IN :VGA and Audio cable		
	Component Video and L/R Audio input SPDIF Output (Digital audio out) AV L/R Audio Output HDMI 1 / HDMI 2		
Side Connectors	Earphone Output AV In (Composite Audio/ Video) S-Video		
	HDMI 3		
WEIGHT & DIMENSIOIN			
Product Dimension (W x D x H)	783 mm 209mm 559 mm	904 mm 230 mm 629 mm	1009.4 mm 262.2 mm 688.1mm
Net Weight	11.3 kg	16 kg	21.3 kg
POWER			
Operation (Max.)	< 170 W	< 200 W	< 250 W
Standby	< 1W		
Mains Power	AC100-240V 2.4A 60-50Hz	AC100-240 V 2.6A 60-50Hz	AC100-240V 2.8A 60-50Hz

2. Operating Instructions

2.1 The Use of Remote Control

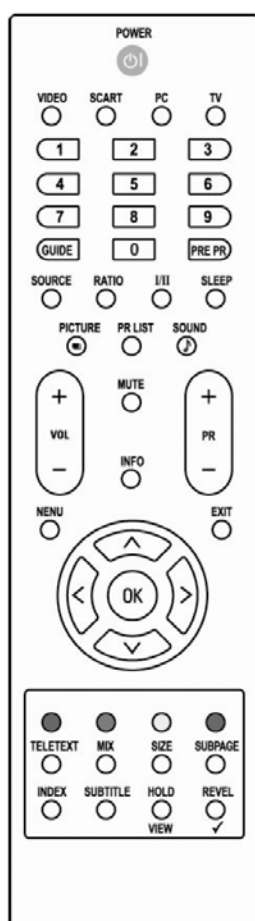

POWER

Press to turn the LCD TV on or enter standby mode.

VIDEO

Press this key you could select YPbPr, Side AV, HDMI 1, HDMI 2, HDMI 3.

SCART

Press this key you could select SCART 1, SCART 2.

PC

Press to direct to the PC mode.

TV

Press to direct to the TV mode.

0-9 DIGIT BUTTONS

To select a TV channel directly.

GUIDE

Press this key to display electronic program guide in TV mode.

PRE PR

To display the previous selected TV channel.

SOURCE

Press to switch signal sources.

RATIO

Change the aspect ratio; please refer to Picture format section.

I/II

Select MONO, STEREO, DUAL 1 and DUAL 2 for ATV channel. Select Audio language for DTV channel.

SLEEP

Press to turn the LCD TV off within an amount of time. (5-180 minutes.)

PICTURE

Press to set the LCD TV to a predefined picture setting. User / Cinema / Sport / Vivid / Hi-Bright

PR LIST

Press to display a list of channels and input sources.

SOUND

Press to set the LCD TV to a predefined sound setting. Off / Rock / Pop / Live / Dance / Techno / Classic / Soft

+ VOL-

Press to adjust the volume.

+ PR -

Press to select the channel.

MUTE

Press to toggle audio on and off. You can also press +/- VOL to restore the previous volume level.

INFO

Press to display the current signal status, including input source/channel audio mode.

MENU

Press to activate the LCD TV OSD. Press again to exit the LCD TV OSD.

EXIT

Press to exit LCD TV OSD.

OK

Press to activate a setting.

^ V < >

Press ^ V < > to navigate and confirm your selection.

VIEW


Press to display a list of all channels marked as favorite (incl. sub channels).



Press to add or remove a channel in the favorite channels list of the TV.

COLOUR BUTTONS

When functions attached to the colour buttons are active or selected, the colour buttons are shown on screen.

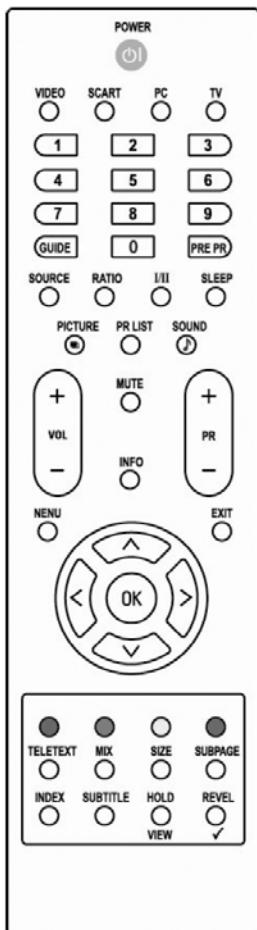**TELETEXT**

Press this button to activate Teletext. Press again to turn off Teletext.

MIX

Press this button to activate Teletext with TV.

SIZE

Press this button to change the font size: Full screen, Top half and Bottom half.

SUBPAGE

Display the sub page (when available)

INDEX

Press this button to return to page 100 or the index page; and then press 0 to 9. The teletext page will be numbered and added to the page you select or the secondary item.

SUBTITLE

Press it to select the next page marked as a subtitle page and request it as the display page.

HOLD

Press this button to stop the scrolling of pages.
The text decoder stops receiving data.

REVEAL

Reveal hidden information such as answers to a quiz.

R/G/Y/B (Colour button)


Press buttons to select the pictures with various colours of text. Different channels display different functions.

Picture format


1. Press the **RATIO** button on the remote control to enter the picture format menu.

2. Press the o/oe buttons to select a picture format and press the **OK** button to confirm your choice.


- **Automatic:** The Automatic format for DTV and HDMI transport streams with AFD information, while that for ATV and SCART should be with WSS information.
- **Panorama:** Removes the black bars on the side of 4:3 broadcasts with minimal distortion.
- **4:3:** Displays the classic 4:3 format.
- **Movie expand 14:9:** Scales the classic 4:3 format to 14:9.
- **Movie expand 16:9:** Scales the classic 4:3 format to 16:9.
- **16:9 subtitle:** Display 4:3 pictures using the full surface of the screen leaving the subtitles visible.
- **Wide screen:** Stretches the classic 4:3 format to 16:9.

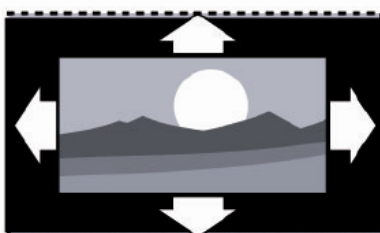

Automatic

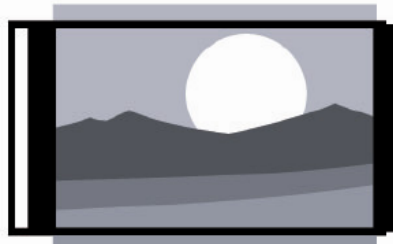


Movie expand 14:9

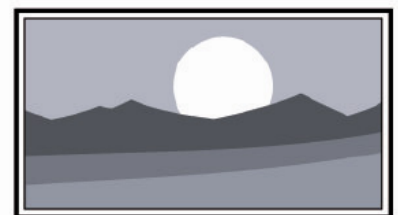

Wide screen




Panorama

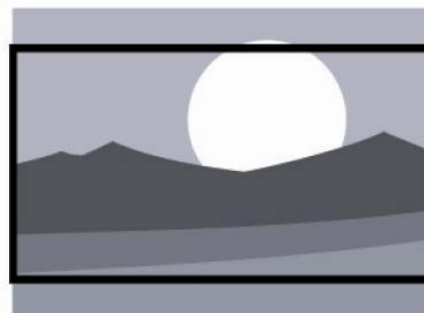

Movie expand 16:9



4:3

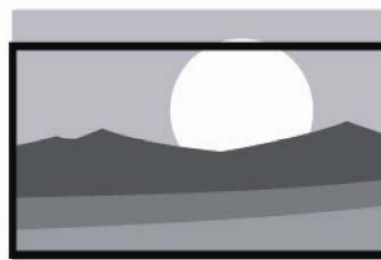

16:9 subtitle

2.2 To Use the Menus

OSD SETTING

Press the MENU button on the side of the LCD TV or press the MENU button on the remote control.


Settings	5	Picture	9
Picture		Picture mode	
Sound		Brightness	
TV		Contrast	
Installation		Colour	
Parental		Sharpness	
		Colour temperature	
		Noise Reduction	
		Back light	
		Picture format	

Menu	Descriptions
Picture	Show more picture modes and functions based on your favourite channels and enables you to adjust the colour and brightness setup.
Sound	Provide more audio selections. You can also set the audio environment of the LCD TV.
TV	Enable you to adjust special functions for country, audio language and channel of the TV.
Installation	Enable you to adjust settings related to the installation of the TV channels and language.
Parental	Enable you to control special functions for the TV channels.

1. Press the MENU button on the side of the LCD TV or press the MENU button on the remote control.
2. Press the o/oe button to highlight the menu entries.
3. Press the π button to enter the submenu.
4. Press the o/oe button to highlight the item to be adjusted.

5. Press the π button to enter the setting.


6. Press the MENU button to quit the picture setting.

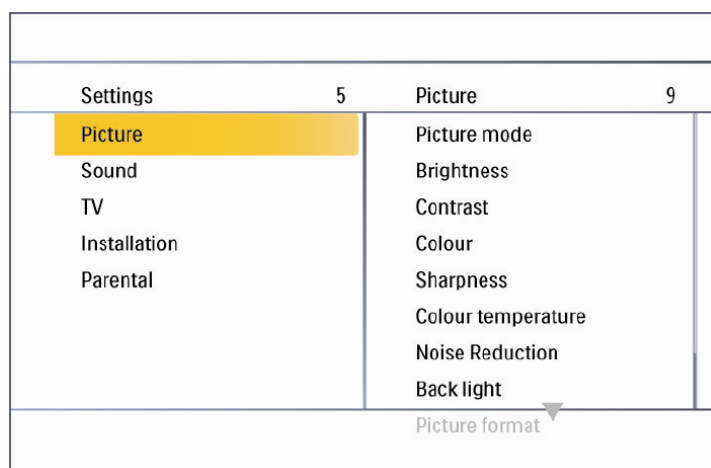

Picture

Menu	Descriptions
Picture mode	To set the LCD TV to a predefined picture settings. Use the o/oe buttons to toggle between User, Cinema, Sport, Vivid, and Hi-Bright.
Brightness	To brighten the dark parts of the picture.
Contrast	To sharpen the picture quality.
Colour	To add or reduce colour.
Sharpness	To improve detail.
Colour temperature	To choose between Normal (neutral), Warm (redder), and Cool (bluer).
Noise Reduction	To filter out and reduce the image noise and improve picture quality. Use the o/oe buttons to toggle between Off, Low, Medium, and Strong.
Back light	To make the background colour brighter or darker.
Picture format	To display a list of available display formats. Use the o/oe buttons to toggle between Automatic, Panorama, 4:3, Movie expand 14:9, Movie expand 16:9, 16:9 subtitle, and Wide screen.

Sound

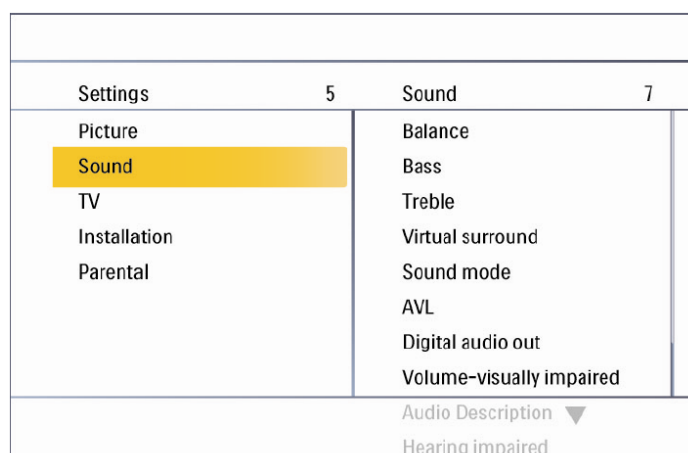

Menu	Descriptions
Balance	To adjust the balance between left/right channels.
Bass	To adjust audio setting parameters of bass.
Treble	To adjust audio setting parameters of treble.
Virtual surround	To add greater depth and dimension to the TV sound. Use the o/oe buttons to toggle between On or Off.
Sound mode	To set the LCD TV to a predefined sound setting. Use the o/oe buttons to toggle between Off, Rock, Pop, Live, Dance, Techno, Classic, and Soft.
AVL	To eliminate the volume differences between channels and programs and also reduce the dynamics of sound.
Digital audio out	To select the Digital audio out. Use the o/oe buttons to toggle between Off, Bit stream, and PCM. <i>Tip: When Bit stream is selected, make sure the amplifier supports digital audio.</i>
<i>The following functions are only available for digital channels with audio signals.</i>	
Volume-visually impaired	To increase or decrease the volume for the visual impaired. Use the o/oe buttons to adjust the volume. <i>Tip: Before you want to adjust the volume, please make sure Audio description is On.</i>
Audio description	To enable or disable the impaired function. Use the o/oe volume-visually buttons to toggle between On or Off.
Hearing impaired	To transmit audio-frequency for the hearing impaired. Use the o/oe buttons to toggle between On or Off.

TV


Settings	5 TV 5
Picture	Country
Sound	Audio language
TV	Audio channel
Installation	Channels
Parental	Common interface

Menu	Descriptions
Country	To select the relevant country. This is the country you are in, or the country whose channels you want to receive if you live near its borders.
Audio language	To display a dialogue enabling the preferred language to be set. This is the language to be used for digital channels if it is available.
Audio channel	Use the o/oe buttons to select Mono, Stereo, Dual 1, and Dual 2. If there is no second language available, the LCD TV will select audio output as mono. This is only available for analog channels.
Channels	Use the o/oe buttons to toggle between Channel scan, Update scan, Analog manual store, Channel skip, Channel sort, and Channel name edit. Please refer to the next page for further instructions.
Common interface	Function when a Conditional Access (CA) module is in Common Interface (CI) slot of the set. Please refer to your CA manual for detail information.

Menu	Descriptions
Channels	- Channel scan - Use the Δ / ∇ buttons to select Channel scan in the Channels menu. - Press the $\triangleright$ button to enter it and press the OK button to start searching the local program automatically. - Update scan - Use the Δ / ∇ buttons to select Channel scan in the Channels menu. - Press the $\triangleright$ button to enter it and press the OK button to start searching the local program automatically. - Analog manual store - Use the Δ / ∇ buttons to select Channel scan in the Channels menu. - Press the $\triangleright$ button to enter it and press the Δ / ∇ buttons to toggle between Search or Fine tune. - Search: to start manual scanning from the specified frequency. - Fine tune: to fine tune the program. - Channel skip - Use the Δ / ∇ buttons to select Channel skip in the Channels menu. - Press the $\triangleright$ button to enter it and press the Δ / ∇ buttons to highlight the program you want to skip and press the OK button to confirm. <i>Tip: The skipped program may not be found by pressing Δ / ∇ buttons but can be access by pressing number buttons directly.</i> ☐ Programs with this are active ☒ Programs with this are skipped


TV/Channels

Menu	Descriptions
Channels	- Channel sort - Use the Δ / ∇ buttons to select Channel sort in the Channels menu. - Press the $\triangleright$ button to enter it and use the Δ / ∇ buttons to highlight a program you want to sort and press the OK button to select. - Use the Δ / ∇ buttons to highlight the second program you want to exchange with the first selected on and press the OK button to switch. - Channel name edit - Use the Δ / ∇ buttons to select Channel name edit in the Channels menu. - Press the $\triangleright$ button to enter it and press the Δ / ∇ buttons to highlight the program you want to edit. - Press the Red button to start editing program name. - Use the Δ / ∇ buttons to edit name and use the $\triangleright$ button to move to the next character. Please refer to below table for available characters. - Press the Green button to confirm. <i>Tip: When functions attached to the colour buttons are active or selected, the colour buttons are shown on screen.</i>



Available characters

	-	-	.	@	0	1	2	3	4
5	6	7	8	9	A	B	C	D	E
F	G	H	I	J	K	L	M	N	O
P	Q	R	S	T	U	V	W	X	Y
Z	a	b	c	d	e	f	g	h	i
j	k	l	m	n	o	p	q	r	s
t	u	v	w	x	y	z			



Available characters

0	.	@	0						
1			-	1					
2	A	B	C	a	b	c	2		
3	D	E	F	d	e	f	3		
4	G	H	I	g	h	i	4		
5	J	K	L	j	k	l	5		
6	M	N	O	m	n	o	6		
7	P	Q	R	S	p	q	r	s	7
8	T	U	V	t	u	v	8		
9	W	X	Y	Z	w	x	y	z	9

Installation

Settings	5	Installation	7
Picture		Language	
Sound		Source	
TV		Time setup	
Installation		Subtitle	
Parental		Teletext	
		Current software info	
		Reset AV settings	

Menu	Descriptions
Language	To choose of languages in your interface.
Source	To identify the accessory devices you have connected to the external inputs/outputs.
Time setup	Use the $\wedge$ / $\vee$ buttons to toggle between : - Time zone: to select the time zone you are in. - Time: to set the time and date or make it auto synchronization. <i>Tip: Before you want to set the time and date by your own, please make sure Auto synchronization is Off.</i> - Sleep timer: to set the TV to turn itself off within a certain time.
Subtitle	Use the $\wedge$ / $\vee$ buttons to toggle between : - Analog subtitle: to display the transmitted subtitle on the screen. This text can either be permanently displayed (assuming that the service is available in the broadcast) or only when mute is active. - Digital subtitle language: to select the transmitted language on the screen. - Subtitle type: to choose the normal type or hearing impaired type of subtitle.

Installation

Settings 5	Installation 7
Picture	Language
Sound	Source
TV	Time setup
Installation	Subtitle
Parental	Teletext
	Current software info
	Reset AV settings

Menu	Descriptions
Teletext	Use the Δ / ∇ buttons to toggle between : - Digital teletext language: to select the transmitted language of teletext on the screen. - Decoding page language: to decode the teletext language on regional location.
Current software info	This menu appears with your TV software information.
Reset AV settings	To reset most of the picture and sound settings to their default factory levels.


Parental

Settings 5	Parental 3
Picture	Channel lock
Sound	Program lock
TV	Change PIN
Installation	
Parental	


Menu	Descriptions
Channel lock	To lock a certain TV channel or external source completely.
Program lock	To control access programs based on their age ratings. All settings apply to digital channels.
Change PIN	To change your access code or overwriting it. If no PIN-code exists, the menu item is set to Set PIN. Please follow the instructions to set it. If a PIN-code has been entered previously, the menu item is set to Change PIN. Please follow the instructions to change it. All member combinations from 0000 to 9999 are valid. <i>Tip: Remember that 0711 is the default Change PIN code. If your access code has been changed or you have forgotten the code, you can always get in by inputting the default code.</i>

2.3 How to Connect


TV connectors

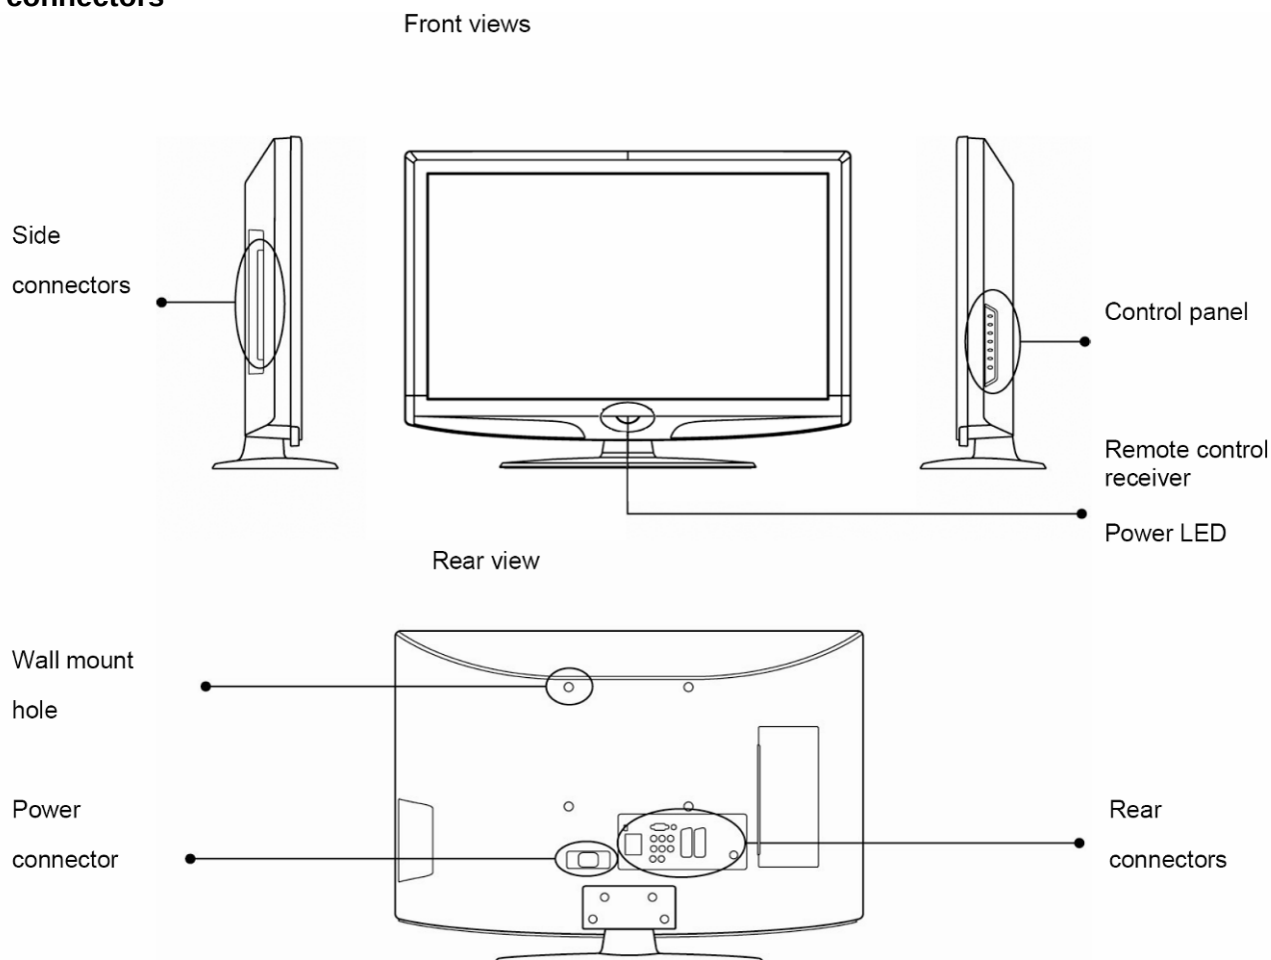

Wall mounting


	TV screen size (inches)	VESA-compatible wall bracket (millimeters) (W X H)	Screw type
	32"	200 x 200 mm	Metric 6 x 10 mm
	37"	200 x 200 mm	Metric 6 x 10 mm
	42"	400 x 200 mm	Metric 6 x 10 mm

Remove the TV stand for wall mounting

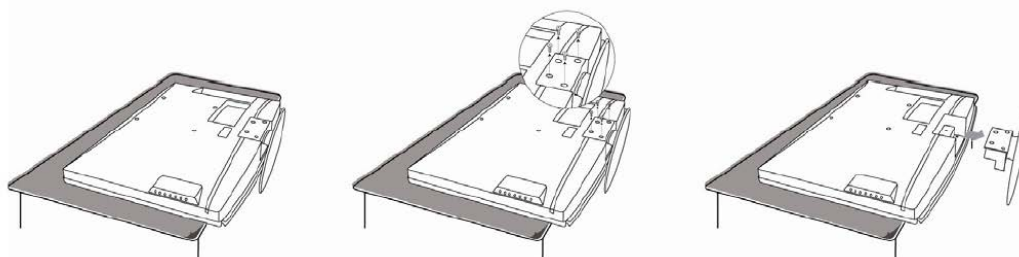


1. Put the TV face down on a safe surface that is covered by a soft and smooth cloth.
2. Unscrew the 4 bolts that fasten the base column to the TV by using a cross-hand screwdriver. (not supplied)
3. Pull the stand from the bottom of the TV.

Rear connections

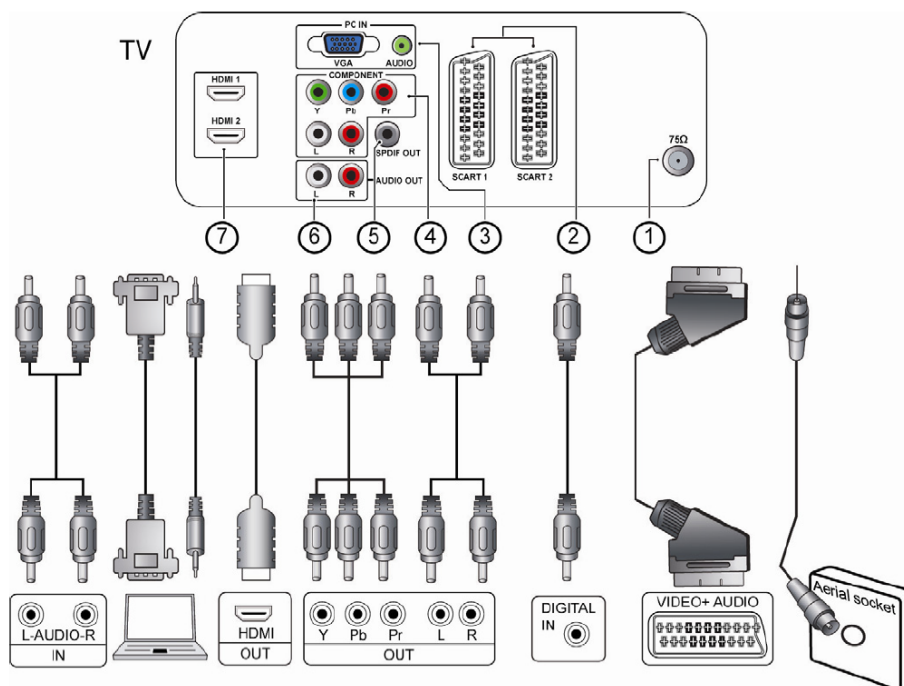

	Port	Functions
1	Tuner Input	Connects to TV RF signals (antenna/CATV).
2	SCART 1	Full SCART, which transmits RGB, S-Video and CVBS in, and CVBS tuner out (Analog only).
	SCART 2	Half SCART, which transmits S-Video or CVBS in, and CVBS monitor out.
3	PC IN	Connect to VGA analog signals sources. PC audio supports 3.5mm Jack.
4	Component Video and L/R Audio Input	The YPbPr video signal can be used if connecting through the component video port. For example Progressive Scan DVD players, Hi-scale HDTV Decoders, and satellite receivers, obtain video with maximum resolution using YPbPr and L/R audio signals.
5	SPDIF Output (Digital audio out)	SPDIF is highly recommended for high quality digital sound output.
6	AV L/R Audio Output	Connect via audio cable for audio output.
7	HDMI 1/ HDMI 2	High Definition Multimedia Interface. Connect to devices with digitals signals and can be used with PC or HDTV video signals.


Side connections

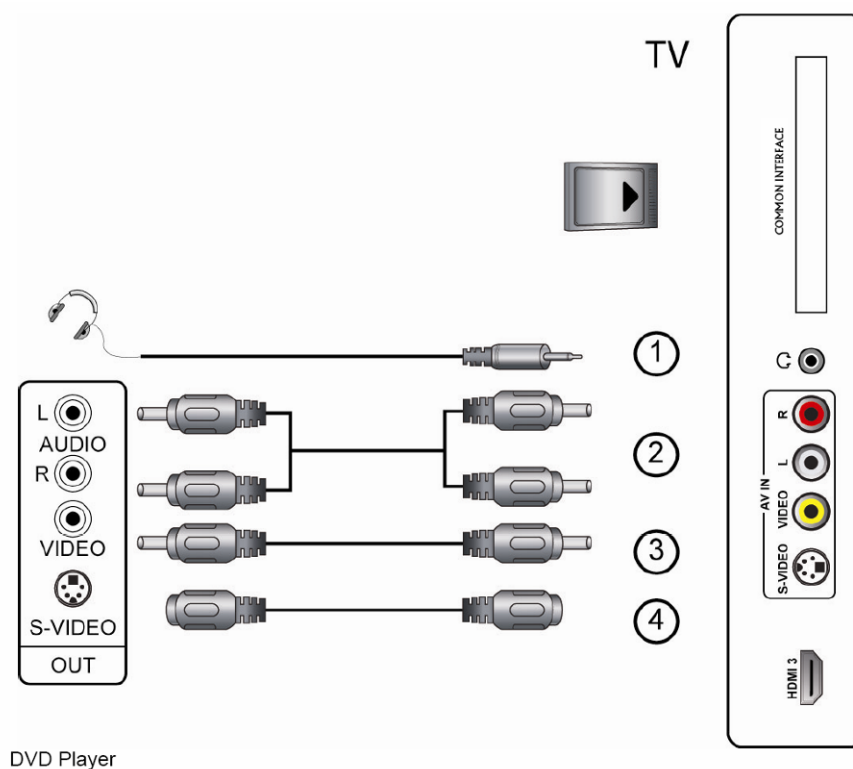

	Port	Functions
	COMMON INTERFACE	Function when PC Card or ExpressCard is in COMMON INTERFACE slot of the set. Please refer to your plug-in card manual for detail information.
1	Earphone Output	Connect to headphones (16Ω or 32Ω).
2	AV IN (Composite Audio/Video)	The composite audio and video provide a basic connection from the DVD player or other device.
3	S-Video	The S-Video supplies a better picture quality than RF and composite connection. Please use S-Video cable with red/white audio cable. <i>Tip: If AV and S-Video to be connected simultaneously, S-Video will have the first priority.</i>
4	HDMI 3	High Definition Multimedia Interface. Connect to devices with digital signals and can be used with PC or HDTV video signals.

Power connection

Attach the AC power cord to the LCD TV and plug into an appropriate wall outlet.

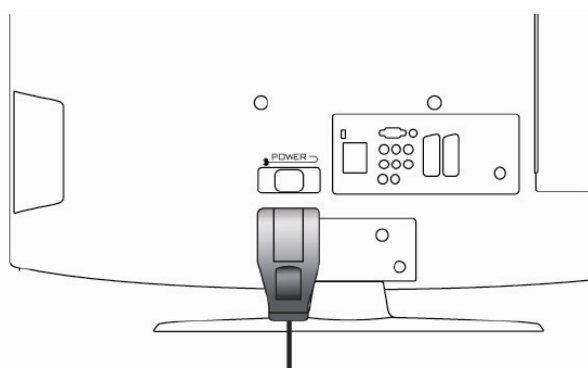


AC 100-240V 50/60Hz

Power outlets differ from region to region.

* Do not insert the power plug in a wall socket before all connections are firm.


Press the POWER button at the side of the TV or press the  button on the remote control to turn on the power or enter standby mode.

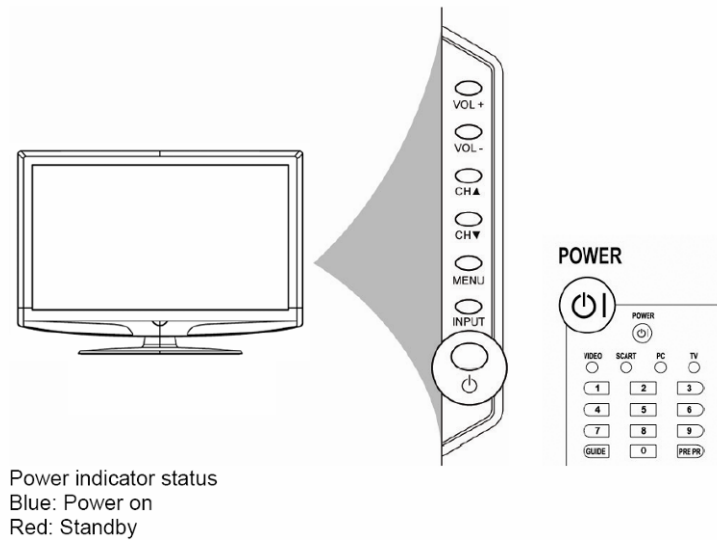

* Due to unstable local voltage, there will occasionally be a delay in POWER ON when the LCD TV is switched on.


First time installation

After unpacking and plugging in your new LCD TV, please proceed with the following steps to set-up your TV. If you do not run this set-up function, your LCD TV may not operate properly.

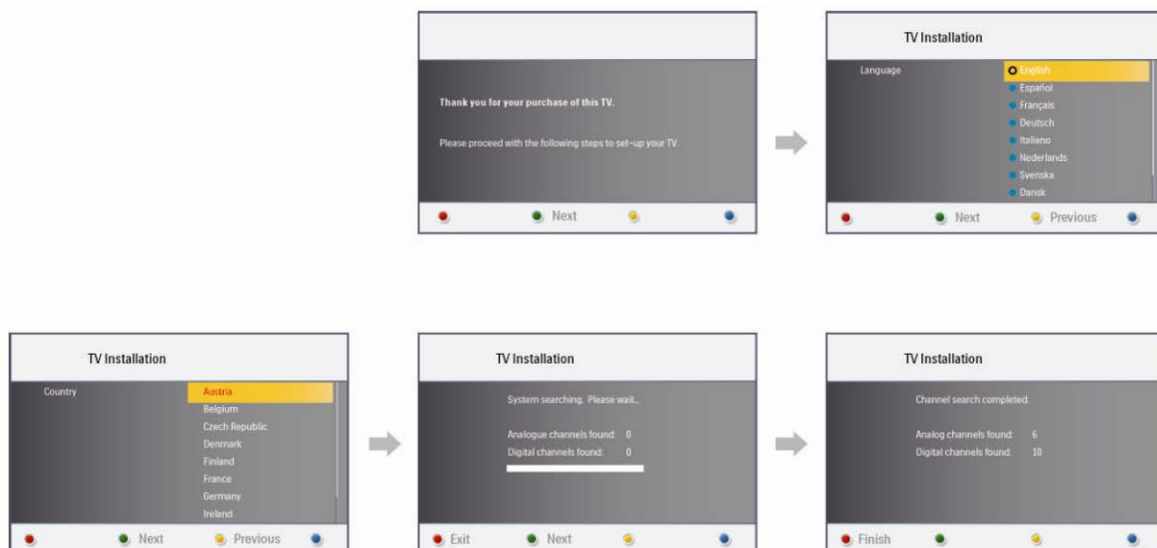

1. Press the Green button to proceed with the installation.
2. Press the $\wedge$ or $\vee$ buttons to select your language. And press the Green button to continue.
3. Press the $\wedge$ or $\vee$ buttons to select your country. And press the Green button to continue or press the Yellow button to the previous.
4. System searching may take few minutes to complete. Please wait until system searching is completed.
5. Channel search completed message may show out when system searching is finished. Press the Red button to finish system searching, then, the LCD TV will switch automatically to the first channel found.


2.4 Control Panel Knobs

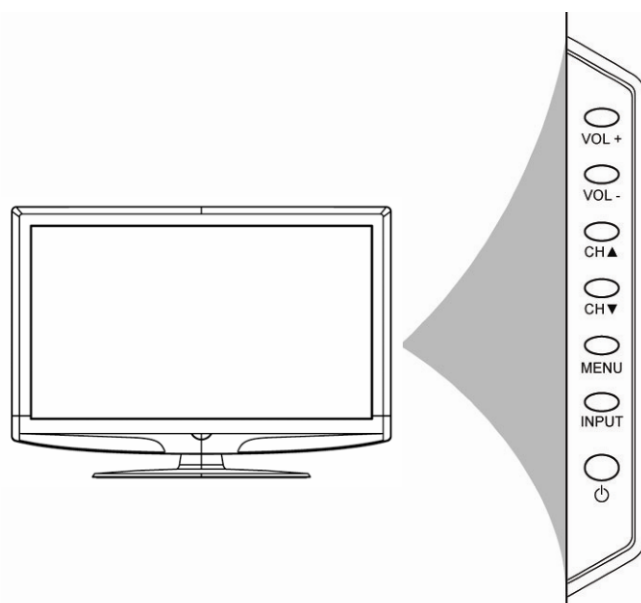

Button	Functions
POWER	Use this button to switches your LCD TV on/off.
INPUT	Use this button to toggle between video input source.
MENU	Use this button to display and adjust the features in the On-Screen-Display (OSD). Use the four arrow keys (channel and volume adjustments) to navigate the menu options.
CH ▲/▼ (FUNCTION ▲/▼)	Use these buttons to switch between programmed channels. In OSD mode, use those two buttons to switch the selection up and down.
VOL +/- (FUNCTION ◀/▶)	Use these two buttons to adjust the volume. In OSD mode, use those two buttons to switch the selection left and right.

3. Input/Output Specification


3.1 RGB Signal input

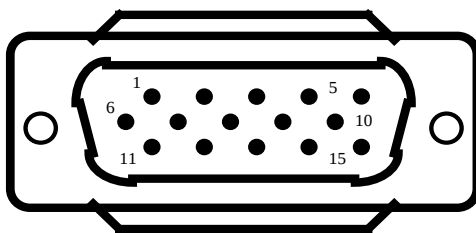

15 - Pin Color Display Signal Cable

Pin No.	Description	Pin No.	Description
1	Red Video	9	Mandatory +5V Supply for PC Bypass
2	Green Video	10	Sync Ground
3	Blue Video	11	SDA(Remote Control)
4	SCL(Remote Control)	12	Bi-directional Data (SDA) for PC Bypass
5	Ground	13	H-Sync.
6	Red Video Ground	14	V-Sync.
7	Green Video Ground	15	Data Clock (SCL) for PC Bypass
8	Blue Video Ground		

3.2 HDMI Digital connector pin assignments

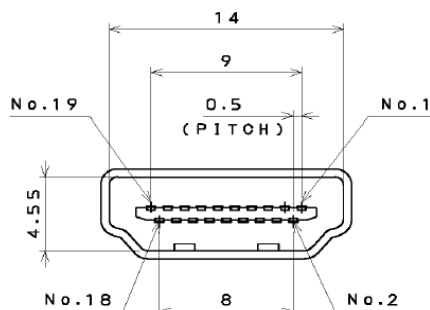

Pin No.	Description	Pin No.	Description
1	TMDS Data2+	2	TMDS Data2 Shield
3	TMDS Data2-	4	TMDS Data1+
5	TMDS Data1 Shield	6	TMDS Data1-
7	TMDS Data0+	8	TMDS Data0 Shield
9	TMDS Data0-	10	TMDS Clock+
11	TMDS Clock Shield	12	TMDS Clock-
13	CEC	14	NC
15	SCL	16	SDA
17	DDC/CEC Ground	18	+5V Power
19	Hot Plug Detect		

3.3 Signal type

1. TV Signal type:

RF Signal: Aerial input / 10mV(80dBuV)

Video signal:

- a) CVBS (RCA input) / 1Vpp (300mV-sync, 700mV-video.)
- b) S video input / 1VppY-signal, 700mVpp C-signal
- c) COMP Video (YPbPr input)/ 1Vpp Y signal, 700mVpp Pb, Pr signal
- d) SCART input / CVBS, RGB, S video signal or CBVS, S video signal
- e) HDMI: Digital interface with 4 channels TMDS signal, HDMI support both video and PC DVI.
- f) CVBS output (SCART out) / 1Vpp (300mV-sync, 700mV-video.)

Audio signal:

Audio (1) R/L input

Level: - Nominal: 0.5 V rms. - Maximum: 2.0 V rms. - Impedance > 10 k ☐.

Audio (2) R/L output

Level: - Nominal: 0.5 V rms. - Maximum: 2.0 V rms ☐.

2. SCART output: (from tuner – ATV for SCART1; from selected source – ATV or CVBS for SCART2)

Video: CVBS output 1Vpp / Impedance : 75Ω.

Audio: R/L output (from TV)

Level: - Nominal: 0.5 V rms. - Maximum: 2.0 V rms

3. PC Signal type:

Analog Video: 0.7 Vp-p linear, positive polarity

Separate Sync.: TTL level, separate, positive or negative polarity

Audio signal: 3.5 mm mini-jack audio input

Level: - Nominal: 0.5 V rms. - Maximum: 2.0 V rms. - Impedance > 10 k Ω.

4. Headphone

Audio: R/L output –10mW at 32Ω.

3.5mm stereo jack. Impedance is between 8 and 600.

5. SPDIF (Digital audio) output:

Audio: coaxial (RCA jack) output

Level: 0.5 +/- 0.1 Vpp with 75 Ω load

1.0 Vpp (no load)

4. Mechanical Instructions


1. Remove the screws to remove the stand and rear cover.




2. Remove the screws to remove the VESA Bracket.



3. Release the connectors and screws to remove the main board, power board and speakers.

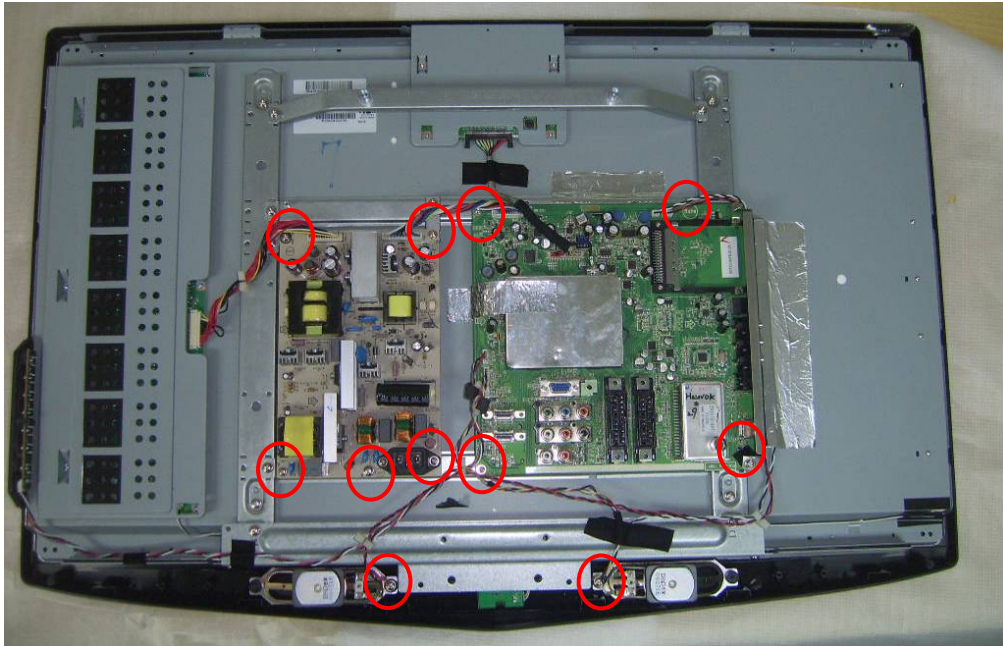

4. Release the screws to remove Stand Bracket-EU and POWER BRACKET-EU.

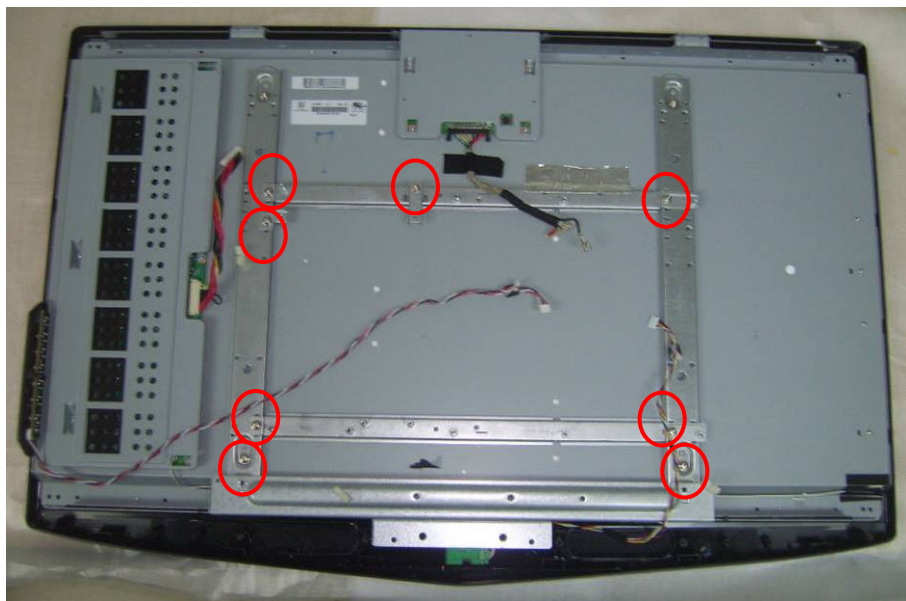


5. Remove the IR Board and Key Board.



6. Remove the screws to remove the Panel Bracket CMO and bezel.

For L32W981&L37W981

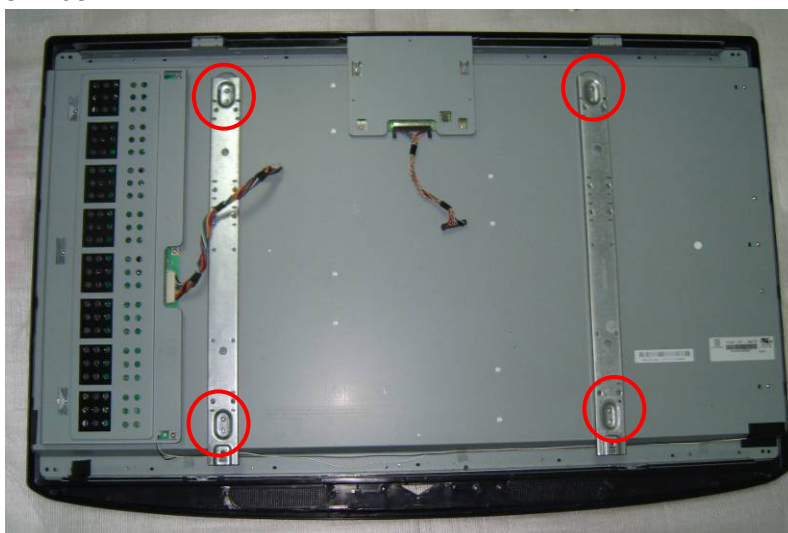


For L42W98H




5. Repair Flow Chart


No picture (LED orange)


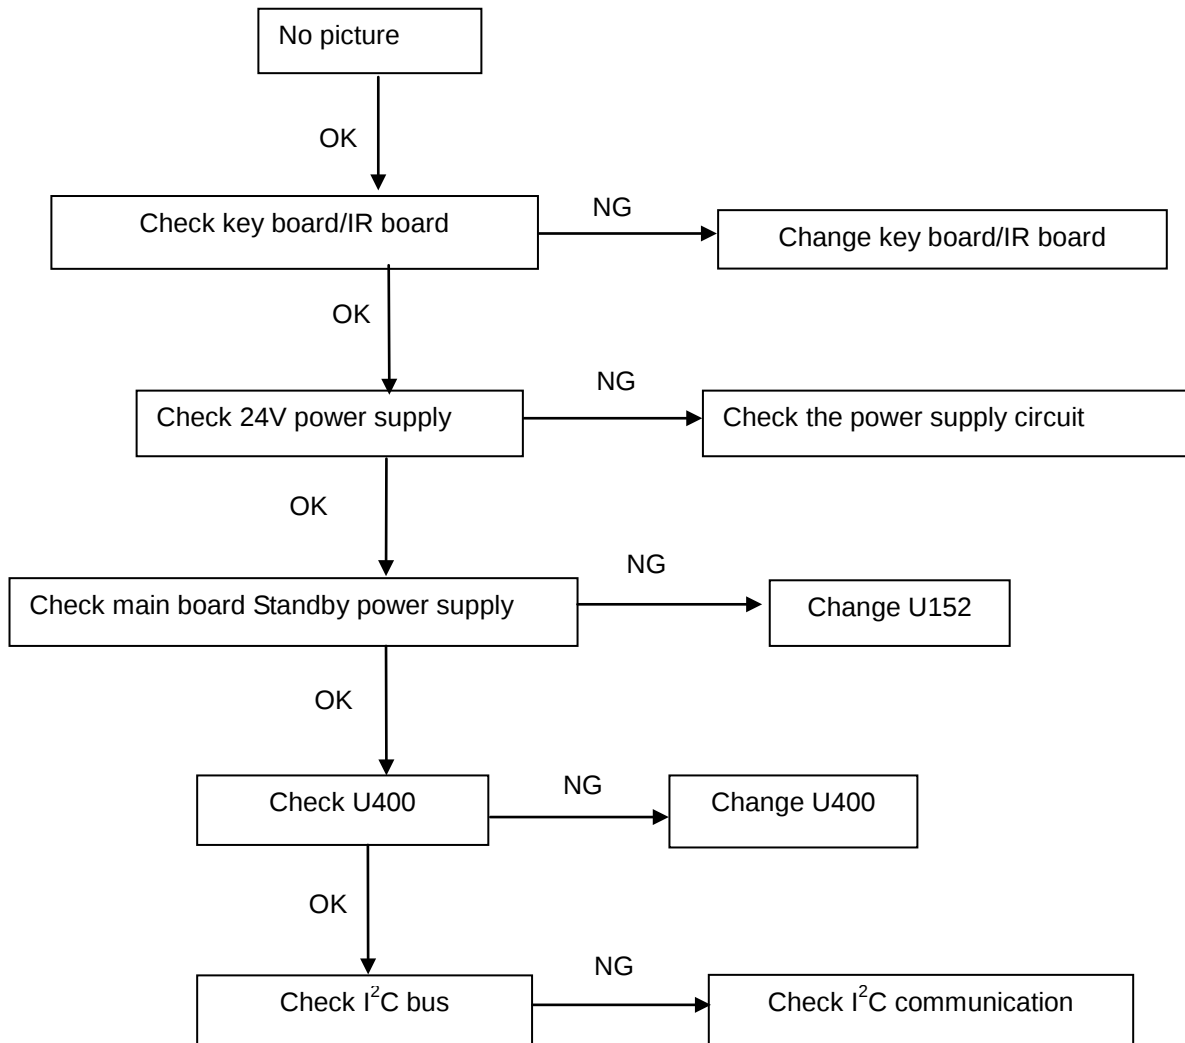



Abnormal display

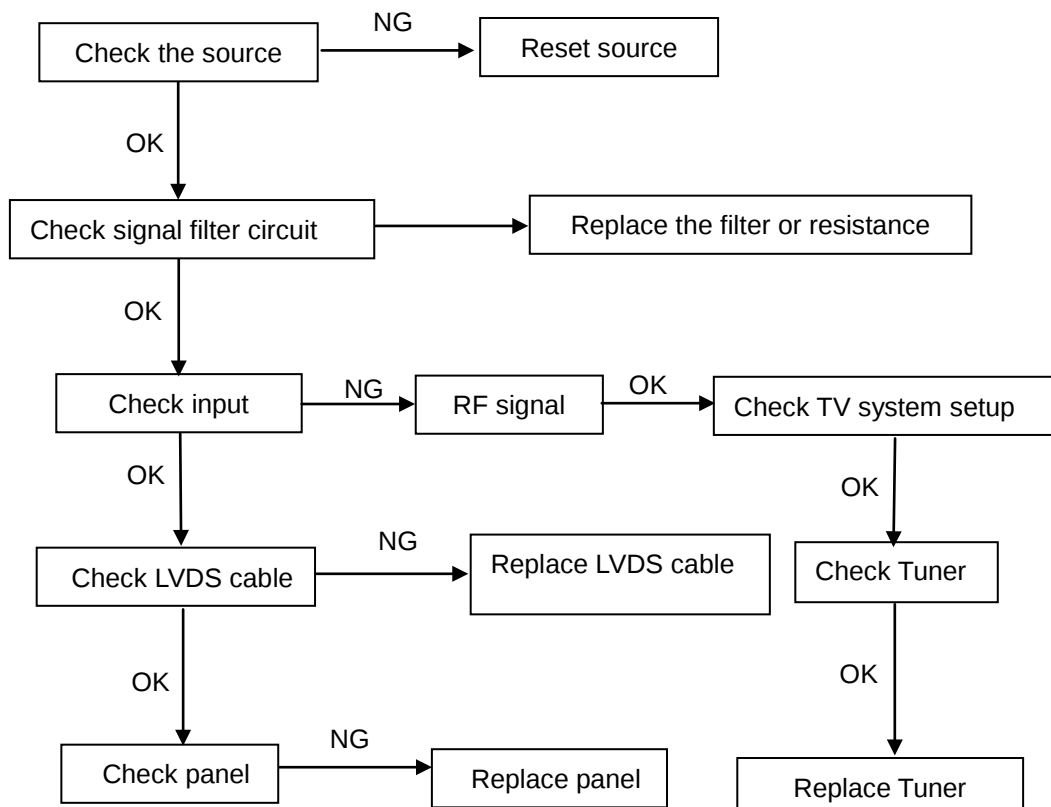

No sound

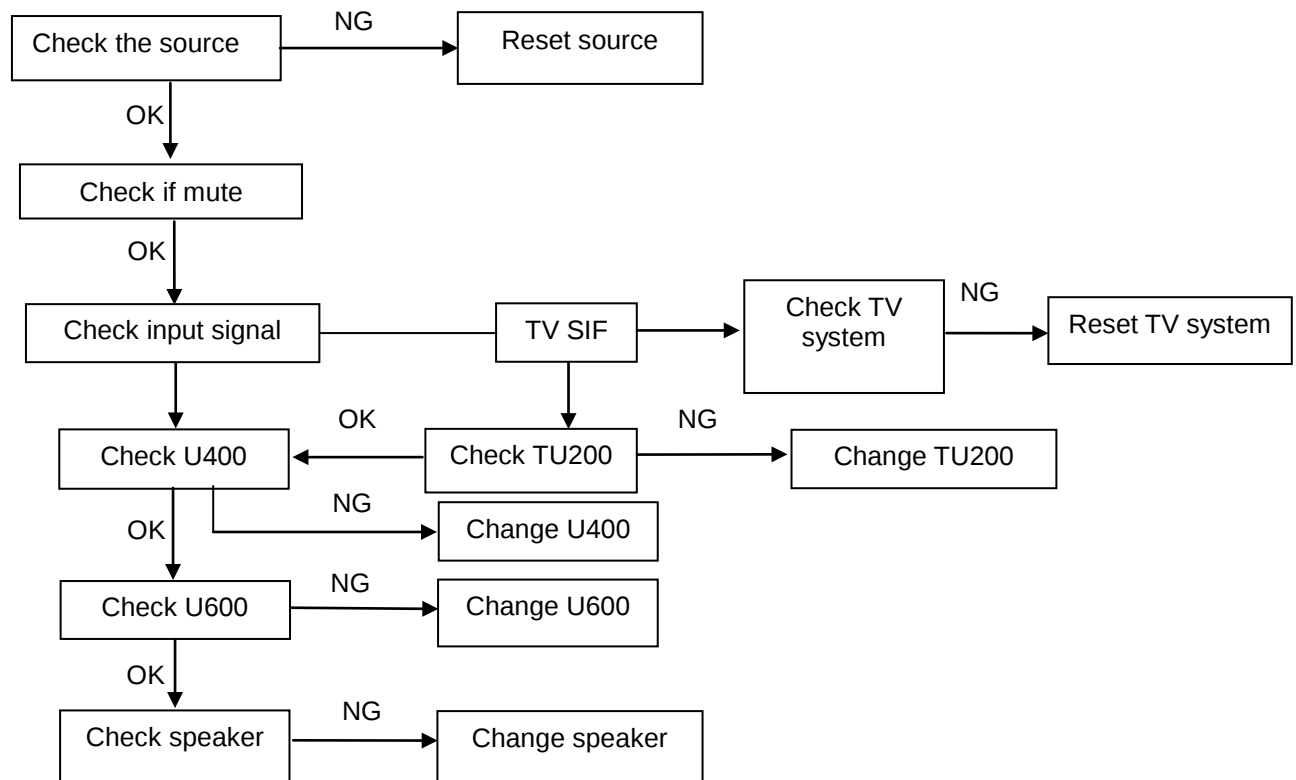


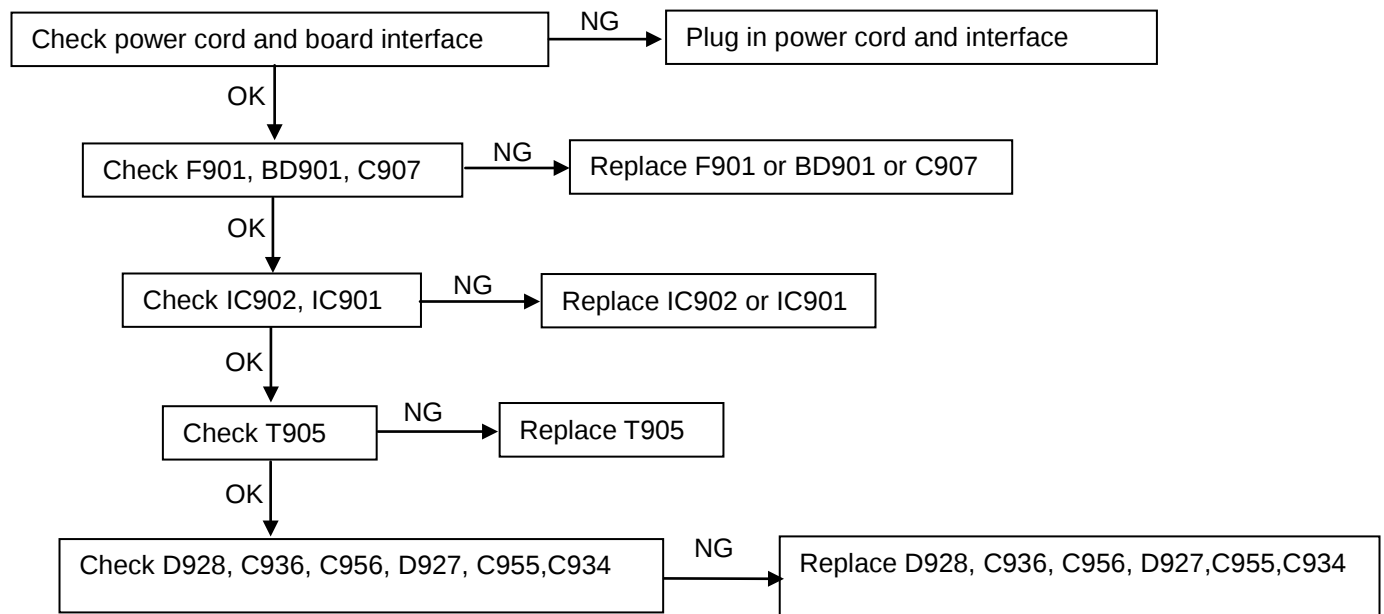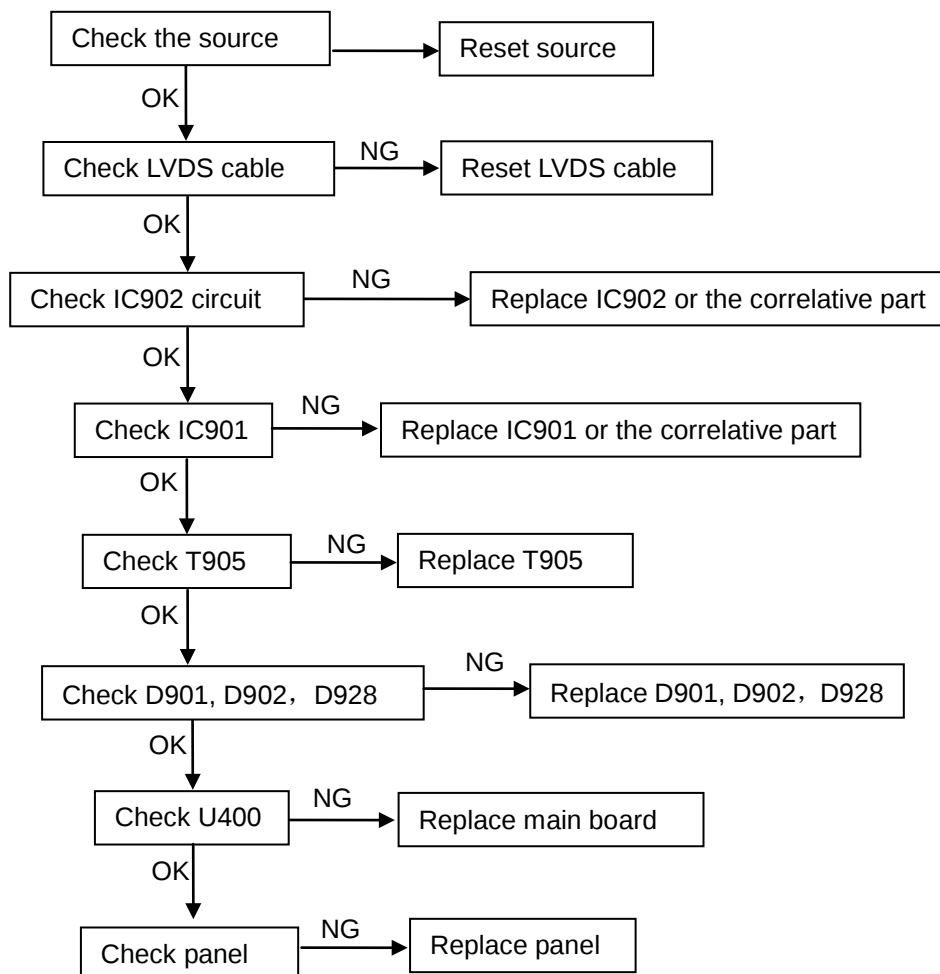
No Power (No LED indicator)**No display (LED indicator green)**

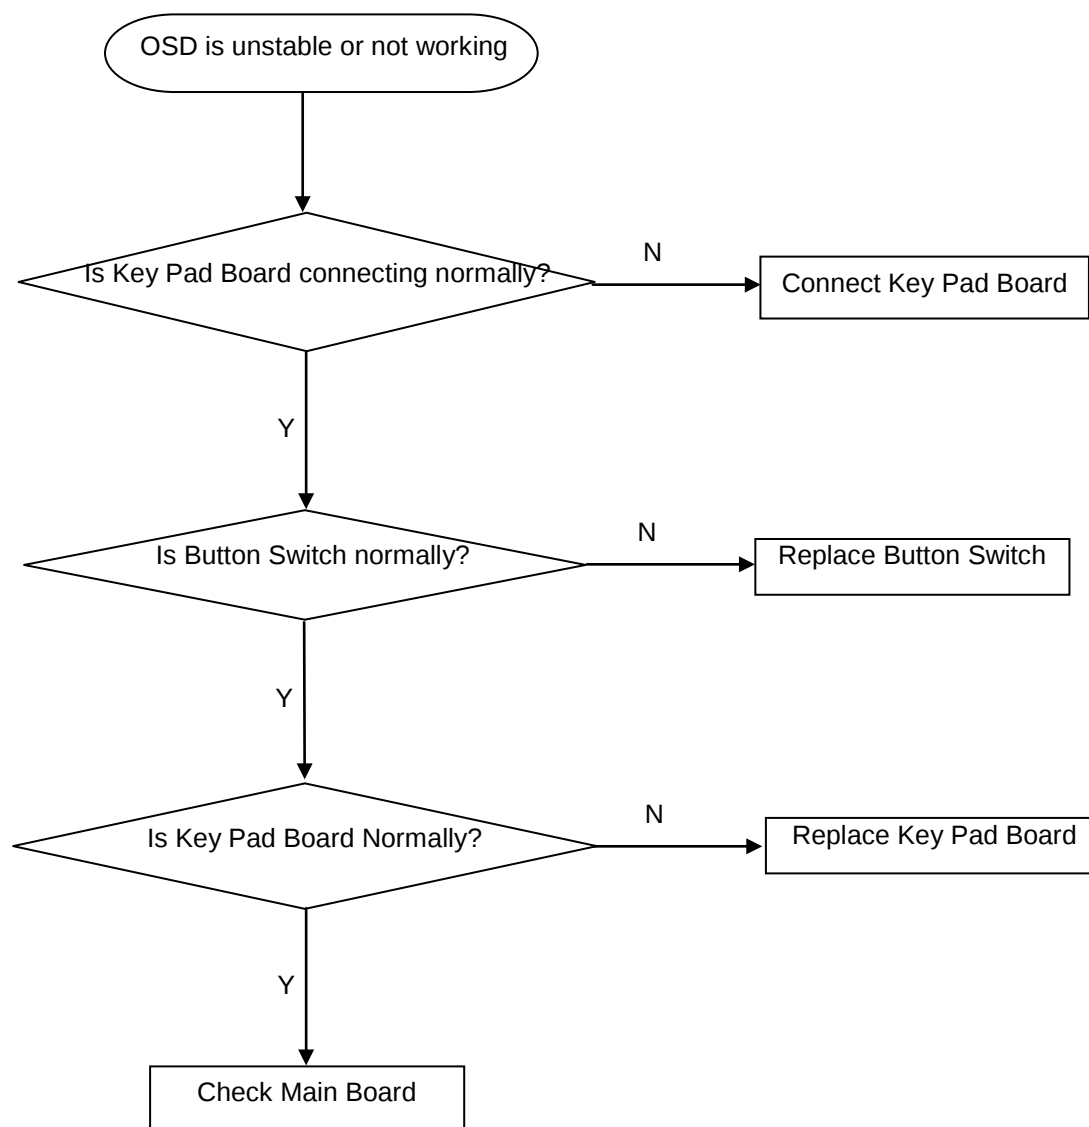



6. PCB Layout


6.1 Main Board

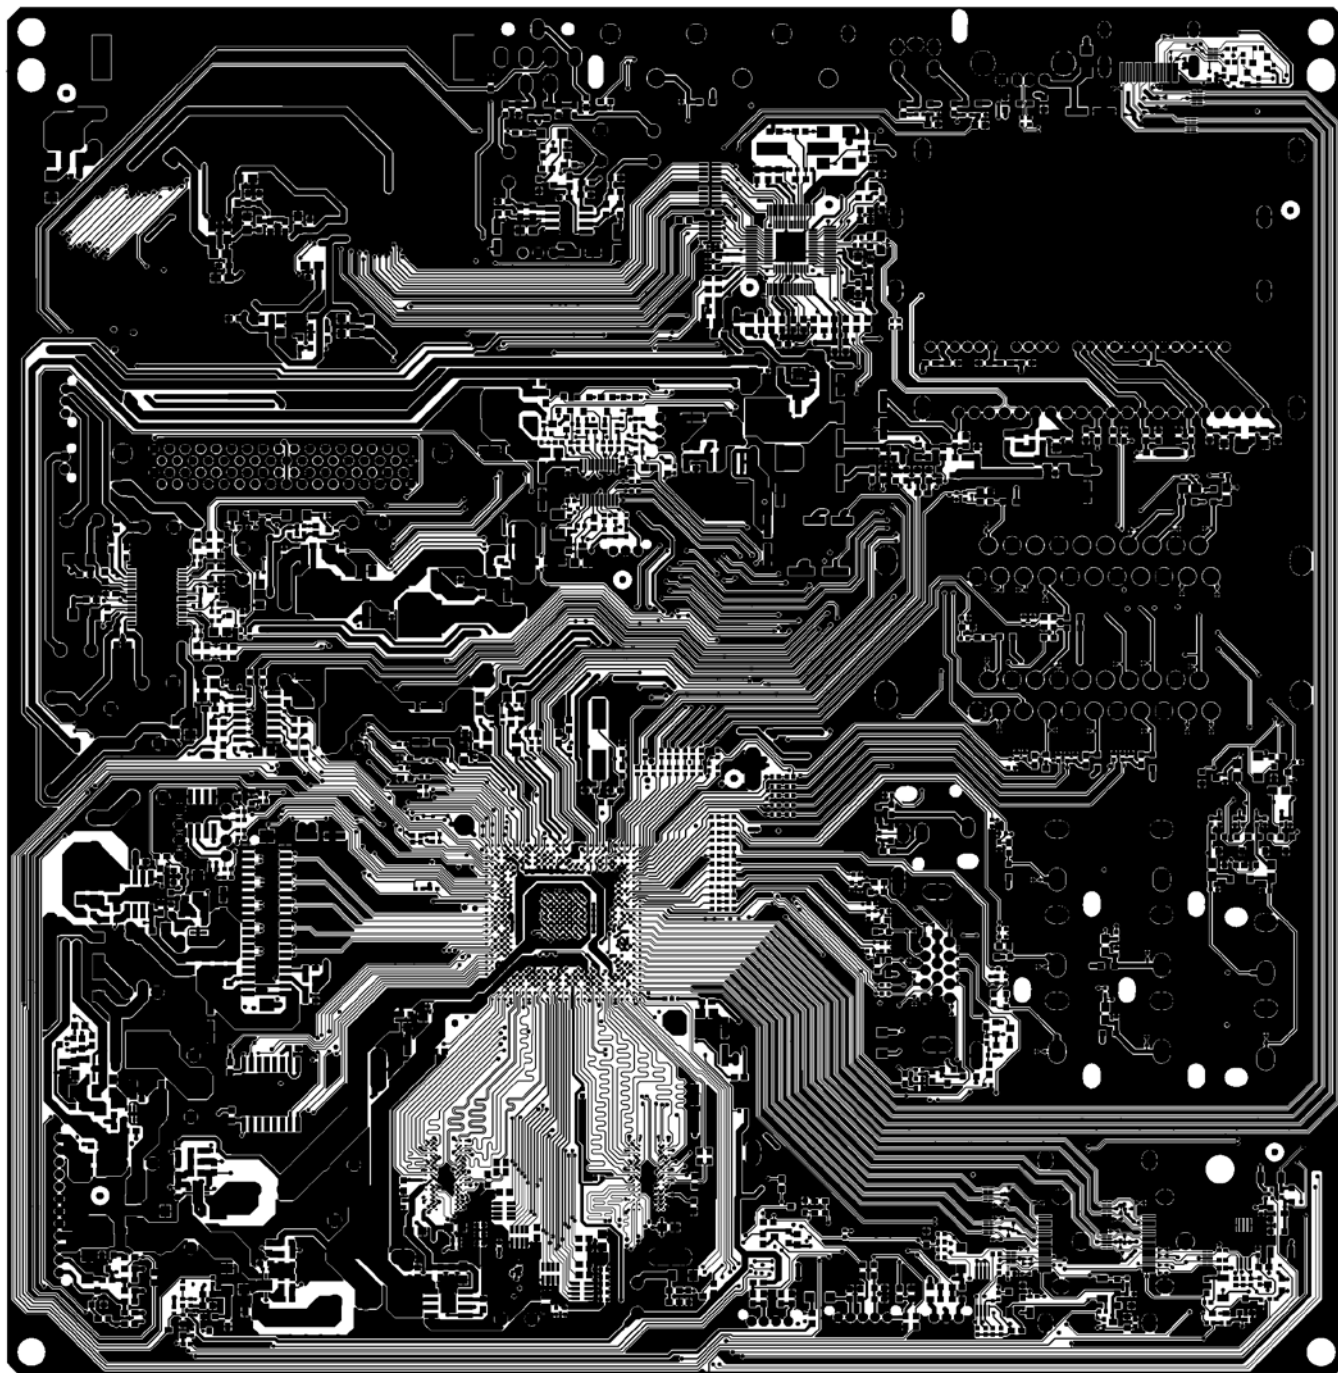

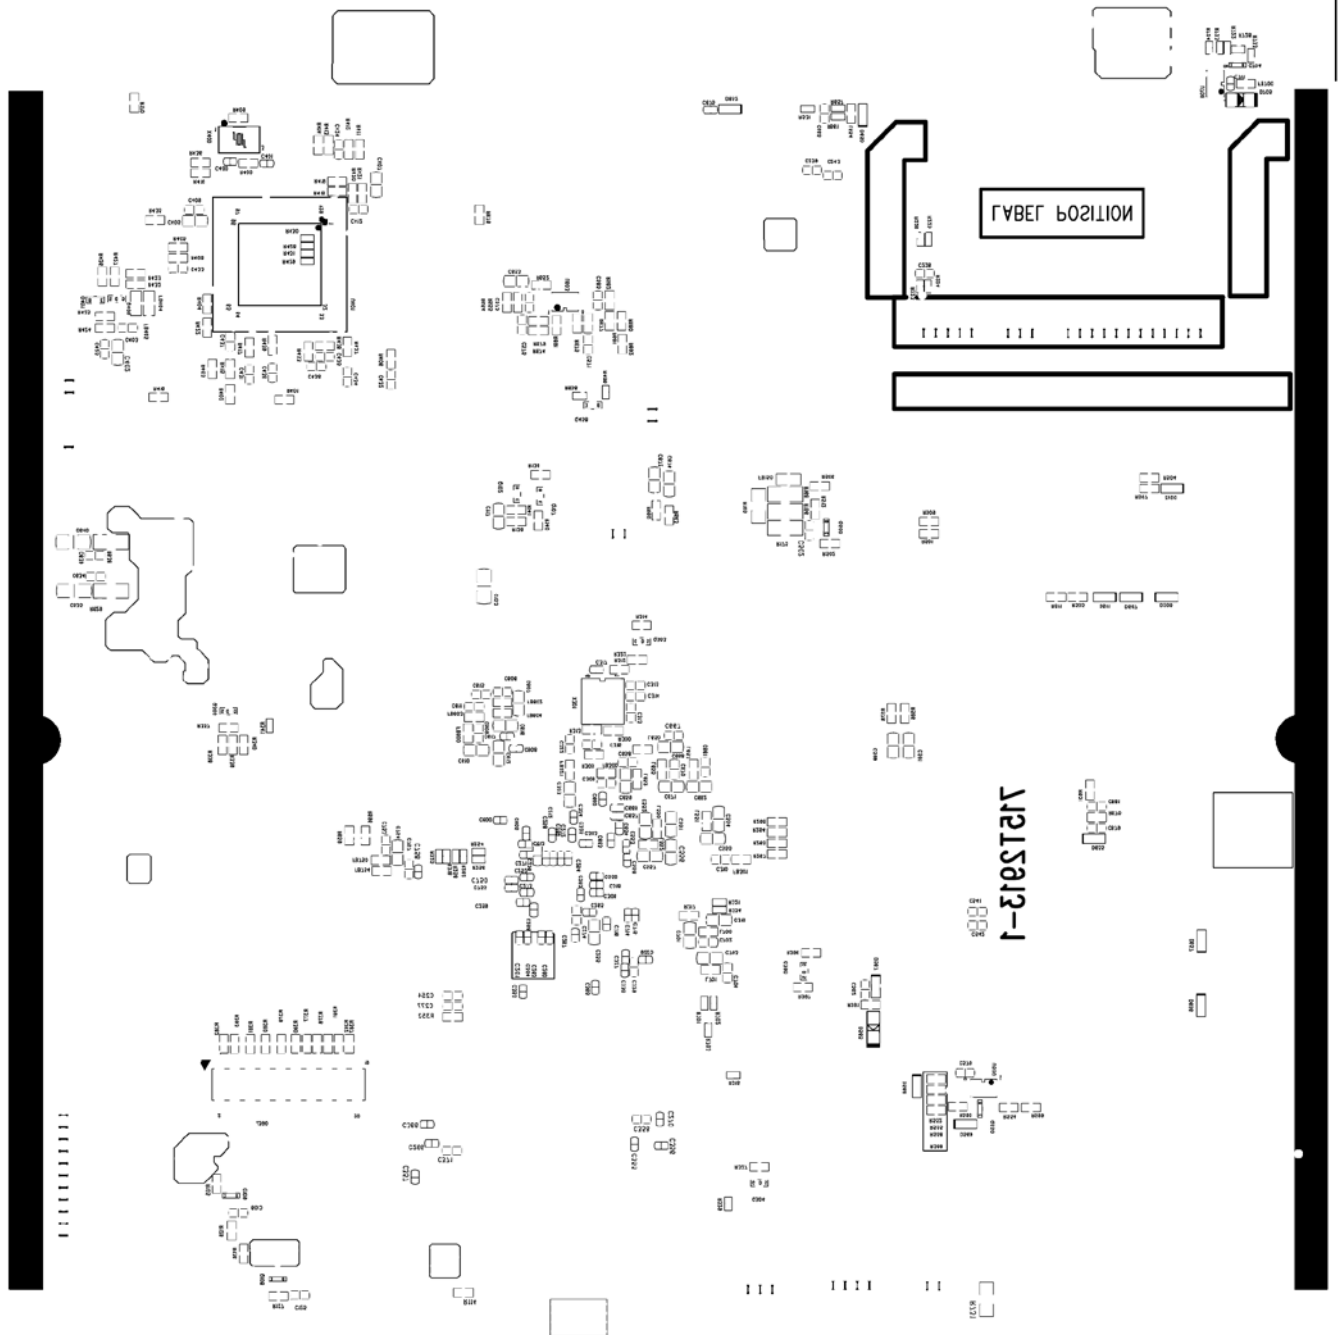


For L32W981&L37W981

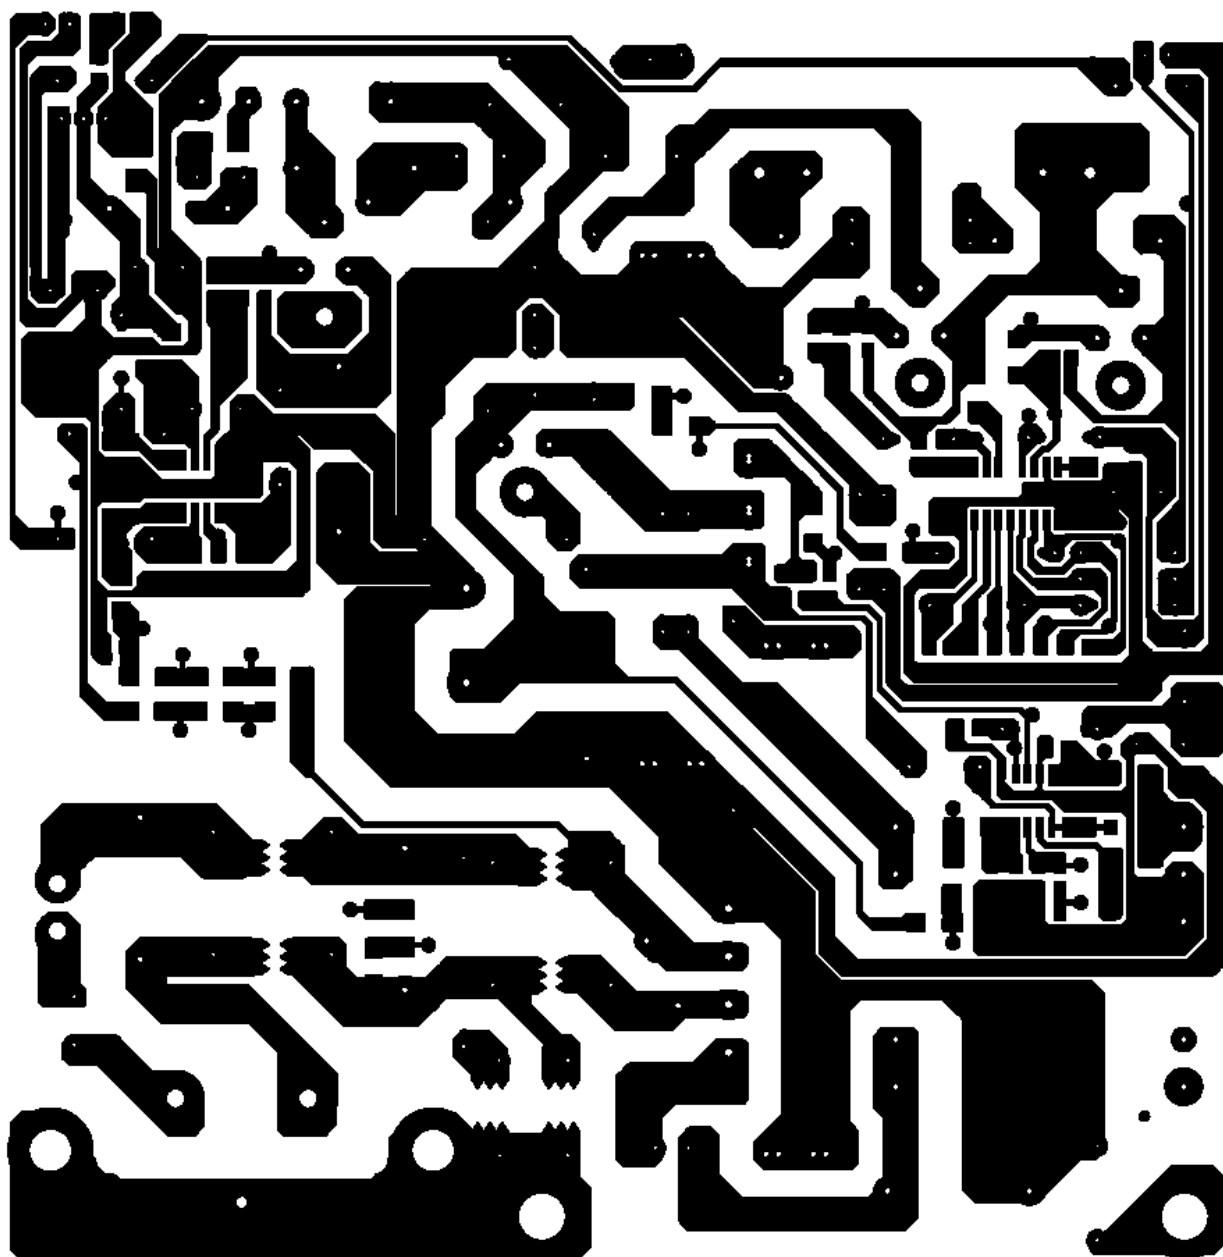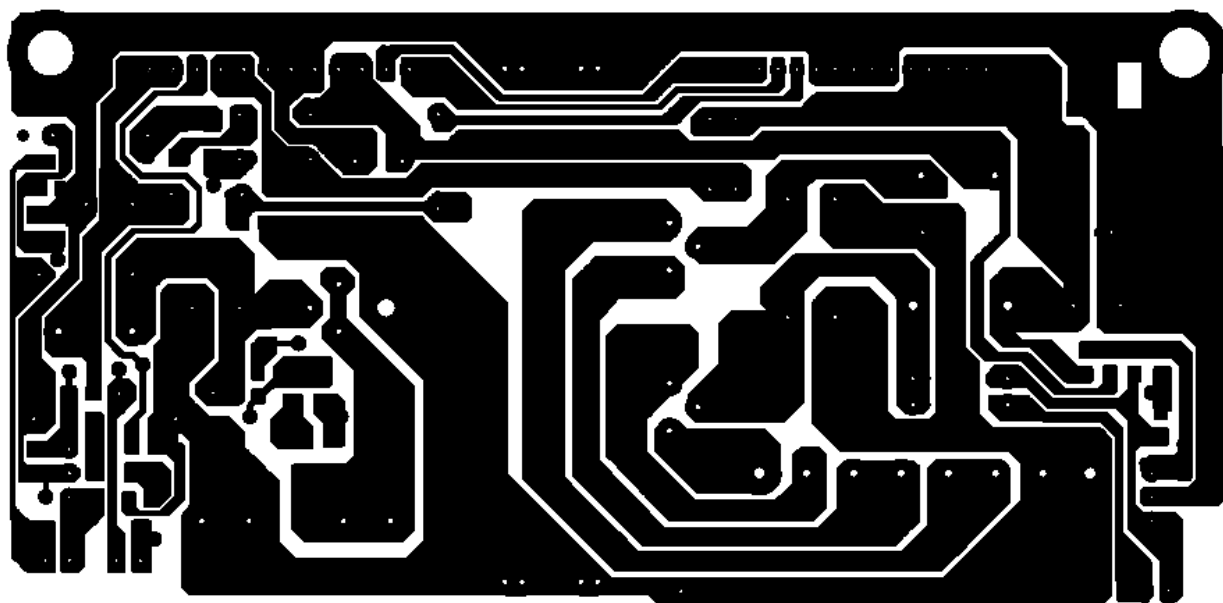


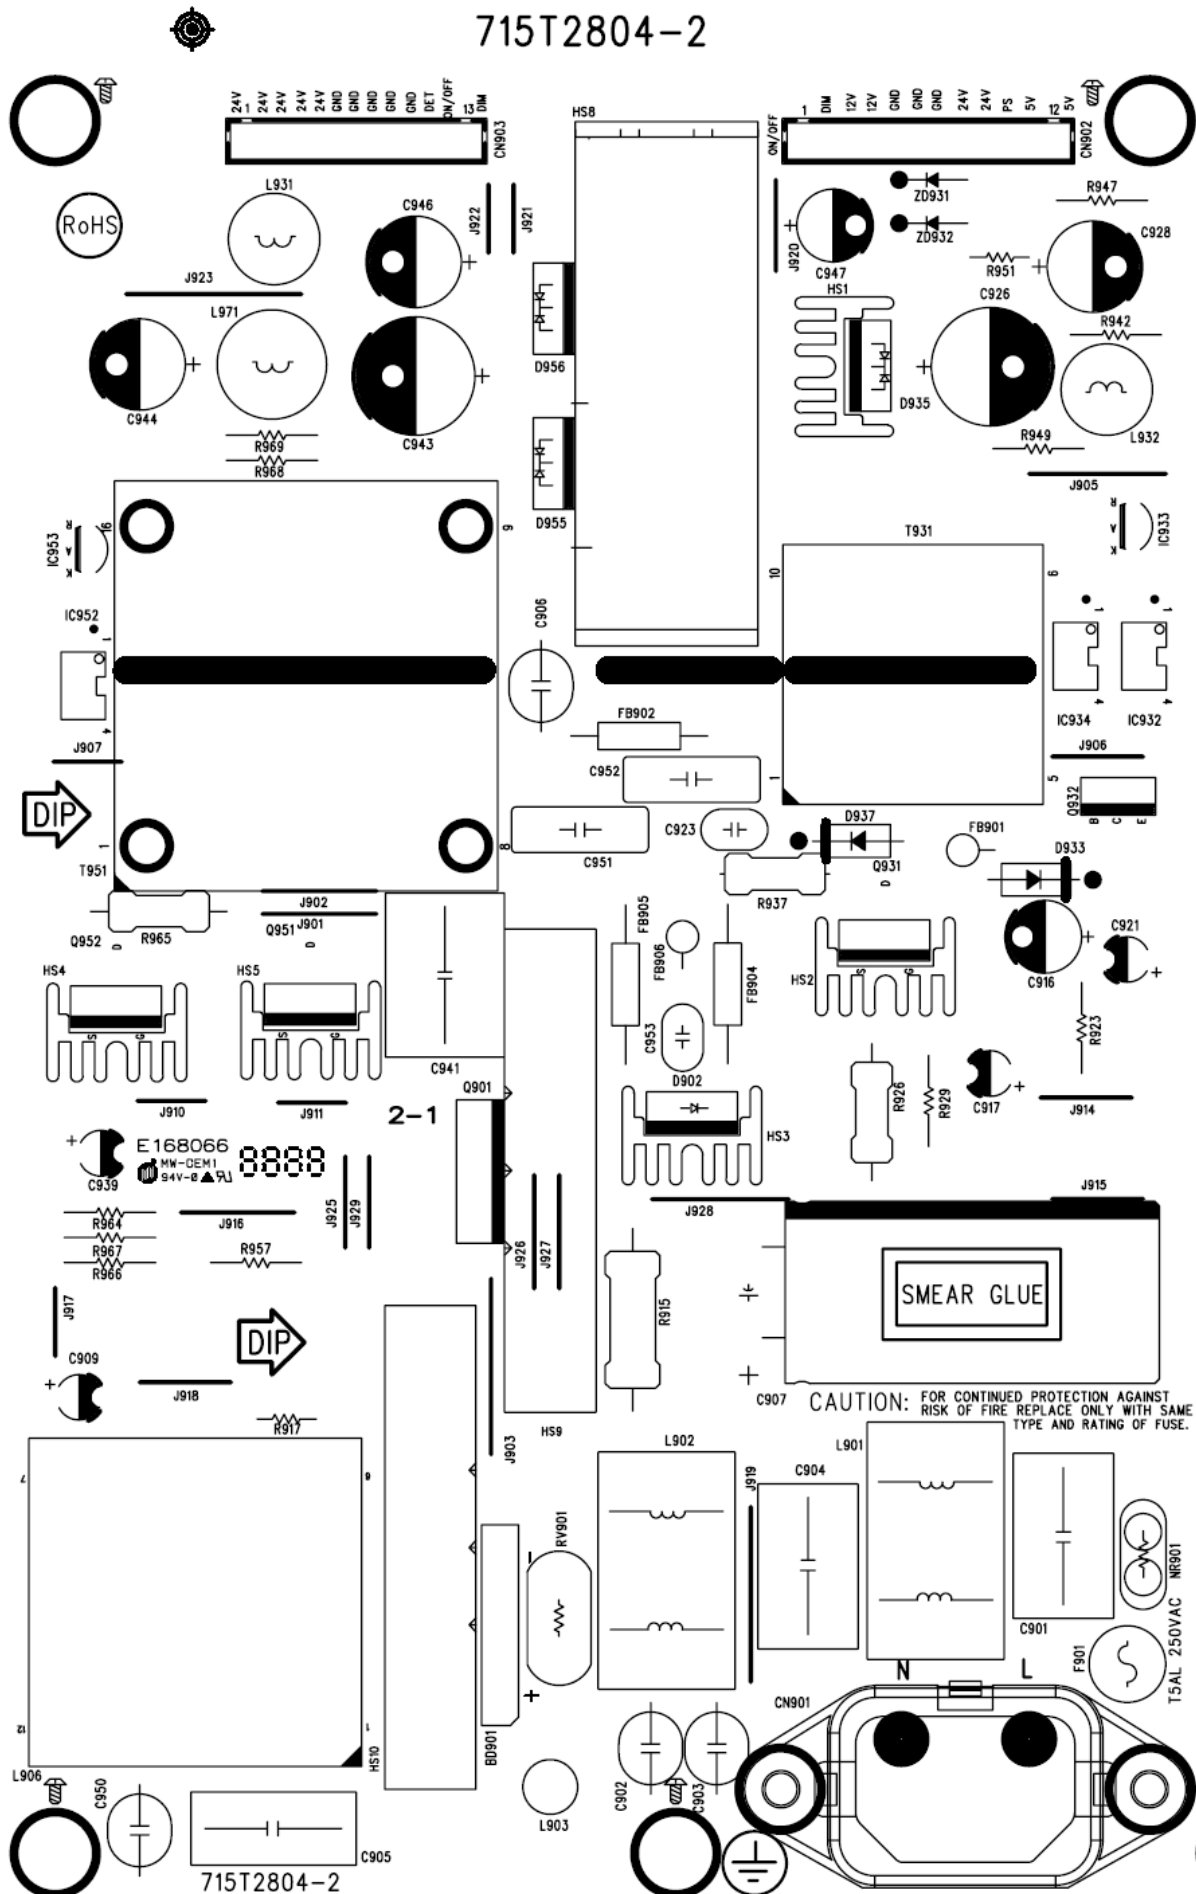


715T2804-2

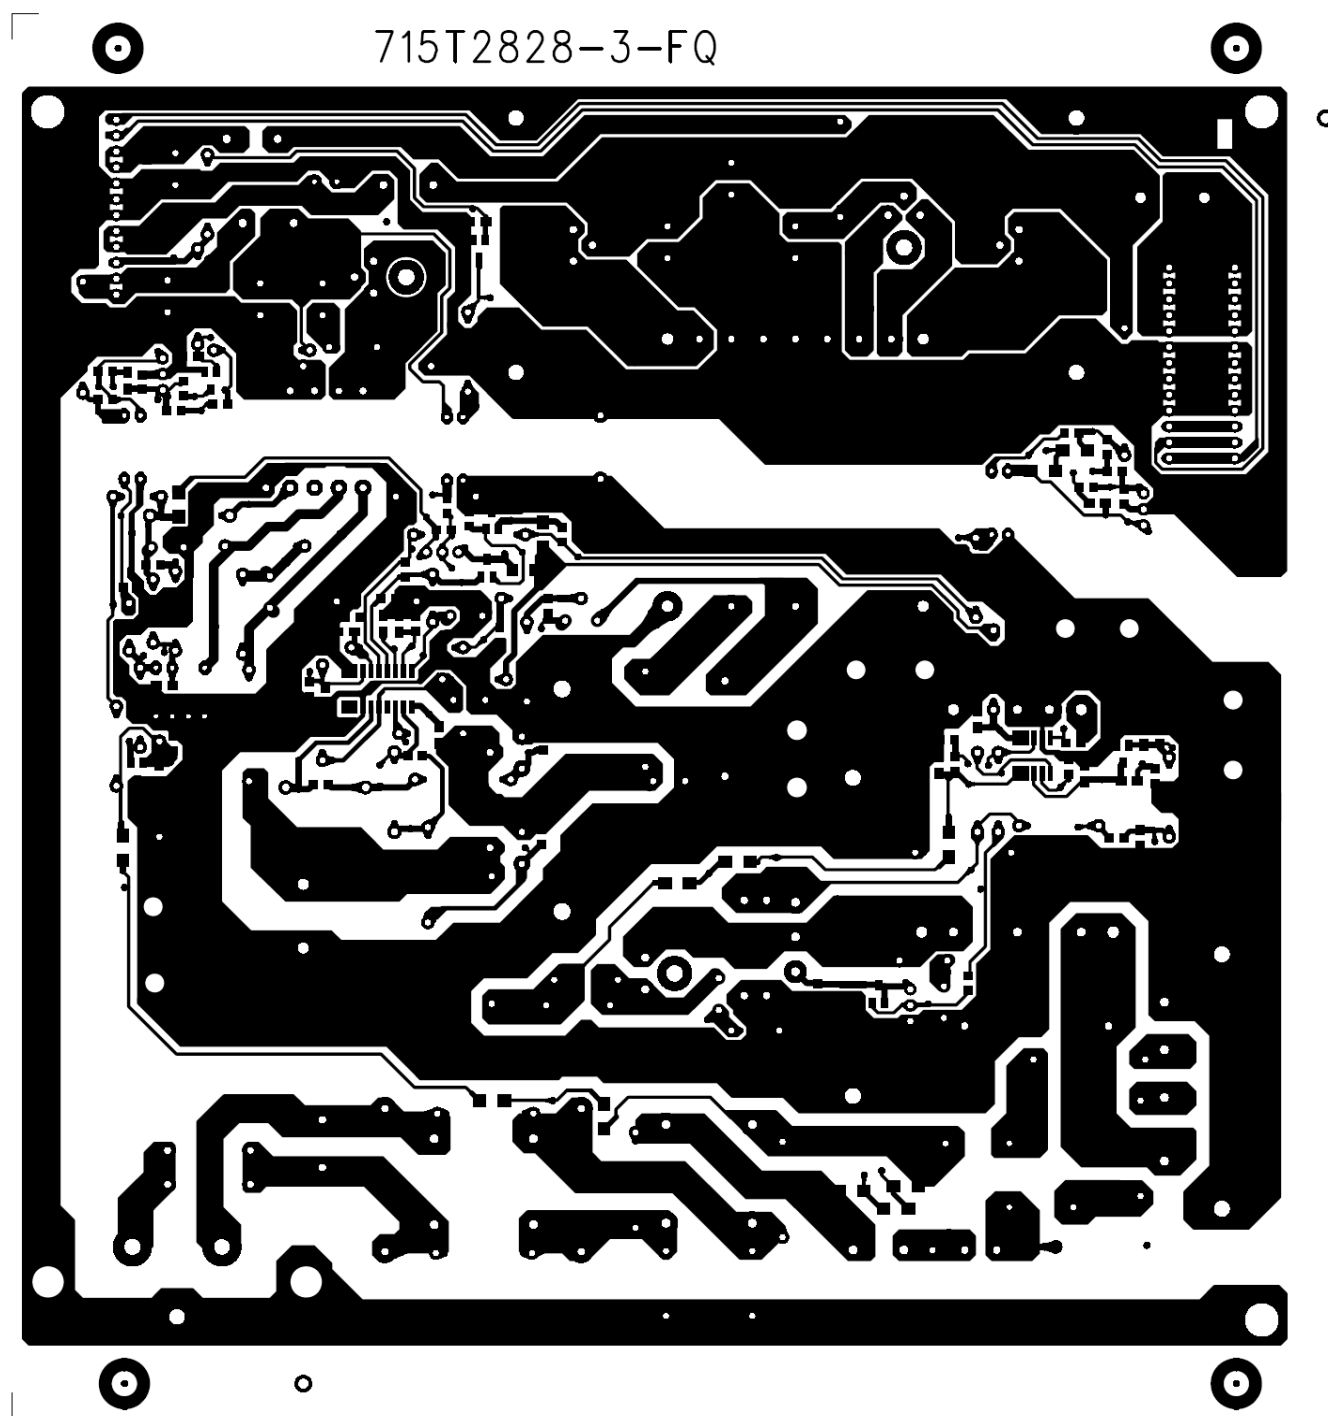


715T2828-3-FQ

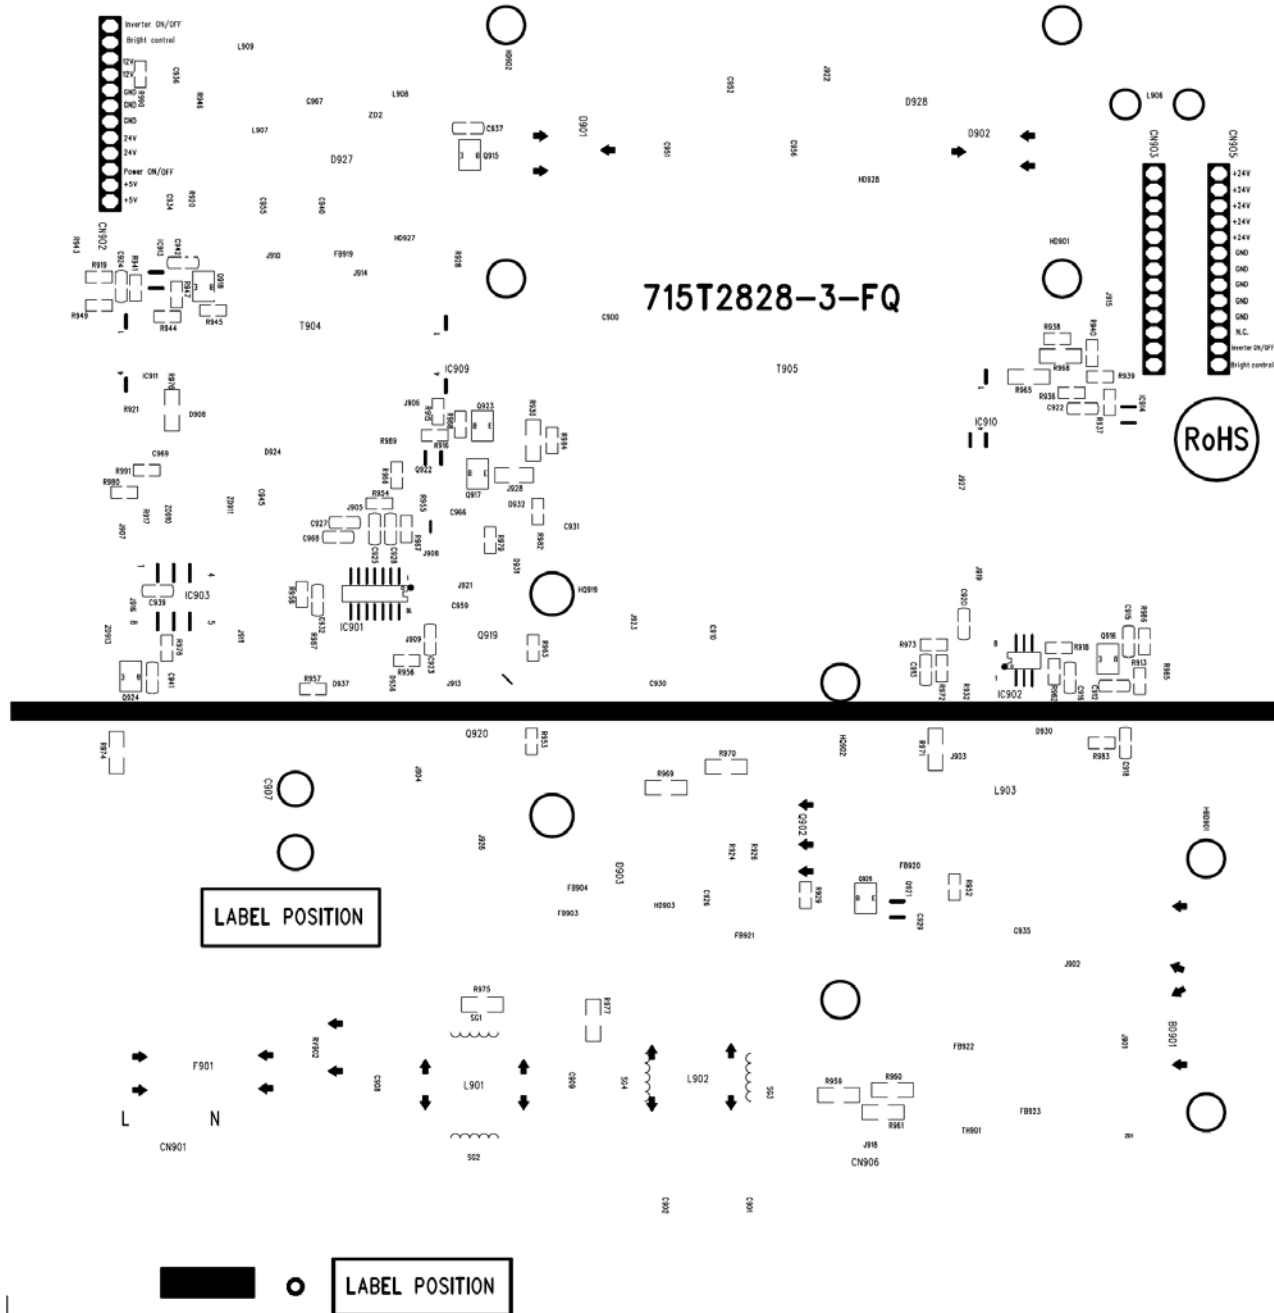


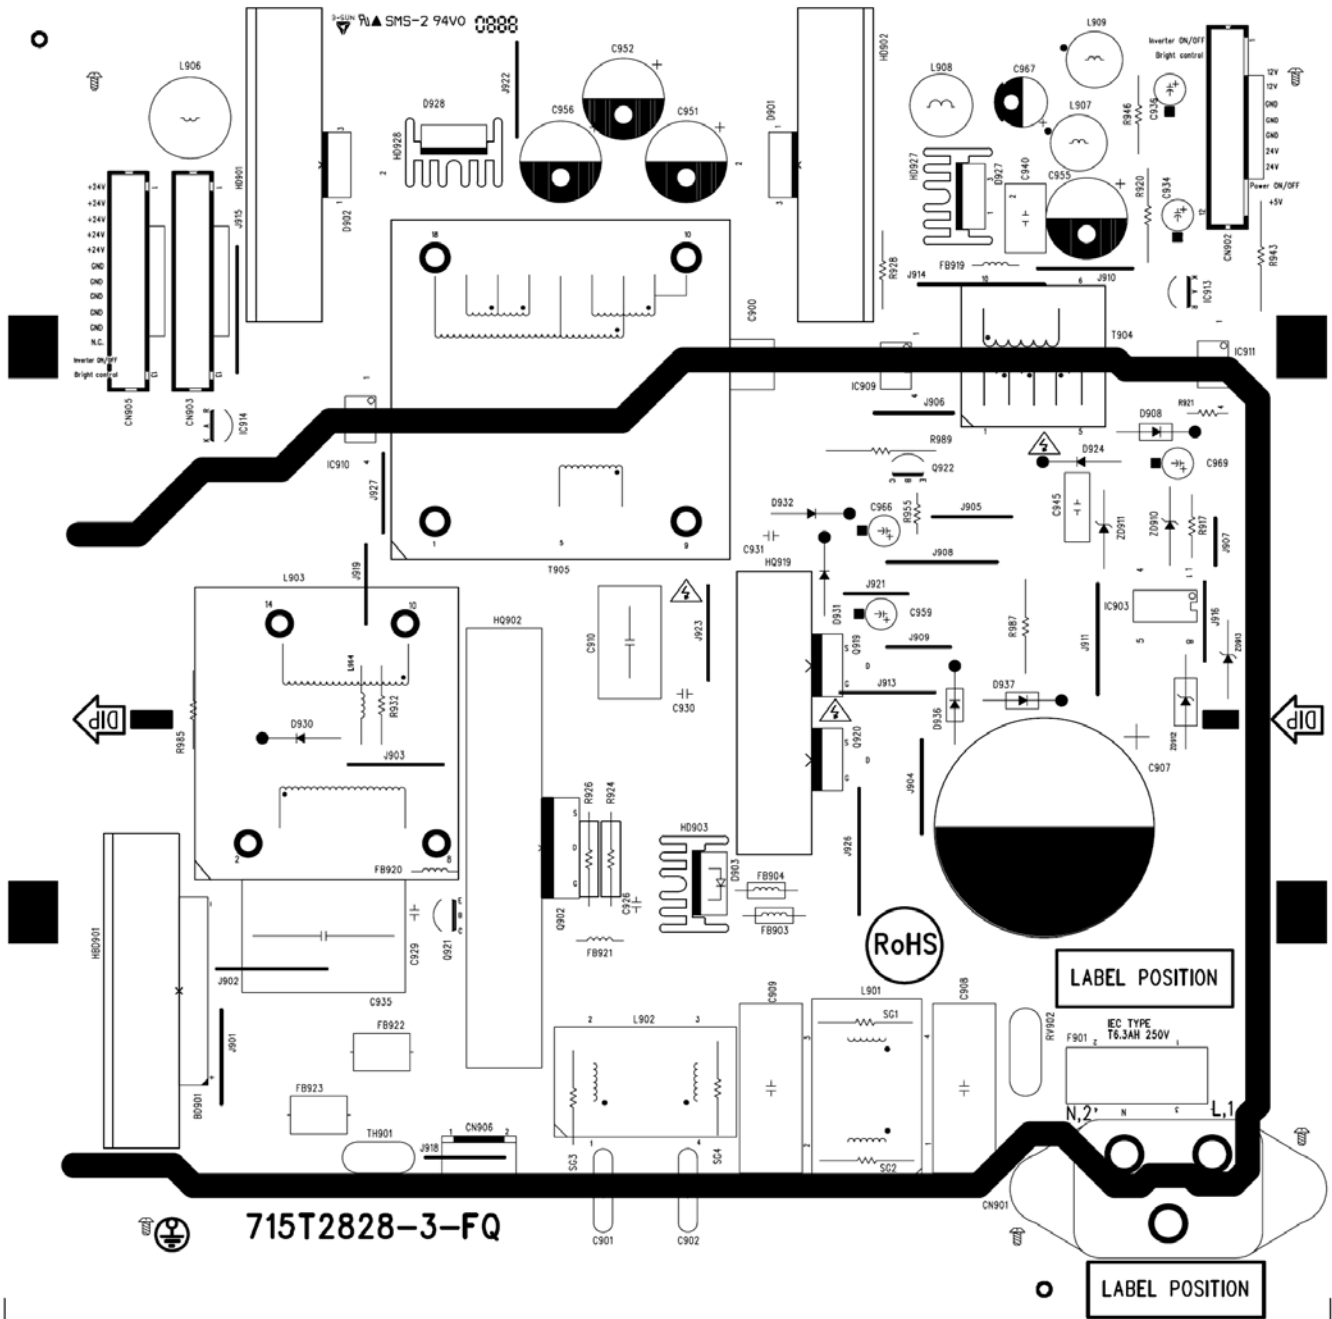

6.3 Key Board

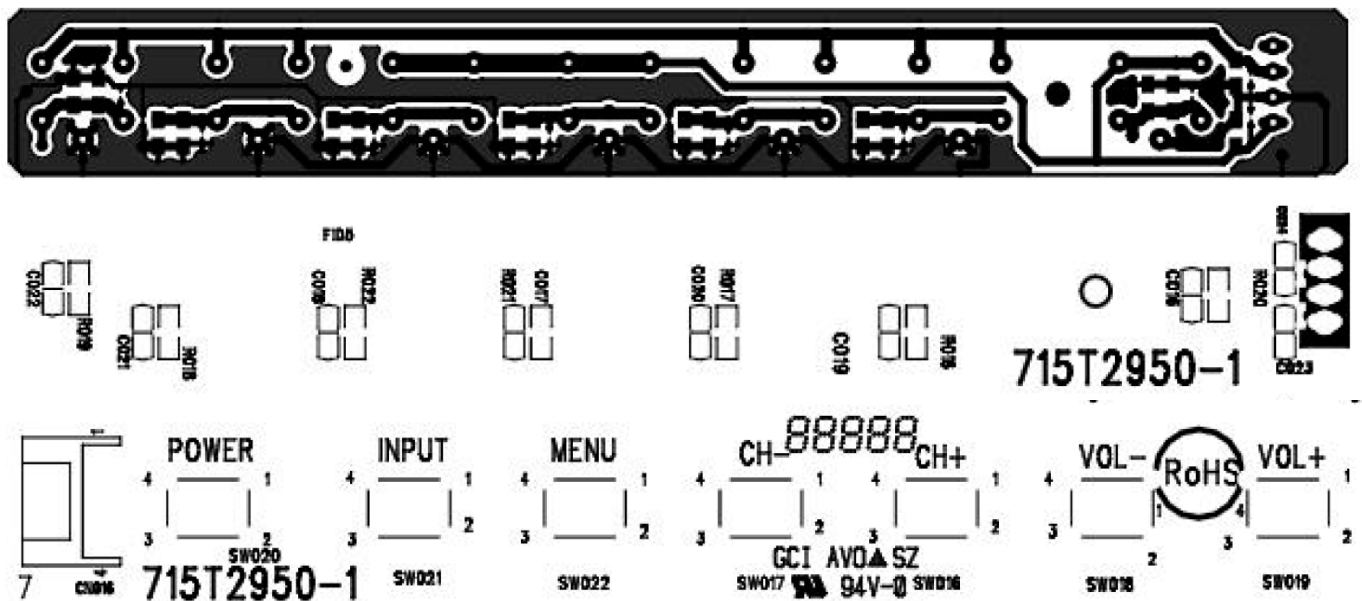

6.4 IR Board

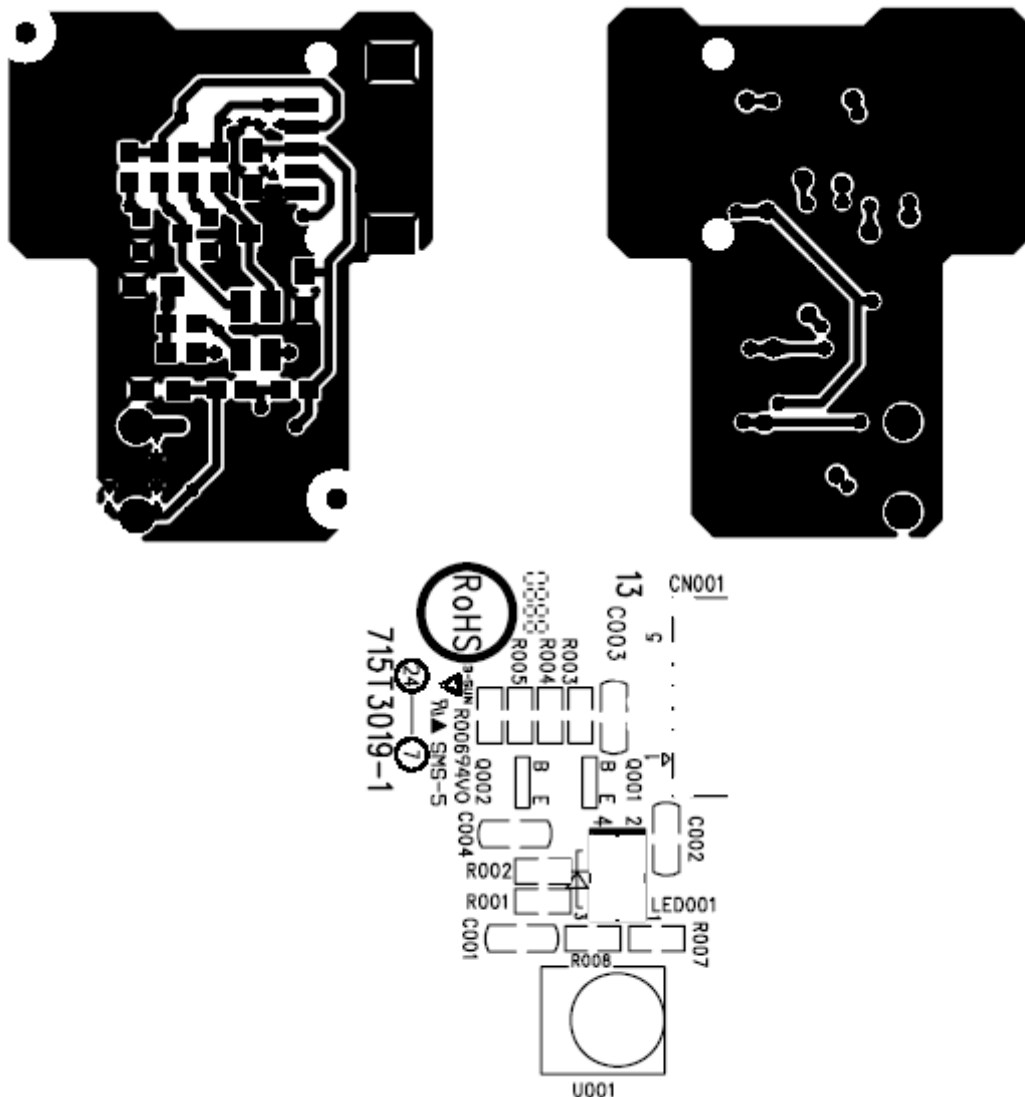

7. White Balance, Luminance Adjustment

In order to make the color of the picture be normal, we should do the white balance adjustment as below. Approximately 30 minutes should be allowed for warm up before proceeding white balance adjustment.

YPbPr Mode Display Adjustment

White balance adjustment (B)

General set-up :

Equipment Requirements: Minolta CA-110 or Equivalent Color analyzer, Quantum Data Pattern Generator 802G, 802BT or equivalent instrument

Input Signal Type: YPbPr signal

1. 720P mode, TVBar100 pattern by 802G or 802BT.
2. Select Smart picture to User mode and check the x, y data.

Input Signal Strength: 1 Vpp for Y signal; 700 mVpp for Pb & Pr signal

Input Injection Point: YPbPr (RAC jack)

720P, TVBar100 pattern



Alignment method:

Initial Set-up:

1. Select source as "Component".
2. Set Picture mode as "User" and to be Contrast =50 (CMO), Brightness=50 (CMO), at normal menu mode.
3. Apply "TVBar100" pattern with color bar pattern by signal generator.
4. Enter factory mode menu: press Numeric keys "062596" + DISPLAY key. (FAC mode menu). Then select "Factory" item.

Alignment:

1. At FAC mode menu, select AUTO_COLOR item. Then press "OK" key to adjust ADC_GAIN_R, ADC_GAIN_G, ADC_GAIN_B and ADC_OFFSET_R, ADC_OFFSET_G, ADC_OFFSET_B. Then store those values to NVM.
2. Apply Flat80 pattern (80% white pattern).
3. Set color temperature to "NORMAL".
4. At FAC mode menu, adjust the CLR TEMP R, CLR TEMP G, CLR TEMP B values to meet "NORMAL" color coordinates specification below. Then store those values to NVM.

Color temperature Normal/Warm/Cold (x, y) co-ordinates specification:

Picture Mode	x	y
Normal (9000°K)	0.289±0.005	0.291±0.005

Table: Reading with Minolta CA-110.

5. Check the 16 grayscale pattern should be distinguished and color bar is correct

Note:

1. Use Minolta CA-110 for color coordinates and luminance check.
2. Luminance > 400 cd/m² in the center of the screen when Brightness control at 100; Contrast control at 100 for CMO 32", 42" panels.
3. Reset AV setting, picture mode shall be recalled to be "Vivid" and Contrast=48, Brightness=58

PC mode display adjustment**White balance adjustment (B)****General set-up:**

Equipment Requirements: Minolta CA-110 or Equivalent Color analyzer, Chroma 2250 or equivalent PC signal generator.

Input Signal Type: PC VGA signal, 1024X768/60Hz PC mode with PGCWRGB pattern. (see pattern-1)

Input Signal Strength: 0.7 Vp-p linear voltage.

Input Injection Point: PC D-SUB input



Pattern-1


Alignment method:**Initial Set-up:**

1. Select source as "VGA".
2. Set Contrast = 50 (CMO) and Brightness=50 (CMO), at Standard menu mode.
3. Apply "PGCWRGB" (pattern-1) pattern by VGA pattern generator.
4. Enter factory mode menu: press Numeric keys "062596" + DISPLAY key. (FAC mode menu).Then select "Factory" item.













Alignment:

At FAC mode menu, select AUTO_COLOR item. Then press "OK" key to adjust ADC_GAIN_R, ADC_GAIN_G, ADC_GAIN_B and ADC_OFFSET_R, ADC_OFFSET_G, ADC_OFFSET_B. Then store those values to NVM.

8. Block Diagram

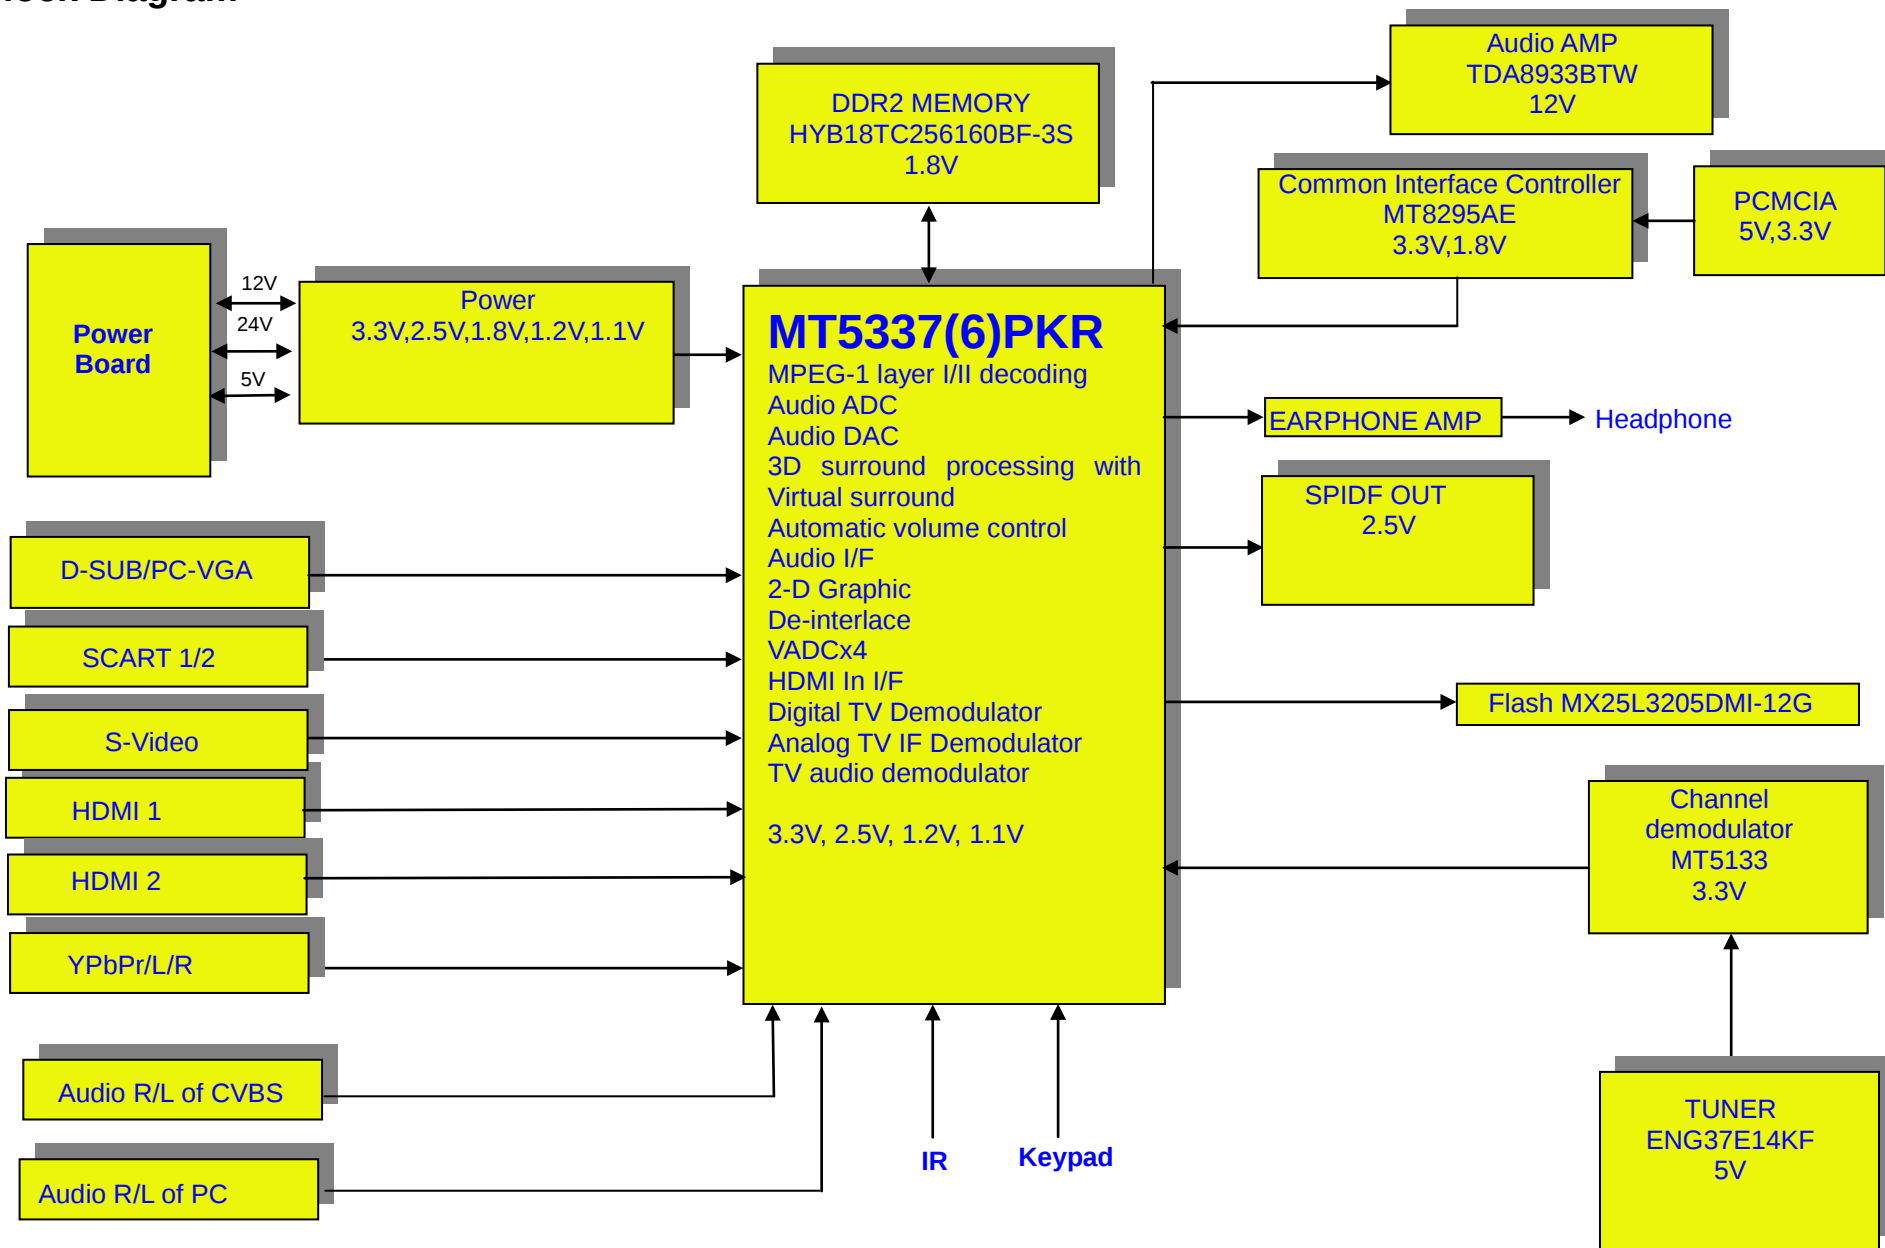



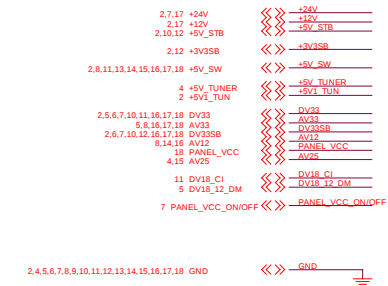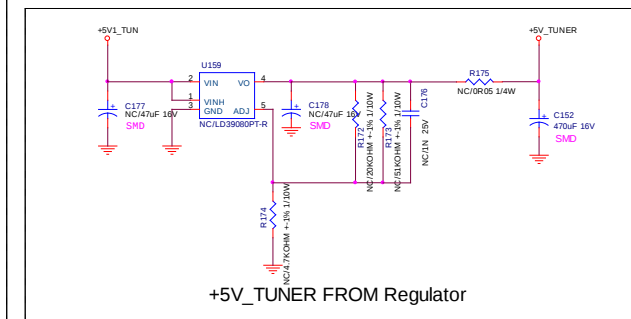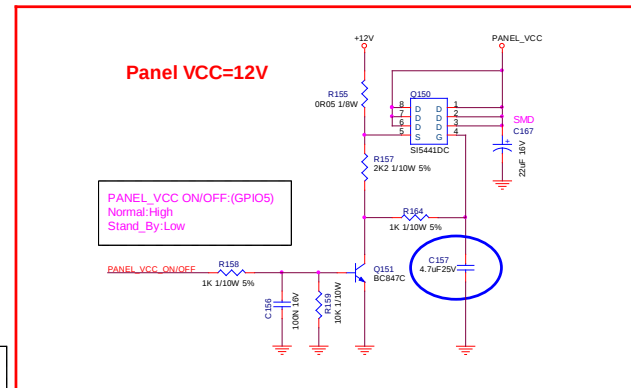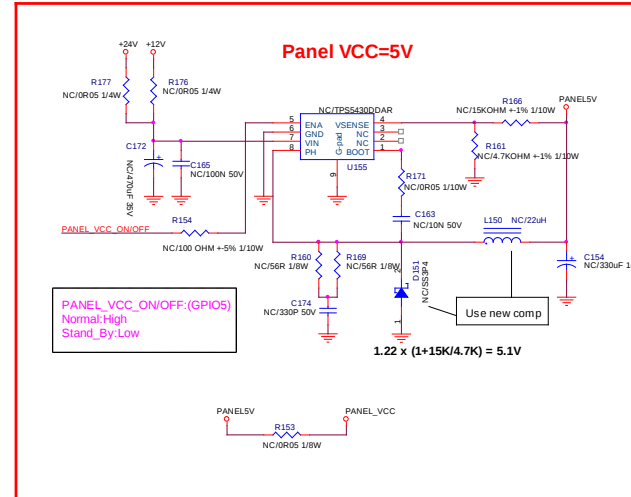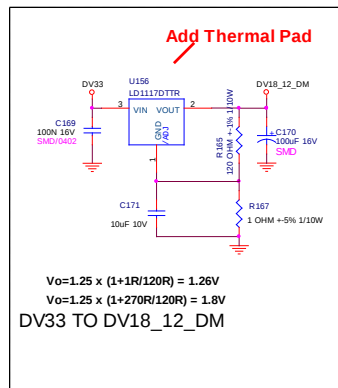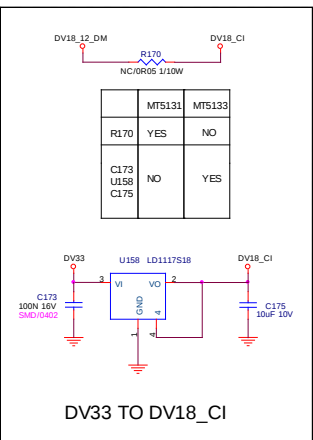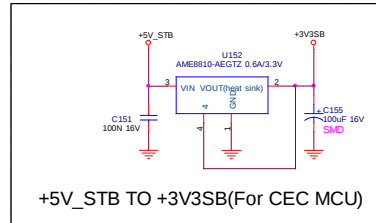

Panel VCC deviation


ITEM	PANEL VCC: +12V	PANEL VCC: +5V
R164	1K	N/C
Q151	BC847C	N/C
R155	0R	N/C
R157	2K2	N/C
Q150	SI5441	N/C
R158	1K	N/C
R159	10K	N/C
C167	22U	N/C
C156	100N	N/C
C157	4U7	N/C
R171	N/C	0R
C163	N/C	10N
R153	N/C	0R
R154	N/C	100R
R161	N/C	4K7
R166	N/C	15K
C172	N/C	470U
L150	N/C	22U
C154	N/C	330U
U155	N/C	TPS5430
C165	N/C	100N
D151	N/C	SS3P4
R176	N/C	0R









+5V_TUNER deviation of different Power board

ITEM	POWER 32"/37"	POWER 42"/47"
FB150	N/C	BEAD
R175	0R	N/C
U159	LD39080	N/C
R174	4K7	N/C
C178	47UF/16V	N/C
R172	20K	N/C
R173	51K	N/C
C176	1N/25V	N/C
C177	47UF/16V	N/C

The item of this page start from "150"

The number of this page shall not be 150					
T P V (Top Victory Electronics Co., Ltd.)		DEM MODEL	Haier 42" MAIN BOARD		
规格书编号		T2913-1-Haier42	TPV MODEL	E42M2NBW9H3N	Size C
Key Component		03. POWER-2	PCB NAME	71572913-1	Rev 1
Date		Friday, April 11, 2008	Sheet	3 of 19	修改 < 修改 >

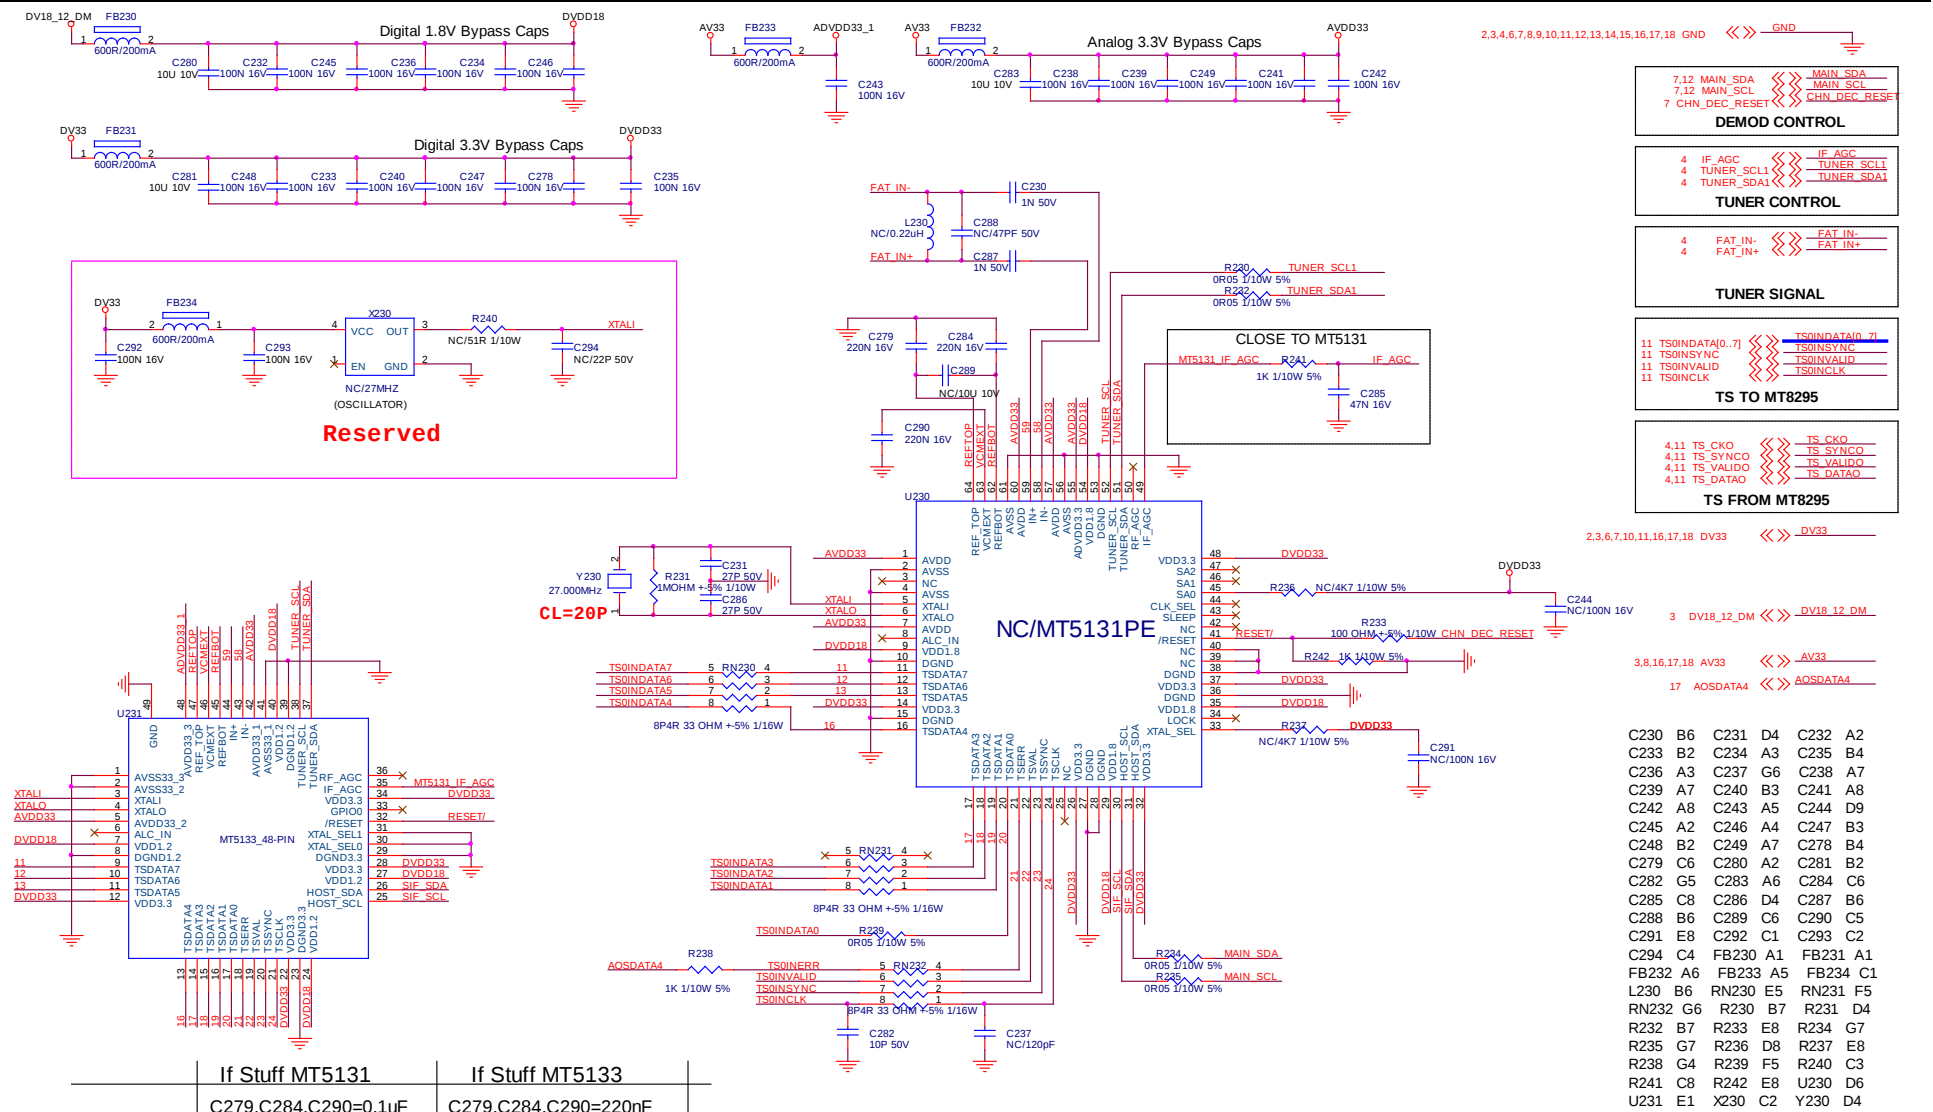

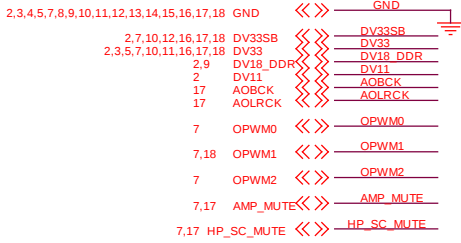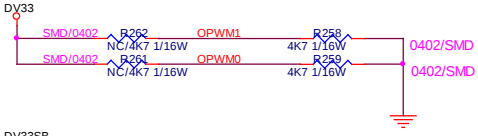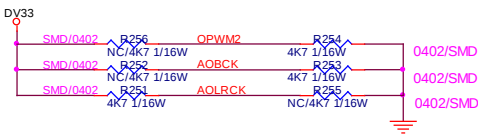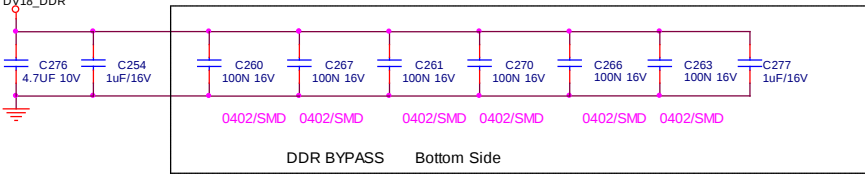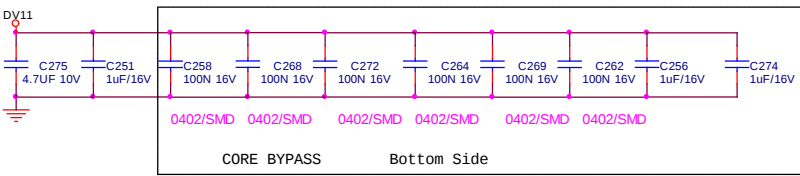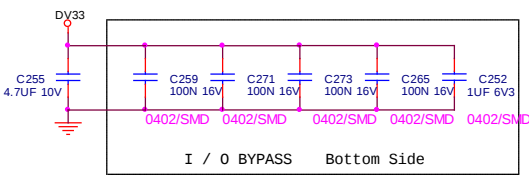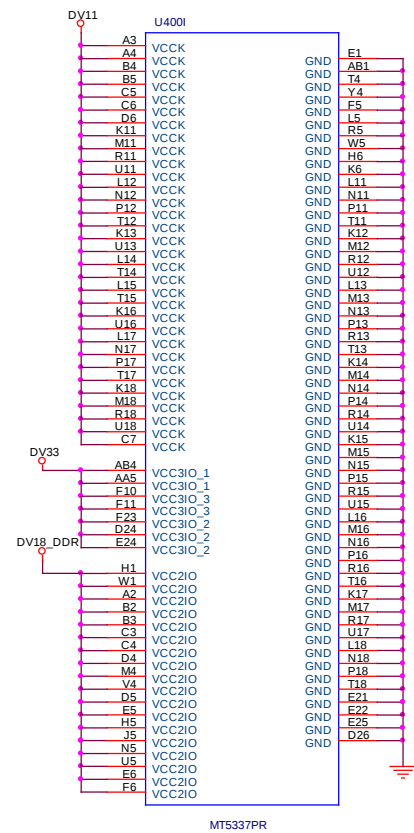

C251	C5	C252	B6
C254	D5	C255	B4
C256	C8	C258	C5
C259	B5	C260	D5
C261	D6	C262	C7
C263	D8	C264	C6
C265	B6	C266	D7
C267	D6	C268	C5
C269	C7	C270	D7
C271	B5	C272	C6
C273	B5	C274	C8
C275	C4	C276	D4
C277	D8	R251	F4
R252	F4	R253	F5
R254	E5	R255	F5
R256	E4	R258	F5
R259	F5	R261	F4
R262	F4	R264	G5
R265	G5	R267	G4
R268	G4	U4001	B2


Trap Mode	OPWM2	AOBCK	AOLRCK
Normal mode	0	0	0
ICE mode	0	0	1
CPU model mode	0	1	0
SCAN mode	1	X	X
Scan BGA Mode	1	1	X
OLT Mode	1	X	1

Trap Mode	OPWM0	OPWM1
NOR BOOT	0	0
NAND BOOT	0	1
LARGE NAND BOOT	1	0


Trap Mode	OPCTRL5	OPCTRL4
Core Reset 0.9V	0	0
Core Reset 3.3V	0	1
SCAN mode	1	0
Core Reset 1us	1	1

The item of this page start from "250"

T P V (Top Victory Electronics Co. , Ltd.)	OEM MODEL	Haier 42" MAIN BOARD	Size	Custom	
经销商名称	T2913-1-Haier42	TPV MODEL	E428M2NBW9H3N	Rev	1
Key Component	06. MT5337 BYPASS/TRAP.	PCB NAME	715T2913-1	称多	< 称多 >
Date	Friday, April 11, 2008	Sheet	6 of 19		









T P V (Top Victory Electronics Co., Ltd.)	OEM MODEL	Haier 42" MAIN BOARD	Size	Custom
結爾瓜爾	T2913-1-Haier42	TPV MODEL	E428M2NBW9H3N	Rev 1
KeyComponent	07. MT5337 PERIPHERAL	PCB NAME	715T2913-1	寄多 < 寄多 >
Date	Friday, April 11, 2008	Sheet	7 of 10	

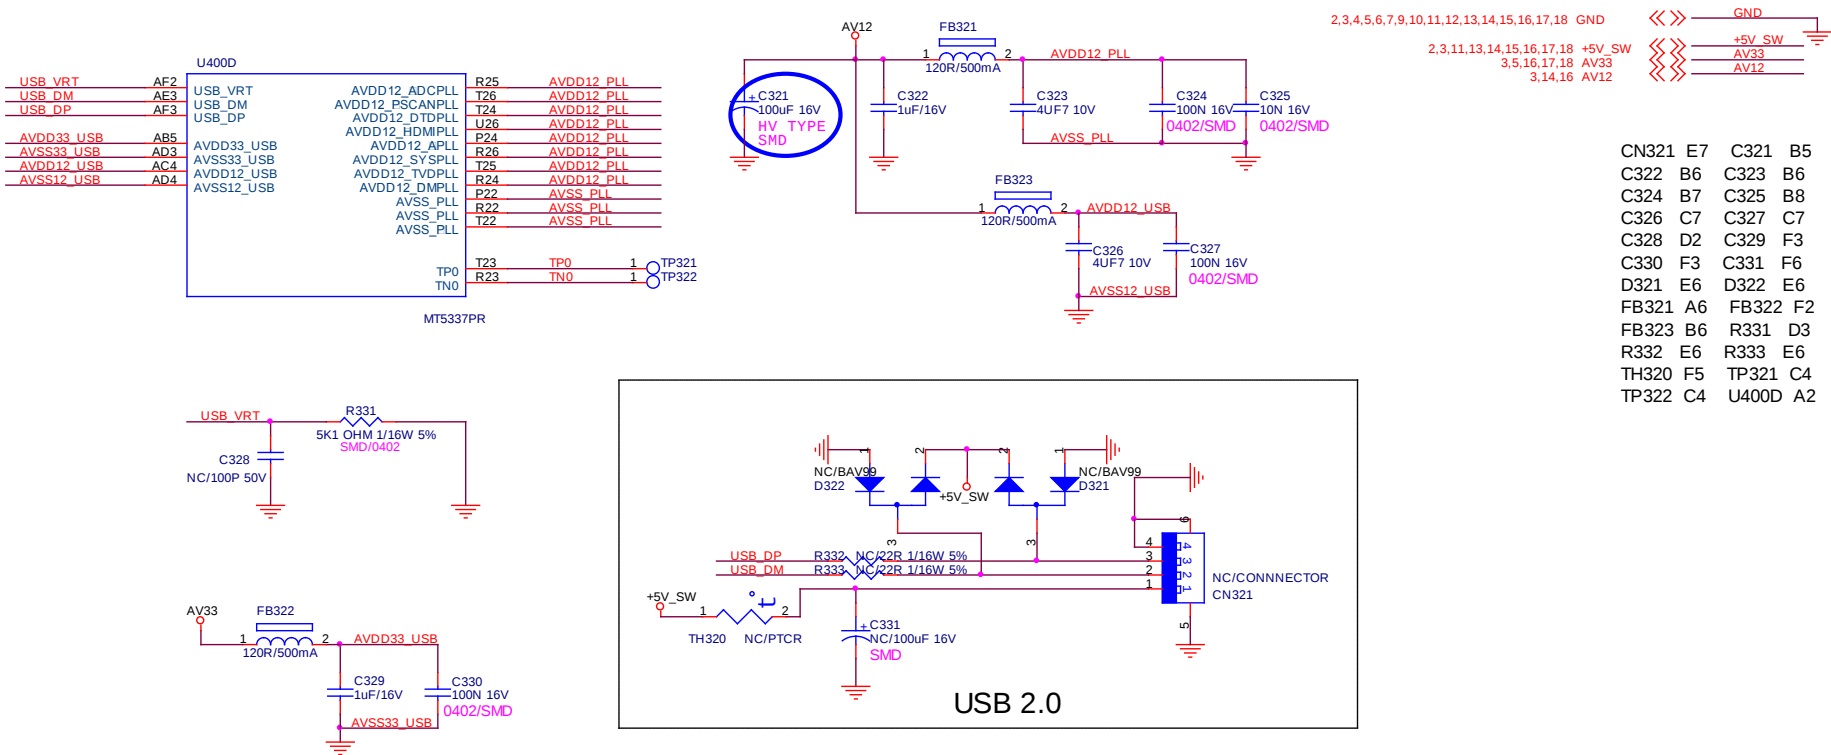






The item of this page start from "320"

T P V (Top Victory Electronics Co. , Ltd.)	OEM MODEL	Haier 42" MAIN BOARD	Size	Custom
結構瓜膜版	T2913-1-Haier42	TPV MODEL	E428M2NBW9H3N	Rev 1
Key Component	08. ANALOG PLL/USB2.0	PCB NAME	715T2913-1	称差 < 称差 >
Date	Friday , April 11, 2008	Sheet	8 of 19	

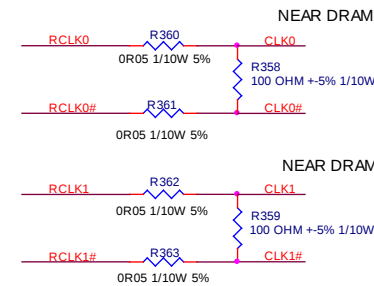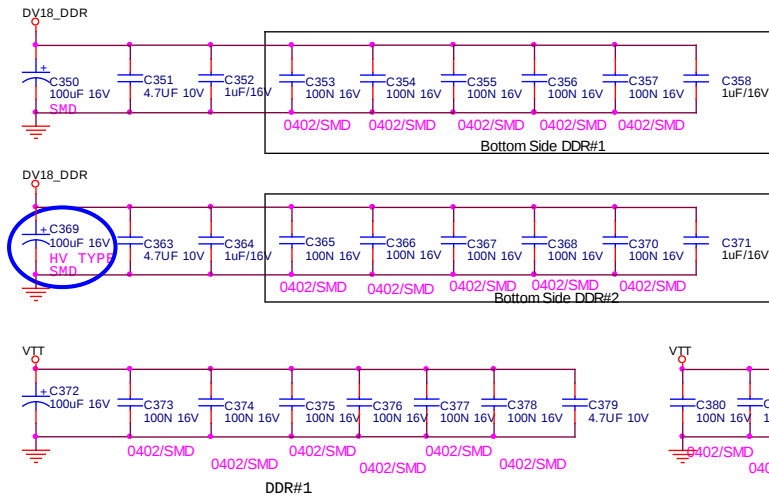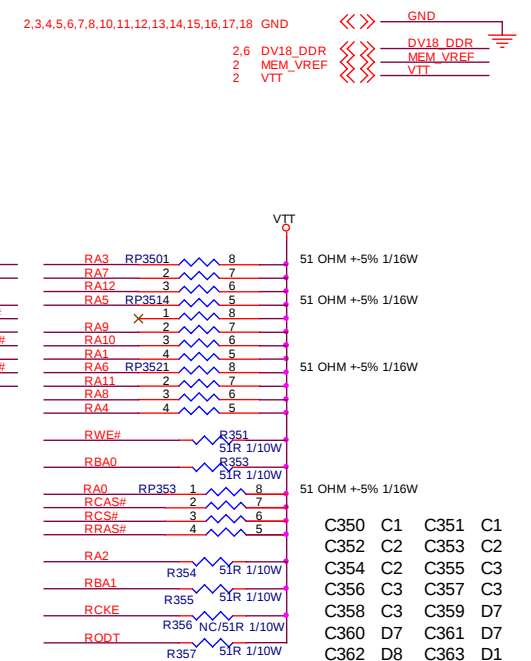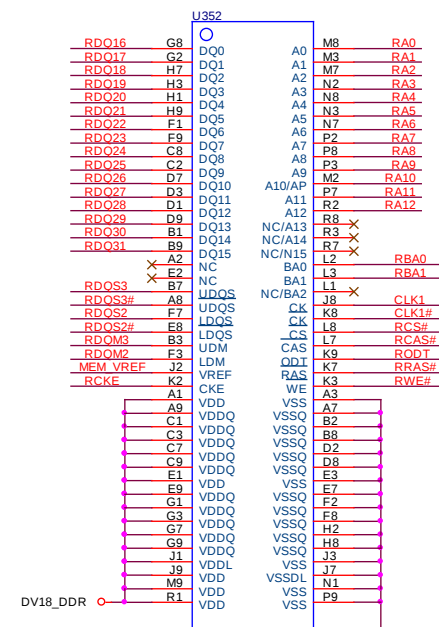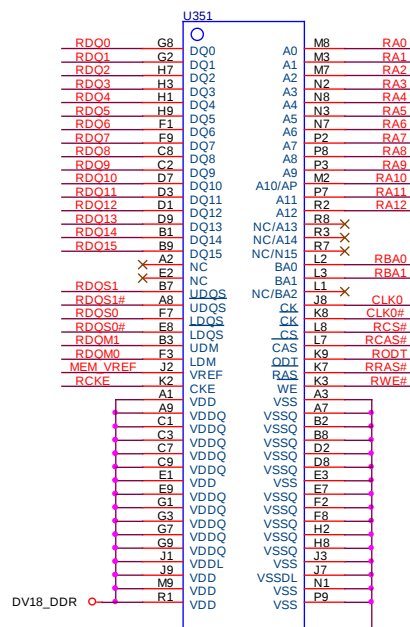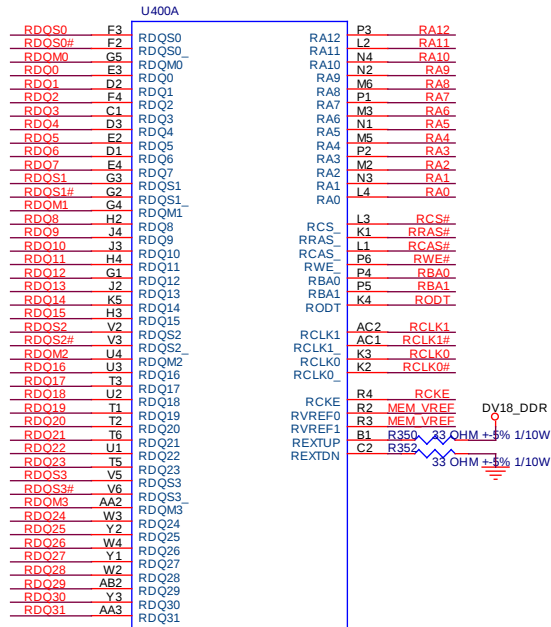

The item of this page start from "350"


TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Haier 42" MAIN BOARD	Size	B
紙隔瓜網廠	TPV MODEL	T2913-1-Haier42	Rev	1
Key Component	09. DDR2 MEMORY	PCB NAME	715T2913-1	廠名 < 廠名 >
Date	Friday, April 11, 2008	Sheet	9 of 19	

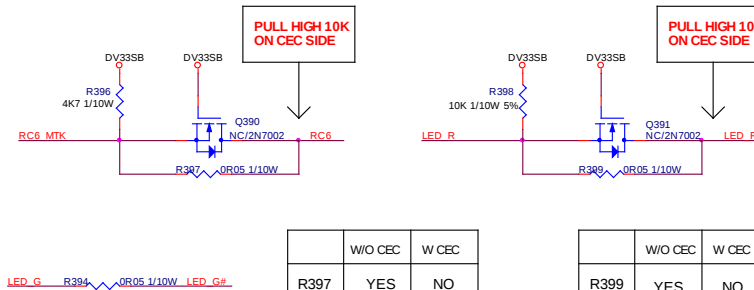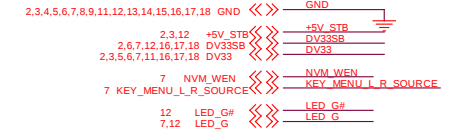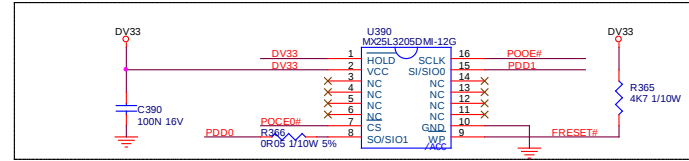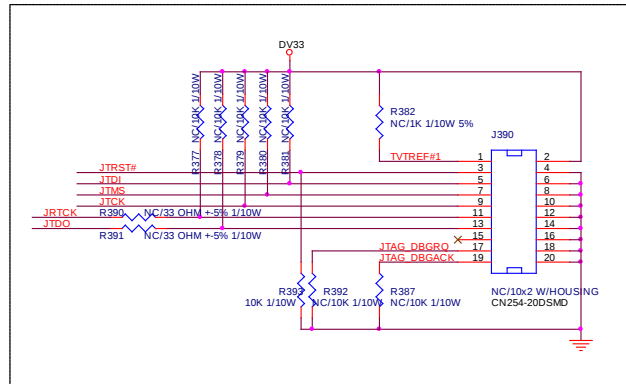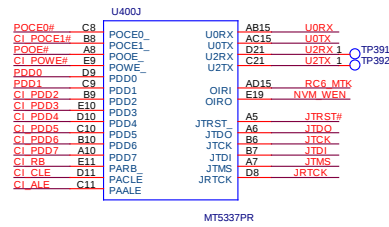

	W/O CEC	W CEC
R397	YES	NO
Q390	NO	YES
R396	YES	NO

	W/O CEC	W CEC
R397	YES	NO
Q390	NO	YES
R396	YES	NO

	W/O CEC	W CEC
R399	YES	NO
Q391	NO	YES
R398	YES	NO



CN390 F10 CN391 F4

CN392 F6 C390 A5

C391 G2 C393 G2

C395 G3 C396 G2

C397 F8 C398 F8

D390 F3 FB390 E3

J390 C4 Q390 C6

Q391 C8 R365 A8

R366 B6 R367 F5

R370 F1 R372 F1

R374 F2 R375 F1

R376 F2 R377 C2

R378 C2 R379 C2

R380 C2 R381 C2

R382 C3 R384 F8

R385 E5 R386 F8

R387 D3 R388 E5

R389 F8 R390 C2

R391 D2 R392 D3




R393 D3 R394 D5

R395 F5 R396 C6

R397 C6 R398 C8




R399 C8 TP391 A3

TP392 A3 U390 A6

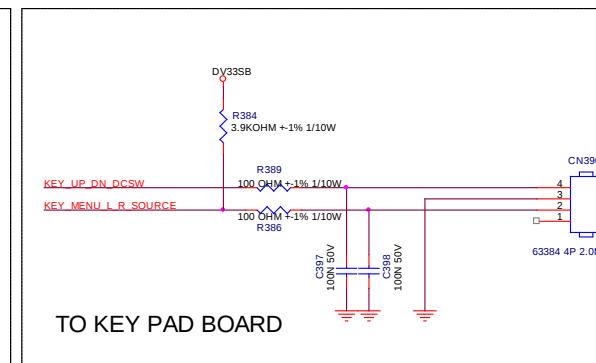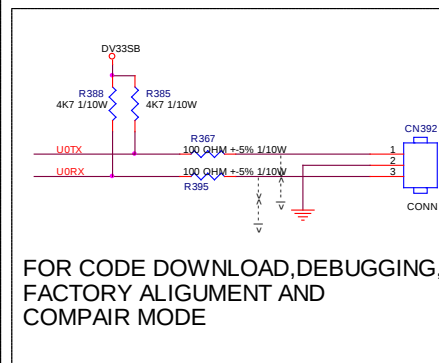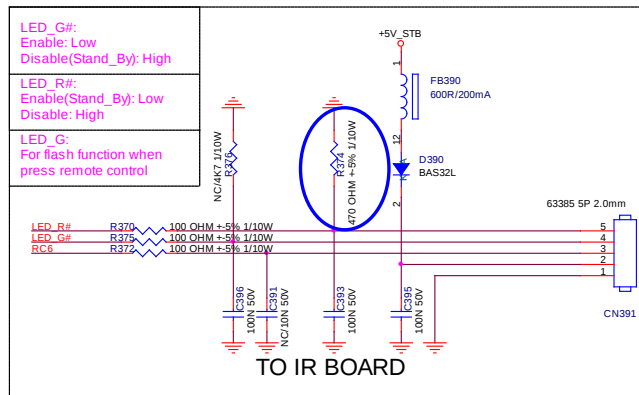


The item of this page start from "390"

TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Haier 42" MAIN BOARD	Size	Custom
新 隔 瓜 里 廠	T2913-1-Haier42	TPV MODEL	E428M2NBW9H3N	Rev 1
Key Component	10_FLASH/JTAG/UART7/IR	PCB NAME	715T2913-1	份数 < 份数 >
Date	Friday, April 11, 2008	Sheet	10 of 19	



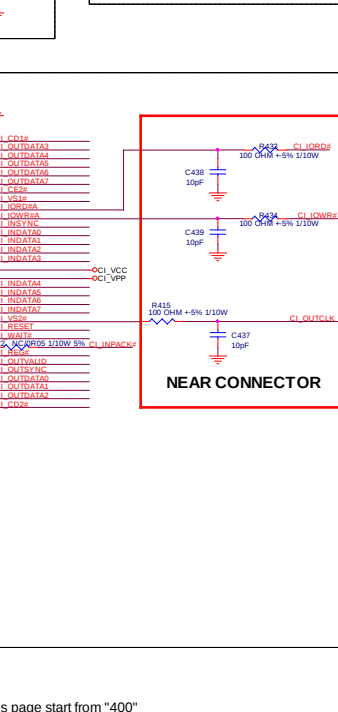
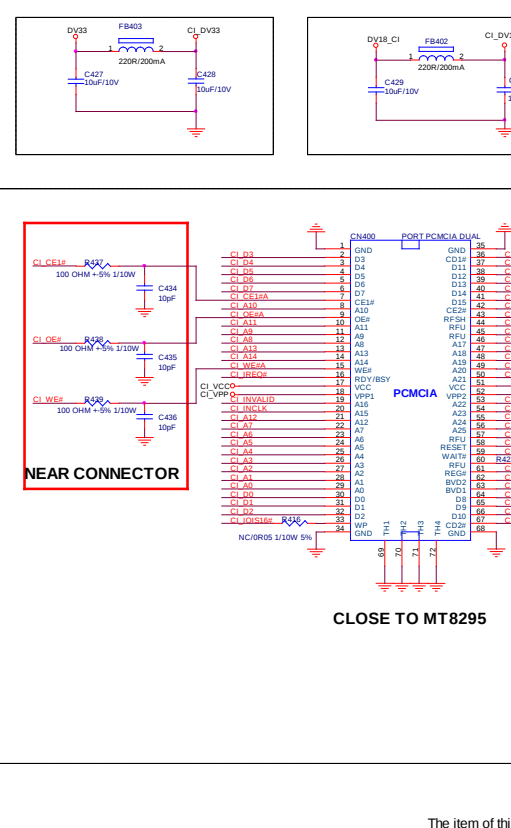
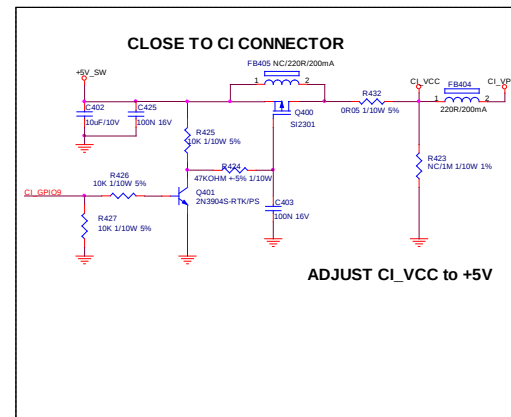


CN400 E7
C400 C40
C401 D3
C402 A6
C403 B7
C404 B1
C405 B1
C406 C1
C407 B2
C408 B2
C409 B2
C410 B3
C411 B3
C412 B3
C413 B3
C414 B4
C415 B4
C416 B4
C417 B5
C418 B4
C419 C3
C420 C3
C421 C4
C422 C4
C423 C5
C424 C2
C425 A6
C426 B3
C428 D6
C429 D8
C430 D8
C431 B4
C432 B3
C433 B4
C434 B5
C435 B4
C436 F6
C437 F10
C438 E10
C439 E10
FB400 C3
FB401 C4
FB402 B8
FB403 C8
FB404 A8
FB405 A7
Q400 A7
Q401 B6
R400 D3
R401 A2
R402 A2
R403 B2
R404 B1
R405 B1
R406 A5
R407 B2
R408 A4
R409 D4
R410 D4
R411 D2
R412 D2
R413 D2
R414 D2
R415 D9
R416 F7
R417 G3
R418 H1
R419 H1
R420 H1
R421 H2
R422 F8
R423 B8
R424 B7
R425 A6
R426 B6
R427 B6
R428 D1
R429 D1
R430 D1
R431 D1
R432 A7
R433 E10
R434 E10
R435 A5
R436 A4
R437 B5
R438 B5
R439 B5
TP400 E2
TP401 E2
TP402 E3
TP403 E3
TP404 E3
TP405 E5
TP406 E5
TP407 E5
TP408 F1
TP409 F1
TP410 F1
U401 E2
X400 D3






TP V	Top	Victory	Electronics	Co., Ltd.	OEM Model	Haier 42" MAIN BOARD	Size	Custom
经 销 代 理	T2913-1-Haier42				TPV MODEL	E428M2NBW9H3N	Rev	1
Key Component	11. MT8295/CI CARD				PCB NAME	71572913-1	规格	< 规格 >
Date	2008.03.11_2008				Sheet	11 of 10		

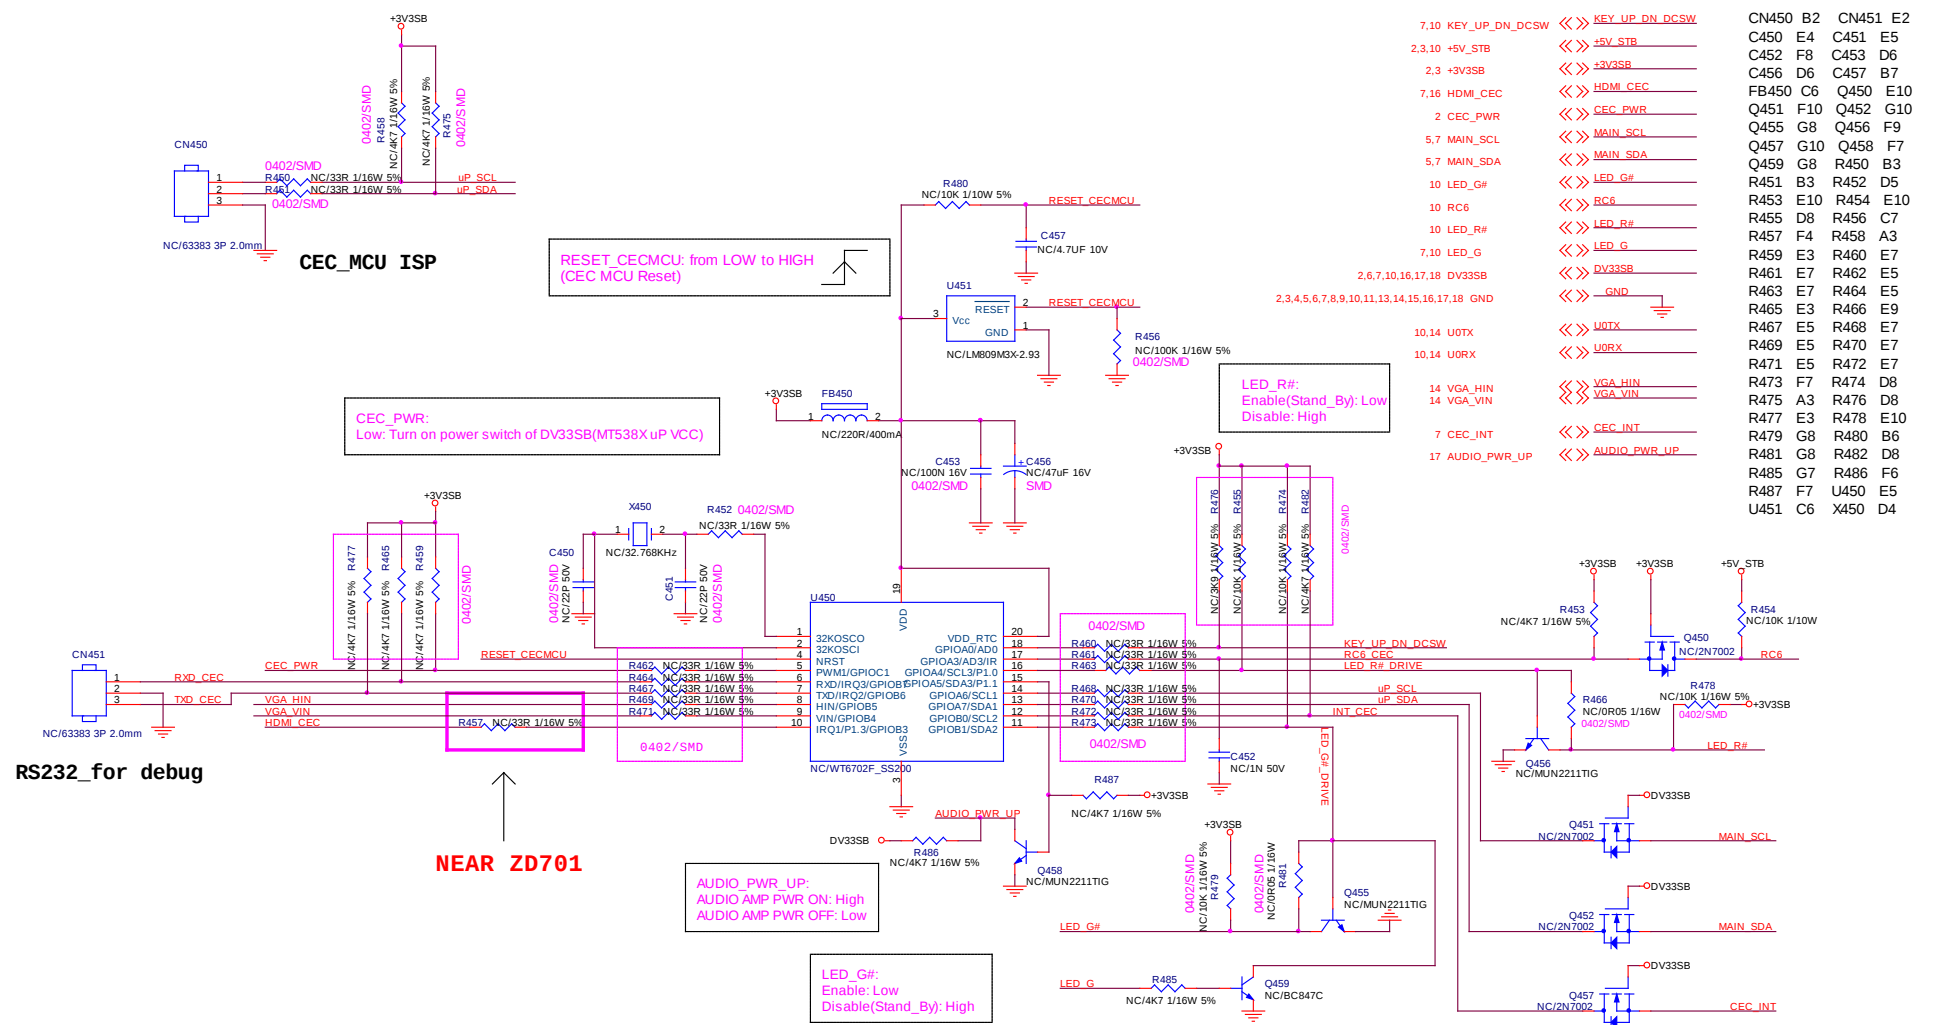

0482/SMD

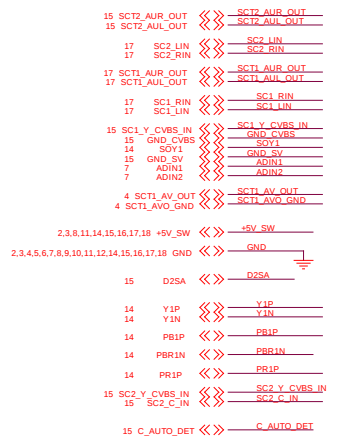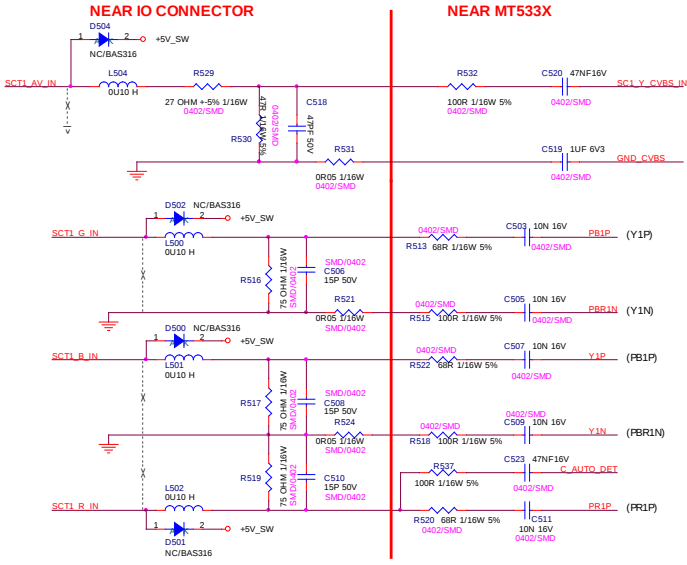


- CN500 B2
- CN501 E1
- C500 F11
- C501 F10
- C502 E10
- C503 B6
- C504 E6
- C505 C6
- C506 B4
- C507 C6
- C508 C4
- C509 D6
- C510 D4
- C511 D6
- C512 A7
- C513 B7
- C514 G6
- C515 E7
- C516 E7
- C517 G4
- C518 A4
- C519 B6
- C520 A6
- C521 F4
- C522 F6
- C523 D6
- C524 C4
- D500 D4
- D501 D4
- D502 B4
- D503 G4
- D504 A3
- D505 E3
- D506 A7
- D507 A7
- D508 E7
- D509 E7
- D510 C7
- D511 C7
- D512 F7
- L500 B4
- L501 C4
- L502 D4
- L503 G4
- L504 A3
- L505 E3
- Q500 F10
- R500 C7
- R501 F9
- R502 F10
- R504 G8
- R505 D7
- R506 F10
- R507 F7
- R508 C7
- R509 F9
- R511 D8
- R512 E10
- R513 B5
- R514 G5
- R515 C5
- R516 B4
- R517 C4
- R518 D5
- R519 D4
- R520 D5
- R521 C5
- R522 C5
- R523 A8
- R524 D5
- R525 B8
- R526 E8
- R527 E8
- R528 G4
- R529 A4
- R530 A4
- R531 B4
- R532 A5
- R533 E5
- R534 E4
- R535 E4
- R536 F5
- R537 D5

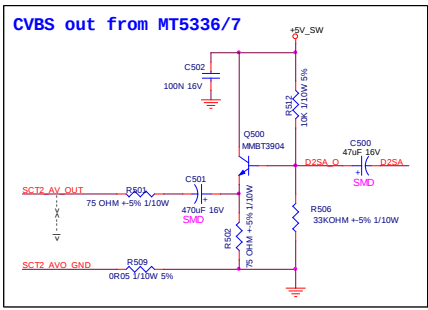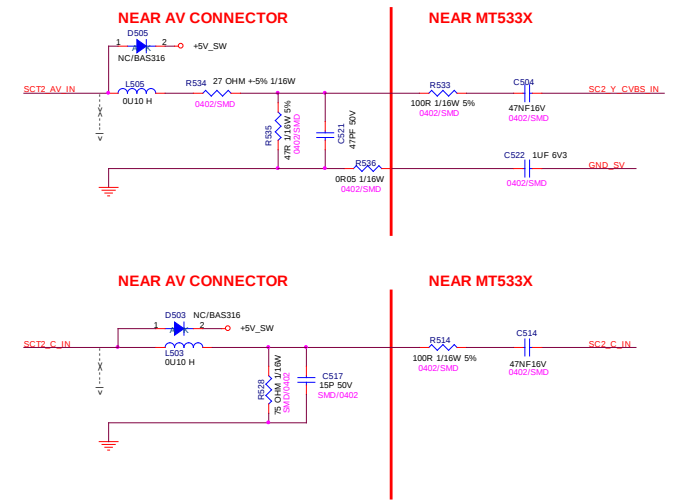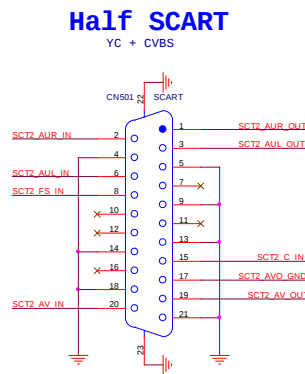


The item of this page start from "500"

TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL Haier 42" MAIN BOARD	Size	Custom
经 銷 代 理 商 T2913-1-Haier42	TPV MODEL E428M2NBW9H3N	Rev	1
Key Component 13.SCRT1/SCRT2	PCB NAME 715T2913-1		
Date Friday, April 11, 2008	Sheet 13 of 19		

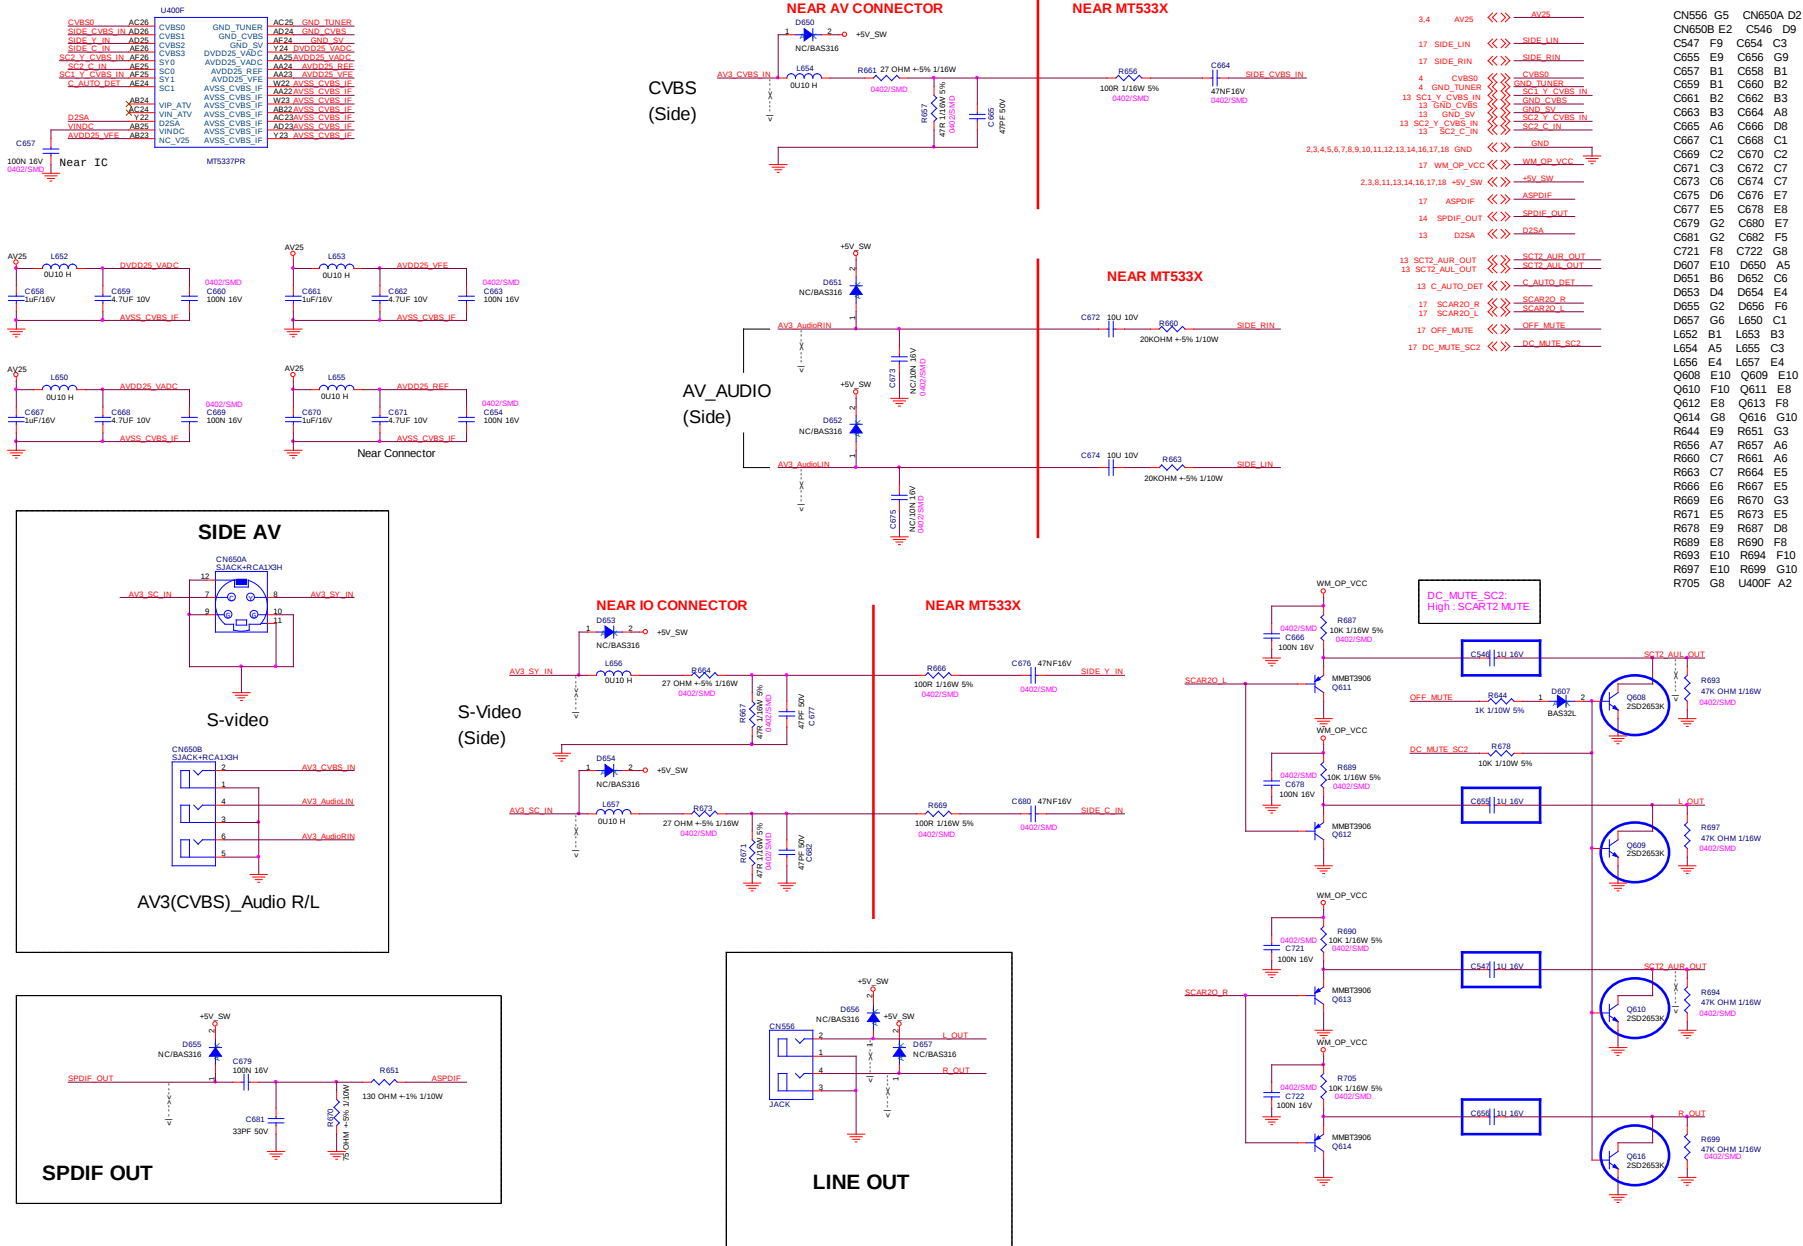

The item of this page start from "650"

T P V (Top Victory Electronics Co. , Ltd.)	OEM MODEL	Haier 42" MAIN BOARD	Size	Custom	
图 纸 名 称	T2913-1-Haier42	TPV MODEL	E428M2NBW9H3N	Rev	1
Key Component	15. SideAV/SPDIF OUT	PCB NAME	71572913-1	图 号	4 (张数)
Date	Friday, April 11, 2008	Sheet	15 of 19		



ITEM	2	H0M1	3	H0M1	ITEM	2	H0M1	3	H0M1	ITEM	2	H0M1	3	H0M1
Q781	NC	YES			R732	NC	YES			R745	NC	YES		
R725	NC	YES			D795	NC	YES			Q787	NC	YES		
R726	NC	YES			F8700	NC	YES			R746	NC	YES		
D706	NC	YES			C711	NC	YES			R760	NC	YES		
C700	NC	YES			U780	NC	YES			R761	NC	YES		
R728	NC	YES			R722	NC	YES							
D700	NC	YES			R723	NC	YES							
ZD783	NC	YES			R724	NC	YES							
R738	NC	YES			Q784	NC	YES							
Q783	NC	YES			R733	NC	YES							
C713	NC	YES			Q781	NC	YES							

FOR EMC

NEAR CN701


5V SW
D709 NC/BAS32L
H+LIDER 1V
F700 NC/500V/500mA
R702 NC/10K 1/16W
R703 10K 1/16W
U709
EDID EEPROM
N2039P 5.150W
EDID_WEN (GPIO3)
write_enable: High
write_disable: Low

HDMI 3 EDID EEPROM (SIDE)


NEAR CN702

5V SW
D707 NC/BAS32L
H+LIDER 1V
F700 NC/500V/500mA
R702 NC/10K 1/16W
R703 10K 1/16W
U707
EDID EEPROM
N2039P 5.150W
EDID_WEN (GPIO3)
write_enable: High
write_disable: Low

The item of this page start from "700"				
TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	Hsier 42" MAIN BOARD	Size	Custom
品名及型號	T2913-1-Hsier42	TPV MODEL	E42BM2NBW9V3N	Rev 1
Key Component	16. HDMI/HDMI2 INPUT	PCB NAME	715T2913-1	
Date	Friday, April 11, 2008	Sheet	16 of 19	修改 < 舊版 >



FOR FULL HD PANEL

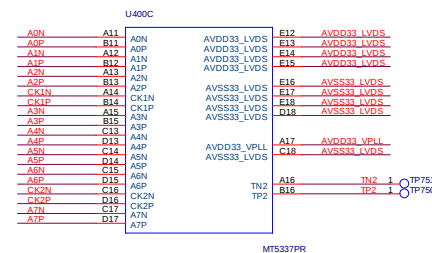





6,7 OPWM1
7 INVERTER_SW
2 BRIGHT_ADJ
2 INVERTER_ON OFF

3.5.8.16.17 AV33

PANEL VCC
+5V SW
DV33
DV33SB
GND

OPWM1
 INVERTER SW
 BRIGHT ADJ
 INVERTER_ON

CN750	B3	C750	D8
C751	A6	C752	A6
C752	D7	C754	D8
C755	D9	C756	E7
C757	E8	C758	E8
C759	F3	FB750	D7
FB751	A7	FB752	A7
FB753	A7	FB754	E7
Q750	G3	Q751	F3
R751	F2	R752	A1
R753	A2	R754	A2
R755	A3	R756	E2
R757	E3	R758	E3
R759	G2	R760	E3
R761	F2	R763	G3
R764	G3	R765	G2
TP750	C9	TP751	C9
TP752	C1	TP753	C1
TP754	C1	TP755	C2
TP756	C2	TP757	C2
TP758	C2	TP759	C2
TP760	C2	TP761	C3
TP762	C4	TP763	C4
TP764	C4	TP765	C5
TP766	C5	TP767	C5
TP768	C5	TP769	C5
TP770	C5	TP771	C6




TPV (Top	Victory Electronics Co., Ltd.)	OEM MODEL	Haier 42" MAIN BOARD	Size	Custom
纸南瓜图版	T2913-1 Haier42	TPV MODEL	E428M2NBW9H3N	Rev	1
Key Component	18. LVDS OUTPUT	PCB NAME	715T2913-1	数量	< 数量 >
Date	Friday, April 11, 2008	Sheet	18 of 19		

32"&37"&42"LCD TV

9.2 Power Board For L42W98H


AOC L32W981&L37W981&L42W98H

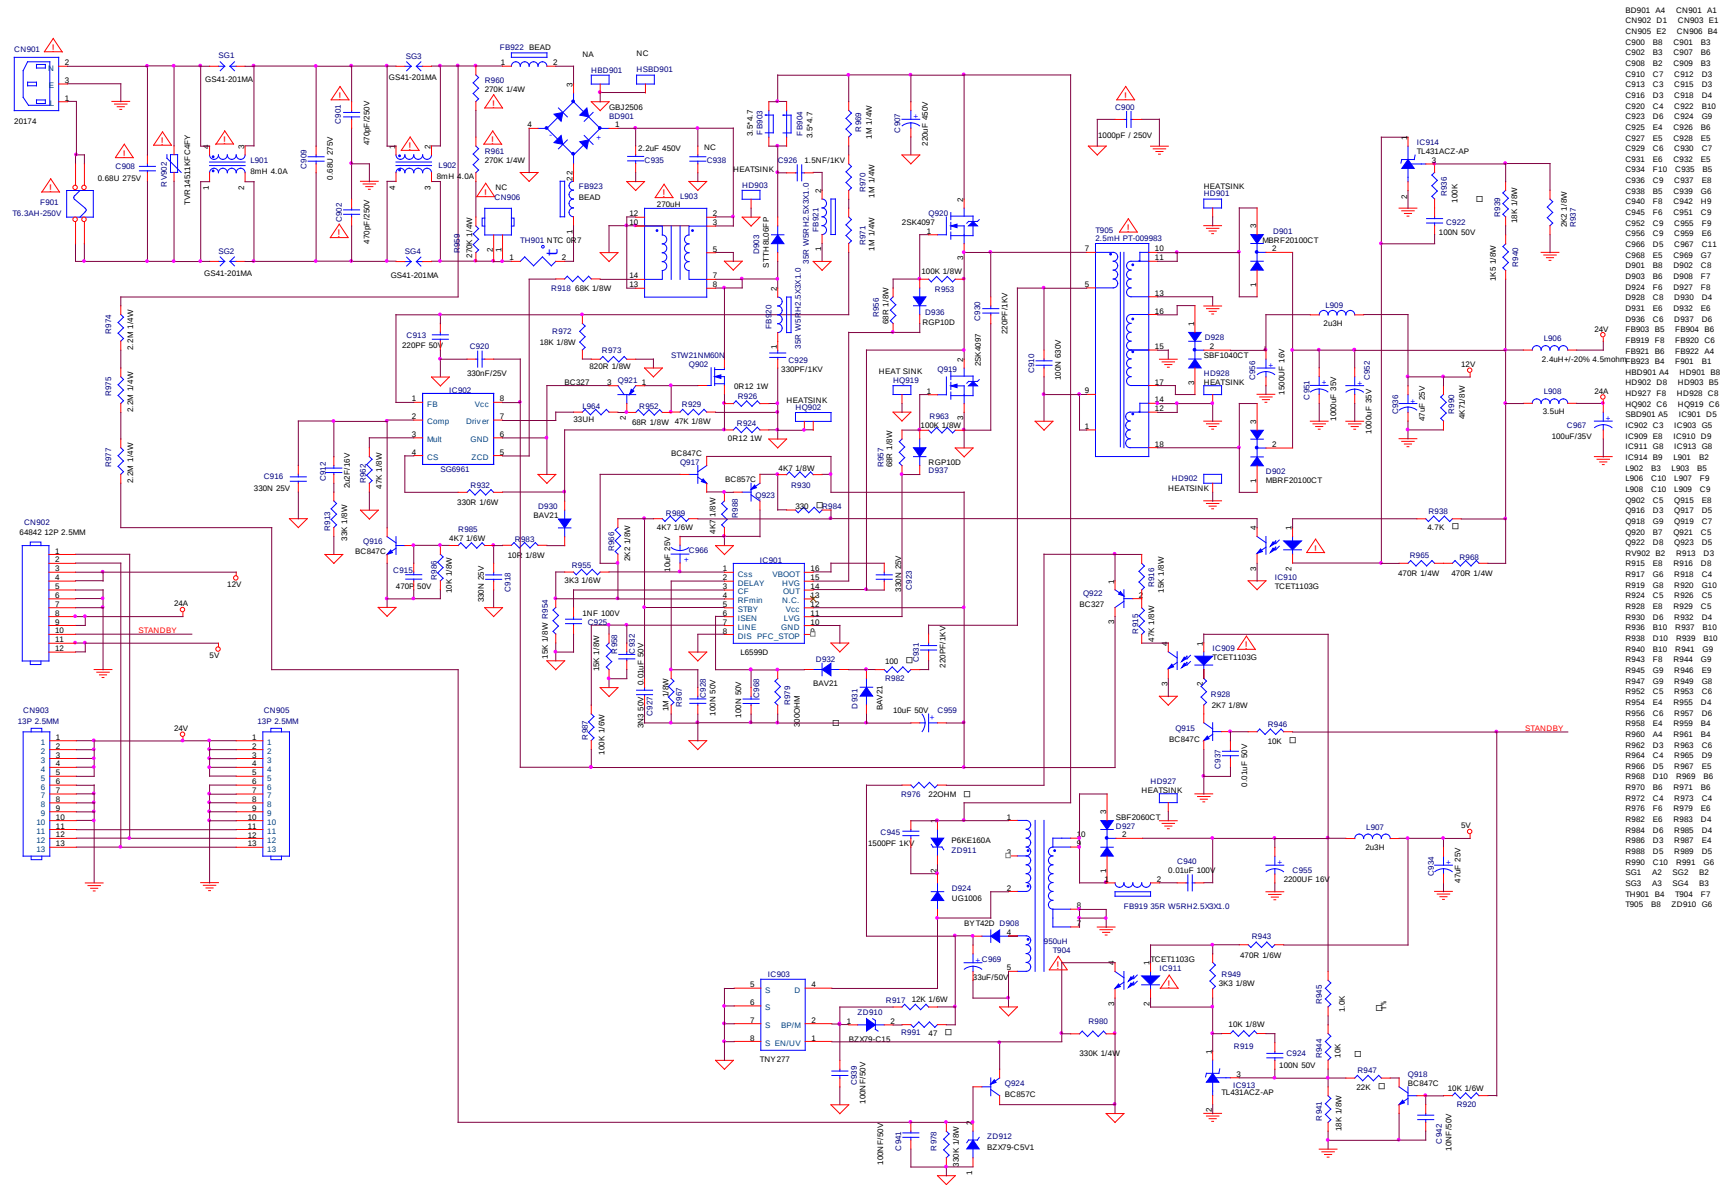

BD901 A4	CN901 A1
CN902 D1	CN903 E1
CN905 E2	CN906 B4
C900 B8	C901 B3
C902 B3	C907 B6
C908 B2	C909 B3
C910 C7	C912 D3
C913 C3	C915 D3
C916 D3	C918 D4
C920 C4	C922 B10
C923 D6	C924 D9
C925 E4	C926 B6
C927 E5	C928 E5
C929 C6	C930 C7
C931 E6	C932 E5
C934 F10	C935 B5
C936 C9	C937 E8
C938 B5	C939 E6
C940 F8	C942 H9
C945 F6	C951 C9
C952 C9	C955 F9
C956 C9	C959 E6
C966 D5	C967 C11
C968 E5	C969 C7
D901 B8	D902 C8
D903 B6	D908 F7
D904 F6	D907 F8
D928 C8	D930 D4
D931 E6	D932 E6
D936 C4	D937 D6
F8903 B5	F8904 B6
F8919 F8	F8920 C5
F8921 B6	F8922 A4
HD901 A4	HD902 B8
HD902 D8	HD903 B5
HD927 F8	HD928 C8
HQ902 C6	HQ919 C6
SD901 A5	IC901 D5
IC902 C3	IC903 G5
IC909 E8	IC910 D9
IC911 G8	IC913 G8
IC914 B9	L901 B2
L902 B3	L903 B5
L906 C10	L907 F9
L908 C10	L909 C9
Q902 C5	Q915 E8
Q916 D3	Q917 D5
Q918 G9	Q919 C7
Q920 B7	Q921 C5
Q922 D8	Q923 D5
RV902 B2	R913 D3
R915 E8	R916 D8
R917 G6	R918 C4
R919 G8	R920 G10
R924 C5	R926 C5
R928 E9	R929 C5
R930 D6	R932 D4
R936 B10	R937 B10
R938 D10	R939 B10
R940 B10	R941 G9
R943 F8	R944 G9
R945 G9	R946 G9
R947 G9	R949 G8
R952 C5	R953 C6
R954 E4	R955 D4
R956 C6	R957 D6
R958 E4	R959 B4
R960 A4	R961 B4
R962 D3	R963 C6
R964 C4	R965 D9
R966 D5	R967 E5
R968 D10	R969 B6
R970 B6	R971 B6
R972 C4	R973 C4
R976 F6	R979 E6
R982 E6	R983 D4
R984 D6	R985 D4
R986 D3	R987 E4
R988 D5	R989 D5
R990 C10	R991 G6
SG1 A2	SG2 B2
SG3 A3	SG4 B3
TH901 B4	TH904 F7
T905 B8	ZD910 G6

TPV (Top Victory Electronics Co., Ltd.)	OEM MODEL	POWER BOARD	Size	C
规格书编号	T2528-2-FQ-X2-080605	TPV MODEL	Rev	1
Key Component	02 POWER BOARD	PCB NAME	T15T2828-2-FQ	数量 < 数量 >
Date	Friday, June 20, 2008	Sheet	2 of 2	


For L32W981&L37W981

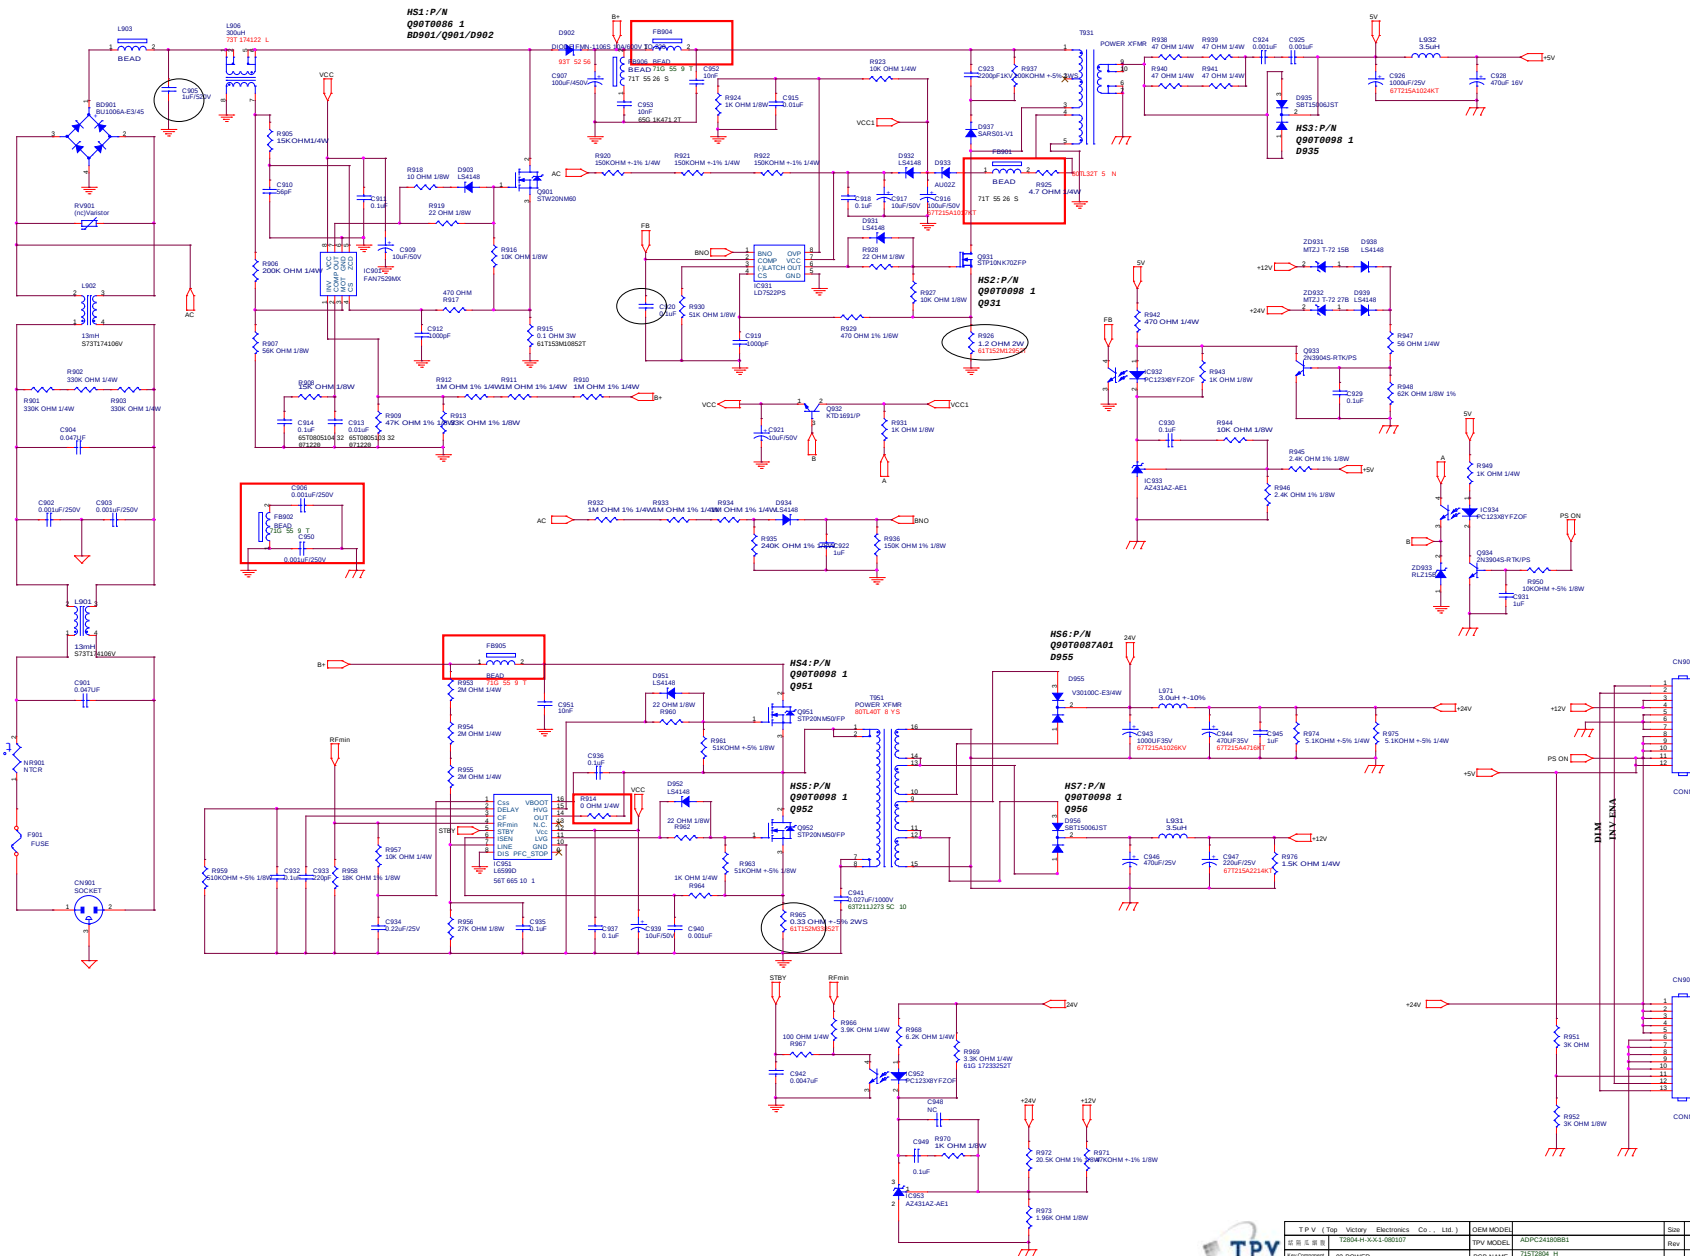

T.P.V. (Top Victory Electronics Co., Ltd.)	OEM MODEL	Doc	Custom
G.B.S.B.	TPV MODEL	Rev	1.0
Q9070086 1	Q9070088 1		
Doc	PCB NAME		
Date	Rev		

10. Exploded View


For L32W981

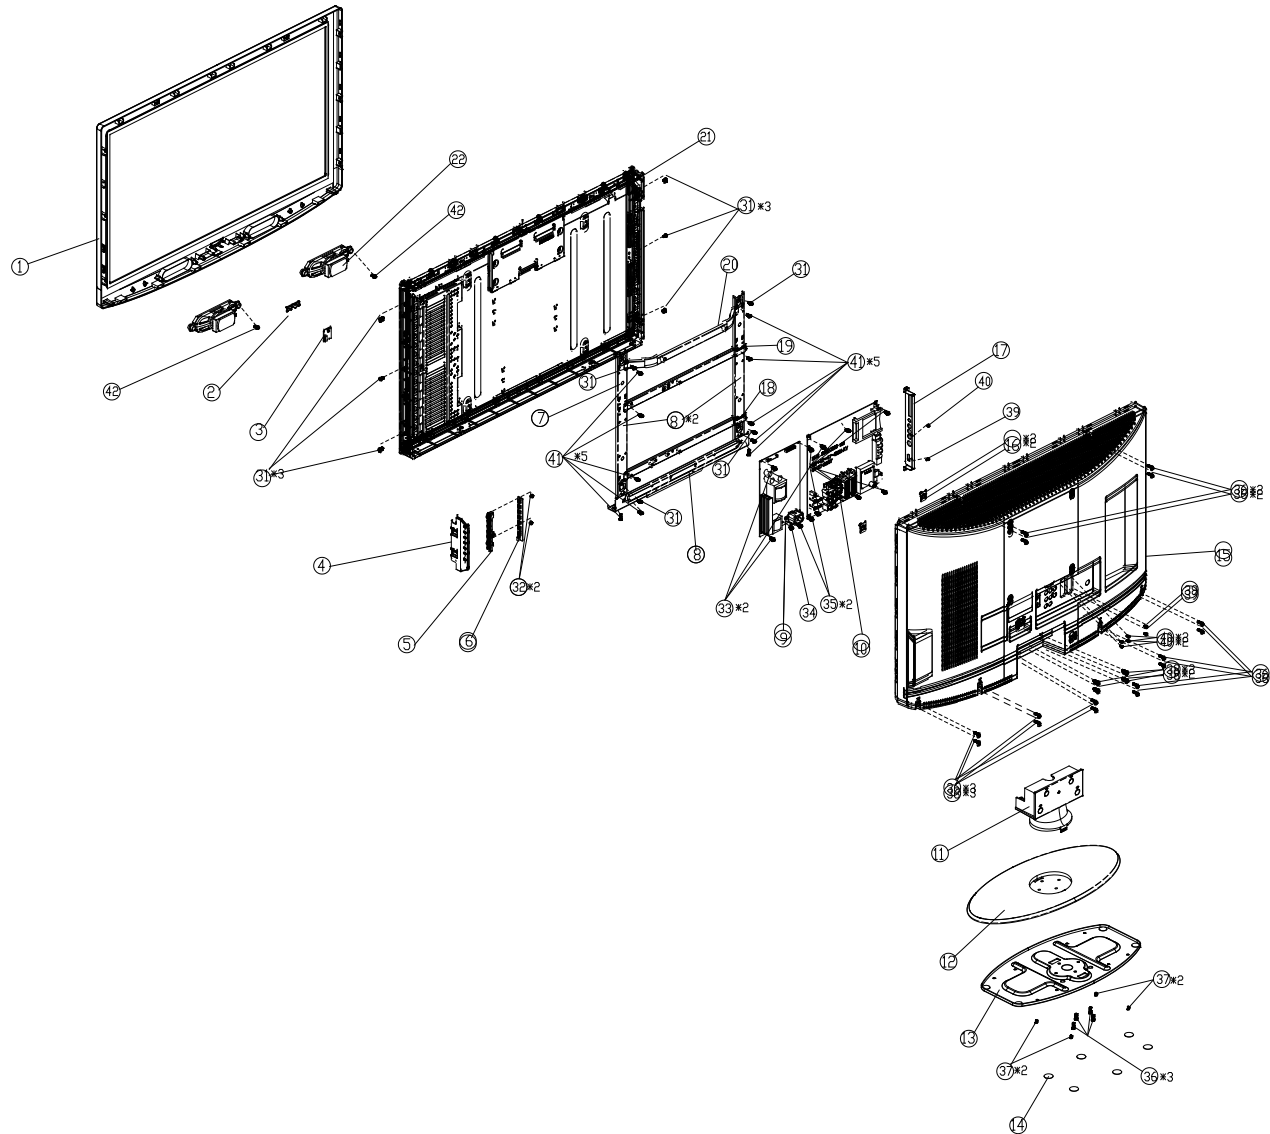


32TV GMBH Exploding			
Item		Q'ty	Unit
1	BEZEL TV32W-8A2	1	PCS
2	LENS POWER&IR FOR A2	1	PCS
3	IR BOARD	1	PCS
4	COVER FUNC	1	PCS
5	BUTTON FUNC	1	PCS
6	KEY BOARD	1	PCS
7	PANEL SUPPORT	2	PCS
8	BKT-BASE-SUPPORT	1	PCS
9	POWER PCB	1	PCS
10	MAIN PCB	1	PCS
11	HINGE ASS'Y	1	PCS
12	BASE S1	1	PCS
13	BKT-BASE-PLATE-A1-BIG	1	PCS
14	RUBBER FOOT	6	PCS
15	REAR COVER	1	PCS
16	BKT-VESA-BTM	2	PCS
17	BKT-IO-EUO	1	PCS
18	BKT-PCB-HOLDER-BTM	1	PCS
19	BKT-PCB-HOLDER-TOP	1	PCS
20	BKT-VESA-TOP	1	PCS
21	PANEL	1	PCS
22	SPKEAKERS	2	PCS
31	SCREW	10	PCS
32	SCREW	2	PCS
33	SCREW	9	PCS
34	SCREW	1	PCS
35	SCREW	2	PCS
36	SCREW	12	PCS
37	SCREW	4	PCS
38	SCREW	2	PCS
39	SCREW	2	PCS
40	SCREW	3	PCS
41	SCREW	10	PCS
42	SCREW	2	PCS

For L37W981

Item	Description	Qt'y	Unit	Item	Description	Qt'y	Unit
1	BEZEL TV37W-8A2	1	pcs	16	Neck Cover	1	pcs
2	LENS_POWER&IR FOR A2	1	pcs	17	COVER_FUNC	1	pcs
3	Panel	1	pcs	18	BUTTON_FUNC	1	pcs
4	Fix Bracket for V4&Vc	2	pcs	19	key board	1	pcs
5	Panel Bracket for AUD VC&V4	2	pcs	20	Main Board	1	pcs
6	PCB Bracket	1	pcs	21	Power Board	1	pcs
7	Vesa-bkt-top	1	pcs	22	BKT-VESA-BTM	2	pcs
8	Heat sink	1	pcs	23	Side label	1	pcs
9	Shielding	1	pcs	24	bkt-power-euo	2	pcs
10	Shielding	1	pcs	25	Stand Bracket for V4&Vc	1	pcs
11	Rear Cover EU	1	pcs	26	Ir Board	1	pcs
12	Swivel Assembly	1	pcs	27	Bkt-io-euo	1	pcs
13	Stand Cover A1	1	pcs	28	Speaker	2	pcs
14	BASE_S1	1	pcs	29	FOOT PAD	6	pcs
15	Base Bracket L	1	pcs				

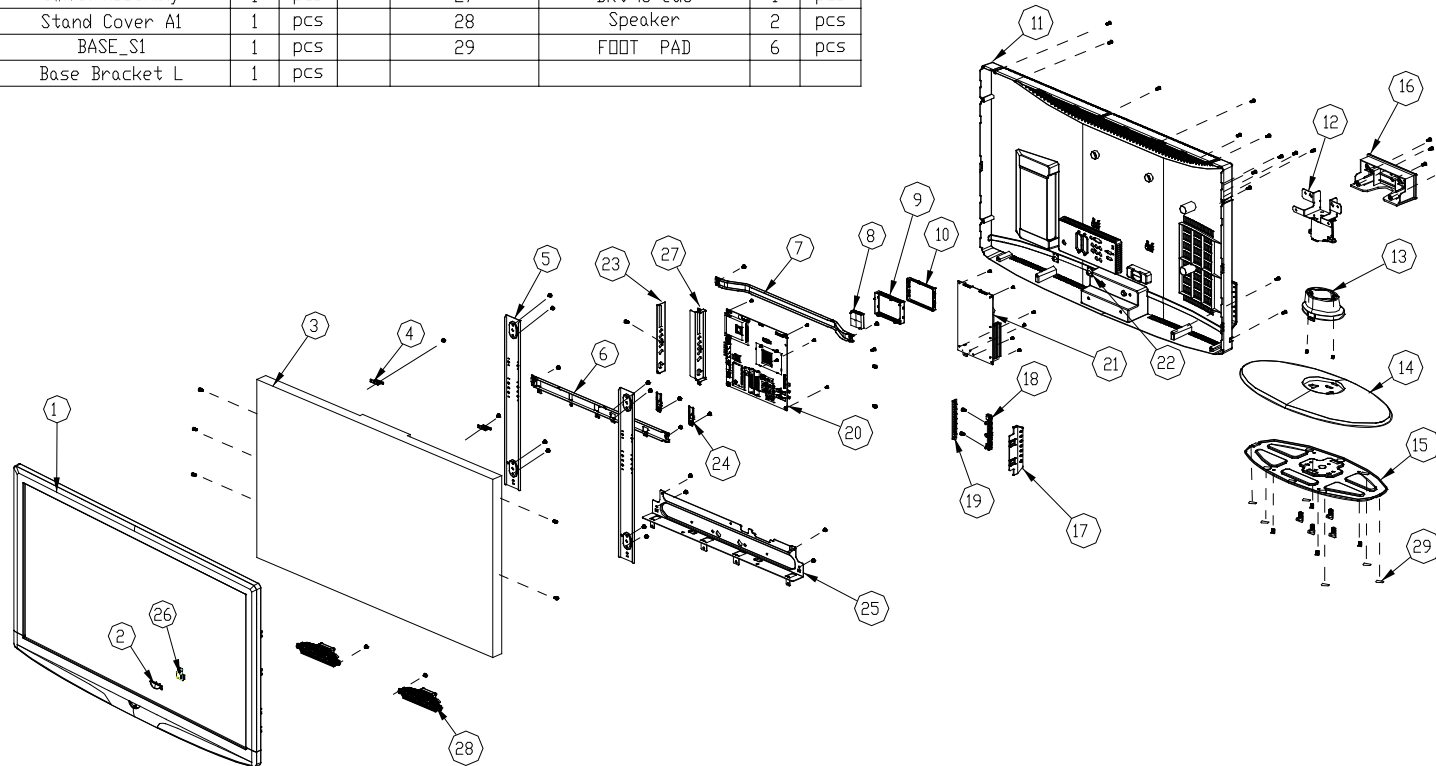

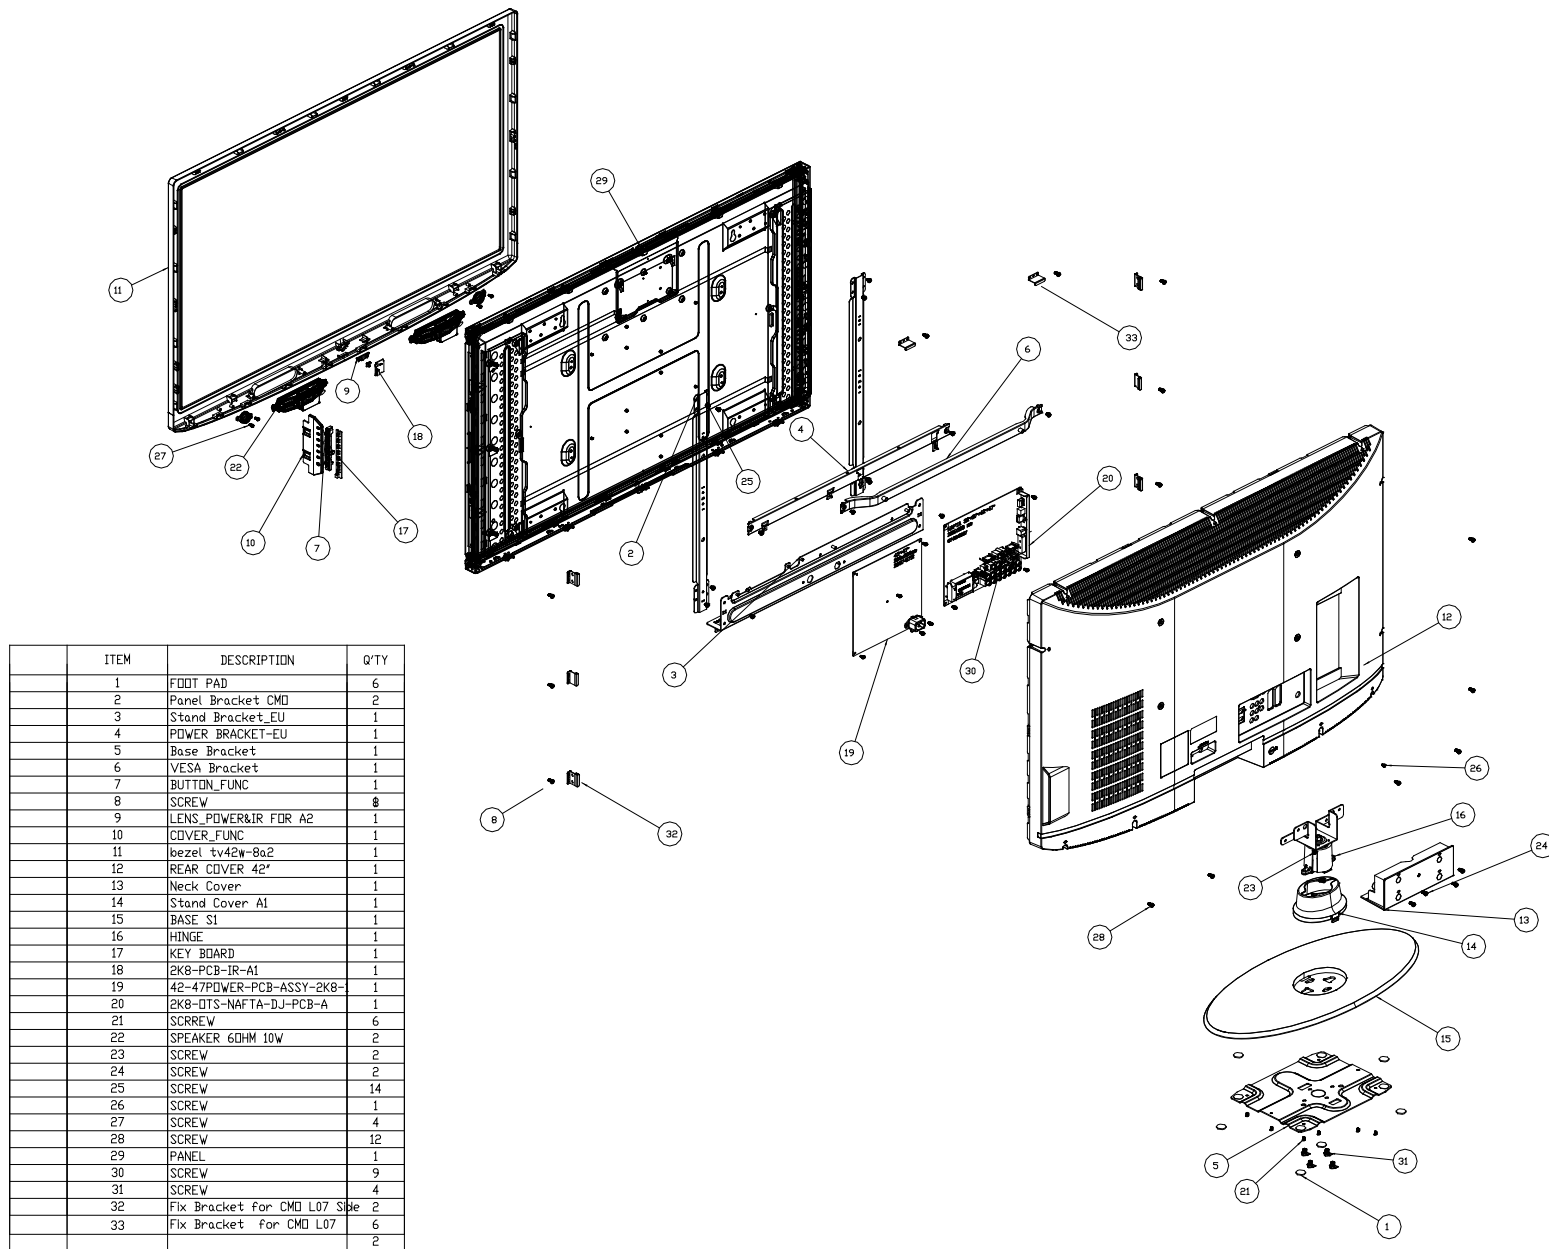

11. BOM List

L32W981 E328M2NBW8ACNN

Location	Part Number	Description	Remark
	036T 600 18112	NONWOVEN FABRTC	
	040T 581 26704	SHIPPING LABEL	
	044T6000 4 6B	SPACE PAPER	
	044T9003210	CORNER PAPER	
	045T 77501	RIBBON	
	049T 51 1A	ERADICATOR	
	052T 1150 C	BLACK TAPE	
	052T 1186	SMALL TAPE	
	052T 1211502	AL FOIL(45X185MM)	
	052T 1211551	AL FOIL (30X100MM) (CMO)	
	052T 2191 A	TAPE	
E078	078T 495902 M	SPEAKER 8OHM 6W 120MMX30MM	
E078	078T 495905 G	SPEAKER 8OHM/5W 120MMX30MM	2nd source
E08901	089T404A18N IS	POWER CORD	
E08901	089T404A18N LS	POWER CORD 1.8M	2nd source
E08901	089T404A18N YH	POWER CORD	2nd source
	095T8013 2X910	HARNESS 2P-FAST 520MM LCDXXTE0071	
	095T8013 3X901	HARNESS 3P-FAST 725MM LCDXXTE0070	
	095T8014 4X911	HARNESS 4P-4P 520MM LCDXXTE0067	
	095T8014 5X903	HARNESS 5P-5P 380MM LCDXXTE0066	
	095T801412X908	HARNESS 12P-12P 115MM LCDXXTE0069	
	095T801414X908	HARNESS 14P-13P 160MM LCDXXTE0180	
	095T8018 30962 X	HARNESS 30P-20*2P 150MM LVDSXTE0026	
	098TRABDBNTACC	REMOTE CONTROL RL57B	
	0D1T 930 8 47 CR3	SCREW	
	0D1T 940 6120	SCREW	
	0M1T 940 6120	SCREW	
	0M1T 940 8 47 CR3	SCREW	
	0M1T 940 8120	SCREW	
	0M1T1730 6120	SCREW 3*6MM	
	0M1T1730 10120	SCREW	
	0M1T1740 6120	SCREW	
	0Q1T 930 8 47 CR3	SCREW	
	0Q1T 940 14 47 CR3	SCREW	
	0Q1T1040 8 47 CR3	SCREW	
	705TP834009	REAR COVER ASSY	
	A15T0282101	BKT-VESA-BTM	
	A34T0518 GM 4L0100	REAR COVER	
	Q36T 600 18113	CLOTH_GRIDDING	
	Q36T 600 18120	CLOTH_GRIDDING	
	Q36T 600 37 36 GP	NONWOVEN FABRIC	
	705TP837001	BASE COVER ASS'Y	
	0Q1T 130 8120	SCREW	
	A15T0384201	BKT-BASE-PLATE-A1-BIG	
	A34T0521 GM 1L0220	BASE_S1	
	Q12T6300 25 2	RUBBER FOOT	
M037	Q37T0078021 GM	HINGE ASS'Y	
	705TQ815002	BRACKET ASS'Y	
	0Q1T 930 8 47 CR3	SCREW	
	P15T0328102	BKT-IO-EUO	
	705TQ833026	PLASTIC ASS'Y	
	0Q1T 930 6120	SCREW	
	A33T0304 GMA1L0100	COVER_FUNC	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

	A33T0305 QV 1L0100	BUTTON_FUNC	
	705TQ834207	BEZEL_ASS'Y	
	A33T0334AEU 1C0100	LENS_POWER&IR FOR A2	
	A34T0517 GMC2L0130	BEZEL_TV32W-8A2	
	750TVMM5B1113N	PANEL_V315B1-L01 C2 NH CMO	
	A15T0278301	BKT-PCB-HOLDER-TOP	
	A15T0279102	BKT-PCB-HOLDER-BTM	
	A15T0280103	PANEL_SUPPORT	
	A15T0281102	BKT-VESA-TOP	
	A15T0283102	BKT-BASE-SUPPORT	
	A15T0285101	BKT-PWRPCB-HOLDER-T	
	A15T0286101	BKT-PWRPCB-HOLDER-R	
	ADTV82418PA2	POWER_BOARD	
	040G 45762412B	CBPC_LABEL	
CN902	033T327812D	WAFER_12P_PLUG	
CN903	033T380213B Y	CONNECTOR	
IC952	056T 139 3B	IC_PC123Y82FZ0F	
IC934	056T 139 3B	IC_PC123Y82FZ0F	
IC932	056T 139 3B	IC_PC123Y82FZ0F	
Q932	057T 761 7	KTD1691P	
R915	061T153M10852T	RST_MOFR 0.1 OHM +-5% 3WS	
C904	063T107K474 US	X2_CAP 0.47UF K 275VAC	
C901	063T107K474 US	X2_CAP 0.47UF K 275VAC	
C905	063T210K105BCN	MPP_CAP 1UF 520V P=15MM	
C941	063T211J273 5C 10	0.027UF 5% 1000V P=15MM	
C951	065T 1K103 2E6213	CAP_CER 10NF K 1KV	
C952	065T 1K103 2E6213	CAP_CER 10NF K 1KV	
C950	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C902	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C903	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C906	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C907	067G215S10115R	CAPACITANCE	
C926	067T215A1024KT	EC 1000UF 25V 10*25MM	
C943	067T215A1026KV	EC 1000UF 35V 12.5*25MM	
C928	067T215A4713KT	EC 470UF 16V 10*12.5MM	
C944	067T215A4716KT	EC 470UF 35V M 10*20MM	
C946	067T215S4714KL	ELCAP 105°C 470UF M 25V	
L903	071T 55 21	IND BEAD 10.0*6.0	
FB901	071T 55 26 S	FERRITE CORE	
FB906	071T 55 26 S	FERRITE CORE	
L902	073T 174106 DN	LINE FILTER 13MH LK.TF032.A20	
L901	073T 174106 DN	LINE FILTER 13MH LK.TF032.A20	
L906	073T 174122 L	PFC CHOKE 230UH PT-009321	
L931	073T 253 91 H	CHOKE COIL	
L932	073T 253 91 H	CHOKE COIL	
L971	073T 253150 L	CHOCK	
T931	080TL32T 5 N	X'FMR 1.9MH YUVA-827	
T951	080TL40T 8 YS	X'FMR 600UH YS04160149	
CN901	087T 501 44 DL	AC SOCKET 3PIN + 2 SCREW HOLE V/T	
	705TQ757011	Q951 ASS'Y	
Q951	057T 611 9	FET 2SK4097LS 9.5A/500V TO-220FI(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ757012	Q952 ASS'Y	
Q952	057T 611 9	FET 2SK4097LS 9.5A/500V TO-220FI(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

	705TQ757013	Q931 ASS'Y	
Q931	057T 667 52	FET 2SK4100LS-T 7A/650V TO-220FI(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ757022	Q901 ASS'Y	
Q901	057T 600 72	FET SPW16N50C3 16A/560V P-TO247	
	0M1T1730 10120	SCREW	
	Q12T 372 8	SILICON	
	Q90T0095 2	HEAT SINK	
	705TQ761021	NR901 ASS'Y	
NR901	061T 58030 WL	RST NTCR 3 OHM +-20% 5A THINKING	
	Q09T 203 8	PIN	
	705TQ793020	BD901 ASS'Y	
BD901	093T 50460 39	BRIDGE BU1006A-E3/45 10A/600V BU	
	0M1T1730 10120	SCREW	
	Q90T0095 2	HEAT SINK	
	705TQ793021	D902 ASS'Y	
D902	093T 52 56	DIODE FMN-1106S 10A/600V TO-220	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ793022	D935 ASS'Y	
D935	093T 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ793023	D955/D956 ASS'Y	
	005T 42 1	CUSHION	
	032G3028 8	MICA	
	051G 200 1	OIL FOR DISAPPEAR	
D956	093T 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
D955	093T 60310	DIODE V30100C-E3/4W 30A/100V TO-220AB	
	0M1T1730 10120	SCREW	
	Q90T0087 2	HEAT SINK	
IC901	056T 368 12	IC FAN7529MX SOP-8	
IC931	056T 379 79	IC LD7522PS SOP-8	
IC951	056T 665 10 1	IC RESONANT L6599DTR SO-16N ST	
Q933	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
Q934	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
R973	061G0805196 1F	RST CHIP 1.96K 1/8W 1%	
R918	061T0805100	RST CHIPR 10 OHM +-5% 1/8W	
R924	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R931	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R943	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R970	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R916	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R927	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R944	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R950	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R936	061T0805150 3F	RST CHIPR 150 KOHM +-1% 1/8W	
R908	061T0805153	RST CHIPR 15 KOHM +-5% 1/8W	
R958	061T0805180 2F	RST CHIPR 18 KOHM +-1% 1/8W	
R972	061T0805205 2F	RST CHIPR 20.5KOHM +-1% 1/8W	
R946	061T08052101FY	RST CHIP 2K1 1/8W 1%	
R962	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R960	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R928	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R919	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R945	061T0805240 1F	RST CHIPR 2.4 KOHM +-1% 1/8W	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

R935	061T0805240 3F	RST CHIPR 240 KOHM +-1% 1/8W	
R956	061T0805273	RST CHIPR 27 KOHM +-5% 1/8W	
R952	061T0805302	RST CHIPR 3 KOHM +-5% 1/8W	
R913	061T0805330 2F	RST CHIPR 33 KOHM +-1% 1/8W	
R971	061T0805470 2F	RST CHIPR 47 KOHM +-1% 1/8W	
R909	061T0805470 2F	RST CHIPR 47 KOHM +-1% 1/8W	
R930	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R961	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R963	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R959	061T0805514	RST CHIPR 510KOHM +-5% 1/8W	
R907	061T0805563	RST CHIPR 56 KOHM +-5% 1/8W	
R948	061T0805620 2F	RST CHIPR 62 KOHM +-1% 1/8W	
R914	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
R911	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R912	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R932	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R933	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R934	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R910	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R922	061T1206150 3F	RST CHIPR 150KOHM +-1% 1/4W	
R921	061T1206150 3F	RST CHIPR 150KOHM +-1% 1/4W	
R920	061T1206150 3F	RST CHIPR 150KOHM +-1% 1/4W	
R976	061T1206152	RST CHIPR 1.5 KOHM +-5% 1/4W	
R905	061T1206153	RST CHIPR 15 KOHM +-5% 1/4W	
R906	061T1206204	RST CHIPR 200 KOHM +-5% 1/4W	
R955	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R954	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R953	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R901	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R902	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R903	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R938	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R939	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R940	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R941	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R925	061T1206479	RST CHIPR 4.7 OHM +-5% 1/4W	
R974	061T1206512	RST CHIPR 5.1KOHM +-5% 1/4W	
R975	061T1206512	RST CHIPR 5.1KOHM +-5% 1/4W	
C919	065T0805102 31	1000PF 50V NPO	
C912	065T0805102 31	1000PF 50V NPO	
C940	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C924	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C925	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C915	065T0805103 32	10NF/50V/0805/X7R	
C913	065T0805103 32	10NF/50V/0805/X7R	
C914	065T0805104 32	CHIP 0.1UF 50V X7R	
C949	065T0805104 32	CHIP 0.1UF 50V X7R	
C920	065T0805104 32	CHIP 0.1UF 50V X7R	
C937	065T0805104 32	CHIP 0.1UF 50V X7R	
C936	065T0805104 32	CHIP 0.1UF 50V X7R	
C935	065T0805104 32	CHIP 0.1UF 50V X7R	
C932	065T0805104 32	CHIP 0.1UF 50V X7R	
C930	065T0805104 32	CHIP 0.1UF 50V X7R	
C929	065T0805104 32	CHIP 0.1UF 50V X7R	
C918	065T0805104 32	CHIP 0.1UF 50V X7R	
C911	065T0805104 32	CHIP 0.1UF 50V X7R	
C922	065T0805105 37	CHIP 1UF 50V Y5V	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C931	065T0805105 37	CHIP 1UF 50V Y5V	
C945	065T0805105 37	CHIP 1UF 50V Y5V	
C933	065T0805221 31	220PF 50V NPO	
C934	065T0805224 22	CAIP CAP 0.22 UF 25V X7R	
C942	065T0805472 32	MLCC 0805 CAP 4700PF K 50V X7R	
C910	065T0805560 31	MLCC 0805 CAP 56PF J 50V NPO	
ZD933	093T 39S 15 T	RLZ15B	
D951	093T 64S901 T	DIODE LS4148	
D939	093T 64S901 T	DIODE LS4148	
D952	093T 64S901 T	DIODE LS4148	
D938	093T 64S901 T	DIODE LS4148	
D934	093T 64S901 T	DIODE LS4148	
D932	093T 64S901 T	DIODE LS4148	
D931	093T 64S901 T	DIODE LS4148	
D903	093T 64S901 T	DIODE LS4148	
	006G 31 4	1.7MM RIVET	
T951	006G 31 4	1.7MM RIVET	
CN901	006G 31501	EYELET	
IC953	056T 158 10 T	IC AS431AZTR-E1 TO-92	
IC933	056T 158 10 T	IC AS431AZTR-E1 TO-92	
R969	061G 17233252T	3.3K 1/4W	
R929	061G 21047152T	470 OHM 1% 1/6W	
R937	061G208M10452T	RST MOF 100K 5% 1W	
R964	061T 17210252T	RST CFR 1KOHM +-5% 1/4W	
R949	061T 17210252T	RST CFR 1KOHM +-5% 1/4W	
R957	061T 17210352T	CFR 10KOHM +-5% 1/4W	
R923	061T 17210352T	CFR 10KOHM +-5% 1/4W	
R942	061T 17247152T	470OHM 5% 1/4W	
R947	061T 17256052T	RST CFR 56 OHM +-5% 1/4W	
R968	061T 17262252T	6.2KPHM 5% 1/4W	
R967	061T 20010152T	100 OHM 1% 1/4W	
R966	061T 20039252T	RST MFR 3.9KOHM +-1% 1/4W	
R951	061T 21030252T	3KOHM 1% 1/6W	
R917	061T 60247152T	470OHM +-5% 1/6W	
R926	061T152M12952T	RST MOFR 1.2OHM +-5% 2WS	
R965	061T152M33852T	RST MOFR 0.33 OHM +-5% 2WS	
C953	065G 1K471 2T	470PF 1KV Z5P +-10%	
C923	065T 1K222 2T6921	0.0022UF 1KV +-10%	
C916	067T215A1017KT	EC 100UF 50V 8*12MM	
C947	067T215A2214KT	EC 220UF 25V 8*12MM	
C909	067T215Y1007KT	EC105 10U 50V KEM50V	
C917	067T215Y1007KT	EC105 10U 50V KEM50V	
C921	067T215Y1007KT	EC105 10U 50V KEM50V	
C939	067T215Y1007KT	EC105 10U 50V KEM50V	
FB902	071G 55 9 T	FERRITE BEAD	
FB904	071G 55 9 T	FERRITE BEAD	
FB905	071G 55 9 T	FERRITE BEAD	
F901	084T 55 4	FUSE 382-5A 250V WICKMANN	
ZD931	093T 3916652T	MTZJ T-72 15B	
ZD932	093T 3917052T	MTZJT-72 27B	
D933	093T 5250S52T	AU02Z	
D937	093T1080 252T	DIODE SARSO1-V1 SANKEN	
	715T2804 2	POWER BOARD PCB	
	Q51G 6 4509	GLUE_RTV	
	CBPF82MBPA	MAIN BOAD	
	040T 45762412B	CBPC LABEL	
CN600	033T3802 2	WAFER EH-2	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

CN601	033T3802 3 X	CONNECTOR	
CN390	033T3802 4 X	CONNECTOR	
CN391	033T3802 5	AUDIO IN	
CN100	033T3802 12	WAFER PH-12	
CN392	033T3802 3E PT	WAFER 2.0MM 3P H:17.5 MM	
C107	067T 2154713CT	EC 470UF 16V GF 8X16MM	
C172	067T 3054716CT	EC 470UF 35V KM 10X16MM	
C623	067T 3054716CT	EC 470UF 35V KM 10X16MM	
C684	067T215A4714CT	EC 470UF 25V GF 10X16MM	
C630	067T215A4714CT	EC 470UF 25V GF 10X16MM	
FB605	071T 55903 TA	FERRITE CORE 75R W6 RH 3.5X10X1.0	
CN556	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN552	088T 78 1360S	RCA JACK 1*3 G/B/R V/A	
CN553	088T 78 13935 S	RCA JACK 1*3 W/R/B V/A 2PJ1535-001111	
CN650	088T 78 13939 JC	RCA JACK 1*3 Y/W/R + S JACK	
CN555	088T 30252S	PHONE JACK 3.5MM 3P V/A GREEN	
CN602	088T 302912 S	PHONE JACK 3.5MM 7P BLACK 2SJ1508-001111	
CN554	088T 35315F VC	D-SUB 15PIN VERTICAL CONNECTOR	
CN500	088T 35521E ST	SCART CONN. 21P V/A	
CN501	088T 35521E ST	SCART CONN. 21P V/A	
CN400	088T 500 9 P	PCMCIA CONN.	
TU200	094TPASEBGL 3M	TUNER ENG37E14KRF	
U604	056T 133 22 ST	L78L09ACZ	
C101	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C150	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C159	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C372	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C622	067T 3051016CT	EC 100UF 35V KM 8X11.5MM	
C624	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C696	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C698	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C707	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C312	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C110	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C642	067T 3054704CT	EC 47UF 25V KM 5X11MM	
C111	067T 5153313CT	EC 330UF 16V GF 8*16MM	
C112	067T 5153313CT	EC 330UF 16V GF 8*16MM	
C154	067T 5153313CT	EC 330UF 16V GF 8*16MM	
U158	056T 1331PH	LD1117S18 SOT-223	
U155	056T 368 4	IC TPS5430DDAR SO-8(DDA)	
U400	056T 562930	IC MT5336PKR PBGA-465	
U152	056T 563129	IC AME8810-AEGTZ 0.6A/3.3V SOT-223	
U156	056T 563906	IC LD1117DTTR DPAK(T&R)	
U154	056T 563906	IC LD1117DTTR DPAK(T&R)	
U157	056T 563916	IC LD1117DT33TR DPAK	
U151	056T 563916	IC LD1117DT33TR DPAK	
U102	056T 563928	IC LP2996MRX PSOP-8	
U103	056T 563948	IC L5985 VFQFPN8	
U104	056T 563948	IC L5985 VFQFPN8	
U159	056T 563949	IC LD39080PT-R PPAK	
U153	056T 563951	IC LD1117ADT-TR DPAK	
U351	056T 615911	IC NT5TU16M16AG-3C BGA84	
U352	056T 615911	IC NT5TU16M16AG-3C BGA84	
U601	056T 616 13	IC LM4809MA NOPB SO-8	
U600	056T 616912	IC TDA8933BTW HTSSOP32	
U603	056T 616914	IC RC4580IPWR TSSOP8	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

U231	056T 647 25	IC MT5133AN QFN-48	
U602	056T 647903	IC WM8521H9GED/RV SOIC-14	
U401	056T1126 40	IC MT8295AE LQFP-128	
U301	056T1133 56(DG1BK6M32EQ1)	M24C16-WMN6TP	
U708	056T1133913	IC M24C02-WDW6P TSSOP8	
U701	056T1133913	IC M24C02-WDW6P TSSOP8	
U700	056T1133913	IC M24C02-WDW6P TSSOP8	
U550	056T1133913	IC M24C02-WDW6P TSSOP8	
U390	056T1133935(DG1BK6M32NQ1)	IC MX25L3205DMI-12G SOP-16	
Q401	057T 417 4	CHIP PMBS3904 BY PHILIPS	
Q751	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q750	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q500	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q301	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q300	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q201	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q200	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q614	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q613	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q612	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q611	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q616	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q610	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q609	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q608	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q702	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q700	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q607	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q601	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q550	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q109	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q108	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q106	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q101	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q100	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q703	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q704	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q705	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q706	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q600	057T 477904 T	TRA BC847BW 100MA/45V SOT-323	
Q615	057T 761902 T	TRA BC857BW 100MA/50V SOT-323	
Q606	057T 761902 T	TRA BC857BW 100MA/50V SOT-323	
Q104	057T 7631PH	SI5441DC 1206-8	
Q103	057T 763900	FET SI3441BDV TSOP-6	
Q701	057T 763910	FET 2SK1828 TO-236MOD	
Q707	057T 763910	FET 2SK1828 TO-236MOD	
Q400	057T 763911	MOSFET SI2301BDS SOT-23	
RN232	061T 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RN231	061T 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RN230	061T 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP350	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
RP351	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
RP352	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
RP353	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
R582	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R594	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R596	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

R597	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R598	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R600	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R618	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R700	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R706	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R707	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R125	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R341	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R521	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R524	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R531	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R536	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R550	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R551	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R570	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R575	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R205	061T04021000FY	RST CHIP 100R 1/16W 1%	
R206	061T04021000FY	RST CHIP 100R 1/16W 1%	
R656	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R633	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R621	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R619	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R592	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R588	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R585	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R563	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R557	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R537	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R533	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R532	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R518	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R515	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R514	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R320	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R319	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R215	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R113	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R666	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R735	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R734	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R726	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R725	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R714	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R713	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R703	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R702	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R701	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R669	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R738	061T0402102 Y	RST CHIP 1K 1/16W 5%	
R737	061T0402102 Y	RST CHIP 1K 1/16W 5%	
R732	061T0402102 Y	RST CHIP 1K 1/16W 5%	
R730	061T0402102 Y	RST CHIP 1K 1/16W 5%	
R721	061T0402102 Y	RST CHIP 1K 1/16W 5%	
R718	061T0402102 Y	RST CHIP 1K 1/16W 5%	
R668	061T0402102 Y	RST CHIP 1K 1/16W 5%	
R316	061T0402102 Y	RST CHIP 1K 1/16W 5%	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

R144	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R126	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R687	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R689	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R690	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R705	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R710	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R722	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R740	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R630	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R301	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R302	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R304	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R306	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R307	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R315	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R607	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R617	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R622	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R717	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R729	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R736	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R593	061T0402202	Y	RST CHIP 2K +-5% 1/16W	
R595	061T0402202	Y	RST CHIP 2K +-5% 1/16W	
R649	061T0402202	Y	RST CHIP 2K +-5% 1/16W	
R727	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R572	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R568	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R527	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R526	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R525	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R523	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R608	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R612	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R627	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R634	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R640	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R529	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R534	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R661	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R664	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R673	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R704	061T0402273	Y	RST CHIP 27K 1/16W 5%	
R743	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R728	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R715	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R303	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R635	061T0402393	Y	RST CHIP 39K 1/16W 5%	
R671	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R667	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R657	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R535	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R530	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R616	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R746	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R745	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R744	061T0402472	Y	RST CHIP 4K7 1/16W 5%	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

R733	061T0402472 Y	RST CHIP 4K7 1/16W 5%	
R720	061T0402472 Y	RST CHIP 4K7 1/16W 5%	
R620	061T0402472 Y	RST CHIP 4K7 1/16W 5%	
R251	061T0402472 Y	RST CHIP 4K7 1/16W 5%	
R253	061T0402472 Y	RST CHIP 4K7 1/16W 5%	
R254	061T0402472 Y	RST CHIP 4K7 1/16W 5%	
R258	061T0402472 Y	RST CHIP 4K7 1/16W 5%	
R259	061T0402472 Y	RST CHIP 4K7 1/16W 5%	
R325	061T0402472 Y	RST CHIP 4K7 1/16W 5%	
R326	061T0402472 Y	RST CHIP 4K7 1/16W 5%	
R693	061T0402473 Y	RST CHIP 47K 1/16W 5%	
R694	061T0402473 Y	RST CHIP 47K 1/16W 5%	
R697	061T0402473 Y	RST CHIP 47K 1/16W 5%	
R699	061T0402473 Y	RST CHIP 47K 1/16W 5%	
R711	061T0402473 Y	RST CHIP 47K 1/16W 5%	
R712	061T0402473 Y	RST CHIP 47K 1/16W 5%	
R723	061T0402473 Y	RST CHIP 47K 1/16W 5%	
R724	061T0402473 Y	RST CHIP 47K 1/16W 5%	
R741	061T0402473 Y	RST CHIP 47K 1/16W 5%	
R742	061T0402473 Y	RST CHIP 47K 1/16W 5%	
R331	061T0402512 Y	RST CHIP 5K1 1/16W 5%	
R650	061T0402512 Y	RST CHIP 5K1 1/16W 5%	
R520	061T0402680 Y	RST CHIP 68R 1/16W 5%	
R522	061T0402680 Y	RST CHIP 68R 1/16W 5%	
R553	061T0402680 Y	RST CHIP 68R 1/16W 5%	
R559	061T0402680 Y	RST CHIP 68R 1/16W 5%	
R513	061T0402680 Y	RST CHIP 68R 1/16W 5%	
R587	061T0402680 Y	RST CHIP 68R 1/16W 5%	
R583	061T0402680 Y	RST CHIP 68R 1/16W 5%	
R580	061T0402680 Y	RST CHIP 68R 1/16W 5%	
R567	061T0402680 Y	RST CHIP 68R 1/16W 5%	
R581	061T0402750 Y	RST CHIP 75R 1/16W 5%	
R579	061T0402750 Y	RST CHIP 75R 1/16W 5%	
R565	061T0402750 Y	RST CHIP 75R 1/16W 5%	
R561	061T0402750 Y	RST CHIP 75R 1/16W 5%	
R556	061T0402750 Y	RST CHIP 75R 1/16W 5%	
R528	061T0402750 Y	RST CHIP 75R 1/16W 5%	
R519	061T0402750 Y	RST CHIP 75R 1/16W 5%	
R517	061T0402750 Y	RST CHIP 75R 1/16W 5%	
R516	061T0402750 Y	RST CHIP 75R 1/16W 5%	
R584	061T0402750 Y	RST CHIP 75R 1/16W 5%	
R397	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R394	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R366	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R363	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R362	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R361	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R360	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R336	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R323	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R322	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R239	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R235	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R234	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R232	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R230	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R218	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

R217	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R208	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R204	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R201	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R200	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R171	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R751	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R696	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R662	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R646	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R645	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R643	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R642	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R577	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R576	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R509	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R508	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R432	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R410	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R399	061T0603000 Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R211	061T0603100 Y	RST CHIPR 10 OHM +-5% 1/10W YAGEO	
R214	061T0603100 Y	RST CHIPR 10 OHM +-5% 1/10W YAGEO	
R386	061T06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R389	061T06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R216	061T06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R300	061T06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R154	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R233	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R358	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R359	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R367	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R370	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R372	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R375	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R395	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R415	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R417	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R433	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R434	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R437	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R438	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R439	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R590	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R591	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R647	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R760	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R555	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R755	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R602	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R309	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R107	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R238	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R241	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R242	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R426	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R427	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R504	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

R511	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R512	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R589	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R624	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R654	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R677	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R678	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R765	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R552	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R554	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R558	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R425	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R127	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R128	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R210	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R393	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R398	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R401	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R403	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R404	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R405	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R406	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R407	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R408	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R609	061T0603104 Y	RST CHIPR 100KOHM +-5% 1/10W YAGEO	
R400	061T0603105 Y	RST CHIPR 1MOHM +-5% 1/10W YAGEO	
R231	061T0603105 Y	RST CHIPR 1MOHM +-5% 1/10W YAGEO	
R163	061T0603109 Y	RST CHIPR 1 OHM +-5% 1/10W YAGEO	
R167	061T0603109 Y	RST CHIPR 1 OHM +-5% 1/10W YAGEO	
R317	061T0603109 Y	RST CHIPR 1 OHM +-5% 1/10W YAGEO	
R123	061T06031101FY	RST CHIPR 1.1KOHM +-1% 1/10W YAGEO	
R151	061T06031200FY	RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R152	061T06031200FY	RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R162	061T06031200FY	RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R165	061T06031200FY	RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R117	061T06031201FY	RST CHIPR 1.2KOHM +-1% 1/10W YAGEO	
R122	061T06031201FY	RST CHIPR 1.2KOHM +-1% 1/10W YAGEO	
R651	061T06031300FY	RST CHIPR 130 OHM +-1% 1/10W YAGEO	
R166	061T06031502FY	RST CHIPR 15KOHM +-1% 1/10W YAGEO	
R626	061T06031802FY	RST CHIPR 18KOHM +-1% 1/10W YAGEO	
R641	061T06031802FY	RST CHIPR 18KOHM +-1% 1/10W YAGEO	
R639	061T06031802FY	RST CHIPR 18KOHM +-1% 1/10W YAGEO	
R628	061T06031802FY	RST CHIPR 18KOHM +-1% 1/10W YAGEO	
R604	061T0603200 Y	RST CHIPR 20 OHM +-5% 1/10W YAGEO	
R603	061T0603200 Y	RST CHIPR 20 OHM +-5% 1/10W YAGEO	
R172	061T06032002FY	RST CHIPR 20KOHM +-1% 1/10W YAGEO	
R764	061T0603202 Y	RST CHIPR 2KOHM +-5% 1/10W YAGEO	
R578	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R586	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R615	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R631	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R660	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R663	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R310	061T06032200FY	RST CHIPR 220 OHM +-1% 1/10W YAGEO	
R115	061T06032201FY	RST CHIPR 2.2KOHM +-1% 1/10W YAGEO	
R675	061T06032202FY	RST CHIPR 22KOHM +-1% 1/10W YAGEO	
R652	061T06032202FY	RST CHIPR 22KOHM +-1% 1/10W YAGEO	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R103	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R119	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R100	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R101	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R124	061T06032400FY	RST CHIPR 240 OHM +-1% 1/10W YAGEO	
R611	061T0603273 Y	RST CHIPR 27KOHM +-5% 1/10W YAGEO	
R613	061T0603273 Y	RST CHIPR 27KOHM +-5% 1/10W YAGEO	
R350	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R352	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R411	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R412	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R413	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R414	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R212	061T0603332 Y	RST CHIPR 3.3KOHM +-5% 1/10W YAGEO	
R682	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R655	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R507	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R506	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R505	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R314	061T06033901FY	RST CHIPR 3.9KOHM +-1% 1/10W YAGEO	
R384	061T06033901FY	RST CHIPR 3.9KOHM +-1% 1/10W YAGEO	
R104	061T0603392 Y	RST CHIPR 3.9KOHM +-5% 1/10W YAGEO	
R106	061T0603392 Y	RST CHIPR 3.9KOHM +-5% 1/10W YAGEO	
R161	061T06034701FY	RST CHIPR 4.7KOHM +-1% 1/10W YAGEO	
R174	061T06034701FY	RST CHIPR 4.7KOHM +-1% 1/10W YAGEO	
R311	061T06034702FY	RST CHIPR 47KOHM +-1% 1/10W YAGEO	
R680	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
R679	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
R374	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
R385	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R388	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R396	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R419	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R421	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R435	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R436	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R365	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R268	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R265	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R209	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R207	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R202	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R114	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R695	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R644	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R761	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R759	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R758	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R692	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R691	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R659	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R623	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R610	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R606	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R601	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R648	061T0603473 Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R636	061T0603473 Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

R424	061T0603473	Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R136	061T0603473	Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R135	061T0603473	Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R357	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R355	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R354	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R353	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R351	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R173	061T06035102FY		RST CHIPR 51KOHM +-1% 1/10W YAGEO	
R130	061T0603512	Y	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R102	061T0603512	Y	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R500	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R501	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R502	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R670	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R213	061T06037509FY		RST CHIPR 75 OHM +-1% 1/10W YAGEO	
R111	061T0805000	Y	RST CHIPR 0 OHM +-5% 1/8W YAGEO	
R153	061T0805000	Y	RST CHIPR 0 OHM +-5% 1/8W YAGEO	
R625	061T0805100	Y	RST CHIPR 10 OHM +-5% 1/8W YAGEO	
R149	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R150	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R175	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R176	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R731	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R637	061T1206100	Y	RST CHIPR 10 OHM +-5% 1/4W YAGEO	
R632	061T1206100	Y	RST CHIPR 10 OHM +-5% 1/4W YAGEO	
R638	061T1206220	Y	RST CHIPR 22 OHM +-5% 1/4W YAGEO	
R629	061T1206220	Y	RST CHIPR 22 OHM +-5% 1/4W YAGEO	
C282	065T040210031J	Y	CAP CHIP 0402 10P 50V NPO +/-5%	
C230	065T040210232K	Y	CAP CHIP 0402 1N 50V X7R +/-10%	
C287	065T040210232K	Y	CAP CHIP 0402 1N 50V X7R +/-10%	
C559	065T040210232K	Y	CAP CHIP 0402 1N 50V X7R +/-10%	
C207	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C208	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C325	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C719	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C713	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C709	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C597	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C596	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C593	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C592	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C590	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C587	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C576	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C503	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C505	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C507	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C509	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C511	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C560	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C561	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C565	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C568	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C572	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C359	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C357	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	

32"&37"&42"LCD TV

AOC L32W981&L37W981&L42W98H

[illegible]

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C381	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C382	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C383	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C384	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C386	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C550	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C553	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C558	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C600	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C602	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C605	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C608	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C613	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C260	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C758	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C755	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C750	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C722	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C721	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C718	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C717	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C716	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C124	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C160	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C164	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C169	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C173	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C212	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C258	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C259	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C221	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C252	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C519	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C522	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C598	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C589	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C588	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C574	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C569	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C564	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C517	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C510	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C508	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C506	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C231	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C286	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C400	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C401	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C646	065T040233132K	Y	CAP CHIP 0402 330P 50V X7R +/-10%	
C627	065T040233132K	Y	CAP CHIP 0402 330P 50V X7R +/-10%	
C680	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C676	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C664	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C523	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C520	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C514	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C504	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C210	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C563	065T040250931D	Y	CAP CHIP 0402 5PF 50V NPO +/-0.5PF	
C567	065T040250931D	Y	CAP CHIP 0402 5PF 50V NPO +/-0.5PF	
C439	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C438	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C304	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C305	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C424	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C437	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C436	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C435	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C431	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C434	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C573	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C585	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C692	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C697	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C542	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C176	065T060310221J	Y	CAP CHIP 0603 1NF J 25V MPO	
C308	065T060310221J	Y	CAP CHIP 0603 1NF J 25V MPO	
C163	065T060310332K	Y	CAP CHIP 0603 10NF K 50V X7R	
C204	065T060310332K	Y	CAP CHIP 0603 10NF K 50V X7R	
C710	065T060310332K	Y	CAP CHIP 0603 10NF K 50V X7R	
C712	065T060310332K	Y	CAP CHIP 0603 10NF K 50V X7R	
C293	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C390	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C403	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C408	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C409	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C410	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C411	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C292	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C278	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C249	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C248	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C247	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C246	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C245	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C412	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C679	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C570	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C562	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C751	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C618	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C502	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C433	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C432	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C425	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C423	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C420	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C417	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C416	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C413	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C243	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C203	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C201	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C166	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C158	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C151	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C126	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C125	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C123	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C121	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C119	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C118	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C109	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C106	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C105	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C206	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C242	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C241	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C240	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C239	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C238	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C236	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C235	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C234	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C233	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C232	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C219	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C217	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C215	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C209	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C628	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C398	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C397	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C396	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C395	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C393	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C165	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C644	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C647	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C648	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C649	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C629	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C634	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C636	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C637	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C639	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C641	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C371	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C364	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C358	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C352	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C329	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C322	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C311	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C310	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C309	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C277	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C274	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C256	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C254	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C251	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C213	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C757	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C753	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C704	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C702	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C670	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C667	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C661	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C658	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C615	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C611	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C609	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C606	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C603	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C422	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C419	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C571	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C575	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C580	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C582	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C633	065T060315332K	Y	CAP CHIP 0603 15NF K 50V X7R	
C638	065T060315332K	Y	CAP CHIP 0603 15NF K 50V X7R	
C541	065T060322031J	Y	CAP CHIP 0603 22PF J 50V NPO	
C279	065T060322412K	Y	CAP CHIP 0603 0.22UF K 16V X7R	
C284	065T060322412K	Y	CAP CHIP 0603 0.22UF K 16V X7R	
C290	065T060322412K	Y	CAP CHIP 0603 0.22UF K 16V X7R	
C681	065T060333031J	Y	CAP CHIP 0603 33PF J 50V NPO	
C128	065T060333131J	Y	CAP CHIP 0603 330PF J 50V NPO	
C129	065T060333131J	Y	CAP CHIP 0603 330PF J 50V NPO	
C102	065T060333312K	Y	CAP CHIP 0603 33N 16V X7R +/-10%	
C104	065T060333312K	Y	CAP CHIP 0603 33N 16V X7R +/-10%	
C682	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C677	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C665	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C521	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C518	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C211	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C643	065T060347131J	Y	CAP CHIP 0603 470PF J 50V NPO	
C632	065T060347131J	Y	CAP CHIP 0603 470PF J 50V NPO	
C285	065T060347312K	Y	CAP CHIP 0603 47N 16V X7R +/-10%	
C626	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C631	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C645	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C685	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C690	065T060368232K	Y	CAP CHIP 0603 6800PF K 50V X7R	
C691	065T060368232K	Y	CAP CHIP 0603 6800PF K 50V X7R	
C656	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C655	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C556	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C554	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C551	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C547	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C546	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C651	065T0805106 15		CHIP 10UF 16V X5R 0805	
C516	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C515	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C513	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C512	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C430	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C429	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C428	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C427	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C577	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C581	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C591	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C599	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C650	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C652	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C672	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C674	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C127	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C120	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C205	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C216	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C218	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C220	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C280	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C281	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C283	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C402	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C404	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C405	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C406	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C407	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C414	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C415	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C418	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C421	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C621	065T080547412K	Y	CAP CHIP 0805 470N 16V X7R +/-10%	
C601	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C604	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C607	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C610	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C612	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C616	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C653	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C659	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C662	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C668	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C671	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C701	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C703	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C754	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C557	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C214	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C255	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C275	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C276	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C319	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C323	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C326	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C351	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C362	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C363	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	

32"&37"&42"LCD TV

AOC L32W981&L37W981&L42W98H

C379	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C385	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C552	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C555	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C114	065T0805475A7Z	Y	CAP CHIP 4.7UF 10V Y5V -20%~+80%	
C689	065T0805475A7Z	Y	CAP CHIP 4.7UF 10V Y5V -20%~+80%	
C108	065T120610612K	Y	CER 1206 10U 16V X7R 10%	
C132	065T120610612K	Y	CER 1206 10U 16V X7R 10%	
C153	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C168	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C171	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C175	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C640	065T120647432K	Y	CER 1206 470N 50V X7R +/-10%	
C635	065T120647432K	Y	CER 1206 470N 50V X7R +/-10%	
C625	065T120647432K	Y	CER 1206 470N 50V X7R +/-10%	
C693	067T 3111003CT		EC SMD 10UF 16V HV 4X5.5MM	
C619	067T 3111003CT		EC SMD 10UF 16V HV 4X5.5MM	
C756	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C103	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C155	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C161	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C162	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C170	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C202	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C321	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C350	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C369	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C614	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C752	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C705	067T 3111097CT		EC SMD 1UF 50V HV 4X5.5MM	
C688	067T 3111097CT		EC SMD 1UF 50V HV 4X5.5MM	
C177	067T 3114703CT		EC SMD 47UF 16V HV 6.3X5.5MM	
C178	067T 3114703CT		EC SMD 47UF 16V HV 6.3X5.5MM	
C200	067T 3114703CT		EC SMD 47UF 16V HV 6.3X5.5MM	
C500	067T 3114703CT		EC SMD 47UF 16V HV 6.3X5.5MM	
C152	067T 3114713CT		EC SMD 470UF 16V HV 8X10MM	
C222	067T 3114713CT		EC SMD 470UF 16V HV 8X10MM	
C501	067T 3114713CT		EC SMD 470UF 16V HV 8X10MM	
U301	070GHDCP500HDC		HDCP CODE	
FB751	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB403	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB753	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB752	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB201	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB101	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB100	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB404	071T 56B221 TA		CHIP BEAD 220R/400MA FCM2012CF-221T04	
FB402	071T 56B221 TA		CHIP BEAD 220R/400MA FCM2012CF-221T04	
FB390	071T 59C601 TA		CHIP BEAD 600R/200MA FCM1608K-601T02	
FB566	071T 59C601 TA		CHIP BEAD 600R/200MA FCM1608K-601T02	
FB567	071T 59C601 TA		CHIP BEAD 600R/200MA FCM1608K-601T02	
FB700	071T 59C601 TA		CHIP BEAD 600R/200MA FCM1608K-601T02	
FB701	071T 59C601 TA		CHIP BEAD 600R/200MA FCM1608K-601T02	
FB702	071T 59C601 TA		CHIP BEAD 600R/200MA FCM1608K-601T02	
FB230	071T 59C601 TA		CHIP BEAD 600R/200MA FCM1608K-601T02	
FB231	071T 59C601 TA		CHIP BEAD 600R/200MA FCM1608K-601T02	
FB232	071T 59C601 TA		CHIP BEAD 600R/200MA FCM1608K-601T02	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

FB233	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB234	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB200	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB202	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB754	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB750	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB607	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB606	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB604	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB603	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB602	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB601	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB600	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB401	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB400	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB323	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB322	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB321	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB302	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB301	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB300	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB204	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB203	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
L551	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L550	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L505	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L504	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L503	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L502	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L501	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L500	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L701	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L700	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L657	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L656	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L655	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L654	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L653	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L652	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L650	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L565	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L564	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L563	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L562	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L561	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L558	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L556	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L554	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L552	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L201	073T 63229 TA	CHIP INDUCROR 2.2UH 10% FCI1608F-2R2K	
L200	073T 63229 TA	CHIP INDUCROR 2.2UH 10% FCI1608F-2R2K	
L300	073T 63828 T	CHIP INDUCROR 0U82 10% MLF1608DR82K	
X300	093T 22S917 C	CRYSTAL 60MHZ 9P SMD-49	
Y230	093T 22S920 C	CRYSTAL 27MHZ 20P SMD-49	
X400	093T 22S921 C	CRYSTAL 27MHZ 20P SMD-5.0X3.2	
ZD702	093T 39S906 T	DIODE PDZ24B SOD-323 PHILIPS	
ZD703	093T 39S906 T	DIODE PDZ24B SOD-323 PHILIPS	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

ZD704	093T 39S906 T	DIODE PDZ24B SOD-323 PHILIPS	
D151	093T 60S906 T	DIODE 3A/40V SS3P4 DO-220AA	
D100	093T 60S906 T	DIODE 3A/40V SS3P4 DO-220AA	
D101	093T 60S906 T	DIODE 3A/40V SS3P4 DO-220AA	
D709	093T 64S3PH	BAS32L SOD80C	
D708	093T 64S3PH	BAS32L SOD80C	
D706	093T 64S3PH	BAS32L SOD80C	
D705	093T 64S3PH	BAS32L SOD80C	
D703	093T 64S3PH	BAS32L SOD80C	
D702	093T 64S3PH	BAS32L SOD80C	
D701	093T 64S3PH	BAS32L SOD80C	
D607	093T 64S3PH	BAS32L SOD80C	
D605	093T 64S3PH	BAS32L SOD80C	
D604	093T 64S3PH	BAS32L SOD80C	
D603	093T 64S3PH	BAS32L SOD80C	
D600	093T 64S3PH	BAS32L SOD80C	
D565	093T 64S3PH	BAS32L SOD80C	
D564	093T 64S3PH	BAS32L SOD80C	
D390	093T 64S3PH	BAS32L SOD80C	
D300	093T 64S3PH	BAS32L SOD80C	
D707	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D704	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D700	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
	715T2913 1	MAIN BOARD PCB	
CN750	033T8033 40	CONNECTOR 1.25 SMT 40P	
CN700	088T 340 19 VD	HDMI HEADER 19P V/A	
CN702	088T 340 19 VD	HDMI HEADER 19P V/A	
D560	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D561	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D562	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D568	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D569	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D570	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D571	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
CN701	088T 340 19 AV	HDMI HEADER 19P +SCREW HOLE	
	P12T 65011	HEAT PAD (27X27X1)	
	P51T 11003	GLUE EP RES RD PD945 SYR.NR8	
	P51T 11004	GLUE POLYMER PCB RD PD860002SP	
	P51T 11005	GLUE FOR SMD LOCTITE 3609 30ML	
	P51T 11006	GLUE EP RES RD PD944 SYR.NR8	
	P85T0086101	SHIELDING	
	P85T0087101	SHIELDING	
	P90T0051101	HEAT SINK	
L150	073T 253915 H	CHOKE COIL 22UH+-10% 52MOHM DR10*8	
L101	073T 253916 H	CHOKE COIL 15UH+-10% 38MOHM DR10*8	
L102	073T 253916 H	CHOKE COIL 15UH+-10% 38MOHM DR10*8	
D150	093T 6490452T	DIODE RGP15D DO-41	
L600	073T 259902 T	CHOKE 33UH 10% TSL0808S-330K1R4	
L601	073T 259902 T	CHOKE 33UH 10% TSL0808S-330K1R4	
	IRPF8PB1	IR BOARD	
U001	056T 627902	IC TSOP34438ST1	
	P51T 11003	GLUE EP RES RD PD945 SYR.NR8	
	P51T 11004	GLUE POLYMER PCB RD PD860002SP	
	P51T 11005	GLUE FOR SMD LOCTITE 3609 30ML	
	P51T 11006	GLUE EP RES RD PD944 SYR.NR8	
CN001	033T8032 5P H FP	COM BM H 5P M 1.25 60925	
Q001	057T 477900 T	TRA BC847C 100MA/50V SOT-23	

32"&37"&42"LCD TV

AOC L32W981&L37W981&L42W98H

Q002	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
R008	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R004	061T0603222 Y	RST CHIPR 2.2KOHM +-5% 1/10W YAGEO	
R006	061T0603222 Y	RST CHIPR 2.2KOHM +-5% 1/10W YAGEO	
R007	061T0603272 Y	RST CHIPR 2.7KOHM +-5% 1/10W YAGEO	
R002	061T0603560 Y	RST CHIPR 56 OHM +-5% 1/10W YAGEO	
R001	061T0603681 Y	RST CHIPR 680 OHM +-5% 1/10W YAGEO	
C002	065T060310337Z Y	CAP CHIP 0603 10N 50V Y5V -20%+80%	
C004	065T060310437Z Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
LED001	081T 14 29 EL	CHIP LED RED / BLUE	
	715T3019 1	IR BOARD PCB	
C001	065T0603105A7Z Y	CAP CHIP 0603 1U 10V Y5V -20%+80%	
	KEPF8PB2	KEY BOARD	
CN016	033T3802 4 H X	WAFER 4P RIGHT ANGLE PITCH 2.0	
SW016	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW017	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW018	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW019	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW020	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW021	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW022	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
	P51T 11003	GLUE EP RES RD PD945 SYR.NR8	
	P51T 11004	GLUE POLYMER PCB RD PD860002SP	
	P51T 11005	GLUE FOR SMD LOCTITE 3609 30ML	
	P51T 11006	GLUE EP RES RD PD944 SYR.NR8	
R020	061T0603113 Y	RST CHIPR 11KOHM +-5% 1/10W YAGEO	
R016	061T0603113 Y	RST CHIPR 11KOHM +-5% 1/10W YAGEO	
R018	061T0603182 Y	RST CHIPR 1.8KOHM +-5% 1/10W YAGEO	
R022	061T0603182 Y	RST CHIPR 1.8KOHM +-5% 1/10W YAGEO	
R017	061T0603432 Y	RST CHIPR 4.3KOHM +-5% 1/10W YAGEO	
R021	061T0603432 Y	RST CHIPR 4.3KOHM +-5% 1/10W YAGEO	
R019	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
C024	065T060310437Z Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C023	065T060310437Z Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
	715T2950 1	KEY BOARD PCB	
	Q11T5027 1	LEAD-CLAMPER	
	Q26T 800504 2	BARCODE	
	Q36T 600 18113	CLOTH_GRIDDING	
	Q36T 600 18114	CLOTH_GRIDDING	
	Q36T 600 18120	CLOTH_GRIDDING	
	Q36T 600 36 9 GP	NONWOVEN FABRIC	
	Q36T 600 37 12 GP	NONWOVEN FABRIC	
	Q40T 32061547A	RATING LABEL	
	Q40T0001624 4A	PALLET LABEL	
	Q40T000262488A	POP LABEL	
	Q40T000267358A	SIDE LABEL	
	Q41T7800615B10	TELEPHONE NUMBER	
	Q41T780B615 7A	WARRANTY FOR EU	
	Q44T6002102 89	PAPER BOARD	
	Q44T6002122 89	PAPER BOARD	
	Q44TJ019 5 1B	U TYPE SHEET FOR BASE	
	Q44TJ019 7 1A	U TYPE SHEET FOR MANUAL	
	Q44TJ019101	CUSHION EPS 32	
	Q44TJ019201	CUSHION EPS 32	
	Q44TJ019301	CUSHION EPS 32	
	Q44TJ019401	CUSHION EPS 32	
	Q44TJ019615 6A	32" TV CARTON	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

	Q44TJ019BLO001	PAPER SHEET	
	Q44TSLIP10031A	PLASTIC SLIPSHEET	
	Q44TSLIP10075A	PLASTIC SLIPSHEET	
	Q45G 77 5	PE PACKING	
	Q45T 99609 61	EPE COVER FOR MONITOR	
	Q45T 99609 79	EPE COVER FOR BASE	
	Q50T 500523	CABLE TIE	
	Q52T 1185 99	BIG CARTON TAPE FOR AOC	
	Q52T6025 11983	INSULATE SHEET	
	045T 76 28 RN	PE BAG FOR MANUAL	
	092TB1JX1A31GM	PEONY A1KALINE LR03	
	0Q1T 940 14 47 CR3	SCREW	
	Q41T320161538A	MANUAL	
	Q41T780A61597A	QSG	
	Q41T780A61598A	QSG	
	Q45T 76 28NV2 R	PE BAG FOR CLAMP	
	040T 58162435A	LABEL	

L37W981 E378A2NBW8ACNN

Location	Part Number	Description	Remark
	001T6021 1	SCREW	
	033T 465 1	CLIP JIONTER	
	040T 581 26704	SHIPPING LABEL	
	044T6002608 1A	PAPER BOARD	
	044T6002608 7A	PAPER BOARD	
	044T9000 2A	PAPER BOARD	
	049T 51 1A	ERADICATOR	
	050T 500 1	CABLE TIE	
	052T 1150 C	BLACK TAPE	
	052T 1186	SMALL TAPE	
	052T 1211 B	ADHESIVE TYPE	
	052T 2191 A	TAPE	
E078	078T 499902 M	SPEAKER 6OHM 10W 150MMX30MM	
E078	078T 499903 G	SPEAKER 6OHM 10W 150MMX30MM	2nd Source
E08901	089T404A18N IS	POWER CORD	
E08901	089T404A18N LS	POWER CORD 1.8M	2nd Source
E08901	089T404A18N YH	POWER CORD	2nd Source
	092TB1JX1A31GM	PEONY A1KALINE LR03	
E09504	095T8013 2F918	HARNESS 2P-FAST 650MM 75242	
E09505	095T8013 3F905	HARNESS 3P-FAST 630MM 75243	
E09502	095T8014 4F917	HARNESS 4P-4P 620MM 75241	
E09503	095T8014 5F905	HARNESS 5P-5P 390MM 75240	
E09507	095T801412F913	HARNESS 12P-12P 160MM 75239	
E09508	095T801414F913	HARNESS 14P-13P 220MM 75238	
E09506	095T8018 30964 FP	HARNESS 30P-20*2P 240MM 75237	
	098TRABDBNTACC	REMOTE CONTROL RL57B	
	0D1T1730 8120	SCREW	
	0M1T 930 6 47 CR3	SCREW	
	0M1T 940 8120	SCREW	
	0M1T 940 16 47 CR3	SCREW M4X6	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

	0M1T1730 10120	SCREW	
	0M1T1740 6120	SCREW	
	0Q1T 930 6120	SCREW	
	0Q1T 930 8 47 CR3	SCREW	
	0Q1T 940 12 47 CR3	T4X12 SCREW	
	0Q1T 940 16 47 CR3	SCREW	
	705TP834011	REAR COVER ASSY	
	A15T0282101	BKT-VESA-BTM	
	A34T0579 GM 3L0100	REAR COVER EU	
	705TP837003	BASE COVER ASSY	
	0Q1T 130 8120	SCREW	
	A15T0433101	BASE BRACKET L	
	A34T0582 GM 1L0133	BASE_S1	
	Q12T6300 25 1	FOOT PAD	
	705TP837004	BASE STAND ASSY	
	0M1T 130 6120	SCREW	
	A34T0544 GM 1L0100	STAND COVER A1	
	A37T0066011	SWIVEL ASSEMBLY	
	705TQ833034	PLASTIC ASS'Y	
	0Q1T 930 8 47 CR3	SCREW	
	A33T0304 GMA1L0100	COVER_FUNC	
	A33T0305 QV 1L0100	BUTTON_FUNC	
	750TVU370W2C01N000	PANEL T370XW02 VC00 TW AUO	
	A15T0300101	BKT-POWER-EUO	
	A15T0336201	PANEL BRACKET FOR AUO VC&V4	
	A15T0337201	STAND BRACKET FOR V4&VC	
	A15T0338302	PCB BRACKET	
	A15T0340102	VESA-BKT-TOP	
	A15T0342101	FIX BRACKET FOR V4&VC	
	A33T0334AEU 1C0100	LENS_POWER&IR FOR A2	
	A34T0578 GMC2L0130	BEZEL TV37W-8A2	
	A34T0580 GM 1L0100	NECK COVER	
	ADTV82420PA2	POWER BOARD	
	040G 45762412B	CBPC LABEL	
CN902	033T327812D	WAFER 12P PLUG	
CN903	033T380213B Y	CONNECTOR	
IC952	056T 139 3B	IC PC123Y82FZ0F	
IC934	056T 139 3B	IC PC123Y82FZ0F	
IC932	056T 139 3B	IC PC123Y82FZ0F	
Q932	057T 761 7	KTD1691P	
R915	061T153M10852T	RST MOFR 0.1 OHM +-5% 3WS	
C904	063T107K474 US	X2 CAP 0.47UF K 275VAC	
C901	063T107K474 US	X2 CAP 0.47UF K 275VAC	
C905	063T210K105BCN	MPP CAP 1UF 520V P=15MM	
C941	063T211J273 5C 10	0.027UF 5% 1000V P=15MM	
C952	065T 1K103 2E6213	CAP CER 10NF K 1KV	
C951	065T 1K103 2E6213	CAP CER 10NF K 1KV	
C902	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C903	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C906	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	
C950	065T306M1022BM GP	Y1.CAP.001UF 250VAC MURATA	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C907	067T 40Z12115K	EC 120UF V 450V 20*40MM	
C926	067T215A1024KT	EC 1000UF 25V 10*25MM	
C943	067T215A1026KV	EC 1000UF 35V 12.5*25MM	
C928	067T215A4713KT	EC 470UF 16V 10*12.5MM	
C944	067T215A4716KT	EC 470UF 35V M 10*20MM	
C946	067T215S4714KL	ELCAP 105℃ 470UF M 25V	
L903	071T 55 21	IND BEAD 10.0*6.0	
FB901	071T 55 26 S	FERRITE CORE	
FB906	071T 55 26 S	FERRITE CORE	
L902	073T 174106 DN	LINE FILTER 13MH LK.TF032.A20	
L901	073T 174106 DN	LINE FILTER 13MH LK.TF032.A20	
L906	073T 174122 L	PFC CHOKE 230UH PT-009321	
L932	073T 253 91 H	CHOKE COIL	
L931	073T 253 91 H	CHOKE COIL	
L971	073T 253150 L	CHOCK	
T931	080TL32T 5 N	X'FMR 1.9MH YUVA-827	
T951	080TL40T 8 YS	X'FMR 600UH YS04160149	
CN901	087T 501 44 DL	AC SOCKET 3PIN + 2 SCREW HOLE V/T	
	705TQ757011	Q951 ASS'Y	
Q951	057T 611 9	FET 2SK4097LS 9.5A/500V TO-220FI(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ757012	Q952 ASS'Y	
Q952	057T 611 9	FET 2SK4097LS 9.5A/500V TO-220FI(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ757013	Q931 ASS'Y	
Q931	057T 667 52	FET 2SK4100LS-T 7A/650V TO-220FI(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ761021	NR901 ASS'Y	
NR901	061T 58030 WL	RST NTCR 3 OHM +-20% 5A THINKING	
	Q09T 203 8	PIN	
	705TQ793020	BD901 ASS'Y	
BD901	093T 50460 39	BRIDGE BU1006A-E3/45 10A/600V BU	
	0M1T1730 10120	SCREW	
	Q90T0095 2	HEAT SINK	
	705TQ793021	D902 ASS'Y	
D902	093T 52 56	DIODE FMN-1106S 10A/600V TO-220	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ793022	D935 ASS'Y	
D935	093T 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	
	0M1T1730 8120	SCREW	
	Q90G6084 3	HEAT SINK	
	705TQ793023	D955/D956 ASS'Y	
	005T 42 1	CUSHION	
	032G3028 8	MICA	
	051G 200 1	OIL FOR DISAPPEAR	
D956	093T 60298	DIODE SBT15006JST 15A/60V TO-220ML(LS)	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

D955	093T 60310	DIODE V30100C-E3/4W 30A/100V TO-220AB	
	0M1T1730 10120	SCREW	
	Q90T0087 2	HEAT SINK	
	705TQ857007	Q901 ASS'Y	
Q901	057T 667 40	SPW20N60C3	
	0M1T1730 10120	SCREW	
	Q12T 372 8	SILICON	
	Q90T0095 2	HEAT SINK	
IC901	056T 368 12	IC FAN7529MX SOP-8	
IC931	056T 379 79	IC LD7522PS SOP-8	
IC951	056T 665 10 1	IC RESONANT L6599DTR SO-16N ST	
Q933	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
Q934	057T 417 12 T	TRA 2N3904S-RTK/PS SOT-23 KEC	
R973	061G0805196 1F	RST CHIP 1.96K 1/8W 1%	
R918	061T0805100	RST CHIPR 10 OHM +-5% 1/8W	
R924	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R931	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R943	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R970	061T0805102	RST CHIPR 1KOHM +-5% 1/4W	
R916	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R927	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R944	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R950	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R936	061T0805150 3F	RST CHIPR 150 KOHM +-1% 1/8W	
R908	061T0805153	RST CHIPR 15 KOHM +-5% 1/8W	
R958	061T0805180 2F	RST CHIPR 18 KOHM +-1% 1/8W	
R972	061T0805205 2F	RST CHIPR 20.5KOHM +-1% 1/8W	
R946	061T08052101FY	RST CHIP 2K1 1/8W 1%	
R962	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R960	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R928	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R919	061T0805220	RST CHIPR 22 OHM +-5% 1/8W	
R945	061T0805240 1F	RST CHIPR 2.4 KOHM +-1% 1/8W	
R935	061T0805240 3F	RST CHIPR 240 KOHM +-1% 1/8W	
R956	061T0805273	RST CHIPR 27 KOHM +-5% 1/8W	
R952	061T0805302	RST CHIPR 3 KOHM +-5% 1/8W	
R913	061T0805330 2F	RST CHIPR 33 KOHM +-1% 1/8W	
R971	061T0805470 2F	RST CHIPR 47 KOHM +-1% 1/8W	
R909	061T0805470 2F	RST CHIPR 47 KOHM +-1% 1/8W	
R930	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R961	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R963	061T0805513	RST CHIPR 51 KOHM +-5% 1/8W	
R959	061T0805514	RST CHIPR 510KOHM +-5% 1/8W	
R907	061T0805563	RST CHIPR 56 KOHM +-5% 1/8W	
R948	061T0805620 2F	RST CHIPR 62 KOHM +-1% 1/8W	
R914	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
R911	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R912	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R932	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R933	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R934	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R910	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R922	061T1206150 3F	RST CHIPR 150KOHM +-1% 1/4W	
R921	061T1206150 3F	RST CHIPR 150KOHM +-1% 1/4W	
R920	061T1206150 3F	RST CHIPR 150KOHM +-1% 1/4W	
R976	061T1206152	RST CHIPR 1.5 KOHM +-5% 1/4W	
R905	061T1206153	RST CHIPR 15 KOHM +-5% 1/4W	
R906	061T1206204	RST CHIPR 200 KOHM +-5% 1/4W	
R955	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R954	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R953	061T1206205	RST CHIPR 2 MOHM +-5% 1/4W	
R903	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R902	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R901	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R941	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R940	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R939	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R938	061T1206470	RST CHIPR 47 OHM +-5% 1/4W	
R925	061T1206479	RST CHIPR 4.7 OHM +-5% 1/4W	
R974	061T1206512	RST CHIPR 5.1KOHM +-5% 1/4W	
R975	061T1206512	RST CHIPR 5.1KOHM +-5% 1/4W	
C919	065T0805102 31	1000PF 50V NPO	
C912	065T0805102 31	1000PF 50V NPO	
C924	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C925	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C940	065T0805102 32	CHIP 1000PF 50V X7R 0805	
C913	065T0805103 32	10NF/50V/0805/X7R	
C915	065T0805103 32	10NF/50V/0805/X7R	
C914	065T0805104 32	CHIP 0.1UF 50V X7R	
C949	065T0805104 32	CHIP 0.1UF 50V X7R	
C920	065T0805104 32	CHIP 0.1UF 50V X7R	
C937	065T0805104 32	CHIP 0.1UF 50V X7R	
C936	065T0805104 32	CHIP 0.1UF 50V X7R	
C935	065T0805104 32	CHIP 0.1UF 50V X7R	
C932	065T0805104 32	CHIP 0.1UF 50V X7R	
C930	065T0805104 32	CHIP 0.1UF 50V X7R	
C929	065T0805104 32	CHIP 0.1UF 50V X7R	
C918	065T0805104 32	CHIP 0.1UF 50V X7R	
C911	065T0805104 32	CHIP 0.1UF 50V X7R	
C922	065T0805105 37	CHIP 1UF 50V Y5V	
C931	065T0805105 37	CHIP 1UF 50V Y5V	
C945	065T0805105 37	CHIP 1UF 50V Y5V	
C933	065T0805221 31	220PF 50V NPO	
C934	065T0805224 22	CAIP CAP 0.22 UF 25V X7R	
C942	065T0805472 32	MLCC 0805 CAP 4700PF K 50V X7R	
C910	065T0805560 31	MLCC 0805 CAP 56PF J 50V NPO	
ZD933	093T 39S 15 T	RLZ15B	
D952	093T 64S901 T	DIODE LS4148	
D951	093T 64S901 T	DIODE LS4148	
D939	093T 64S901 T	DIODE LS4148	
D938	093T 64S901 T	DIODE LS4148	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

D934	093T 64S901 T	DIODE LS4148	
D932	093T 64S901 T	DIODE LS4148	
D931	093T 64S901 T	DIODE LS4148	
D903	093T 64S901 T	DIODE LS4148	
	006G 31 4	1.7MM RIVET	
T951	006G 31 4	1.7MM RIVET	
CN901	006G 31501	EYELET	
IC953	056T 158 10 T	IC AS431AZTR-E1 TO-92	
IC933	056T 158 10 T	IC AS431AZTR-E1 TO-92	
R969	061G 17233252T	3.3K 1/4W	
R929	061G 21047152T	470 OHM 1% 1/6W	
R937	061G208M10452T	RST MOF 100K 5% 1W	
R964	061T 17210252T	RST CFR 1KOHM +-5% 1/4W	
R949	061T 17210252T	RST CFR 1KOHM +-5% 1/4W	
R957	061T 17210352T	CFR 10KOHM +-5% 1/4W	
R923	061T 17210352T	CFR 10KOHM +-5% 1/4W	
R942	061T 17247152T	470OHM 5% 1/4W	
R947	061T 17256052T	RST CFR 56 OHM +-5% 1/4W	
R968	061T 17262252T	6.2KPHM 5% 1/4W	
R967	061T 20010152T	100 OHM 1% 1/4W	
R966	061T 20039252T	RST MFR 3.9KOHM +-1% 1/4W	
R951	061T 21030252T	3KOHM 1% 1/6W	
R917	061T 60247152T	470OHM +-5% 1/6W	
R926	061T152M12952T	RST MOFR 1.2OHM +-5% 2WS	
R965	061T152M33852T	RST MOFR 0.33 OHM +-5% 2WS	
C953	065G 1K471 2T	470PF 1KV Z5P +-10%	
C923	065T 1K222 2T6921	0.0022UF 1KV +-10%	
C916	067T215A1017KT	EC 100UF 50V 8*12MM	
C947	067T215A2214KT	EC 220UF 25V 8*12MM	
C939	067T215Y1007KT	EC105 10U 50V KEM50V	
C921	067T215Y1007KT	EC105 10U 50V KEM50V	
C917	067T215Y1007KT	EC105 10U 50V KEM50V	
C909	067T215Y1007KT	EC105 10U 50V KEM50V	
FB904	071G 55 9 T	FERRITE BEAD	
FB905	071G 55 9 T	FERRITE BEAD	
FB902	071G 55 9 T	FERRITE BEAD	
F901	084T 55 4	FUSE 382-5A 250V WICKMANN	
ZD931	093T 3916652T	MTZJ T-72 15B	
ZD932	093T 3917052T	MTZJT-72 27B	
D933	093T 5250S52T	AU02Z	
D937	093T1080 252T	DIODE SARSO1-V1 SANKEN	
	715T2804 2	POWER BOARD PCB	
	Q51G 6 4509	GLUE_RTV	
	AM1T1740 10125	SCREW	
	CBPF82MBPD	MAIN BOARD	
	040T 45762412B	CBPC LABEL	
CN600	033T3802 2	WAFER EH-2	
CN601	033T3802 3 X	CONNECTOR	
CN390	033T3802 4 X	CONNECTOR	
CN391	033T3802 5	AUDIO IN	
CN100	033T3802 12	WAFER PH-12	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

CN392	033T3802 3E PT	WAFER 2.0MM 3P H:17.5 MM	
C107	067T 2154713CT	EC 470UF 16V GF 8X16MM	
C623	067T 3054716CT	EC 470UF 35V KM 10X16MM	
C630	067T215A4714CT	EC 470UF 25V GF 10X16MM	
C684	067T215A4714CT	EC 470UF 25V GF 10X16MM	
FB605	071T 55903 TA	FERRITE CORE 75R W6 RH 3.5X10X1.0	
L102	073T 253916 LS	CHOKE COIL 15UH+/-10% 38MOHM DR10*8	
L101	073T 253916 LS	CHOKE COIL 15UH+/-10% 38MOHM DR10*8	
L601	073T 259902 T	CHOKE 33UH 10% TSL0808S-330K1R4	
L600	073T 259902 T	CHOKE 33UH 10% TSL0808S-330K1R4	
CN556	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN552	088T 78 1360S	RCA JACK 1*3 G/B/R V/A	
CN553	088T 78 13935 S	RCA JACK 1*3 W/R/B V/A 2PJ1535-001111	
CN650	088T 78 13939 JC	RCA JACK 1*3 Y/W/R + S JACK	
CN555	088T 30252S	PHONE JACK 3.5MM 3P V/A GREEN	
CN602	088T 302912 S	PHONE JACK 3.5MM 7P BLACK 2SJ1508-001111	
CN554	088T 35315F VC	D-SUB 15PIN VERTICAL CONNECTOR	
CN501	088T 35521E ST	SCART CONN. 21P V/A	
CN500	088T 35521E ST	SCART CONN. 21P V/A	
CN400	088T 500 9 P	PCMCIA CONN.	
D150	093T 6490452T	DIODE RGP15D DO-41	
TU200	094TPASEBGL 3M	TUNER ENG37E14KRF	
	0Q1T 930 8 47 CR3	SCREW	
C101	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C150	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C159	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C372	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C622	067T 3051016CT	EC 100UF 35V KM 8X11.5MM	
C110	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C312	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C698	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C707	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C696	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C624	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C642	067T 3054704CT	EC 47UF 25V KM 5X11MM	
C111	067T 5153313CT	EC 330UF 16V GF 8*16MM	
C112	067T 5153313CT	EC 330UF 16V GF 8*16MM	
U158	056T 1331PH	LD1117S18 SOT-223	
U400	056T 562930	IC MT5336PKR PBGA-465	
U152	056T 563129	IC AME8810-AEGTZ 0.6A/3.3V SOT-223	
U156	056T 563906	IC LD1117DTTR DPAK(T&R)	
U154	056T 563906	IC LD1117DTTR DPAK(T&R)	
U157	056T 563916	IC LD1117DT33TR DPAK	
U151	056T 563916	IC LD1117DT33TR DPAK	
U102	056T 563928	IC LP2996MRX PSOP-8	
U103	056T 563948	IC L5985 VFQFPN8	
U104	056T 563948	IC L5985 VFQFPN8	
U159	056T 563949	IC LD39080PT-R PPAK	
U153	056T 563951	IC LD1117ADT-TR DPAK	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

U351	056T 615911	IC NT5TU16M16AG-3C BGA84	
U352	056T 615911	IC NT5TU16M16AG-3C BGA84	
U601	056T 616 13	IC LM4809MA NOPB SO-8	
U600	056T 616912	IC TDA8933BTW HTSSOP32	
U603	056T 616914	IC RC4580IPWR TSSOP8	
U231	056T 647 25	IC MT5133AN QFN-48	
U602	056T 647903	IC WM8521H9GED/RV SOIC-14	
U401	056T1126 40	IC MT8295AE LQFP-128	
U301	056T1133 56(DG1BK6A37EQ1)	M24C16-WMN6TP	
U550	056T1133913	IC M24C02-WDW6P TSSOP8	
U700	056T1133913	IC M24C02-WDW6P TSSOP8	
U701	056T1133913	IC M24C02-WDW6P TSSOP8	
U708	056T1133913	IC M24C02-WDW6P TSSOP8	
U390	056T1133935(DG1BK6A37NQ1)	IC MX25L3205DMI-12G SOP-16	
Q401	057T 417 4	CHIP PMBS3904 BY PHILIPS	
Q200	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q201	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q300	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q301	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q500	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q750	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q751	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q611	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q612	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q613	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q614	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q616	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q610	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q609	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q608	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q706	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q705	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q704	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q703	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q702	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q700	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q607	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q601	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q550	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q151	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q109	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q108	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q106	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q101	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q100	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q600	057T 477904 T	TRA BC847BW 100MA/45V SOT-323	
Q615	057T 761902 T	TRA BC857BW 100MA/50V SOT-323	
Q606	057T 761902 T	TRA BC857BW 100MA/50V SOT-323	
Q104	057T 7631PH	SI5441DC 1206-8	
Q150	057T 7631PH	SI5441DC 1206-8	
Q103	057T 763900	FET SI3441BDV TSOP-6	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

Q701	057T 763910	FET 2SK1828 TO-236MOD	
Q707	057T 763910	FET 2SK1828 TO-236MOD	
Q400	057T 763911	MOSFET SI2301BDS SOT-23	
RN230	061T 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RN231	061T 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RN232	061T 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP350	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
RP351	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
RP352	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
RP353	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
R582	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R594	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R596	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R597	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R598	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R600	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R618	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R700	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R706	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R707	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R125	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R341	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R521	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R524	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R531	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R536	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R550	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R551	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R570	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R575	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R205	061T04021000FY	RST CHIP 100R 1/16W 1%	
R206	061T04021000FY	RST CHIP 100R 1/16W 1%	
R701	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R669	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R666	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R656	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R633	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R621	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R619	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R702	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R703	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R713	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R714	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R725	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R726	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R734	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R735	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R113	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R215	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R319	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R320	061T0402101 Y	RST CHIP 100R 1/16W 5%	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R514	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R515	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R518	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R532	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R533	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R537	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R557	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R563	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R585	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R588	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R592	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R126	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R144	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R316	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R668	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R718	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R721	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R730	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R732	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R737	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R738	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R705	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R690	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R689	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R687	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R630	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R607	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R315	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R307	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R306	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R304	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R302	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R301	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R710	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R722	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R740	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R736	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R729	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R717	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R622	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R617	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R593	061T0402202	Y	RST CHIP 2K +-5% 1/16W	
R595	061T0402202	Y	RST CHIP 2K +-5% 1/16W	
R649	061T0402202	Y	RST CHIP 2K +-5% 1/16W	
R523	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R525	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R526	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R527	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R568	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R572	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R727	061T0402203	Y	RST CHIP 20K 1/16W 5%	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R608	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R612	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R627	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R634	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R640	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R529	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R534	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R661	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R664	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R673	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R704	061T0402273	Y	RST CHIP 27K 1/16W 5%	
R743	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R728	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R715	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R303	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R635	061T0402393	Y	RST CHIP 39K 1/16W 5%	
R530	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R535	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R657	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R667	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R671	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R616	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R746	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R745	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R744	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R733	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R720	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R620	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R326	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R325	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R259	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R258	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R254	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R253	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R251	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R742	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R741	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R724	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R723	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R712	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R711	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R699	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R697	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R694	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R693	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R331	061T0402512	Y	RST CHIP 5K1 1/16W 5%	
R650	061T0402512	Y	RST CHIP 5K1 1/16W 5%	
R513	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R520	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R522	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R553	061T0402680	Y	RST CHIP 68R 1/16W 5%	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R559	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R567	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R580	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R583	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R587	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R584	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R581	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R579	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R565	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R561	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R556	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R528	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R519	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R517	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R516	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R234	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R235	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R239	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R322	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R751	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R696	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R662	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R646	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R232	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R230	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R218	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R217	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R208	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R204	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R201	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R200	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R432	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R508	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R410	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R399	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R397	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R394	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R366	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R363	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R362	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R361	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R360	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R336	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R323	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R509	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R576	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R577	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R642	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R643	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R645	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R211	061T0603100	Y	RST CHIPR 10 OHM +-5% 1/10W YAGEO	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R214	061T0603100 Y	RST CHIPR 10 OHM +-5% 1/10W YAGEO	
R386	061T06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R389	061T06031000FY	RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R216	061T06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R300	061T06031001FY	RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R555	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R760	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R647	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R591	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R590	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R439	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R438	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R437	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R434	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R233	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R433	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R417	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R415	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R395	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R375	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R372	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R370	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R367	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R359	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R358	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R107	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R158	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R164	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R238	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R241	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R242	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R309	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R602	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R755	061T0603102 Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R504	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R427	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R426	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R425	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R408	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R407	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R406	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R405	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R404	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R403	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R401	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R398	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R393	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R210	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R159	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R128	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R127	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R558	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R554	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R552	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R765	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R678	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R677	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R654	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R624	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R589	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R512	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R511	061T0603103 Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R609	061T0603104 Y	RST CHIPR 100KOHM +-5% 1/10W YAGEO	
R231	061T0603105 Y	RST CHIPR 1MOHM +-5% 1/10W YAGEO	
R400	061T0603105 Y	RST CHIPR 1MOHM +-5% 1/10W YAGEO	
R163	061T0603109 Y	RST CHIPR 1 OHM +-5% 1/10W YAGEO	
R167	061T0603109 Y	RST CHIPR 1 OHM +-5% 1/10W YAGEO	
R317	061T0603109 Y	RST CHIPR 1 OHM +-5% 1/10W YAGEO	
R123	061T06031101FY	RST CHIPR 1.1KOHM +-1% 1/10W YAGEO	
R151	061T06031200FY	RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R152	061T06031200FY	RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R162	061T06031200FY	RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R165	061T06031200FY	RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R122	061T06031201FY	RST CHIPR 1.2KOHM +-1% 1/10W YAGEO	
R117	061T06031201FY	RST CHIPR 1.2KOHM +-1% 1/10W YAGEO	
R651	061T06031300FY	RST CHIPR 130 OHM +-1% 1/10W YAGEO	
R641	061T06031302FY	RST CHIPR 13KOHM +-1% 1/10W YAGEO	
R639	061T06031302FY	RST CHIPR 13KOHM +-1% 1/10W YAGEO	
R628	061T06031302FY	RST CHIPR 13KOHM +-1% 1/10W YAGEO	
R626	061T06031302FY	RST CHIPR 13KOHM +-1% 1/10W YAGEO	
R603	061T0603200 Y	RST CHIPR 20 OHM +-5% 1/10W YAGEO	
R604	061T0603200 Y	RST CHIPR 20 OHM +-5% 1/10W YAGEO	
R172	061T06032002FY	RST CHIPR 20KOHM +-1% 1/10W YAGEO	
R578	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R586	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R615	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R631	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R660	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R663	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R310	061T06032200FY	RST CHIPR 220 OHM +-1% 1/10W YAGEO	
R115	061T06032201FY	RST CHIPR 2.2KOHM +-1% 1/10W YAGEO	
R652	061T06032202FY	RST CHIPR 22KOHM +-1% 1/10W YAGEO	
R675	061T06032202FY	RST CHIPR 22KOHM +-1% 1/10W YAGEO	
R157	061T0603222 Y	RST CHIPR 2.2KOHM +-5% 1/10W YAGEO	
R100	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R101	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R103	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R119	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R124	061T06032400FY	RST CHIPR 240 OHM +-1% 1/10W YAGEO	
R611	061T0603273 Y	RST CHIPR 27KOHM +-5% 1/10W YAGEO	
R613	061T0603273 Y	RST CHIPR 27KOHM +-5% 1/10W YAGEO	
R352	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R350	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R411	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R412	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R413	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R414	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R212	061T0603332 Y	RST CHIPR 3.3KOHM +-5% 1/10W YAGEO	
R682	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R655	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R507	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R506	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R505	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R314	061T06033901FY	RST CHIPR 3.9KOHM +-1% 1/10W YAGEO	
R384	061T06033901FY	RST CHIPR 3.9KOHM +-1% 1/10W YAGEO	
R106	061T0603392 Y	RST CHIPR 3.9KOHM +-5% 1/10W YAGEO	
R104	061T0603392 Y	RST CHIPR 3.9KOHM +-5% 1/10W YAGEO	
R174	061T06034701FY	RST CHIPR 4.7KOHM +-1% 1/10W YAGEO	
R311	061T06034702FY	RST CHIPR 47KOHM +-1% 1/10W YAGEO	
R679	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
R680	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
R374	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
R695	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R644	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R763	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R761	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R759	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R758	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R692	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R691	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R659	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R623	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R610	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R606	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R601	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R436	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R365	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R268	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R385	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R388	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R265	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R209	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R207	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R202	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R114	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R396	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R419	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R421	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R435	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R135	061T0603473 Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R136	061T0603473 Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R424	061T0603473 Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R636	061T0603473 Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R648	061T0603473	Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R351	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R353	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R354	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R355	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R357	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R173	061T06035102FY		RST CHIPR 51KOHM +-1% 1/10W YAGEO	
R102	061T0603512	Y	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R130	061T0603512	Y	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R500	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R501	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R502	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R670	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R213	061T06037509FY		RST CHIPR 75 OHM +-1% 1/10W YAGEO	
R111	061T0805000	Y	RST CHIPR 0 OHM +-5% 1/8W YAGEO	
R155	061T0805000	Y	RST CHIPR 0 OHM +-5% 1/8W YAGEO	
R625	061T0805100	Y	RST CHIPR 10 OHM +-5% 1/8W YAGEO	
R731	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R175	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R150	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R149	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R632	061T1206100	Y	RST CHIPR 10 OHM +-5% 1/4W YAGEO	
R637	061T1206100	Y	RST CHIPR 10 OHM +-5% 1/4W YAGEO	
R629	061T1206220	Y	RST CHIPR 22 OHM +-5% 1/4W YAGEO	
R638	061T1206220	Y	RST CHIPR 22 OHM +-5% 1/4W YAGEO	
C282	065T040210031J	Y	CAP CHIP 0402 10P 50V NPO +/-5%	
C230	065T040210232K	Y	CAP CHIP 0402 1N 50V X7R +/-10%	
C287	065T040210232K	Y	CAP CHIP 0402 1N 50V X7R +/-10%	
C559	065T040210232K	Y	CAP CHIP 0402 1N 50V X7R +/-10%	
C572	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C576	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C587	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C590	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C592	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C593	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C596	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C597	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C709	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C713	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C719	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C568	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C207	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C208	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C325	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C503	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C505	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C507	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C509	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C511	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C560	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C561	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	

32"&37"&42"LCD TV

AOC L32W981&L37W981&L42W98H

[illegible]

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

C722	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C750	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C755	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C758	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C384	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C386	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C550	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C553	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C558	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C600	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C602	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C605	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C608	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C613	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C617	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C620	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C654	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C657	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C660	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C663	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C666	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C669	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C124	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C160	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C164	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C169	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C173	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C212	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C258	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C259	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C260	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C261	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C262	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C263	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C264	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C265	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C266	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C267	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C268	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C221	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C252	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C519	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C522	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C598	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C589	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C588	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C574	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C569	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C564	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C517	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C510	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C508	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C506	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C231	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C286	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C400	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C401	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C627	065T040233132K	Y	CAP CHIP 0402 330P 50V X7R +/-10%	
C646	065T040233132K	Y	CAP CHIP 0402 330P 50V X7R +/-10%	
C680	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C676	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C664	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C523	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C520	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C514	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C504	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C210	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C563	065T040250931D	Y	CAP CHIP 0402 5PF 50V NPO +/-0.5PF	
C567	065T040250931D	Y	CAP CHIP 0402 5PF 50V NPO +/-0.5PF	
C437	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C436	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C438	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C439	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C435	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C434	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C431	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C424	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C304	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C305	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C542	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C697	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C692	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C585	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C573	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C176	065T060310221J	Y	CAP CHIP 0603 1NF J 25V MPO	
C308	065T060310221J	Y	CAP CHIP 0603 1NF J 25V MPO	
C712	065T060310332K	Y	CAP CHIP 0603 10NF K 50V X7R	
C710	065T060310332K	Y	CAP CHIP 0603 10NF K 50V X7R	
C204	065T060310332K	Y	CAP CHIP 0603 10NF K 50V X7R	
C215	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C217	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C219	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C232	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C233	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C234	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C235	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C236	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C238	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C239	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C240	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C241	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C242	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

C243	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C118	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C119	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C121	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C123	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C125	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C126	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C151	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C156	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C158	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C166	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C201	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C203	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C206	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C209	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C245	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C413	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C416	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C417	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C420	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C423	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C425	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C432	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C433	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C502	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C618	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C751	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C562	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C570	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C679	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C246	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C247	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C248	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C249	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C278	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C292	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C293	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C390	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C403	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C408	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C409	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C410	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C411	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C412	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C109	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C106	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C105	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C636	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C634	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C629	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C628	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

C398	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C397	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C396	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C395	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C393	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C649	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C648	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C647	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C644	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C641	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C639	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C637	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C322	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C329	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C352	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C358	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C364	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C371	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C419	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C422	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C311	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C310	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C309	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C277	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C274	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C256	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C254	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C251	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C213	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C603	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C757	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C753	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C704	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C702	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C670	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C667	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C661	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C658	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C615	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C611	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C609	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C606	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C571	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C575	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C580	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C582	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C633	065T060315332K	Y	CAP CHIP 0603 15NF K 50V X7R	
C638	065T060315332K	Y	CAP CHIP 0603 15NF K 50V X7R	
C541	065T060322031J	Y	CAP CHIP 0603 22PF J 50V NPO	
C279	065T060322412K	Y	CAP CHIP 0603 0.22UF K 16V X7R	
C284	065T060322412K	Y	CAP CHIP 0603 0.22UF K 16V X7R	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

C290	065T060322412K	Y	CAP CHIP 0603 0.22UF K 16V X7R	
C681	065T060333031J	Y	CAP CHIP 0603 33PF J 50V NPO	
C129	065T060333131J	Y	CAP CHIP 0603 330PF J 50V NPO	
C128	065T060333131J	Y	CAP CHIP 0603 330PF J 50V NPO	
C102	065T060333312K	Y	CAP CHIP 0603 33N 16V X7R +/-10%	
C104	065T060333312K	Y	CAP CHIP 0603 33N 16V X7R +/-10%	
C211	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C518	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C521	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C665	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C677	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C682	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C643	065T060347131J	Y	CAP CHIP 0603 470PF J 50V NPO	
C632	065T060347131J	Y	CAP CHIP 0603 470PF J 50V NPO	
C285	065T060347312K	Y	CAP CHIP 0603 47N 16V X7R +/-10%	
C626	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C631	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C645	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C685	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C690	065T060368232K	Y	CAP CHIP 0603 6800PF K 50V X7R	
C691	065T060368232K	Y	CAP CHIP 0603 6800PF K 50V X7R	
C546	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C547	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C551	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C554	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C556	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C655	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C656	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C651	065T0805106 15		CHIP 10UF 16V X5R 0805	
C402	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C404	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C405	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C406	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C407	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C414	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C415	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C418	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C283	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C281	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C280	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C220	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C218	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C216	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C205	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C120	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C127	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C674	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C672	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C652	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C650	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C599	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

C591	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C581	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C577	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C421	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C427	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C428	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C429	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C430	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C512	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C513	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C515	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C516	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C621	065T080547412K	Y	CAP CHIP 0805 470N 16V X7R +/-10%	
C214	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C255	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C275	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C276	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C319	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C323	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C754	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C703	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C701	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C671	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C668	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C662	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C659	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C653	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C616	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C612	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C610	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C607	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C326	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C351	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C362	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C363	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C379	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C385	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C552	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C555	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C557	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C601	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C604	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C114	065T0805475A7Z	Y	CAP CHIP 4.7UF 10V Y5V -20%~+80%	
C689	065T0805475A7Z	Y	CAP CHIP 4.7UF 10V Y5V -20%~+80%	
C108	065T120610612K	Y	CER 1206 10U 16V X7R 10%	
C132	065T120610612K	Y	CER 1206 10U 16V X7R 10%	
C153	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C168	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C171	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C175	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C640	065T120647432K	Y	CER 1206 470N 50V X7R +/-10%	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C635	065T120647432K Y	CER 1206 470N 50V X7R +/-10%	
C625	065T120647432K Y	CER 1206 470N 50V X7R +/-10%	
C157	065T120647522K Y	CAP CHIP 1206 4.7UF K 25V X7R	
C619	067T 3111003CT	EC SMD 10UF 16V HV 4X5.5MM	
C693	067T 3111003CT	EC SMD 10UF 16V HV 4X5.5MM	
C756	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C752	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C614	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C369	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C350	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C321	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C202	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C170	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C162	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C161	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C155	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C103	067T 3111013CT	EC SMD 100UF 16V HV 6.3X5.5MM	
C705	067T 3111097CT	EC SMD 1UF 50V HV 4X5.5MM	
C688	067T 3111097CT	EC SMD 1UF 50V HV 4X5.5MM	
C167	067T 3112203CT	EC SMD 22UF 16V HV 4X5.5MM	
C178	067T 3114703CT	EC SMD 47UF 16V HV 6.3X5.5MM	
C177	067T 3114703CT	EC SMD 47UF 16V HV 6.3X5.5MM	
C500	067T 3114703CT	EC SMD 47UF 16V HV 6.3X5.5MM	
C200	067T 3114703CT	EC SMD 47UF 16V HV 6.3X5.5MM	
C152	067T 3114713CT	EC SMD 470UF 16V HV 8X10MM	
C222	067T 3114713CT	EC SMD 470UF 16V HV 8X10MM	
C501	067T 3114713CT	EC SMD 470UF 16V HV 8X10MM	
FB100	071T 56A221 TA	CHIP BEAD 0805 220R/2000MA	
FB101	071T 56A221 TA	CHIP BEAD 0805 220R/2000MA	
FB201	071T 56A221 TA	CHIP BEAD 0805 220R/2000MA	
FB751	071T 56A221 TA	CHIP BEAD 0805 220R/2000MA	
FB752	071T 56A221 TA	CHIP BEAD 0805 220R/2000MA	
FB753	071T 56A221 TA	CHIP BEAD 0805 220R/2000MA	
FB403	071T 56A221 TA	CHIP BEAD 0805 220R/2000MA	
FB402	071T 56B221 TA	CHIP BEAD 220R/400MA FCM2012CF-221T04	
FB404	071T 56B221 TA	CHIP BEAD 220R/400MA FCM2012CF-221T04	
FB230	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB231	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB232	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB233	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB234	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB390	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB566	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB567	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB700	071T 59C601 TA	CHIP BEAD 600R/200MA	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

		FCM1608K-601T02	
FB701	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB702	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB401	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB400	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB323	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB322	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB321	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB302	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB301	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB300	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB203	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB204	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB600	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB601	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB602	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB603	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB604	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB606	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB607	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB750	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB754	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB200	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB202	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
L550	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L505	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L504	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L503	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L502	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L501	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L500	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L551	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L701	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L700	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L657	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L656	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L655	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L654	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L653	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L652	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

L650	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L565	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L564	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L563	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L562	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L561	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L558	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L556	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L554	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L552	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L201	073T 63229 TA	CHIP INDUCROR 2.2UH 10% FCI1608F-2R2K	
L200	073T 63229 TA	CHIP INDUCROR 2.2UH 10% FCI1608F-2R2K	
L300	073T 63828 T	CHIP INDUCROR 0U82 10% MLF1608DR82K	
X300	093T 22S917 C	CRYSTAL 60MHZ 9P SMD-49	
Y230	093T 22S920 C	CRYSTAL 27MHZ 20P SMD-49	
X400	093T 22S921 C	CRYSTAL 27MHZ 20P SMD-5.0X3.2	
ZD702	093T 39S906 T	DIODE PDZ24B SOD-323 PHILIPS	
ZD703	093T 39S906 T	DIODE PDZ24B SOD-323 PHILIPS	
ZD704	093T 39S906 T	DIODE PDZ24B SOD-323 PHILIPS	
D101	093T 60S906 T	DIODE 3A/40V SS3P4 DO-220AA	
D100	093T 60S906 T	DIODE 3A/40V SS3P4 DO-220AA	
D706	093T 64S3PH	BAS32L SOD80C	
D705	093T 64S3PH	BAS32L SOD80C	
D703	093T 64S3PH	BAS32L SOD80C	
D702	093T 64S3PH	BAS32L SOD80C	
D701	093T 64S3PH	BAS32L SOD80C	
D607	093T 64S3PH	BAS32L SOD80C	
D605	093T 64S3PH	BAS32L SOD80C	
D604	093T 64S3PH	BAS32L SOD80C	
D603	093T 64S3PH	BAS32L SOD80C	
D600	093T 64S3PH	BAS32L SOD80C	
D565	093T 64S3PH	BAS32L SOD80C	
D564	093T 64S3PH	BAS32L SOD80C	
D390	093T 64S3PH	BAS32L SOD80C	
D300	093T 64S3PH	BAS32L SOD80C	
D708	093T 64S3PH	BAS32L SOD80C	
D709	093T 64S3PH	BAS32L SOD80C	
D700	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D704	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D707	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
	715T2913 1	MAIN BOARD PCB	
U301	070GHDCP500HDC	HDCP CODE	
CN750	033T8033 40	CONNECTOR 1.25 SMT 40P	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

CN700	088T 340 19 VD	HDMI HEADER 19P V/A	
CN702	088T 340 19 VD	HDMI HEADER 19P V/A	
D560	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D561	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D562	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D568	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D569	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D570	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D571	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
CN701	088T 340 19 AV	HDMI HEADER 19P +SCREW HOLE	
U604	056T 133 22 ST	L78L09ACZ	
	P12T 65011	HEAT PAD (27X27X1)	
	P15T0328102	BKT-IO-EUO	
	P51T 11003	GLUE EP RES RD PD945 SYR.NR8	
	P51T 11004	GLUE POLYMER PCB RD PD860002SP	
	P51T 11005	GLUE FOR SMD LOCTITE 3609 30ML	
	P51T 11006	GLUE EP RES RD PD944 SYR.NR8	
	P85T0086101	SHIELDING	
	P85T0087101	SHIELDING	
	P90T0051101	HEAT SINK	
	Q40T000267358A	SIDE LABEL	
	IRPF8PB1	IR BOARD	
U001	056T 627902	IC TSOP34438ST1	
	P51T 11003	GLUE EP RES RD PD945 SYR.NR8	
	P51T 11004	GLUE POLYMER PCB RD PD860002SP	
	P51T 11005	GLUE FOR SMD LOCTITE 3609 30ML	
	P51T 11006	GLUE EP RES RD PD944 SYR.NR8	
CN001	033T8032 5P H FP	COM BM H 5P M 1.25 60925	
Q001	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q002	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
R008	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R004	061T0603222 Y	RST CHIPR 2.2KOHM +-5% 1/10W YAGEO	
R006	061T0603222 Y	RST CHIPR 2.2KOHM +-5% 1/10W YAGEO	
R007	061T0603272 Y	RST CHIPR 2.7KOHM +-5% 1/10W YAGEO	
R002	061T0603560 Y	RST CHIPR 56 OHM +-5% 1/10W YAGEO	
R001	061T0603681 Y	RST CHIPR 680 OHM +-5% 1/10W YAGEO	
C002	065T060310337Z Y	CAP CHIP 0603 10N 50V Y5V -20%+80%	
C004	065T060310437Z Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
LED001	081T 14 29 EL	CHIP LED RED / BLUE	
	715T3019 1	IR BOARD PCB	
C001	065T0603105A7Z Y	CAP CHIP 0603 1U 10V Y5V -20%+80%	
	KEPF8PB2	KEY BOARD	
CN016	033T3802 4 H X	WAFER 4P RIGHT ANGLE PITCH 2.0	
SW016	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW017	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW018	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW019	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW020	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW021	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW022	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
	P51T 11003	GLUE EP RES RD PD945 SYR.NR8	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

	P51T 11004	GLUE POLYMER PCB RD PD860002SP	
	P51T 11005	GLUE FOR SMD LOCTITE 3609 30ML	
	P51T 11006	GLUE EP RES RD PD944 SYR.NR8	
R016	061T0603113 Y	RST CHIPR 11KOHM +-5% 1/10W YAGEO	
R020	061T0603113 Y	RST CHIPR 11KOHM +-5% 1/10W YAGEO	
R022	061T0603182 Y	RST CHIPR 1.8KOHM +-5% 1/10W YAGEO	
R018	061T0603182 Y	RST CHIPR 1.8KOHM +-5% 1/10W YAGEO	
R021	061T0603432 Y	RST CHIPR 4.3KOHM +-5% 1/10W YAGEO	
R017	061T0603432 Y	RST CHIPR 4.3KOHM +-5% 1/10W YAGEO	
R019	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
C024	065T060310437Z Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C023	065T060310437Z Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
	715T2950 1	KEY BOARD PCB	
	Q40T 37061519A	RATING LABEL	
	Q40T0001624 4A	PALLET LABEL	
	Q40T000262488A	POP LABEL	
	Q44T3231 21 41	EVA WASHER	
	Q44T3231 21 42	EVA WASHER	
	Q44TL010101	EPS CUSHION 37	
	Q44TL010201	EPS CUSHION 37	
	Q44TL010301	EPS CUSHION 37	
	Q44TL010401	EPS CUSHION 37	
	Q44TL010615 2A B	37 TV AOC CARTON BOTTOM	
	Q44TL010615 2A T	37 TV AOC CARTON TOP	
	Q44TL010BLO001	PAPER SHEET	
	Q44TN005 5 1A	U TYPE SHEET FOR BASE	
	Q44TSLIP00122A	PAPER SLIPSHEET	
	Q44TSLIP00123A	PAPER SLIPSHEET	
	Q45G 77 5	PE PACKING	
	Q45T 99609 60	EPE COVER FOR BASE	
	Q45T 99609 80	EPE COVER FOR MONITOR	
	Q50T 500523	CABLE TIE	
	Q52T 1185 99	BIG CARTON TAPE FOR AOC	
	Q52T 1213607	ALUMINUM FOIL TAPE	
	Q52T6025 11983	INSULATE SHEET	
	045T 76 28 RN	PE BAG FOR MANUAL	
	0M1T6022500	SCREW	
	Q41T320161538A	MANUAL	
	Q41T7800615B10	TELEPHONE NUMBER	
	Q41T780A61597A	QSG	
	Q41T780A61598A	QSG	
	Q41T780B615 7A	WARRANTY FOR EU	
	Q45T 76 28NV2 R	PE BAG FOR CLAMP	
	040T 58162435A	LABEL	
	Q26T 800504 2	BARCODE	
	Q44T3231 21 11	EVA WASHER	

Location	Part Number	Description	Remark
	033T 465 1	CLIP JIONTER	
	044T6002709 3A	PAPER BOARD	
	044T9003169	CORNER PAPER	
	049T 51 1A	ERADICATOR	
	095T801412X911	HARNESS 12P-12P 160MM LCDXXTE0116	
	Q07T 8 3120	COMPOUND PALLET	
	Q07T 8 3190	COMPOUND PALLET	
	Q44T600019L 4A	CARTON	
	Q44T6002115101	PAPER BOARD	
	Q44TN005 5 1A	U TYPE SHEET FOR BASE	
	Q44TN005615 9A B	42" TV BOTTOM CARTON	
	Q44TN005615 9A T	42" TV TOP CARTON	
	Q45T 99606 25 ESD	INSULATING PE BAG	
	Q50T 500520	CABLE TIE	
	045T 76 28 RN	PE BAG FOR MANUAL	
	0M1T6022500	SCREW	
	Q41T320161538A	MANUAL	
	Q41T7800615B10	TELEPHONE NUMBER	
	Q41T780A61597A	QSG	
	Q41T780A61598A	QSG	
	Q41T780B615 7A	WARRANTY FOR EU	
	Q44T600024D 3A	CARTON	
	Q45T 76 28NV2 R	PE BAG FOR CLAMP	
	040T 581 26646	S/N LABEL	
	040T 58162435A	LABEL	
	040T 581654 3A	CARTON LABEL	
	Q40T 582813 3A	S/N LABEL	
	044T6000 1 1A	EMPTY CARTON FOR LOADING	
	044T6000 4 6B	SPACE PAPER	
	050T 500 1	CABLE TIE	
	052T 1150 C	BLACK TAPE	
	052T 1186	SMALL TAPE	
	052T 2191 A	TAPE	
E08901	089T404A18N IS	POWER CORD	
E08901	089T404A18N LS	POWER CORD 1.8M	2ND SOURCE
E08901	089T404A18N YH	POWER CORD	2ND SOURCE
	092TB1JX1A31GM	PEONY A1KALINE LR03	
	095T8013 2X925	HARNESS 2P-FAST 580MM LCDXXTE0288	
	095T8013 3X908	HARNESS 3P-FAST 850MM LCDXXTE0287	
	095T8014 4X925	HARNESS 4P-4P 720MM LCDXXTE0286	
	095T8014 5X912	HARNESS 5P-5P 310MM LCDXXTE0285	
	095T801414X909	HARNESS 14P-13P 150MM LCDXXTE0181	
	095T8018 51929 X	HARNESS 51P-20*2P 310MM LVDSXTE0034	
	098TRABDBNTACC	REMOTE CONTROL RL57B	
	0D1T1730 8120	SCREW	
	0M1T 930 6 47 CR3	SCREW	
	0M1T 940 6120	SCREW	
	0M1T 940 16 47 CR3	SCREW M4X6	
	0Q1T 930 8 47 CR3	SCREW	
	0Q1T 930 8120	SCREW	
	0Q1T 940 12 47 CR3	T4X12 SCREW	
	0Q1T 940 20 47 CR3	SCREW	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

	705TQ8SK079	SKD ASS'Y FOR 42"	
	001T6021 1	SCREW	
E07801	078T 499902 M	SPEAKER 6OHM 10W 150MMX30MM	
E07801	078T 499903 G	SPEAKER 6OHM 10W 150MMX30MM	2ND SOURCE
	095T801413X910	HARNESS 13P-12P 770MM LCDXXTE0289	
	0D1T1730 8120	SCREW	
	0M1T 940 6120	SCREW	
	0M1T 940 16 47 CR3	SCREW M4X6	
	0M1T 960 10120	SCREW	
	0M1T1030 8120	SCREW	
	0M1T1730 10120	SCREW	
	0Q1T 940 12 47 CR3	T4X12 SCREW	
	0Q1T 940 20 47 CR3	SCREW	
	A15T0297101	PANEL BRACKET CMO	
	A15T0298201	STAND BRACKET_EU	
	A15T0299301	POWER BRACKET-EU	
	A15T0300101	BKT-POWER-EUO	
	A15T0302101	VESA BRACKET	
	A34T0541 GMB2L0130	BEZEL TV42W-8A2	
	A34T0543 GM 1L0100	NECK COVER	
	ADTV72428PA1	POWER BOARD	
	040T 45762412B	CBPC LABEL	
CN902	033T3803 12	WAFER & PLUG 12PIN	
CN903	033T3803 13	WAFER & PLUG 13PIN	
CN905	033T3803 13	WAFER & PLUG 13PIN	
IC909	056T 139 5A	TCET1103G	
IC910	056T 139 5A	TCET1103G	
IC911	056T 139 5A	TCET1103G	
IC903	056T 581 7	IC TNY277PN DIP-8C	
RV902	061T 46902	VARISTOR 510V TVR14511KFC4FY	
TH901	061T 58905 WT	NTC 0R75 15% SCK100R75MSY001 BY THINKING	
C908	063T107K684 U	X2 CAP 0.68UF K 275VAC	
C909	063T107K684 U	X2 CAP 0.68UF K 275VAC	
C910	063T210J1044CC	CAP MPP 100NF 630V 5%	
C935	063T214J225GMC	CAP MPP 2.2UF 450V 5%	
C930	065T 1K2219AT	C CAP. 220PF 1KV	
C931	065T 1K2219AT	C CAP. 220PF 1KV	
C929	065T 1K3319AT	C CAP. 330PF 1KV RR	
C902	065T306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C901	065T306K4712B3	Y1 CAP 470PF +-10% 250VAC CD SERIES	
C900	065T306M1022B3	Y1 CAP 1000PF +-20% 250VAC CD SERIES	
C945	065T517K1524AT	C CAP. 1500PF 500V 10% RC	
C907	067T 4018115C	EC 180UF 450V HS 30*31MM	
C967	067T 3051016CT	EC 100UF 35V KM 8X11.5MM	
C951	067T 515102 6C	EC 1000UF 35V GF 13X25MM	
C952	067T 515102 6C	EC 1000UF 35V GF 13X25MM	
C956	067T 515152 3C	EC 1500UF 16V GF 13*20MM	
C955	067T 515222 3C	EC 2200UF 16V GF 13*25MM	
FB923	071T 55906 H	FERRITE BEAD 510R 6X9.2(A)	
FB922	071T 55906 H	FERRITE BEAD 510R 6X9.2(A)	
L902	073T 174915 L	LINE FILTER 8MH 4.0A LF-006013-4	
L901	073T 174915 L	LINE FILTER 8MH 4.0A LF-006013-4	
L908	073T 253 91 H	CHOKE COIL	
L907	073T 253910 L	CHOKE COIL 2.3UH+/-20% 7.2MOHM R4*15	
L909	073T 253910 L	CHOKE COIL 2.3UH+/-20% 7.2MOHM R4*15	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

L906	073T 253911 L	CHOKE COIL 2.4UH+/-20% 4.5MOHM R5*20	
T904	080TL42T916 LS	XFMR 970UH PPH7019AL	
L903	080TL42T917 LS	XFMR 270UH QPH7005AL	
T905	080TL42T923 L	XFMR 2.5MH PT-009983	
CN901	087T 501 44 DL	AC SOCKET 3PIN + 2 SCREW HOLE V/T	
	705TP857006	TRANSISTOR ASS'Y	
	012T 372 5	SILICON	
Q902	057T 667 54	TRA STW21NM60N 17A/650V TO-247	
	0M1T1730 10 47 CR3	SCREW W/WASHER M3X10	
HQ902	P90T0011401	HEAT SINK	
	705TP893006	DIODE ASS'Y	
BD901	093T 50460907	BRIDGE GBJ1506 15A/600V	
	0M1T1730 10 47 CR3	SCREW W/WASHER M3X10	
HBD901	P90T0011301	HEAT SINK	
	705TP893007	DIODE ASS'Y	
Q919	057T 611 9	FET 2SK4097LS 9.5A/500V TO-220FI(LS)	
Q920	057T 611 9	FET 2SK4097LS 9.5A/500V TO-220FI(LS)	
	0M1T1730 8 47 CR3	SCREW	
HQ919	P90T0027201	HEAT SINK	
	705TP893008	DIODE ASS'Y	
D902	093T 60270	MBRF20100CT ITO-220AB	
	0M1T1730 8 47 CR3	SCREW	
HD902	P90T0027301	HEAT SINK	
	705TP893009	DIODE ASS'Y	
D928	093T 60910	DIODE 40V/10A SBF1040CT ITO-220AB	
	0M1T1730 8 47 CR3	SCREW	
HD928	Q90G6084 3	HEAT SINK	
	705TP893010	DIODE ASS'Y	
D901	093T 60270	MBRF20100CT ITO-220AB	
	0M1T1730 8 47 CR3	SCREW	
HD901	P90T0027301	HEAT SINK	
	705TP893011	DIODE ASS'Y	
D927	093T 60911	DIODE 60V/20A SBF2060CT ITO-220AB	
	0M1T1730 8 47 CR3	SCREW	
HD927	Q90G6084 3	HEAT SINK	
	705TP893014	DIODE ASS'Y	
D903	093T 220900	DIODE STTH8L06FP TO-220FP	
	0M1T1730 8 47 CR3	SCREW	
HD903	Q90G6084 3	HEAT SINK	
	705TQ861002	F901 ASS'Y	
F901	084T 41 6	FUSE 6.3A 250V LITTLEFUSE	
	P15T0002 1	SPRING (FUSE HOLDER)	
IC902	056T 379901	IC SG6961	
IC901	056T 665 10 1	IC RESONANT L6599DTR SO-16N ST	
Q923	057T 420519 T	TRA SIG SM BC857CG (ONSE) R	
Q924	057T 420519 T	TRA SIG SM BC857CG (ONSE) R	
Q915	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q916	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q917	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q918	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q925	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
R983	061T0805100	RST CHIPR 10 OHM +-5% 1/8W	
R945	061T0805100 1F	RST CHIPR 1KOHM +-1% 1/8W	
R944	061T0805100 2F	RST CHIPR 10 KOHM +-1% 1/8W	
R982	061T0805101	RST CHIPR 100 OHM +-5% 1/8W	
R986	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	
R919	061T0805103	RST CHIPR 10 KOHM +-5% 1/8W	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

R936	061T0805104	RST CHIPR 100 KOHM +-5% 1/8W	
R953	061T0805104	RST CHIPR 100 KOHM +-5% 1/8W	
R963	061T0805104	RST CHIPR 100 KOHM +-5% 1/8W	
R967	061T0805105	RST CHIPR 1 MOHM +-5% 1/8W	
R978	061T0805124	RST CHIPR 120 KOHM +-5% 1/8W	
R940	061T0805150 1F	RST CHIPR 1.5 KOHM +-1% 1/8W	
R954	061T0805150 2F	RST CHIPR 15 KOHM +-1% 1/8W	
R958	061T0805153	RST CHIPR 15 KOHM +-5% 1/8W	
R916	061T0805153 Y	RST CHIPR 15KOHM +-5% 1/8W YAGEO	
R939	061T0805180 2F	RST CHIPR 18 KOHM +-1% 1/8W	
R941	061T0805180 2F	RST CHIPR 18 KOHM +-1% 1/8W	
R972	061T0805180 2F	RST CHIPR 18 KOHM +-1% 1/8W	
R937	061T0805220 1F	RST CHIPR 2.2KOHM +-1% 1/8W	
R947	061T08052202FY	RST CHIPR 22KOHM +-1% 1/8W YAGEO	
R966	061T0805222	RST CHIPR 2.2 KOHM +-5% 1/8W	
R979	061T0805301	RST CHIP 300R 1/8W 5%	
R984	061T0805331 Y	RST CHIPR 330 OHM +-5% 1/8W YAGEO	
R949	061T0805332	RST CHIPR 3.3 KOHM +-5% 1/8W	
R913	061T0805333	RST CHIPR 33 KOHM +-5% 1/8W	
R980	061T0805334	RST CHIPR 330 KOHM +-5% 1/8W	
R991	061T0805470	RST CHIPR 47 OHM +-5% 1/8W	
R990	061T0805472	RST CHIPR 4.7 KOHM +-5% 1/8W	
R988	061T0805472	RST CHIPR 4.7 KOHM +-5% 1/8W	
R938	061T0805472	RST CHIPR 4.7 KOHM +-5% 1/8W	
R962	061T0805473	RST CHIPR 47 KOHM +-5% 1/8W	
R929	061T0805473	RST CHIPR 47 KOHM +-5% 1/8W	
R915	061T0805473 Y	RST CHIPR 47KOHM +-5% 1/8W YAGEO	
R957	061T0805680	RST CHIP 68R 1/8W 5%	
R956	061T0805680	RST CHIP 68R 1/8W 5%	
R952	061T0805680	RST CHIP 68R 1/8W 5%	
R973	061T08056800FY	RST CHIP 680R 1/8W 1%	
R918	061T0805683	RST CHIPR 68 KOHM +-5% 1/8W	
J928	061T1206000	RST CHIPR 0 OHM +-5% 1/4W	
R969	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R970	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R971	061T1206100 4F	RST CHIPR 1 MOHM +-1% 1/4W	
R976	061T1206220	RST CHIPR 22 OHM +-5% 1/4W	
R977	061T1206225	RST CHIPR 2.2 MOHM +-5% 1/4W	
R975	061T1206225	RST CHIPR 2.2 MOHM +-5% 1/4W	
R974	061T1206225	RST CHIPR 2.2 MOHM +-5% 1/4W	
R959	061T1206274 Y	RST CHIP 270K 1/4W 5%	
R960	061T1206274 Y	RST CHIP 270K 1/4W 5%	
R961	061T1206334	RST CHIPR 330 KOHM +-5% 1/4W	
R965	061T1206471	RST CHIPR 470 OHM +-5% 1/4W	
R968	061T1206471	RST CHIPR 470 OHM +-5% 1/4W	
R930	061T1206472	RST CHIPR 4.7 KOHM +-5% 1/4W	
C925	065T080510231J Y	CAP CHIP 0805 1NF J 50V NPO	
C942	065T0805103 32	10NF/50V/0805/X7R	
C937	065T0805103 32	10NF/50V/0805/X7R	
C932	065T0805103 32	10NF/50V/0805/X7R	
C968	065T080510432K	CAP CHIP 0805 100N 50V X7R +/-10%	
C939	065T080510432K	CAP CHIP 0805 100N 50V X7R +/-10%	
C928	065T080510432K	CAP CHIP 0805 100N 50V X7R +/-10%	
C924	065T080510432K	CAP CHIP 0805 100N 50V X7R +/-10%	
C922	065T080510432K	CAP CHIP 0805 100N 50V X7R +/-10%	
C913	065T0805221 32	CHIP 220PF 50V X7R 0805	
C912	065T0805225 12	CHIP 2.2UF 16V X7R 0805	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C927	065T080533232K Y	CAP CHIP 0805 3300PF K 50V X7R	
C916	065T0805334 22	CHIP 0.33UF +-10% 25V X7R 0805	
C918	065T0805334 22	CHIP 0.33UF +-10% 25V X7R 0805	
C920	065T0805334 22	CHIP 0.33UF +-10% 25V X7R 0805	
C923	065T0805334 22	CHIP 0.33UF +-10% 25V X7R 0805	
C941	065T0805334 22	CHIP 0.33UF +-10% 25V X7R 0805	
C915	065T080547131J Y	CAP CHIP 0805 470PF J 50V NPO	
	006G 31 4	1.7MM RIVET	
	006T 31501	EYELET	
IC913	056T 158 10 T	IC AS431AZTR-E1 TO-92	
IC914	056T 158 10 T	IC AS431AZTR-E1 TO-92	
Q921	057T 420903 T	TRA BC327 800MA/45V TO-92	
Q922	057T 420903 T	TRA BC327 800MA/45V TO-92	
R920	061T 60210352T	CFR 10KOHM +-5% 1/6W	
R946	061T 60210352T	CFR 10KOHM +-5% 1/6W	
R987	061T 60210452T	CFR 100KOHM +-5% 1/6W	
R917	061T 60212352T	12KOHM 5% 1/6W	
R921	061T 60222552T	RST CFR 2M2 1/6W 5%	
R928	061T 60227252T	2.7KOHM 5% 1/6W	
R932	061T 60233152T	330 OHM +-5% 1/6W	
R955	061T 60233252T	3.3K OHM 5%*	
R943	061T 60247152T	470OHM +-5% 1/6W	
R985	061T 60247252T	4.7K OHM 5% 1/6W	
R989	061T 60247252T	4.7K OHM 5% 1/6W	
R926	061T208M12852T SY	RST MOF 0R12 1W 1%	
R924	061T208M15852T SY	RST MOF 0R15 1W 1%	
SG1	062T 10 18 BL	SPARK GAP 200V +-20% BL	
SG2	062T 10 18 BL	SPARK GAP 200V +-20% BL	
SG3	062T 10 18 BL	SPARK GAP 200V +-20% BL	
SG4	062T 10 18 BL	SPARK GAP 200V +-20% BL	
C940	064T 47J1031AT EU	F/C PPN 10N 100V 5%	
C926	065T 1K1529AT	C CAP. 1500PF 1KV	
C959	067T 3051007CT	EC 10UF/50V KM 5*11MM	
C969	067T 3053307CT	EC 33UF 50V KM 6.3X11MM	
C936	067T 305470 4T	105 °CAPACITOR 47UF 25V	
C934	067T 305470 4T	105 °CAPACITOR 47UF 25V	
C966	067T 309100 4T	85C RADIAL E-CAPACITOR 10UF 25V	
FB904	071T 55908	FERRITE CORE 60R C8B RH3.5X4.7X1.0+TAP	
FB903	071T 55908	FERRITE CORE 60R C8B RH3.5X4.7X1.0+TAP	
FB921	071T 55909	FERRITE CORE 2.5*3*0.8 BF-L25030W-768	
FB919	071T 55909	FERRITE CORE 2.5*3*0.8 BF-L25030W-768	
FB920	071T 55909	FERRITE CORE 2.5*3*0.8 BF-L25030W-768	
L964	073T 5433010T	PEAKING COIL 33U 10%	
ZD912	093G 3990752T	DIO REG BZX79-C5V1 A (PHSE) A	
ZD911	093T 3919352T	TVS P6KE160A DO-15	
ZD910	093T 3990252T	DIODE BZX79-C15 DO-35	
ZD913	093T 3992152T	DIODE BZX79-C9V1 DO-35	
D908	093T 60905	DIODE BYT42D VISHAY	
D936	093T 60905	DIODE BYT42D VISHAY	
D937	093T 60905	DIODE BYT42D VISHAY	
D932	093T 6450752T	DIODE BAV21 PHILIPS	
D931	093T 6450752T	DIODE BAV21 PHILIPS	
D930	093T 6450752T	DIODE BAV21 PHILIPS	
D924	093T108090052T	DIODE UG1006 1A 800V DO-41	
	715T2828 3 FQ	POWER BOARD PCB	
	IRPF8PB1	IR BOARD	
U001	056T 627902	IC TSOP34438ST1	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

	P51T 11003	GLUE EP RES RD PD945 SYR.NR8	
	P51T 11004	GLUE POLYMER PCB RD PD860002SP	
	P51T 11005	GLUE FOR SMD LOCTITE 3609 30ML	
	P51T 11006	GLUE EP RES RD PD944 SYR.NR8	
CN001	033T8032 5P H FP	COM BM H 5P M 1.25 60925	
Q002	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q001	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
R008	061T0603101 Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R006	061T0603222 Y	RST CHIPR 2.2KOHM +-5% 1/10W YAGEO	
R004	061T0603222 Y	RST CHIPR 2.2KOHM +-5% 1/10W YAGEO	
R007	061T0603272 Y	RST CHIPR 2.7KOHM +-5% 1/10W YAGEO	
R002	061T0603560 Y	RST CHIPR 56 OHM +-5% 1/10W YAGEO	
R001	061T0603681 Y	RST CHIPR 680 OHM +-5% 1/10W YAGEO	
C002	065T060310337Z Y	CAP CHIP 0603 10N 50V Y5V -20%+80%	
C004	065T060310437Z Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
LED001	081T 14 29 EL	CHIP LED RED / BLUE	
	715T3019 1	IR BOARD PCB	
C001	065T0603105A7Z Y	CAP CHIP 0603 1U 10V Y5V -20%+80%	
	Q44T3231 21 30	EVA WASHER	
	Q44T3231 21 45	EVA WASHER	
	Q44TN005101	EPS CUSHION	
	Q44TN005201	EPS CUSHION	
	Q44TN005301	EPS CUSHION	
	Q44TN005401	EPS CUSHION	
	Q45T 99609 60	EPE COVER FOR BASE	
	Q45T 99609 71	EPE COVER FOR MONITOR	
	Q50T 500523	CABLE TIE	
	044T3231 15531	EVA	
	0M1T 130 6120	SCREW	
	0Q1T 130 10120	SCREW	
	0Q1T 930 6120	SCREW	
	A15T0282101	BKT-VESA-BTM	
	A15T0301101	BASE BRACKET	
	A33T0304 GMA1L0100	COVER_FUNC	
	A33T0305 QV 1L0100	BUTTON_FUNC	
	A33T0334AEU 1C0100	LENS_POWER&IR FOR A2	
	A34T0542 GM 4L0100	REAR COVER 42"	
	A34T0544 GM 1L0100	STAND COVER A1	
	A34T0545 GM 1L0133	BASE S1	
	A37T0060011	HINGE	
	KEPF8PB2	KEY BOARD	
CN016	033T3802 4 H X	WAFER 4P RIGHT ANGLE PITCH 2.0	
SW022	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW021	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW020	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW019	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW018	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW017	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
SW016	077T 600 1GCJ	TACT SWITCH TSPB-2 -NP	
	P51T 11003	GLUE EP RES RD PD945 SYR.NR8	
	P51T 11004	GLUE POLYMER PCB RD PD860002SP	
	P51T 11005	GLUE FOR SMD LOCTITE 3609 30ML	
	P51T 11006	GLUE EP RES RD PD944 SYR.NR8	
R016	061T0603113 Y	RST CHIPR 11KOHM +-5% 1/10W YAGEO	
R020	061T0603113 Y	RST CHIPR 11KOHM +-5% 1/10W YAGEO	
R018	061T0603182 Y	RST CHIPR 1.8KOHM +-5% 1/10W YAGEO	
R022	061T0603182 Y	RST CHIPR 1.8KOHM +-5% 1/10W YAGEO	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

R017	061T0603432 Y	RST CHIPR 4.3KOHM +-5% 1/10W YAGEO	
R021	061T0603432 Y	RST CHIPR 4.3KOHM +-5% 1/10W YAGEO	
R019	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
C023	065T060310437Z Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C024	065T060310437Z Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
	715T2950 1	KEY BOARD PCB	
	Q12T6300 25 1	FOOT PAD	
	Q36T 600 35 17 GP	NONWOVEN FABRIC	
	Q36T 600 46 1	NONWOVEN FABRIC	
	A15T0320101	FIX BRACKET FOR CMO L07	
	A15T0321101	FIX BRACKET FOR CMO L07 SIDE	
	CBPF82MBQ1	MAIN BOARD	
	040T 45762412B	CBPC LABEL	
CN600	033T3802 2	WAFER EH-2	
CN601	033T3802 3 X	CONNECTOR	
CN390	033T3802 4 X	CONNECTOR	
CN391	033T3802 5	AUDIO IN	
CN100	033T3802 12	WAFER PH-12	
CN392	033T3802 3E PT	WAFER 2.0MM 3P H:17.5 MM	
C107	067T 2154713CT	EC 470UF 16V GF 8X16MM	
C623	067T 3054716CT	EC 470UF 35V KM 10X16MM	
C630	067T215A4714CT	EC 470UF 25V GF 10X16MM	
C684	067T215A4714CT	EC 470UF 25V GF 10X16MM	
FB605	071T 55903 TA	FERRITE CORE 75R W6 RH 3.5X10X1.0	
L101	073T 253916 H	CHOKE COIL 15UH+/-10% 38MOHM DR10*8	
L102	073T 253916 H	CHOKE COIL 15UH+/-10% 38MOHM DR10*8	
L601	073T 259902 T	CHOKE 33UH 10% TSL0808S-330K1R4	
L600	073T 259902 T	CHOKE 33UH 10% TSL0808S-330K1R4	
CN556	088T 78 1357C	RCA JACK 1*1 W+R V/A	
CN552	088T 78 1360S	RCA JACK 1*3 G/B/R V/A	
CN553	088T 78 13935 S	RCA JACK 1*3 W/R/B V/A 2PJ1535-001111	
CN650	088T 78 13939 JC	RCA JACK 1*3 Y/W/R + S JACK	
CN555	088T 30252S	PHONE JACK 3.5MM 3P V/A GREEN	
CN602	088T 302912 S	PHONE JACK 3.5MM 7P BLACK 2SJ1508-001111	
CN554	088T 35315F VC	D-SUB 15PIN VERTICAL CONNECTOR	
CN501	088T 35521E ST	SCART CONN. 21P V/A	
CN500	088T 35521E ST	SCART CONN. 21P V/A	
CN400	088T 500 9 P	PCMCIA CONN.	
D150	093T 6490452T	DIODE RGP15D DO-41	
	0M1T 930 6 47 CR3	SCREW	
	0Q1T 930 8 47 CR3	SCREW	
U604	056T 133 22 ST	L78L09ACZ	
C150	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C372	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C159	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C101	067T 3051013CT	EC 100UF 16V KM 6.3X11MM	
C622	067T 3051016CT	EC 100UF 35V KM 8X11.5MM	
C110	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C312	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C624	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C696	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C698	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C707	067T 3052213CT	EC 220UF 16V KM 8X12MM	
C642	067T 3054704CT	EC 47UF 25V KM 5X11MM	
C111	067T 5153313CT	EC 330UF 16V GF 8*16MM	
C112	067T 5153313CT	EC 330UF 16V GF 8*16MM	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

U158	056T 1331PH	LD1117S18 SOT-223	
U400	056T 562932	IC MT5337PKR PBGA-465	
U152	056T 563129	IC AME8810-AEGTZ 0.6A/3.3V SOT-223	
U154	056T 563906	IC LD1117DTTR DPAK(T&R)	
U156	056T 563906	IC LD1117DTTR DPAK(T&R)	
U151	056T 563916	IC LD1117DT33TR DPAK	
U157	056T 563916	IC LD1117DT33TR DPAK	
U102	056T 563928	IC LP2996MRX PSOP-8	
U104	056T 563948	IC L5985 VFQFPN8	
U103	056T 563948	IC L5985 VFQFPN8	
U153	056T 563951	IC LD1117ADT-TR DPAK	
U351	056T 615912	IC HYB18TC256160AF-3S TFBGA84	
U352	056T 615912	IC HYB18TC256160AF-3S TFBGA84	
U601	056T 616 13	IC LM4809MA NOPB SO-8	
U600	056T 616912	IC TDA8933BTW HTSSOP32	
U603	056T 616914	IC RC4580IPWR TSSOP8	
U231	056T 647 25	IC MT5133AN QFN-48	
U602	056T 647903	IC WM8521H9GED/RV SOIC-14	
U401	056T1126 40	IC MT8295AE LQFP-128	
U301	056T1133 56(DG1BK7M42EQ1)	M24C16-WMN6TP	
U550	056T1133913	IC M24C02-WDW6P TSSOP8	
U701	056T1133913	IC M24C02-WDW6P TSSOP8	
U708	056T1133913	IC M24C02-WDW6P TSSOP8	
U700	056T1133913	IC M24C02-WDW6P TSSOP8	
U390	056T1133935(DG1BK7M42NQ1)	IC MX25L3205DMI-12G SOP-16	
Q401	057T 417 4	CHIP PMBS3904 BY PHILIPS	
Q200	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q201	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q300	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q301	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q500	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q750	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q751	057T 417903 T	TRA MMBT3904 200MA/40V SOT-23	
Q614	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q613	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q612	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q611	057T 417907 T	TRA MMBT3906 PNP -200MA/-40V SOT-23	
Q608	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q609	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q610	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q616	057T 419911 T	TRA 2A/12V 2SD2653K SOT-346	
Q607	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q700	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q702	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q705	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q706	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q703	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q704	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q601	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q550	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q151	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q109	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q108	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q106	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q101	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q100	057T 477900 T	TRA BC847C 100MA/50V SOT-23	
Q600	057T 477904 T	TRA BC847BW 100MA/45V SOT-323	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

Q615	057T 761902 T	TRA BC857BW 100MA/50V SOT-323	
Q606	057T 761902 T	TRA BC857BW 100MA/50V SOT-323	
Q104	057T 7631PH	SI5441DC 1206-8	
Q150	057T 7631PH	SI5441DC 1206-8	
Q103	057T 763900	FET SI3441BDV TSOP-6	
Q701	057T 763910	FET 2SK1828 TO-236MOD	
Q707	057T 763910	FET 2SK1828 TO-236MOD	
Q400	057T 763911	MOSFET SI2301BDS SOT-23	
RN230	061T 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RN231	061T 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RN232	061T 125330 8Y	RST CHIP AR 8P4R 33 OHM +-5% 1/16W	
RP350	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
RP351	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
RP352	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
RP353	061T 125510 8Y	RST CHIP ARRAY 51R 1/16W 5% 8P4R	
R125	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R341	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R521	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R524	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R531	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R536	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R550	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R551	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R570	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R575	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R700	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R707	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R706	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R618	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R600	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R598	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R597	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R596	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R594	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R582	061T0402000 Y	RST CHIPR 0 OHM +-5% 1/16W YAGEO	
R205	061T04021000FY	RST CHIP 100R 1/16W 1%	
R206	061T04021000FY	RST CHIP 100R 1/16W 1%	
R592	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R588	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R585	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R563	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R557	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R537	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R533	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R532	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R518	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R515	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R514	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R320	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R319	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R215	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R113	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R701	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R726	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R725	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R735	061T0402101 Y	RST CHIP 100R 1/16W 5%	
R734	061T0402101 Y	RST CHIP 100R 1/16W 5%	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R714	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R713	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R703	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R702	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R669	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R666	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R656	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R633	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R621	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R619	061T0402101	Y	RST CHIP 100R 1/16W 5%	
R732	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R730	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R738	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R737	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R721	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R718	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R668	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R316	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R144	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R126	061T0402102	Y	RST CHIP 1K 1/16W 5%	
R687	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R689	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R690	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R722	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R740	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R710	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R705	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R630	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R607	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R315	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R307	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R306	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R304	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R302	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R301	061T0402103	Y	RST CHIP 10K 1/16W 5%	
R729	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R736	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R717	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R622	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R617	061T0402104	Y	RST CHIP 100K 1/16W 5%	
R593	061T0402202	Y	RST CHIP 2K +5% 1/16W	
R595	061T0402202	Y	RST CHIP 2K +5% 1/16W	
R649	061T0402202	Y	RST CHIP 2K +5% 1/16W	
R523	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R525	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R526	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R527	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R568	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R572	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R727	061T0402203	Y	RST CHIP 20K 1/16W 5%	
R608	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R612	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R627	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R634	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R640	061T0402223	Y	RST CHIP 22K 1/16W 5%	
R673	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R664	061T0402270	Y	RST CHIP 27R 1/16W 5%	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R661	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R534	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R529	061T0402270	Y	RST CHIP 27R 1/16W 5%	
R704	061T0402273	Y	RST CHIP 27K 1/16W 5%	
R303	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R715	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R743	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R728	061T0402330	Y	RST CHIP 33R 1/16W 5%	
R635	061T0402393	Y	RST CHIP 39K 1/16W 5%	
R530	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R535	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R657	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R667	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R671	061T0402470	Y	RST CHIP 47R 1/16W 5%	
R253	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R251	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R254	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R258	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R259	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R325	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R326	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R620	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R720	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R744	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R733	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R745	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R746	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R616	061T0402472	Y	RST CHIP 4K7 1/16W 5%	
R693	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R694	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R697	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R699	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R711	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R712	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R724	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R723	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R742	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R741	061T0402473	Y	RST CHIP 47K 1/16W 5%	
R650	061T0402512	Y	RST CHIP 5K1 1/16W 5%	
R331	061T0402512	Y	RST CHIP 5K1 1/16W 5%	
R587	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R583	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R580	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R567	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R559	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R553	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R522	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R520	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R513	061T0402680	Y	RST CHIP 68R 1/16W 5%	
R584	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R581	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R579	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R565	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R561	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R556	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R528	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R519	061T0402750	Y	RST CHIP 75R 1/16W 5%	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R517	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R516	061T0402750	Y	RST CHIP 75R 1/16W 5%	
R363	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R362	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R361	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R360	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R336	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R323	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R322	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R239	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R235	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R234	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R232	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R230	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R218	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R217	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R208	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R204	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R201	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R751	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R696	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R662	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R646	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R645	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R643	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R642	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R577	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R576	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R509	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R508	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R432	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R410	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R399	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R397	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R394	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R366	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R200	061T0603000	Y	RST CHIPR 0 OHM +-5% 1/10W YAGEO	
R211	061T0603100	Y	RST CHIPR 10 OHM +-5% 1/10W YAGEO	
R214	061T0603100	Y	RST CHIPR 10 OHM +-5% 1/10W YAGEO	
R389	061T06031000FY		RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R386	061T06031000FY		RST CHIPR 100 OHM +-1% 1/10W YAGEO	
R216	061T06031001FY		RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R300	061T06031001FY		RST CHIPR 1KOHM +-1% 1/10W YAGEO	
R760	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R233	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R358	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R359	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R367	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R370	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R372	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R375	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R395	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R415	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R417	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R433	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R434	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R437	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R438	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R439	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R555	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R590	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R591	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R647	061T0603101	Y	RST CHIPR 100 OHM +-5% 1/10W YAGEO	
R755	061T0603102	Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R602	061T0603102	Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R309	061T0603102	Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R242	061T0603102	Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R241	061T0603102	Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R238	061T0603102	Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R107	061T0603102	Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R158	061T0603102	Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R164	061T0603102	Y	RST CHIPR 1KOHM +-5% 1/10W YAGEO	
R401	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R403	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R404	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R405	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R406	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R407	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R408	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R425	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R426	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R427	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R504	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R511	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R512	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R552	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R398	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R765	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R678	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R677	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R654	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R624	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R589	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R558	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R554	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R127	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R128	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R159	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R210	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R393	061T0603103	Y	RST CHIPR 10KOHM +-5% 1/10W YAGEO	
R609	061T0603104	Y	RST CHIPR 100KOHM +-5% 1/10W YAGEO	
R400	061T0603105	Y	RST CHIPR 1MOHM +-5% 1/10W YAGEO	
R231	061T0603105	Y	RST CHIPR 1MOHM +-5% 1/10W YAGEO	
R317	061T0603109	Y	RST CHIPR 1 OHM +-5% 1/10W YAGEO	
R167	061T0603109	Y	RST CHIPR 1 OHM +-5% 1/10W YAGEO	
R163	061T0603109	Y	RST CHIPR 1 OHM +-5% 1/10W YAGEO	
R123	061T0603110FY		RST CHIPR 1.1KOHM +-1% 1/10W YAGEO	
R151	061T06031200FY		RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R152	061T06031200FY		RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R162	061T06031200FY		RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R165	061T06031200FY		RST CHIPR 120 OHM +-1% 1/10W YAGEO	
R117	061T06031201FY		RST CHIPR 1.2KOHM +-1% 1/10W YAGEO	
R122	061T06031201FY		RST CHIPR 1.2KOHM +-1% 1/10W YAGEO	
R651	061T06031300FY		RST CHIPR 130 OHM +-1% 1/10W YAGEO	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

R626	061T06031302FY	RST CHIPR 13KOHM +-1% 1/10W YAGEO	
R628	061T06031302FY	RST CHIPR 13KOHM +-1% 1/10W YAGEO	
R639	061T06031302FY	RST CHIPR 13KOHM +-1% 1/10W YAGEO	
R641	061T06031302FY	RST CHIPR 13KOHM +-1% 1/10W YAGEO	
R603	061T0603200 Y	RST CHIPR 20 OHM +-5% 1/10W YAGEO	
R604	061T0603200 Y	RST CHIPR 20 OHM +-5% 1/10W YAGEO	
R764	061T0603202 Y	RST CHIPR 2KOHM +-5% 1/10W YAGEO	
R578	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R586	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R615	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R631	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R660	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R663	061T0603203 Y	RST CHIPR 20KOHM +-5% 1/10W YAGEO	
R310	061T06032200FY	RST CHIPR 220 OHM +-1% 1/10W YAGEO	
R115	061T06032201FY	RST CHIPR 2.2KOHM +-1% 1/10W YAGEO	
R675	061T06032202FY	RST CHIPR 22KOHM +-1% 1/10W YAGEO	
R652	061T06032202FY	RST CHIPR 22KOHM +-1% 1/10W YAGEO	
R157	061T0603222 Y	RST CHIPR 2.2KOHM +-5% 1/10W YAGEO	
R119	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R103	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R101	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R100	061T0603223 Y	RST CHIPR 22KOHM +-5% 1/10W YAGEO	
R124	061T06032400FY	RST CHIPR 240 OHM +-1% 1/10W YAGEO	
R613	061T0603273 Y	RST CHIPR 27KOHM +-5% 1/10W YAGEO	
R611	061T0603273 Y	RST CHIPR 27KOHM +-5% 1/10W YAGEO	
R414	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R413	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R412	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R411	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R352	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R350	061T0603330 Y	RST CHIPR 33 OHM +-5% 1/10W YAGEO	
R212	061T0603332 Y	RST CHIPR 3.3KOHM +-5% 1/10W YAGEO	
R505	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R506	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R507	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R655	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R682	061T0603333 Y	RST CHIPR 33KOHM +-5% 1/10W YAGEO	
R384	061T06033901FY	RST CHIPR 3.9KOHM +-1% 1/10W YAGEO	
R314	061T06033901FY	RST CHIPR 3.9KOHM +-1% 1/10W YAGEO	
R106	061T0603392 Y	RST CHIPR 3.9KOHM +-5% 1/10W YAGEO	
R104	061T0603392 Y	RST CHIPR 3.9KOHM +-5% 1/10W YAGEO	
R311	061T06034702FY	RST CHIPR 47KOHM +-1% 1/10W YAGEO	
R680	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
R679	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
R374	061T0603471 Y	RST CHIPR 470 OHM +-5% 1/10W YAGEO	
R421	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R435	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R419	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R396	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R436	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R601	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R606	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R610	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R388	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R385	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R365	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R268	061T0603472 Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

R265	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R209	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R207	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R202	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R114	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R695	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R644	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R761	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R759	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R758	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R692	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R691	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R659	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R623	061T0603472	Y	RST CHIPR 4.7KOHM +-5% 1/10W YAGEO	
R135	061T0603473	Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R136	061T0603473	Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R424	061T0603473	Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R636	061T0603473	Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R648	061T0603473	Y	RST CHIPR 47KOHM +-5% 1/10W YAGEO	
R357	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R355	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R354	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R353	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R351	061T0603510	Y	RST CHIPR 51 OHM +-5% 1/10W YAGEO	
R102	061T0603512	Y	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R130	061T0603512	Y	RST CHIPR 5.1KOHM +-5% 1/10W YAGEO	
R500	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R501	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R502	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R670	061T0603750	Y	RST CHIPR 75 OHM +-5% 1/10W YAGEO	
R213	061T06037509FY		RST CHIPR 75 OHM +-1% 1/10W YAGEO	
R111	061T0805000	Y	RST CHIPR 0 OHM +-5% 1/8W YAGEO	
R155	061T0805000	Y	RST CHIPR 0 OHM +-5% 1/8W YAGEO	
R625	061T0805100	Y	RST CHIPR 10 OHM +-5% 1/8W YAGEO	
R149	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R150	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R731	061T1206000	Y	RST CHIPR 0 OHM +-5% 1/4W YAGEO	
R637	061T1206100	Y	RST CHIPR 10 OHM +-5% 1/4W YAGEO	
R632	061T1206100	Y	RST CHIPR 10 OHM +-5% 1/4W YAGEO	
R629	061T1206220	Y	RST CHIPR 22 OHM +-5% 1/4W YAGEO	
R638	061T1206220	Y	RST CHIPR 22 OHM +-5% 1/4W YAGEO	
C282	065T040210031J	Y	CAP CHIP 0402 10P 50V NPO +/-5%	
C230	065T040210232K	Y	CAP CHIP 0402 1N 50V X7R +/-10%	
C287	065T040210232K	Y	CAP CHIP 0402 1N 50V X7R +/-10%	
C559	065T040210232K	Y	CAP CHIP 0402 1N 50V X7R +/-10%	
C572	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C576	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C587	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C590	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C592	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C593	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C596	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C597	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C709	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C719	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C713	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	
C711	065T040210312K	Y	CAP CHIP 0402 10N 16V X7R +/-10%	

32"&37"&42"LCD TV

AOC L32W981&L37W981&L42W98H

[illegible]

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

C700	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C600	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C602	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C605	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C608	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C613	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C617	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C620	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C654	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C657	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C660	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C663	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C666	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C669	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C678	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C683	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C264	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C263	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C262	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C261	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C260	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C259	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C258	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C212	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C173	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C169	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C164	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C160	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C124	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C265	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C318	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C307	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C306	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C303	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C302	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C273	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C272	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C271	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C270	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C269	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C268	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C267	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C266	065T040210412K	Y	CAP CHIP 0402 100N 16V X7R +/-10%	
C221	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C252	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C519	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C522	065T040210505K	Y	CAP CHIP 0402 1UF 6V3 X5R +/-10%	
C506	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C508	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C510	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C517	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C564	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C569	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C574	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C588	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C589	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	
C598	065T040215031J	Y	CAP CHIP 0402 15P 50V NPO +/-5%	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C401	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C400	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C286	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C231	065T040227031J	Y	CAP CHIP 0402 27P 50V NPO +/-5%	
C627	065T040233132K	Y	CAP CHIP 0402 330P 50V X7R +/-10%	
C646	065T040233132K	Y	CAP CHIP 0402 330P 50V X7R +/-10%	
C680	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C676	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C664	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C523	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C520	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C514	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C504	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C210	065T040247312K	Y	CHIP CAP 47N 16V X7R +/-10%	
C563	065T040250931D	Y	CAP CHIP 0402 5PF 50V NPO +/-0.5PF	
C567	065T040250931D	Y	CAP CHIP 0402 5PF 50V NPO +/-0.5PF	
C439	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C438	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C437	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C436	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C435	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C434	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C431	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C424	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C305	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C304	065T060310031J	Y	MLCC 0603 10PF J 50V NPO	
C697	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C692	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C585	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C573	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C542	065T060310131J	Y	CAP CHIP 0603 100PF J 50V NPO	
C308	065T060310221J	Y	CAP CHIP 0603 1NF J 25V MPO	
C204	065T060310332K	Y	CAP CHIP 0603 10NF K 50V X7R	
C710	065T060310332K	Y	CAP CHIP 0603 10NF K 50V X7R	
C712	065T060310332K	Y	CAP CHIP 0603 10NF K 50V X7R	
C238	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C239	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C240	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C241	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C242	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C243	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C245	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C246	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C247	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C248	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C249	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C236	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C235	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C234	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C233	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C232	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C219	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C217	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C215	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C209	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C206	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C203	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

C201	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C278	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C751	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C679	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C618	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C570	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C562	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C502	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C433	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C432	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C425	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C423	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C420	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C417	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C416	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C413	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C412	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C411	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C410	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C409	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C408	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C403	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C390	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C293	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C292	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C105	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C106	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C109	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C118	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C119	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C121	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C123	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C166	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C158	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C156	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C125	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C126	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C151	065T060310412K	Y	CAP CHIP 0603 0.1UF K 16V X7R	
C648	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C647	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C644	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C641	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C639	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C637	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C636	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C634	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C629	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C628	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C398	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C397	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C396	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C395	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C393	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C649	065T060310437Z	Y	CAP CHIP 0603 0.1UF Z 50V Y5V	
C277	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C274	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C256	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C254	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C251	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C213	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C611	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C615	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C658	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C661	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C667	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C670	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C702	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C309	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C609	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C606	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C603	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C422	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C419	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C371	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C364	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C358	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C352	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C329	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C322	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C311	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C310	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C704	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C753	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C757	065T060310512K	Y	CAP CHIP 0603 1UF K 16V X7R	
C571	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C575	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C580	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C582	065T060310517Z	Y	CAP CHIP 0603 1UF Z 16V Y5V	
C638	065T060315332K	Y	CAP CHIP 0603 15NF K 50V X7R	
C633	065T060315332K	Y	CAP CHIP 0603 15NF K 50V X7R	
C541	065T060322031J	Y	CAP CHIP 0603 22PF J 50V NPO	
C290	065T060322412K	Y	CAP CHIP 0603 0.22UF K 16V X7R	
C284	065T060322412K	Y	CAP CHIP 0603 0.22UF K 16V X7R	
C279	065T060322412K	Y	CAP CHIP 0603 0.22UF K 16V X7R	
C681	065T060333031J	Y	CAP CHIP 0603 33PF J 50V NPO	
C129	065T060333131J	Y	CAP CHIP 0603 330PF J 50V NPO	
C128	065T060333131J	Y	CAP CHIP 0603 330PF J 50V NPO	
C104	065T060333312K	Y	CAP CHIP 0603 33N 16V X7R +/-10%	
C102	065T060333312K	Y	CAP CHIP 0603 33N 16V X7R +/-10%	
C682	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C211	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C518	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C521	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C665	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C677	065T060347031J	Y	CAP CHIP 0603 47PF J 50V NPO	
C632	065T060347131J	Y	CAP CHIP 0603 470PF J 50V NPO	
C643	065T060347131J	Y	CAP CHIP 0603 470PF J 50V NPO	
C285	065T060347312K	Y	CAP CHIP 0603 47N 16V X7R +/-10%	
C626	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C631	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C645	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C685	065T0603474A7Z	Y	CAP CHIP 0603 470N 10V Y5V -20%+80%	
C690	065T060368232K	Y	CAP CHIP 0603 6800PF K 50V X7R	
C691	065T060368232K	Y	CAP CHIP 0603 6800PF K 50V X7R	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

C546	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C547	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C551	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C554	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C556	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C655	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C656	065T080510512K	Y	CAP CHIP 0805 1UF K 16V X7R	
C651	065T0805106 15		CHIP 10UF 16V X5R 0805	
C427	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C421	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C418	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C415	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C414	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C407	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C406	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C405	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C404	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C402	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C283	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C281	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C280	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C220	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C218	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C216	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C120	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C205	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C672	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C674	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C127	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C652	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C650	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C599	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C591	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C581	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C577	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C516	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C515	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C513	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C512	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C430	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C429	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C428	065T0805106A7Z	Y	CAP CHIP 0805 10UF Z 10V Y5V	
C621	065T080547412K	Y	CAP CHIP 0805 470N 16V X7R +/-10%	
C555	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C552	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C385	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C379	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C363	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C362	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C351	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C326	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C323	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C319	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C276	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C275	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C255	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C214	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

C557	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C754	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C703	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C701	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C671	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C668	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C662	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C659	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C653	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C616	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C612	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C610	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C607	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C604	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C601	065T0805475A2K	Y	CAP CHIP 0805 4.7UF K 10V X7R	
C114	065T0805475A7Z	Y	CAP CHIP 4.7UF 10V Y5V -20%~+80%	
C689	065T0805475A7Z	Y	CAP CHIP 4.7UF 10V Y5V -20%~+80%	
C132	065T120610612K	Y	CER 1206 10U 16V X7R 10%	
C108	065T120610612K	Y	CER 1206 10U 16V X7R 10%	
C153	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C168	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C171	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C175	065T1206106A5K	Y	CAP CHIP 1206 10UF K 10V X5R	
C625	065T120647432K	Y	CER 1206 470N 50V X7R +/-10%	
C635	065T120647432K	Y	CER 1206 470N 50V X7R +/-10%	
C640	065T120647432K	Y	CER 1206 470N 50V X7R +/-10%	
C157	065T120647522K	Y	CAP CHIP 1206 4.7UF K 25V X7R	
C693	067T 3111003CT		EC SMD 10UF 16V HV 4X5.5MM	
C619	067T 3111003CT		EC SMD 10UF 16V HV 4X5.5MM	
C350	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C369	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C614	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C752	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C756	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C321	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C202	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C170	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C162	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C161	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C155	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C103	067T 3111013CT		EC SMD 100UF 16V HV 6.3X5.5MM	
C688	067T 3111097CT		EC SMD 1UF 50V HV 4X5.5MM	
C705	067T 3111097CT		EC SMD 1UF 50V HV 4X5.5MM	
C167	067T 3112203CT		EC SMD 22UF 16V HV 4X5.5MM	
C500	067T 3114703CT		EC SMD 47UF 16V HV 6.3X5.5MM	
C200	067T 3114703CT		EC SMD 47UF 16V HV 6.3X5.5MM	
C152	067T 3114713CT		EC SMD 470UF 16V HV 8X10MM	
C222	067T 3114713CT		EC SMD 470UF 16V HV 8X10MM	
C501	067T 3114713CT		EC SMD 470UF 16V HV 8X10MM	
U301	070GHDCP500HDC		HDCP CODE	
FB100	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB101	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB150	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB201	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB751	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB752	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	
FB753	071T 56A221 TA		CHIP BEAD 0805 220R/2000MA	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

FB403	071T 56A221 TA	CHIP BEAD 0805 220R/2000MA	
FB404	071T 56B221 TA	CHIP BEAD 220R/400MA FCM2012CF-221T04	
FB402	071T 56B221 TA	CHIP BEAD 220R/400MA FCM2012CF-221T04	
FB230	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB231	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB232	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB233	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB700	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB702	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB701	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB567	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB566	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB390	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB234	071T 59C601 TA	CHIP BEAD 600R/200MA FCM1608K-601T02	
FB606	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB607	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB750	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB754	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB401	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB400	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB323	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB604	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB322	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB321	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB302	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB301	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB300	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB204	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB203	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB202	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB200	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB600	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB601	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB602	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
FB603	071T 59Q121 T	CHIP BEAD 120R/500MA MMZ1608S121CT	
L652	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L653	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L500	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L501	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L502	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L650	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L565	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L564	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L563	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L562	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L561	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L558	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L556	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L554	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L552	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L551	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L550	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L505	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L504	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L503	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L654	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L655	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	

32"&37"&42"LCD TV
AOC L32W981&L37W981&L42W98H

L656	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L657	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L700	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L701	073T 63108 T	CHIP INDUCROR 0U10 10% MLF1608DR10KT	
L200	073T 63229 TA	CHIP INDUCROR 2.2UH 10% FCI1608F-2R2K	
L201	073T 63229 TA	CHIP INDUCROR 2.2UH 10% FCI1608F-2R2K	
L300	073T 63828 T	CHIP INDUCROR 0U82 10% MLF1608DR82K	
X300	093T 22S917 C	CRYSTAL 60MHZ 9P SMD-49	
Y230	093T 22S920 C	CRYSTAL 27MHZ 20P SMD-49	
X400	093T 22S921 C	CRYSTAL 27MHZ 20P SMD-5.0X3.2	
ZD703	093T 39S906 T	DIODE PDZ24B SOD-323 PHILIPS	
ZD704	093T 39S906 T	DIODE PDZ24B SOD-323 PHILIPS	
ZD702	093T 39S906 T	DIODE PDZ24B SOD-323 PHILIPS	
D101	093T 60S906 T	DIODE 3A/40V SS3P4 DO-220AA	
D100	093T 60S906 T	DIODE 3A/40V SS3P4 DO-220AA	
D705	093T 64S3PH	BAS32L SOD80C	
D706	093T 64S3PH	BAS32L SOD80C	
D709	093T 64S3PH	BAS32L SOD80C	
D708	093T 64S3PH	BAS32L SOD80C	
D703	093T 64S3PH	BAS32L SOD80C	
D702	093T 64S3PH	BAS32L SOD80C	
D701	093T 64S3PH	BAS32L SOD80C	
D607	093T 64S3PH	BAS32L SOD80C	
D605	093T 64S3PH	BAS32L SOD80C	
D604	093T 64S3PH	BAS32L SOD80C	
D603	093T 64S3PH	BAS32L SOD80C	
D600	093T 64S3PH	BAS32L SOD80C	
D565	093T 64S3PH	BAS32L SOD80C	
D300	093T 64S3PH	BAS32L SOD80C	
D390	093T 64S3PH	BAS32L SOD80C	
D564	093T 64S3PH	BAS32L SOD80C	
D704	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D707	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D700	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
	715T2913 1	MAIN BOARD PCB	
CN750	033T8033 40	CONNECTOR 1.25 SMT 40P	
D560	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D561	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D562	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D568	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D569	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D570	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
D571	093T 64S900 T	DIODE BAS316 SOT-323 PHILIPS	
CN700	088T 340 19 VD	HDMI HEADER 19P V/A	
CN702	088T 340 19 VD	HDMI HEADER 19P V/A	
CN701	088T 340 19 AV	HDMI HEADER 19P +SCREW HOLE	
	N02T6008 1	SCREW	
	P12T 65011	HEAT PAD (27X27X1)	
	P15T0328102	BKT-IO-EUO	
	P51T 11003	GLUE EP RES RD PD945 SYR.NR8	
	P51T 11004	GLUE POLYMER PCB RD PD860002SP	
	P51T 11005	GLUE FOR SMD LOCTITE 3609 30ML	
	P51T 11006	GLUE EP RES RD PD944 SYR.NR8	
	P85T0086101	SHIELDING	
	P85T0087101	SHIELDING	
	P90T0051101	HEAT SINK	
	Q40T000267358A	SIDE LABEL	

32"&37"&42"LCD TV**AOC L32W981&L37W981&L42W98H**

	Q07T 8 1 11	COMPOUND PALLET	
	Q26T 800504 2	BARCODE	
	Q40T 42061517A	RATING LABEL	
	Q40T000162410A	S/N LABEL	
	Q40T000162411A	S/N LABEL	
	Q40T000262493A	POP LABEL	
	Q44T3231 21 11	EVA WASHER	
	Q44T600027V 9A	CARTON FOR SMALL MATERIAL	
	Q44TN005BLO001	PAPER SHEET	
	Q44TN005BLO002	PAPER SHEET	
	Q45G 77 5	PE PACKING	
	Q52T 1185 99	BIG CARTON TAPE FOR AOC	
	Q52T 1211505	AL TAPE	
	Q52T 1211535	ALUMINUM FOIL TAPE	
	Q52T 1213607	ALUMINUM FOIL TAPE	

12. Different Part List**L32W981**

Diversity of E328M2NBW8AC2N compared with E328M2NBW8ACNN		
Location	TPV Part No.	Description
	Q44T600019L 4A	CARTON
	Q44T600026L 1A	CARTON
	Q44T600032B 1B	CARTON
	Q44TJ034101EPE	EPE
	Q45T 88525T26	AIR BUBBLE BAG
	Q45T 88525T30	EPE BAG
	Q45T 99606 25 ESD	INSULATING PE BAG
	Q44T600024D 3A	CARTON
	040T 581 26646	S/N LABEL
	040T 581654 3A	CARTON LABEL
	040T 581654 3A	CARTON LABEL
	040T 581654 3A	CARTON LABEL
	705TQ8SK081	SKD ASS'Y
	0D1T1730 8120	SCREW
	0M1T 960 8 47 CR3	SCREW
	0Q1T 940 14 47 CR3	SCREW
	705TQ8SK097	BASE ASS'Y
	CBPF82MBQ3	MAIN BOARD T2913-1-X-X-8-080723
M037	Q37T0078021 GM CKD	HINGE ASS'Y
	Q40T 32061548A	RATING LABEL
	Q40T000162410A	S/N LABEL
	Q40T000162411A	S/N LABEL
	Q44T6000 1 1A	EMPTY CARTON FOR LOADING
	Q44T600027V 9A	CARTON FOR SMALL MATERIAL
	Q44TJ019615 8A	32" TV CARTON

Diversity of E32RX2NBW8AC2N compared with E328M2NBW8ACNN		
Location	TPV Part No.	Description
	Q44G600019L 4A	CARTON
	Q45G 99606 25 ESD	INSULATING PE BAG
	Q50G 500519	CABLE TIE
	Q41G320161550A	MANUAL
	Q44G600024D 3A	CARTON
	040G 581 26646	EANCODE LABEL
	040G 581654 3A	CARTON LABEL
	Q40G 582813 3A	S/N LABEL
	095T801414XH54	HARNESS 14P(PH)-13P(PLUG) 160MM
	095T801840X508	LVDS CABLE 40P-30P 150MM
	705TQ8SK139	SKD ASS'Y 32"
	0M1G 940 10 47 CR3	SCREW
	0M1T 960 8 47 CR3	SCREW
	0Q1T 940 14 47 CR3	SCREW
	705TQ834681	BEZEL ASS'Y
	A34T0517 GMCDL0530	BEZEL
	Q15T0307103	BKT-PCB-HOLDER-TOP
	Q15T0308103	BKT-PCB-HOLDER-BTM
	Q15T0309103	BKT-PANEL-SUPPORT
	Q15T0310101	BKT-VESA-TOP
	Q36T 600 37 4 GP	NONWOVEN FABRIC
	Q44GJ01961511A	32" AOC TV CARTON
	Q45T 99609102	EPE BAG
	750TVA315Z9411N000	PANEL LK315T3LZ94 JP SHARP
	756TQ8CB 2B038	MAIN BOARD-CBPFR2MBQB
U301	056G1133 56	M24C16-WMN6TP
U390	056T1133935	IC MX25L3205DMI-12G SOP-16
SMTF-U390	100TAKXK001B11	MCU ASS'Y-056T1133935
SMTF-U301	100TAKXK002B11	MCU ASS'Y-056G1133 56
R760	061G0603562	RST CHIPR 5.6 KOHM +-5% 1/10W
C759	065G120610612K 3	CHIP 10UF 16V X7R 10%
C759	065T120610612K Y	CER 1206 10U 16V X7R 10%
R758	061G0603102	RST CHIPR 1K OHM +-5% 1/10W
	Q40G 32061554A	RATING LABEL
	Q40G000162410A	S/N LABEL
	Q44G600027V 9A	CARTON
	Q44T3231 21 11	EVA WASHER

L37W981

Diversity of E37RA2NBW8AC2N compared with E378A2NBW8ACNN		
Location	TPV Part No.	Description
	044G9003 2	CORNER PAPER
	095T801414XH51	HARNESS 14P(PH)-13P(PLUG) 220MM
	095T801840X507	LVDS CABLE 30P-40P 240MM
	750TVUQ0W2512N	PANEL T370XW02 V500 SZ AUO
	A15T0336101	PANEL BRACKET
	A15T0337101	STAND BRACKET FOR V5
	A15T0341101	FIX BRACKET FOR V5
	756TQ8CB 2B039	MAIN BOARD-CBPFR2MBQC
U390	056T1133935	IC MX25L3205DMI-12G SOP-16
SMTF-U390	100TAKAL001B11	MCU ASS'Y-056T1133935
U301	056G1133 56	M24C16-WMN6TP
SMTF-U301	100TAKAL002B11	MCU ASS'Y-056G1133 56
	705TQ8SK138	SKD ASS'Y 37
	0Q1T 940 12 47 CR3	T4X12 SCREW
	0M1T 940 16 47 CR3	SCREW M4X6
	0Q1G 940 16 47 CR3	SCREW
	0M1T 960 10120	SCREW
	Q45G 99606 25 ESD	INSULATING PE BAG
	Q50G 500520	CABLE TIE
	Q44GL010615 6A B	37" AOC TV CARTON BOTTOM
	Q44GL010615 6A T	37" AOC TV CARTON TOP
	Q44G600019L 4A	CARTON
	Q44G600027V 9A	CARTON
	Q44G600024D 3A	CARTON
	040G 581 26646	EANCODE LABEL
	040G 581654 3A	CARTON LABEL
	Q40G 582813 3A	S/N LABEL
	Q40G000162410A	S/N LABEL
	Q40G 37061524A	RATING LABEL

Diversity of E42RM2NBW8AC2N compared with E428M2NBW8AC2N		
Location	TPV Part No.	Description
	Q44G600019L 4A	CARTON
	Q41G320161550A	MANUAL
	0Q1T 940 12 47 CR3	T4X12 SCREW
	705TQ8SK178	42"GMBH TV SKD ASS'Y
	705TQ834551	BEZEL ASS'Y 42"
	705TQ834552	REAR COVER ASS'Y 42"
	705TQ834553	STAND&BASE ASS'Y 42"
	A15T0297201	PANEL BKT
	Q44GN00561519A B	42" TV BOTTOM CARTON
	Q44GN00561519A T	42" TV TOP CARTON
	750TVM420H1312N000	PANEL V420H1-L13 C1/C2 NB CMO
	756TQ8CB 2B048	MAIN BOARD-CBPFR2MBQF
U301	056G1133 56	M24C16-WMN6TP
U390	056T1133935	IC MX25L3205DMI-12G SOP-16
SMTF-U390	100TAKMM001B11	MCU ASS'Y-056T1133935
SMTF-U301	100TAKMM002B11	MCU ASS'Y-056G1133 56
	A15T0303103	FIX BKT FOR AUO SIDE
CN553	088T 78 13A35 YG	RCA JACK 1*3 W/R/B V/A RCA-346D-01
CN552	088T 78 13A36 YG	RCA JACK 1*3 G/BL/R V/A RCA-346D-02
CN556	088T 78 13A37 YG	RCA JACK 1*2 W/R V/A RCA-276D-01
CN650	088T 78 13A39 YG	S JACK + RCA JACK 1*3 Y/W/R RCA-333S-010
CN555	088T 302A17 YG	PHONE JACK 3.5MM 3P V/T GREEN
CN501	088T 35521U YG	SCART CONN. 21P V/T RC-2119
CN500	088T 35521U YG	SCART CONN. 21P V/T RC-2119
TH400	061G 56A050 WT	SMD PTC 0.5A KMC3S050RY 1206
C153	065G0805106 A5	CHIP 10UF 10V X5R 0805
C168	065G0805106 A5	CHIP 10UF 10V X5R 0805
C171	065G0805106 A5	CHIP 10UF 10V X5R 0805
C175	065G0805106 A5	CHIP 10UF 10V X5R 0805
	715T2913 3	MAIN PCB FR4 225X220X1.6MM 4L
	P15T0428101	BRACKET_METAL