

KENFORD INDUSTRIAL CO., LTD.**PART LIST**

PRODUCT : Air Brush
MODEL NO. : HAS-451
STANDARD : GS, CE
RATING : 220-240Vac 50-60Hz 200W
CUSTOMER : Binatone

DATE : 2006-11-16
 REVISION : A0

<u>ITEM</u>	<u>PART NAME</u>	<u>SPECIFICATION</u>	<u>MANUFACTURER</u>	<u>UL FILE NO.</u>
1	Housing Upper	PC, 2805	BAYER	E33640 (M)
2	Housing Lower	PC, 2805	BAYER	E33640 (M)
3	Housing Cover Upper Alt	ABS, PA-757 PC, 2805	CHI MEI BAYER	E56070 (S) E33640 (M)
4	Housing Cover Lower Alt	ABS, PA-757 PC, 2805	CHI MEI BAYER	E56070 (S) E33640 (M)
5	Front Cap	PC, 2805	BAYER	E33640 (M)
6	End Cap	PC, 2805	BAYER	E33640 (M)
7	Switch Cover	PC, 2805	BAYER	E33640 (M)
8	Connector	PA66+33% GLASS FIBRE, ZYTEL 70G33HS1L	DUPONT USA	E41938
9	Heater Shroud	PA66+33% GLASS FIBRE, ZYTEL 70G33HS1L	DUPONT USA	E41938
10	Clip Cover	PA66+33% GLASS FIBRE, ZYTEL 70G33HS1L	DUPONT USA	E41938
11	Motor Frame	PC, 2805	BAYER	E33640 (M)
12	Fan	PA66, ZYTEL 101F	DUPONT USA	E41938 (M)
13	Cool Tip	PA66+33% GLASS FIBRE, ZYTEL 70G33HS1L	DUPONT USA	E41938
14	Screw Tapping	Steel		
15	Screw Machine	Steel		
16	Stud	Brass		
17	Curling Tong	Aluminium		
18	Fix plate	Stainless Steel		
19	Spring W/Roller Spring Roller	Stainless Steel SUS 304 PA66+13% GLASS FIBRE, ZYTEL 70G13HSIL	DUPONT USA	E41938
20	Clip 1	Steel	TRONCA	
21	Clip 2	Steel	TRONCA	
22	Slide Switch	DSN-1207 125V 7A	DEFOND	
23	Electrolytic Capacitor	1uF, 50V		
24	Heater Assembly			
24.1	Mica Plate A,B	HP5 0.7mm, HARD COMMON, UL94V-0	SHENZHEN	E129729
24.2	Heating Wire (R1-R3)	IRON CHROME, OCr25Al5, 1300°C	WO HING	
24.3	Copper Wire	Ø0.6mm, TINNED		
24.4	Silicon Rubber F.G. Tubing	180°C, GS-30-2E F-SRN2500, 200°C	VTTAR CHANGZHOU	E131399 (S) E200473

KENFORD INDUSTRIAL CO., LTD.**PART LIST**


PRODUCT : Air Brush
MODEL NO. : HAS-451
STANDARD : GS, CE
RATING : 220-240Vac 50-60Hz 200W
CUSTOMER : Binatone

DATE : 2006-11-16
 REVISION : A0

ITEM	PART NAME	SPECIFICATION	MANUFACTURER	UL FILE NO.
24.5	Thermostat (T)	MA-10, 105°C, 250VAC 12A	TEXAS	VDE
24.6	Lead Wire	UL1061, AWG#26	VARIOUS	UL Listed
	Alt	UL1430, AWG#26, 105°C, 300V	VARIOUS	UL Listed
24.7	Eyelet	BRASS		
24.8	Flat Washer	BRASS		
24.9	Nylon Tie	TSL-80-M	YONYU	E200473
24.10	Choke Coil	10uH		
24.11	Diode	1N4004, 400V 1A	RECTRON	
ALT			PEC	
25	DC Motor (M)	NF-120G-10750 9Vdc	JOHNSON	
26	Swivel Bracket Assembly			
26.1	Swivel Bracket	PC, 2805	BAYER	E33640 (M)
26.2	Swivel Contact plate (A)	P.BRONZE AG-PLATED		E41396 (S)
26.3	Swivel Contact plate (B)	P.BRONZE AG-PLATED		E41105
26.4	Lead Wire	UL1061, AWG#26	VARIOUS	UL Listed
	Alt	UL1430, AWG#26, 105°C, 300V	VARIOUS	UL Listed
26.5	Heating Shrink Tube	UNITUBE 600V 105°C	UNICHEM	E157822
		RSFR-X 125°C 600V	SHENZHEN WOER	E203950
27	Crystal			
28	PVC INSULATION TAPE	JD-501(+) 130°C	WUXI TIAN WEI	E220831
		1P802 130°C	P.LEO	E126174
29	Power Cord			
	CORD :	H03VVH2-F 2x0.75mm ²	VARIOUS	VDE
	PLUG :	SF-200 250VAC 2.5A	SUN FAI	VDE
	Aalt	SF-8, 250V 16A	SUN FAI	VDE
	Aalt	VDE Plug, 250V 16A or 2.5A	VARIOUS	VDE
	Alt	SF-639 or SF-638 13A with 3A or 5A or 13A Fuse BS1363	SUN FAI	ASTA
	Alt	BS Plug 13A with 3A or 5A or 13A Fuse BS1363	VARIOUS	ASTA
30	Roller (32mm)	PP, K-5108H	CHISSO	E50955 (M)
31	Roller Cap(32mm)	PP, K-5108H	CHISSO	E50955 (M)
32	Roller (38mm)	PP, K-5108H	CHISSO	E50955 (M)
33	Roller Cap(38mm)	PP, K-5108H	CHISSO	E50955 (M)
34	Hair Clip	PP, K-5108H	CHISSO	E50955 (M)
35	Spring	Stainless Steel		
36	Brush Sleeve	PA66, ZYTEL 101F	DUPONT USA	E41938 (M)
	END			

MODEL : AB-639

T : THERMOSTAT
M : DC MOTOR
R1-R3 : HEATING WIRE
D1-D2 : DIODE IN4004 400V 1A
C1 : CAPACITOR 1uF
C2 : METALIZED CAPACITOR
0.1uF 275V
H1-H2 : CHOKE COIL 10uH
SW : SLIDE SWITCH

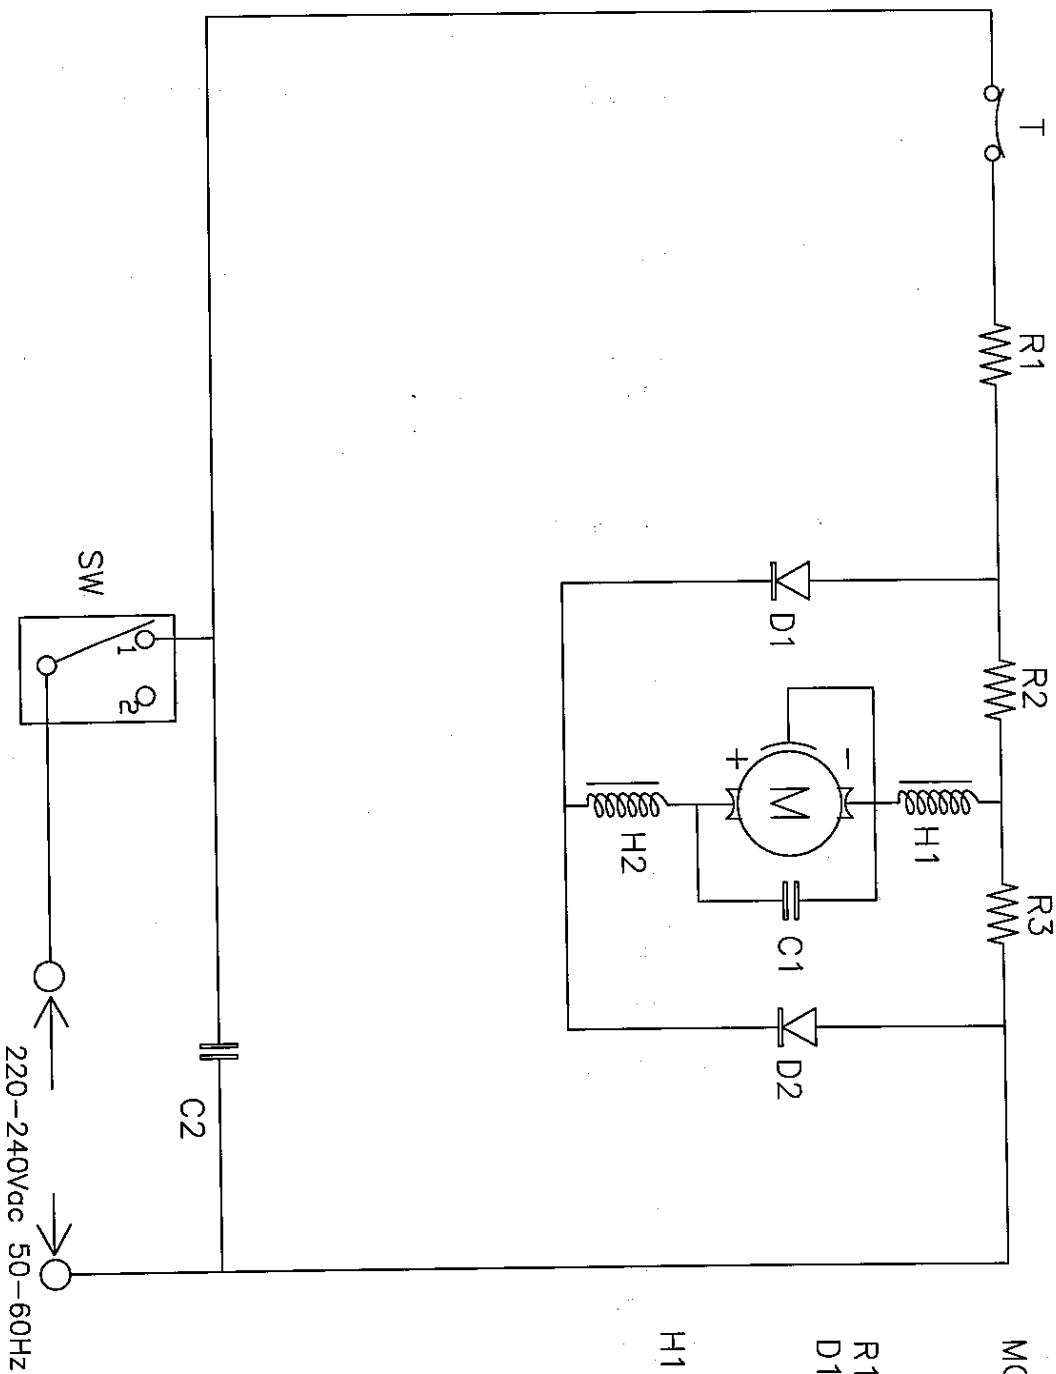

A4

NAME	DATE
DRAWN JIN	2006.02.09
CHECKED	
APPROVED	

CIRCUIT DIAGRAM

WJ 建福 KENFORD

MODEL NO : HAS-451 VOLTAGE : 220-240Vac 50-60Hz

POWER : STANDARD : GS/CE

DWG FILE NAME : SHEET OF

REV. MODIFICATION DESCRIPTION

DRAWN/DATE

APP'D/DATE