

安宇實業有限公司

ORIENTAL UNIVERSE INDUSTRIES LTD.

Product / 成品 : Food Dehydrator / 乾果機
 Model / 型號 : GP-105
 Rating / 額定率 : 220-240VAC 400W +5%-10%

Standard / 安全規格 : CE/ GS
 Ref: RBOM105
 Revised Date / 修訂日期 : 2008.01.07

TWA = TESTED WITH APPLIANCE

ITEM	DESCRIPTION	配件名稱	QTY.	SPECIFICATION	規格	MANUF. / VENDOR	製造商 / 供應商	App.
1	105 Top Housing	105 面殼	1	High Heat PP, CB5108H	UL 94-HB HDT=125°C	Korea Petrochemical Ind. Co. Ltd.		UL
2	026 Front Grille	026 前網	1	PA66+30%GF TECHNYL	A-216V30 UL 94HB HDT255°C	Rhodia Engineering Plastics		UL
3	104 Mica Sheet	104 雲母紙	1	Thk.=0.15mm				
				HP5M, UL 94V-0, RTI=130		Pamica Electric Material Co., Ltd.		UL
			alt.	M928, UL 94V-0, RTI=200		Vitar Insulation Mfrs Ltd.		UL
4	101 Motor Frame	101 摩打架	1	PC				
				MAKROLON 2805, UL 94V-2, RTI=115, HDT 136°C		Bayer Polymers Co Ltd		UL
			alt.	LEXAN 241, UL 94V-2, RTI=125, HDT 140°C		GE Plastics China Ltd.		UL
5	DC Motor	直流摩打	1	DH320002, 20VDC		Dong Guan Anyu Electrons Products Co. Ltd		TWA
			alt.	SR-365-2075P, 20VDC		Sun Motor Technology Group		TWA
6	Screw for Motor	摩打螺絲	2	BM 2.6 X 5 mm		Sun Wai Metal Factory		
7	101 Fan	101 風葉	1	PC		Refer To Item 4		
8	104 Mica Plate	104 雲母片	8	Mica Plate Thk.=0.7mm		Refer To Item 3		
9	Brass Rivet	銅雞眼	8	2350, Brass		Ken Hing Company		
10	Brass Rivet	銅雞眼	2	2330R, Brass		As Ditto		
11	Brass Washer	銅介指	4	B103B, Brass		Chong Ai Hing Metal Mfy. (Shenzhen) Co Ltd (raw)		
12	Fibre Washer	纖維介指	2			Yuet Chung		
13	Thermofuse	溫度保險絲	1	130°C, SM126A0, 250VAC 2A, VDE 33389		NEC Corp.		VDE
			alt.	P4-5A, TF130, 250VAC 5A		AUPO Electronics Ltd.		VDE
14	Thermal Cut-out	恆溫器	1	AUT-75, 125VAC 16A, OPEN AT 75±7.5°C		Au One Electrical Co. Ltd.		VDE
15	Thermostat Connector	恆溫器銅片	2	Brass, 0.4 mm		Dongguan Qingxi Shenxingchang Metal Fty.		
16	Diode	二極管	3	1N4004, 400V		DC Components Co Ltd		
	Heating wire	發熱線		Class 1 = 0Cr25Al5; Class II = 0Cr19A13		Danyang Shunfa Electric Heating Material Co., Ltd.		
17	R1 & R2		2	R1 & R2 =10Ω, SWG32#, Class II, Ø3.0mm				
18	R3		1	R3 = 120Ω, SWG31#, Class II, Ø3.0mm				
19	R4		1	R4 = 60Ω, SWG34#, Class I, Ø3.0mm				
20	Fibreglass Yarn	纖維繩	1	Φ0.8mm, 600°C, L=70cm		Linran Electrical Supplies Co. Ltd.		
21	Lead Wire w/ Ring Terminal	引線(有線耳)	1	UL 1430, 22AWG, L=115mm, Red, 4R x 5mm		UL recognized manufacturers listed on CDF.		UL
22			1	UL 1430, 22AWG, L=150mm, Blue, 4R x 5mm		As Ditto		
23			1	UL 1430, 22AWG, L=100mm, Brown, 4R x 5mm		As Ditto		
24	Copper Wire	光身銅線	2	Ø0.6mm, L=20mm + 40mm		King Fung Electronics Co. Ltd.		
25	Silicon Fibre Glass Sleeveing	矽膠玻纖套管	1	I.D=2.0mm, 2.5KV, L=15mm		Vitar Insulation Mfrs Ltd		UL
26	Silicon Fibre Glass Sleeveing	矽膠玻纖套管	1	I.D=1.0mm, 2.5KV, L=10mm		Vitar Insulation Mfrs Ltd		UL


安宇實業有限公司

ORIENTAL UNIVERSE INDUSTRIES LTD.

Product / 成品 : Food Dehydrator / 乾果機
 Model / 型號 : GP-105
 Rating / 額定率 : 220-240VAC 400W +5%-10%

Standard / 安全規格 : CE/ GS
 Ref: RBOM105
 Revised Date / 修訂日期 : 2008.01.07
 TWA = TESTED WITH APPLIANCE

ITEM	DESCRIPTION 配件名稱	QTY.	SPECIFICATION 規格	MANUF. / VENDOR 製造商 / 供應商	App.
27	Slide Switch 推掣	1	SL-101-24, Terminal 'S' Knob 'J', 250VAC 8A, T-125	Merchant Corp. Ltd.	KEMA
		alt.	DSE-2410, Terminal 'S' Knob 'J', 250VAC 10A T-85	Defong Manufacturing Ltd.	VDE
28	PCB PCB板	1	"105-XXXX", KH-02, Thk.= 1.6mm, UL 94V-C	Kam Hing Manufactory (Nam Hing)	UL
29	Power Cord 電源線	1	H03VVH2-F, 0.75mm ² x 2C, VDE Approved, L=1.2M	VDE recognized manufacturers listed on CDF.	VDE
			Plug: 250VAC 2.5A	VDE recognized manufacturers listed on CDF.	VDE
30	128 Cord Guard 128 線套	1	PVC	Hoview Industrial Ltd	
31	Cord Clamp 壓線片	1	Nylon 66, A 205F	Rhodia Engineering Plastics	UL
32	Screw 螺絲	6	PA 3x12 "+", Ni plated	Sun Wai Metal Factory	
33	105 Top Cover 105頂蓋	1	High Heat PP, CB5108H UL 94-HB HDT=125°C	Korea Petrochemical Ind. Co. Ltd.	UL
34	105 Switch Cover 105 制蓋	1	High Heat PP, CB5108H UL 94-HB HDT=125°C	Korea Petrochemical Ind. Co. Ltd.	UL
35	105 Inner Solid Switch 105內推制片	1	ABS		UL
			PA-757 UL 94HB HDT=85°C	Chi Mei Industries Ltd.	UL
		alt.	Toyolac 700 or 100 UL 94HB HDT=85°C	Toray Industries Ltd.	UL
36	Screw 螺絲	3	PA 3x12 "H", Ni Plated	Refer To Item 6	
37	104 Food Tray 104 儲物膠隔	5	High Heat PP, CB5108H UL 94-HB HDT=125°C	Korea Petrochemical Ind. Co. Ltd.	UL
38	104 BOTTOM HOUSING 104 底殼	1	High Heat PP, CB5108H UL 94-HB HDT=125°C	Korea Petrochemical Ind. Co. Ltd.	UL
39	228 RUBBER CUSHION 228 橡膠圓腳	4	Easiprene TPR E50P-C93M0	Zhi Jin (Hong Kong) Company Ltd.	
40	104 Mesh 104 隔塵網	1	High Heat PP, CB5108H UL 94-HB HDT=125°C	Korea Petrochemical Ind. Co. Ltd.	
41	104 Inlet Grille 104 入風網	1	ABS	Refer To Item 34	

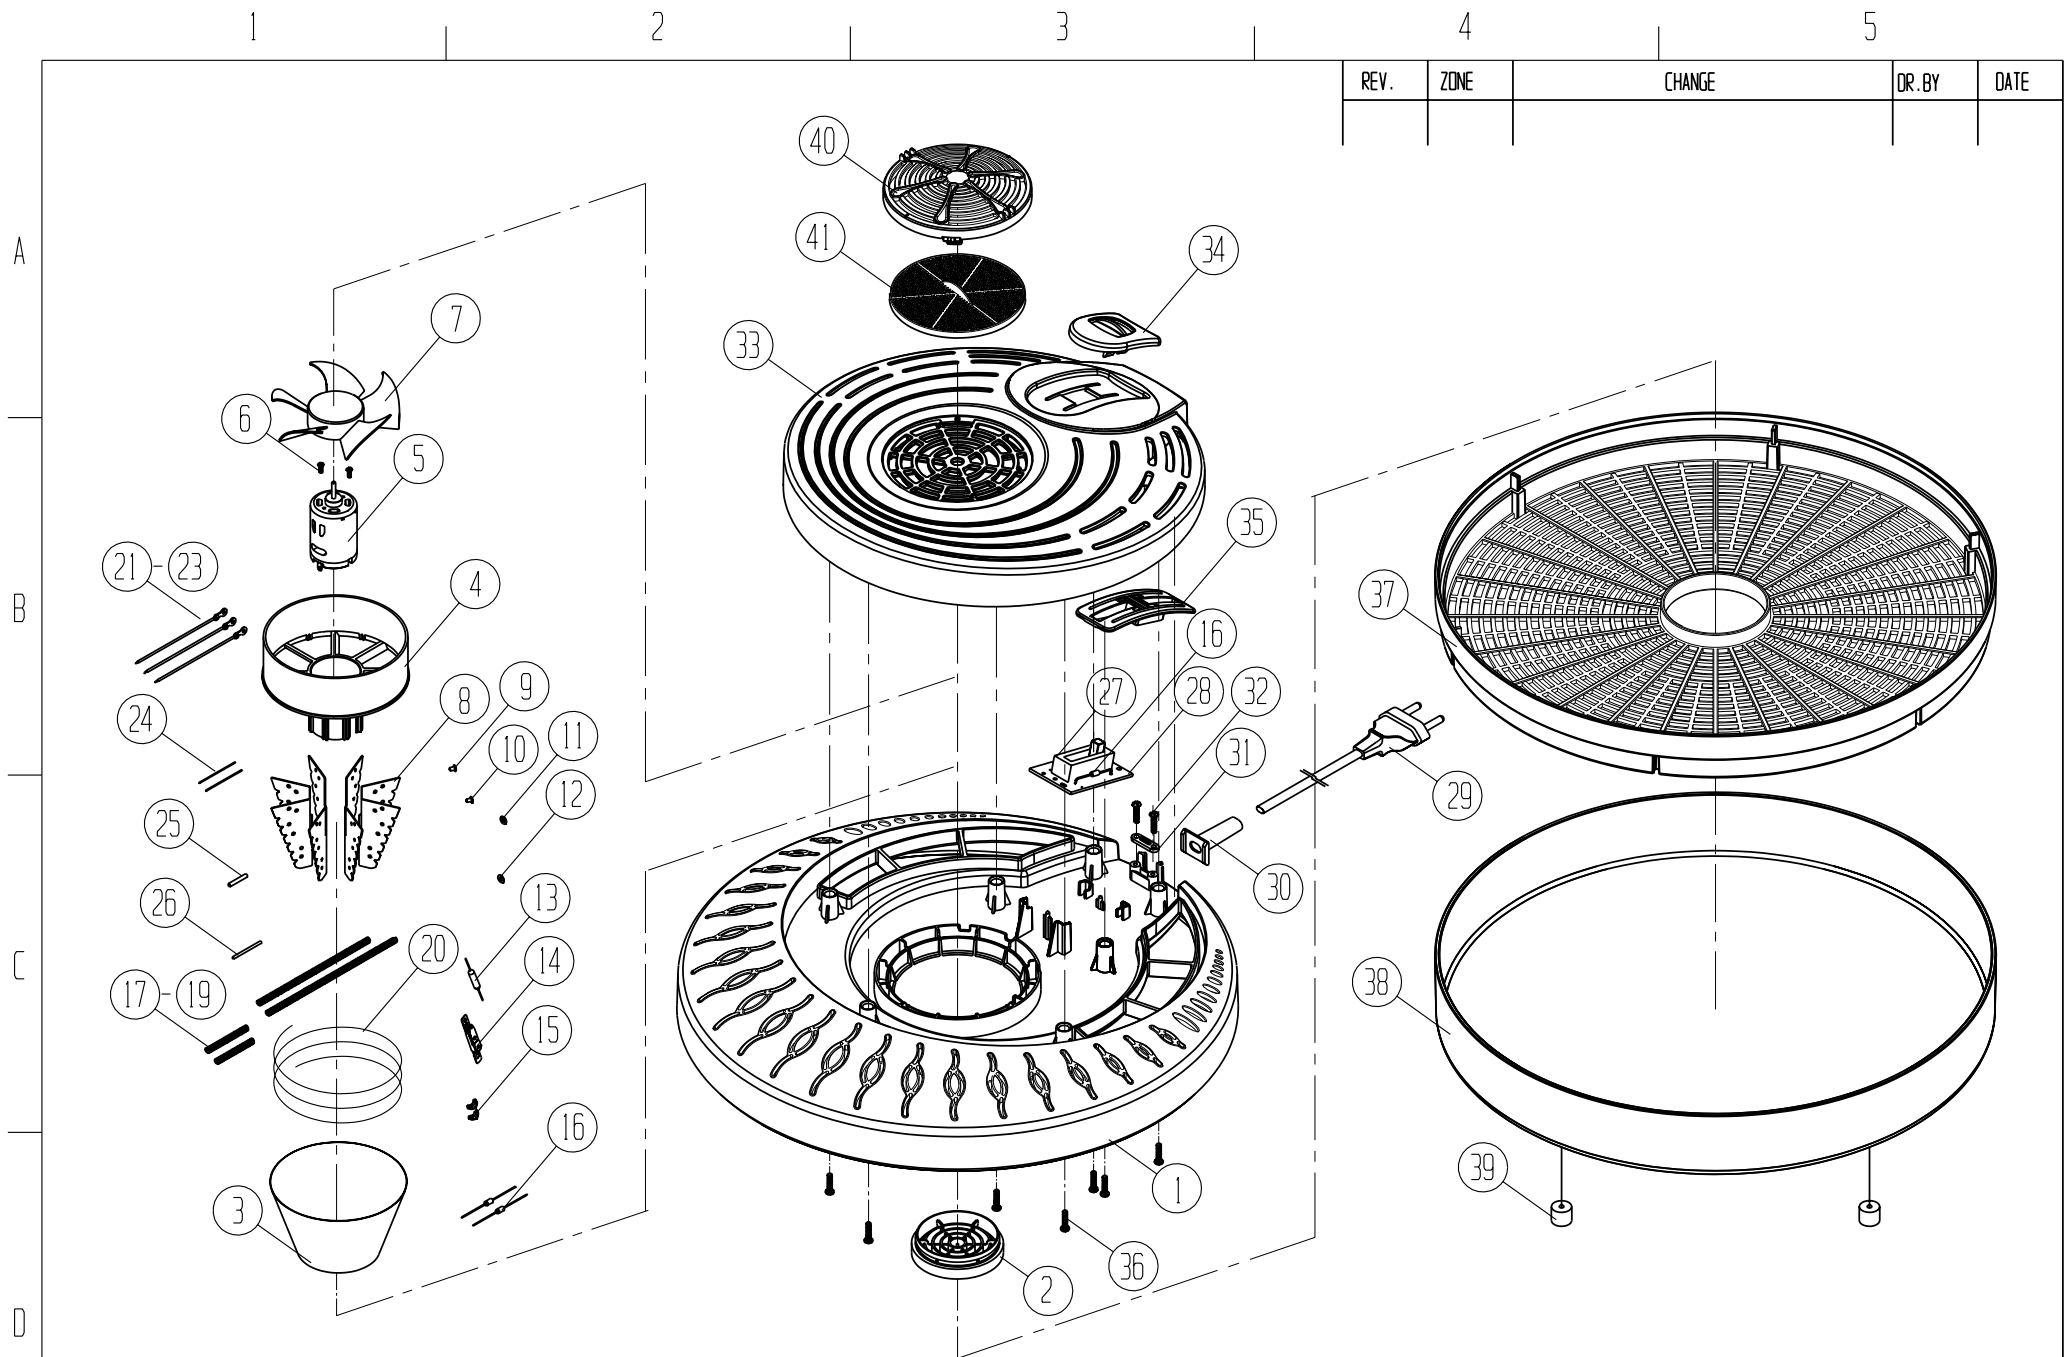

REV.	ZONE	CHANGE	DR. BY	DATE




Oriental Universe Industries Ltd.

DESCRIPTION :
EXPLODED DIAGRAM OF GP-105

DRAWN BY :
MASON CHAN

DATE :
2009.04.01



REVIEWED BY :
GEORGE WAH

FILE NAME :
EXP105CEY2009.PRT

DATE :
2009.04.02

A4